fumagalli®


since 1973

GENERAL CATALOGUE 2027

MADE IN ITALY

231
DISTRIBUTORS ALL OVER THE WORLD

HOW TO READ THE CATALOGUE

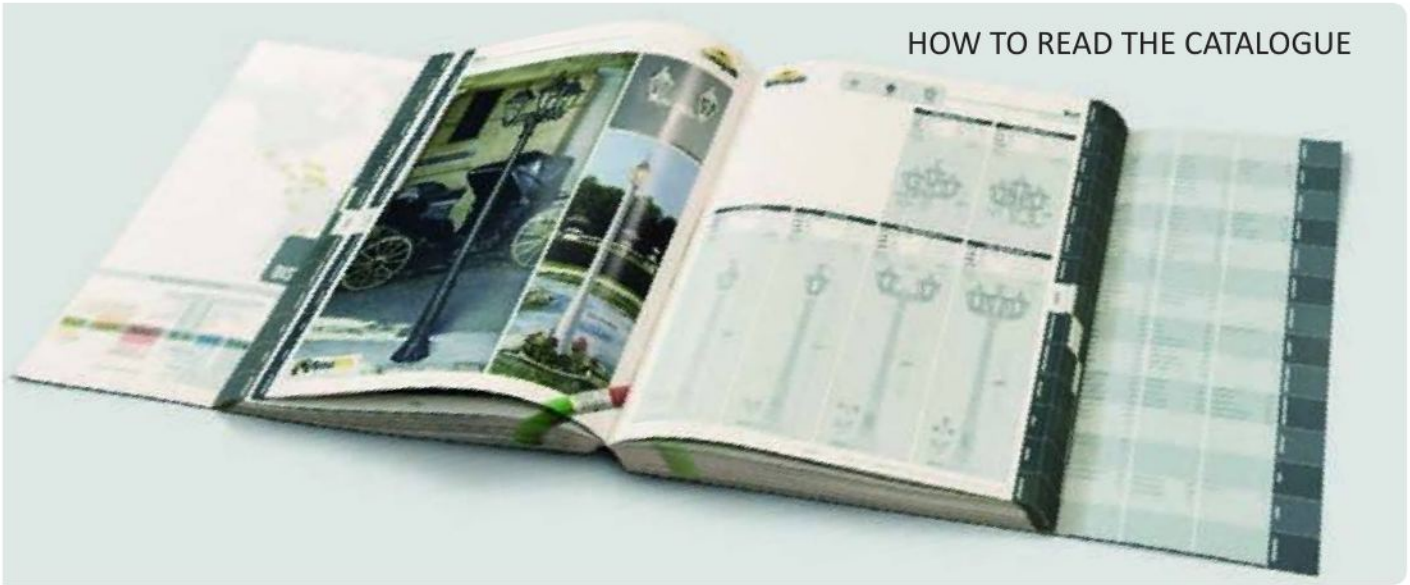

Corporate Management

Geom. **Giancarlo Fumagalli**
Managing Director



Holder of a diploma by the technical high school for building surveyor, he is the creator of this composite material ligthing system.
He speaks Italian and French.

Diplomato alla scuola tecnica per geometri, è ideatore di questo sistema di lampade in materiale composito.
Parla italiano e francese.

Dr. **Marisa Rabuffetti**
Finance Director



Graduate by the Milan University in economic sciences, she is teacher of banking and commercial tecnique. She speaks Italian, English and French.

Laureata all'università di Milano in scienze economiche, è insegnante alle scuole superiori di tecnica commerciale e bancaria.
Parla italiano, inglese e francese.

Dr. **Chiara Fumagalli**
Commercial Director



Graduate by the Milan University in philosophy, she is holder of a diploma in foreign languages: she can speak and write in Italian, English, German French.

Laureata all'università di Milano in filosofia, è diplomata in lingue straniere: scrive e parla italiano, inglese, tedesco e francese.

Arch. **Paolo Fumagalli**
Purchasing and Technical Director



Graduate in architecture by the polytechnic University of Milan, he achieved the specialization in lighting tecnique by the University of Manchester (U. K.). He speaks Italian and English.


Laureato in architettura al Politecnico di Milano, ha conseguito la specializzazione in illuminotecnica all'università di Manchester (U.K.). Parla italiano e inglese.

Dr. **Emmanuele Fumagalli**
Assistant General Manager
Human Resources Director




Graduate by the Milan University in jurisprudence, he achieved the specialization in international law.
He speaks Italian and English.

Laureato in Giurisprudenza all'università di Milano con specializzazione in diritto internazionale
Parla italiano e inglese.



GARDEN REVIVAL

FABIO 40 | GIULIO 42 | GIAMPY 46 | SANDRO 52 | ROBY 58 | DARIO 64 | GLOBE 250 modern 70 | GLOBE 300 modern 76



GARDEN CLASSIC

PIERO 84 | IESSE 86 | ESAU 88 | DARIA 90 | MARY 94 | ANNA 100 | SABA 106 | RUT 112



BOLLARD

VIRGILIO 148 | VIRGILIO APPLIQUE 150 | ESTER 152 | ESTER APPLIQUE 154 | ELISA 156 | ELISA APPLIQUE 158 | STEVEN 160 | CARLO 164



UP&DOWN

MAMETE 198 | ABRAM 150 202 | ABRAM 190 204 | ABRAM 270 204 | FRANCY 206 | MARTA 90 210 | MARTA 160 214 | FRANCA 90 218



DOWN LIGHT

TERESA 50 224 | TERESA 90 228 | TERESA 160 230 | TERESA 260 232 | LIVIA 60 236 | LIVIA 90 238 | LIVIA 160 240 | LIVIA 180 242



BRIKLIGHT

NINA 150 266 | NINA 190 268 | NINA 270 268 | LORENZA 150 270 | LORENZA 190 272 | LORENZA 270 272 | LETI 100 ROUND 274 | LETI 100 SQUARE 278




FLOODLIGHT

MINITOMMY 308 | MINITOMMY 2L 310 | TOMMY 314 | TOMMY-2L 316 | GIOVA GERMANA 322 | GERMANA 326 | GIOVA GIUSEPPE 330 | GIUSEPPE 334



BULKHEAD

FRANCY-OP 340 | BERTINA 344 | BERTA 348 | UMBERTA 352 | GELMI 358 | DANZI 362 | STUCCHI/CECCHI 366/370 | RITA 374



URBAN CLASSIC

NOEMI 410 | SILOE 426 | TOBIA 442 | SIMON 460 | ELIA 478 | PIETRO 490 | GLOBE 400 classic 502 | GLOBE 500 classic 508



URBAN MODERN

GIORGIO ROSA 542 | VIVI 400 546 | ECOVIVI 400 556 | BEPPE 400 564 | ECOBEPPE 400 572 | REMO 400 578 | GINO 400 586 | VIVI 500 594



FUMATECH POST

CLASSIC POSTS 656 | MODERN POSTS 660 | REVIVAL POSTS 664




LAMPS

SOLAR MODULE 670 | E27 HIGH POWER LED 672 | E27 LED 676 | E27 FILAMENT LED 676

SALEM 118
GOLIA 124
CEFA 130
GLOBE 250 classic 136
GLOBE 300 classic 140
CARLO WALL 166
CARLO DECO 168
CARLO WALL DECO 168
AMELIA 170
AMELIA WALL 172
SAURO 174
GABRI 182
PINELA/PINA 192
FRANCA 90-1L WALL 220
FRANCA 90-2L WALL 220
IN-GROUND
ALDO 248
CECI 90 252
CECI 120 256
CECI 160 260
LETI 200 282
LETI 300 286
EXTRALETI 100 ROUND 290
EXTRALETI 100 SQUARE 294
EXTRALETI 200 298
EXTRALETI 300 302
LUCIA 378
MADDI 382
SOLAR
ROSETTA 388
FIORINA 392
FORTUNATO 394
JOSEPHA 396
FELICE 400
SANTINA 404
URBAN REVIVAL
LUCA 514
SERGIO 526
ECOVIVI 500 604
BEPPE 500 612
ECOBEPPE 500 620
REMO 500 626
GINO 500 634
GLOBE 400 modern 642
GLOBE 500 modern 646
GX53 LED 678
G9 LED 684
GU10 LED 686
R7s LED 688

since 1973

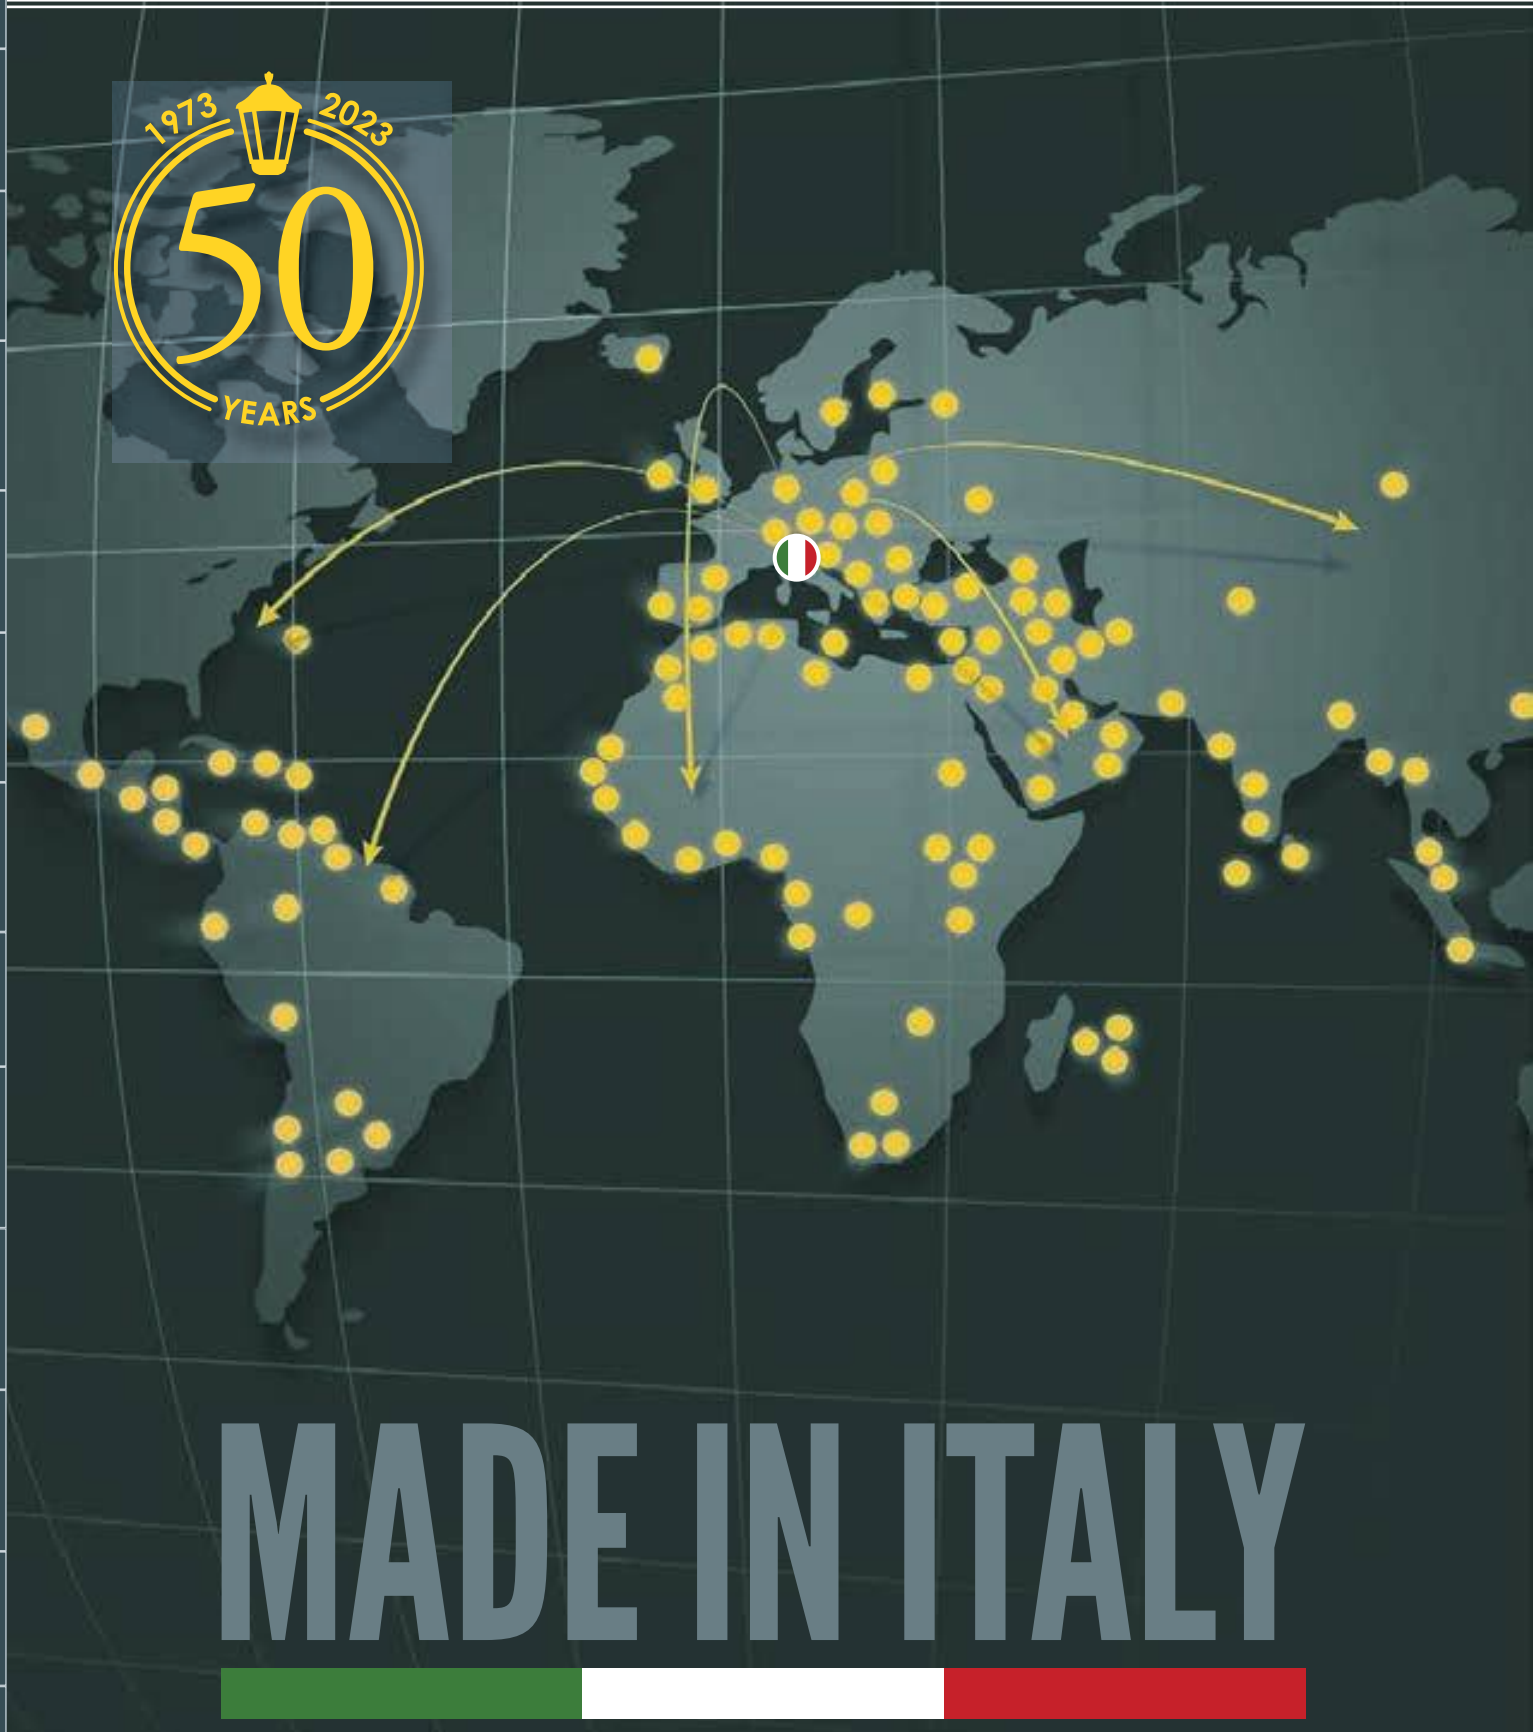

2027



Years of history **54**

Distributors all over the world **231**

Employees **190**

Total Area m^2 (open + covered area) **60.000**

Covered Area m^2 **18.000**

COMPANY

HISTORY

MADE IN ITALY

fumagalli since 1973

1973



la bottega dei maestri Forgiatori

Thanks to the enterprise of Mr. Fumagalli Giancarlo, in 1973 an individual company called "La Bottega dei Maestri Forgiatori" was born in Varese (north of Italy) specialising itself in the artistic handwork of wrought iron indoor lightings.
After five years of activity the company started to employ some workers and to open itself to foreign markets, in particular to the Japanese one.

Nasce a Varese, su iniziativa del Sig. Fumagalli una ditta individuale con il nome di "La Bottega dei Maestri Forgiatori", specializzata nella lavorazione artistica del ferro forgiato a mano. La produzione è costituita da lampade da interno. Dopo cinque anni l'azienda aprendo verso mercati esteri (in particolare il Giappone), inizia ad assumere i primi dipendenti.

1984



fumagalli italian lux

An intuition of Mr.Fumagalli lead the company to an evolution, creating an innovative outdoor lightings production system, consisting of a galvanized steel tube covered by resin material.
After some years of experimentation and the setting-up of adequate machineries, the product started to be appreciated all over the world.

Un'intuizione del Sig. Fumagalli porta l'azienda ad un'evoluzione, creando un ingegnoso processo produttivo di lampade da esterno, costituito da un'anima in acciaio galvanizzato rivestito in resina.
Dopo anni di sperimentazioni e la faticosa messa a punto di un'attrezzatura adeguata, il prodotto comincia ad essere distribuito ed apprezzato in tutto il mondo.

1999



fumagalli since 1973

Fumagalli family decides to turn the individual company into a limited company, going on with the manufacturing of "composite material" outdoor lighting fixures.
The articles range increased thanks to the creation of many new models and the production capacity was multiplied by the use of computerized machineries.
The settlement in the new company seat had definitively made Fumagalli S.r.l. a worldwide leading company in the manufacturing of resin material outdoor lightings.

Subentrando alla ditta individuale, la famiglia Fumagalli decide di costituirsi in società, continuando la fabbricazione di lampade da esterno in materiale composito. Con la creazione di nuovi modelli viene ampliata l'offerta e con attrezzature robotizzate viene moltiplicata la produttività. La sistemazione nella nuova sede rende la società Fumagalli leader mondiale nel suo settore.

2019



SMART FACTORY INDUSTRY 4.0

Fumagalli company earns the title of "Smart factory, Industry 4.0". This title is awarded to factories whose product and production technologies are developed in a complete digital and interconnected environment, granting increased productivity, cost reduction and improved quality control.

L'azienda Fumagalli ottiene il titolo di "Smart factory, Industry 4.0". Questo riconoscimento è assegnato alle fabbriche in cui prodotto e tecnologie produttive vengono sviluppati in un ambiente completamente digitale e interconnesso, che garantisce un'aumentata capacità produttiva, una riduzione dei costi e un migliore controllo della qualità.

2022



FUMAGALLI SRL AT THE TOP OF "ITALY'S EXPORT CHAMPIONS" RANKING

Fumagalli Srl ranks seventh in the list of the top 200 Italian companies with the largest export shares. The ranking is the result of an analysis of more than 9.000 companies, with the aim of enhancing the value of Made in Italy. Particularly noteworthy is the fact that Fumagalli Srl is the only lighting manufacturer to appear in the ranking. Fumagalli company's performance earns us the title of "Italy's Export Champions 2022".

L'azienda Fumagalli si è classificata settima nella lista delle prime 200 aziende italiane con le più elevate percentuali di fatturato destinate all'esportazione. La classifica è il risultato di un'analisi effettuata su più di 9.000 aziende con l'intento di intensificare il valore del Made in Italy. Particolarmente degno di nota è il fatto che la ditta Fumagalli è l'unico fabbricante di illuminazione a rientrare nella classifica. L'azienda Fumagalli ha pertanto guadagnato il titolo di "Campione dell'Export 2022".

2023

1973 2023
50
YEARS

MADE IN ITALY

Fumagalli Srl celebrates its 50 years of activity as successful Italian manufacturer. Offices and showroom are moved to the new headquarter and, in the same year, a new assembly and logistic centre with a covered area of 4.000 sqm becomes fully operative.

L'azienda Fumagalli celebra i suoi 50 anni di storia come fabbricante italiano di successo. Uffici ed esposizione si spostano in una nuova sede operativa e nel medesimo anno viene inaugurato anche un nuovo reparto di assemblaggio e un nuovo centro logistico con una superficie coperta di 4.000 m^2.

2025



To meet the continuously growing demand for products, the construction of a large and modern building with a covered area of 7,400 sqm is successfully completed. A new production department and a new computerized warehouse for the storage of unassembled components are now fully operative.

Per far fronte alla continua e crescente domanda di prodotti, viene portata a termine con successo la costruzione di un ampio e moderno edificio con una superficie coperta di 7.400 m^2. Sono qui ora pienamente operativi sia nuovi reparti produttivi che un nuovo magazzino computerizzato per lo stoccaggio dei componenti.

COMPANY
OVERVIEW

MADE IN ITALY

fumagalli since 1973

We are proud to define ourselves as a “pure Italian manufacturer”: all our products are strictly manufactured inside our factory located in Varese (Italy), on a **60.000 sqm area**. This means to keep a full control on the quality and performances of our products.



*Siamo orgogliosi di poterci definire come fabbricanti italiani "puri": tutti i nostri prodotti sono rigorosamente fabbricati all'interno dei nostri stabilimenti di Varese (Italia), su un'**area di 60.000 m².** Questo ci permette di esercitare un pieno controllo sulla qualità e sulle prestazioni dei nostri prodotti.*



COMPANY

OVERVIEW

MADE IN ITALY

fumagalli since 1973

Member of CONFEDERATION OF ITALIAN INDUSTRY

ITALY'S EXPORT CHAMPIONS 2022

1973 2023 50 YEARS





ISO 9001:2015

IQNET CERTIFIED MANAGEMENT SYSTEM

Sistema di management certificato SQS ISO 9001
ISO 9001:2015

SWISS CERTIFICATION
SCESm 001





INDUSTRY 4.0

SMART FACTORY

A DIGITAL ENTERPRISE

In our company, product and production technologies are developed in a complete digital environment, to get an advanced manufacturing process fully automated and interconnected.

UN'AZIENDA DIGITALE

Nella nostra azienda prodotto e tecnologie produttive vengono sviluppati in un ambiente completamente digitale, per ottenere un avanzato processo di fabbricazione interamente automatizzato ed interconnesso.

- INCREASED PRODUCTIVITY
- COST REDUCTION
- IMPROVED QUALITY CONTROL

REAL TIME DATA EXCHANGE



MONITORING ON-LINE



MACHINERIES AND DEVICES INTERCONNECTION





PURE ITALIAN MANUFACTURER

Inside the following different departments of our company we can manage the whole product development process from the initial design to the fully-finished product.

PURI FABBRICANTI ITALIANI

All'interno dei seguenti dipartimenti della nostra azienda possiamo gestire l'intero processo di sviluppo del prodotto, dall'idea iniziale al prodotto realizzato.

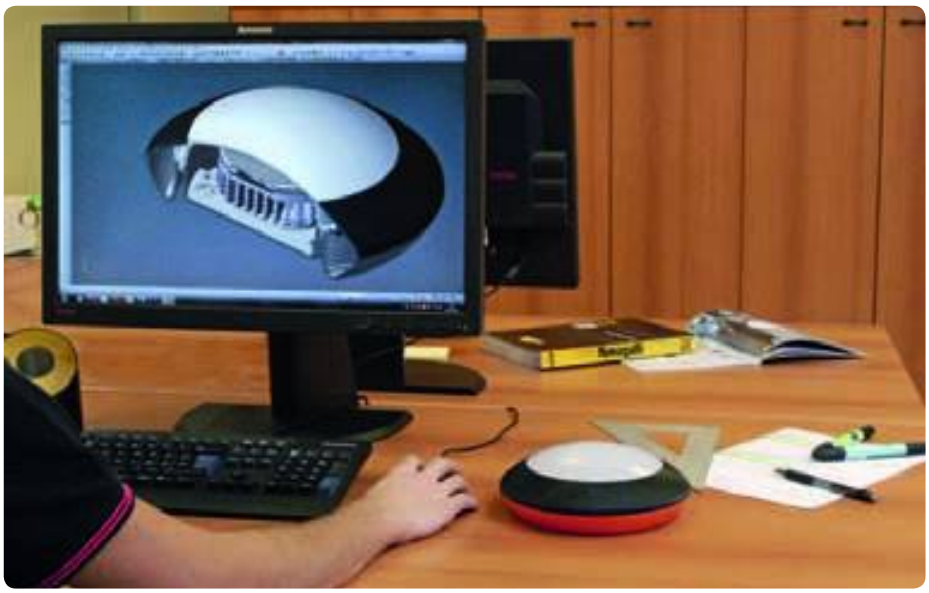

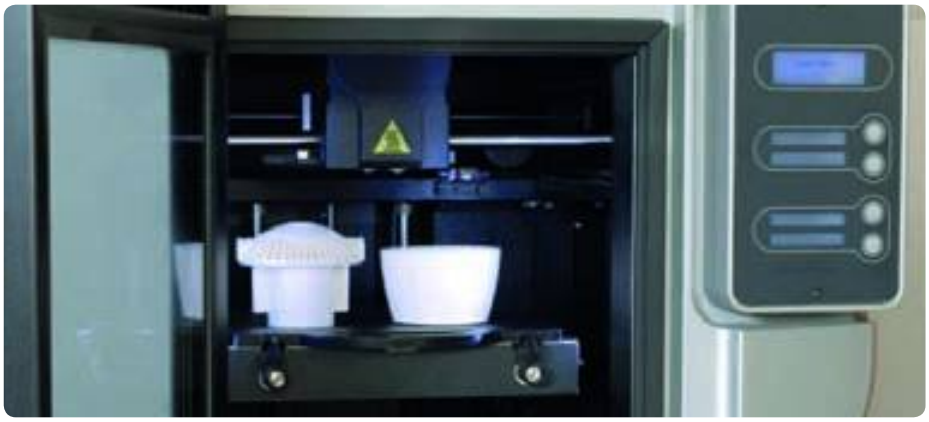

R&D DEPARTMENT 3D PROTOTYPING

Product planning and design through the most advanced 3D modelling software, CAD systems and modern multimedia. Product engineering and prototypes creation with the most advanced 3D printers.

RICERCA E SVILUPPO PROTOTIPAZIONE 3D

Progettazione e disegno del prodotto attraverso i software più avanzati di modellazione 3D, di sistemi CAD e di multimedia moderni. Ingegnerizzazione del prodotto e creazione di prototipi con le più avanzate stampanti 3D.



TECHNICAL DESIGN DEPARTMENT

Mould design and engineering, toolpath programming through the most advanced 3D software directly connected to the CNC workstations.

SEZIONE PROGETTAZIONE STAMPI

Progettazione e ingegnerizzazione degli stampi, studio dei percorsi utensile, attraverso i più avanzati software 3D direttamente collegati alle postazioni di lavoro CNC.

MOULD CONSTRUCTION DEPARTMENT

New hi-tech work stations, working only for the construction of our moulds, enable us to update constantly our collection with new products manufactured in accordance with the most advanced lighting solutions.

REPARTO COSTRUZIONE STAMPI

Nuovi centri di lavoro dedicati esclusivamente alla costruzione dei nostri stampi, ci permettono di aggiornare costantemente la nostra collezione con numerosi prodotti nuovi, fabbricati secondo le più moderne tecnologie e in accordo con le più recenti soluzioni illuminotecniche.











WIRE ELECTRICAL DISCHARGE MACHINE







CNC SURFACE GRINDER

COMPANY

FACTORY

MADE IN ITALY

fumagalli since 1973

INDUSTRIAL PRODUCTION PROCESS IN DIFFERENT PHASES

A successful synergy between the decades-long experience of a qualified staff and the use of modern automatic machineries with the most updated technologies.

PROCESSO DI PRODUZIONE INDUSTRIALE IN DIVERSE FASI

Un'efficace sinergia tra la decennale esperienza di personale qualificato e l'utilizzo di macchinari automatici dotati delle più moderne tecnologie.










KONECRANES
ENGEL


ENGEL
duo 700

NEW PRODUCTION AREA

New factory dedicated to the molding of transparent materials with automatic dehumidification system, doubled raw material storage capacity and advanced technology for pneumatic conveying of the resin granule.

NUOVA AREA PRODUTTIVA

Nuova fabbrica dedicata allo stampaggio dei materiali trasparenti con sistema di deumidificazione automatico, raddoppiata capacità di stoccaggio della materia prima e tecnologia di trasporto pneumatico del granulo.






ENGEL


ENGEL

COMPOSITE MATERIAL POLES MANUFACTURING PROCESS

An entire production plant dedicated to the manufacturing of the composite material poles, from raw materials to the finished product, thanks to the exclusive FUMATECH technology.

FABBRICAZIONE DI PALI IN MATERIALE COMPOSITO


Un intero impianto produttivo dedicato alla realizzazione del palo, partendo dal materiale grezzo e arrivando, grazie alla tecnologia esclusiva FUMATECH, alla creazione del prodotto finito.







RESIN DRYERS AND DEHUMIDIFIERS

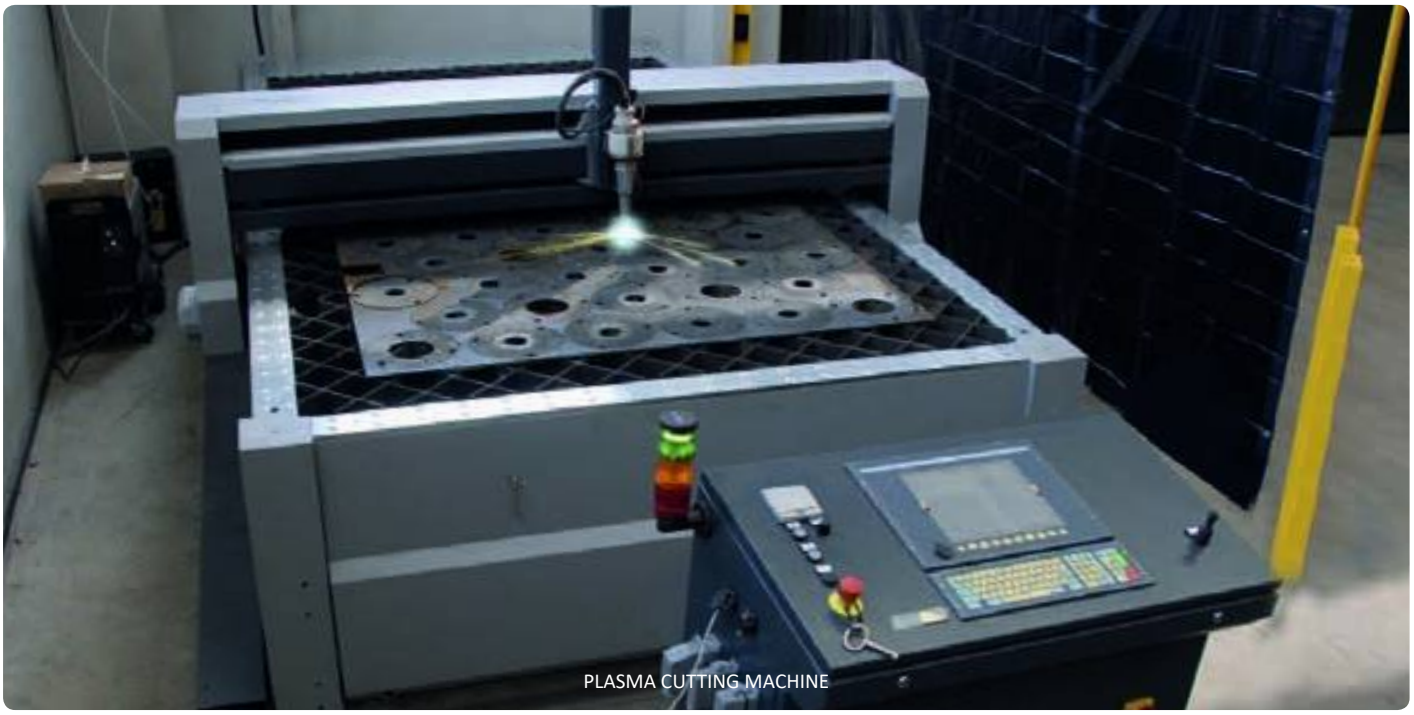
PLASMA CUTTING MACHINE






BLACK STEEL WELDING

COMPANY

WAREHOUSE

MADE IN ITALY

WAREHOUSE

Fumagalli stock of raw materials, components and semi-finished products is maintained at the best levels to ensure prompt delivery of standard products and fast preparation of special or large quantity orders.

MAGAZZINO

Lo stock Fumagalli di materie prime, componenti e semi-lavorati viene mantenuto a livelli ottimali per assicurare pronte consegne dei prodotti standard ed una veloce esecuzione di richieste speciali o per grandi quantità.



RESIN RAW MATERIAL STOCK


RESIN RAW MATERIAL STOCK

COMPONENTS STOCK



READY POLES STOCK

Stock for projects poles to ensure quick deliveries

3200 poles 2,5mt, 3mt, 4mt, 5mt high- Colours: Classic poles in black. Modern poles in grey.





COMPANY

WAREHOUSE

MADE IN ITALY

fumagalli since 1973

AUTOMATIC PACKAGING SYSTEMS

A fully automatic bagging machine provides thousands of hardware/screw assembly kits each day with great accuracy and reliability, minimizing the time.

A dedicated software can manage the numerous assembly kits variants required by our products range.

SISTEMA DI CONFEZIONAMENTO AUTOMATICO

Un sistema di confezionamento automatico consente di realizzare, in maniera precisa e affidabile, migliaia di bustine di minuteria ogni giorno, riducendo al minimo i tempi.

Le numerose varianti di minuteria richieste dalla nostra gamma di prodotti sono gestite tramite un software dedicato.



AUTOMATIC PACKING MACHINE







AUTOMATED VERTICAL WAREHOUSES

Eight automatic vertical tray warehouses allow the storage of the goods in a clean, tidy, safe and fast-moving way. Designed to save space and time and improve process efficiency.

STOCCAGGIO VERTICALE AUTOMATIZZATO

Otto magazzini automatici verticali a cassetti consentono di stoccare la merce in modo pulito, ordinato, sicuro e veloce. Progettati per guadagnare spazio, risparmiare tempo e ottimizzare l'efficienza dei processi.



AUTOMATED VERTICAL WAREHOUSES







COMPANY

WAREHOUSE

MADE IN ITALY

fumagalli since 1973

ASSEMBLY AND ELECTRIFICATION DEPARTMENT

The assembly, electrification and packing department allows us to ship the products ready for installation to meet customer's needs.

REPARTO DI ASSEMBLAGGIO ED ELETTRIFICAZIONE

Il reparto di assemblaggio, elettrificazione ed imballaggio ci consente di spedire i nostri prodotti già pronti per l'installazione e personalizzati secondo le necessità del cliente.



ASSEMBLY DEPARTMENT



CARTON BOX STOCK




GOODS READY FOR SHIPMENT







COMPANY

HEADQUARTER

MADE IN ITALY

fumagalli since 1973

HEADQUARTER

New offices, showroom and meeting rooms ready to welcome Fumagalli dealers from all over the world.

SEDE CENTRALE

Nuovi uffici, sale espositive e meeting room per accogliere i distributori Fumagalli in visita all'azienda.






















fumagalli

FUMATECH

FUMAGALLI POLES TECHNOLOGY


MADE IN ITALY

fumagalli® since 1973

Fumagalli **created** and developed a unique post technology, registered as **FUMATECH**. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.

*L'azienda Fumagalli ha **creato** e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come **FUMATECH.** La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.*

fumaTech®
FUMAGALLI POLES TECHNOLOGY

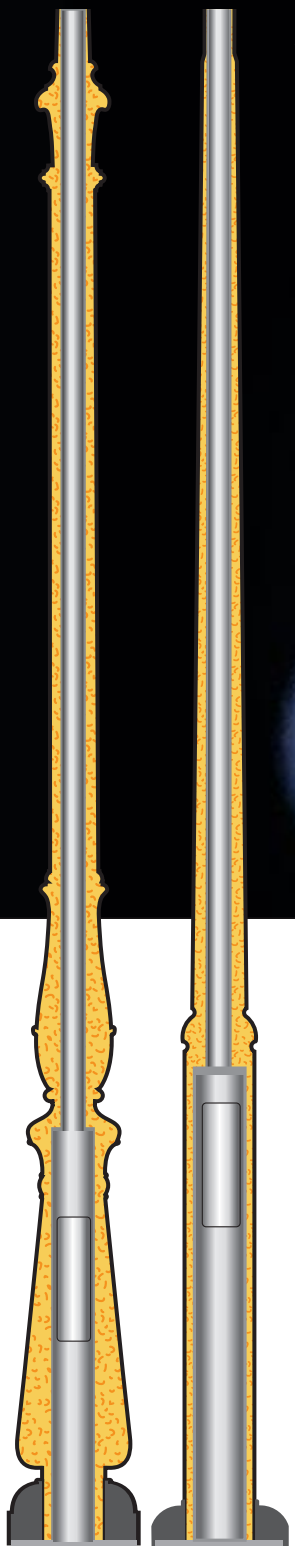

METAL POST COVERED BY RESIN

50 YEARS EXPERIENCE



- ✓ Protected against corrosion.
  Inattaccabile dalla corrosione.
- ✓ Not-fading colours (UV-rays stabilized).
  Colori inalterati nel tempo (stabilizzati ai raggi UV).
- ✓ Double insulated.
  Doppio isolamento.
- ✓ Rigid and shockproof.
  Rigido e resistente agli urti.
- ✓ Fireproof.
  Ignifugo.
- ✓ Light and easy to transport.
  Leggero e facile da trasportare.
- ✓ Manufactured according to European Community's standards.
  Fabbricato secondo le norme della Comunità Europea.
- ✓ High quality resin polymer sourced in Europe.
  Resina polimerica di alta qualità fabbricata in Europa.

CE

1 **INNER METAL POLE STRUCTURE**
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

2 **OUTER RESIN COVER**
Outer coating of a **single piece without joints** made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

3 **EXPANSE**
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.



MADE IN ITALY

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED
MADE IN ITALY




ANTI CORROSION

Thanks to the outer resin material, Fumagalli lamps are protected against rust and corrosion, even if subjected to saline or polluted environments.
Grazie alla resina esterna le lampade Fumagalli sono protette da ruggine e corrosione, anche se esposte ad ambienti salini o inquinati.



NO MAINTENANCE

The colour of the outer resin coating is molded in the paste of material to grant the maximum durability over the time.
No re-painting will ever be necessary.
Il colore della resina esterna è nella pasta stessa del materiale, per garantire la massima durata nel tempo. Non sarà più necessaria alcuna riverniciatura.

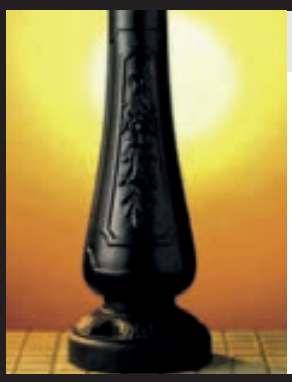

UV-RAYS STABILIZED

Fumagalli products are made of UV stabilized materials to avoid color fading of the outer surface under the sun. Ideal in hot and cold climate.
I prodotti Fumagalli sono realizzati con materiali stabilizzati agli UV per evitare che il colore della superfice esterna sbiadisca con il sole.



SAFE

CLASS II

The outer resin coating of Fumagalli products isolates the lamp from electrical discharges (double insulation Class II).


Il rivestimento esterno dei prodotti Fumagalli rende la lampada isolata dalle scariche elettriche (doppio isolamento Classe II).



UNAFFECTED BY CHEMICAL FERTILIZERS

Fumagalli lamps are not affected by chemical fertilizer or pollutants.

Le lampade Fumagalli non sono soggette a deterioramento dovuto a fertilizzanti chimici od agenti inquinanti.

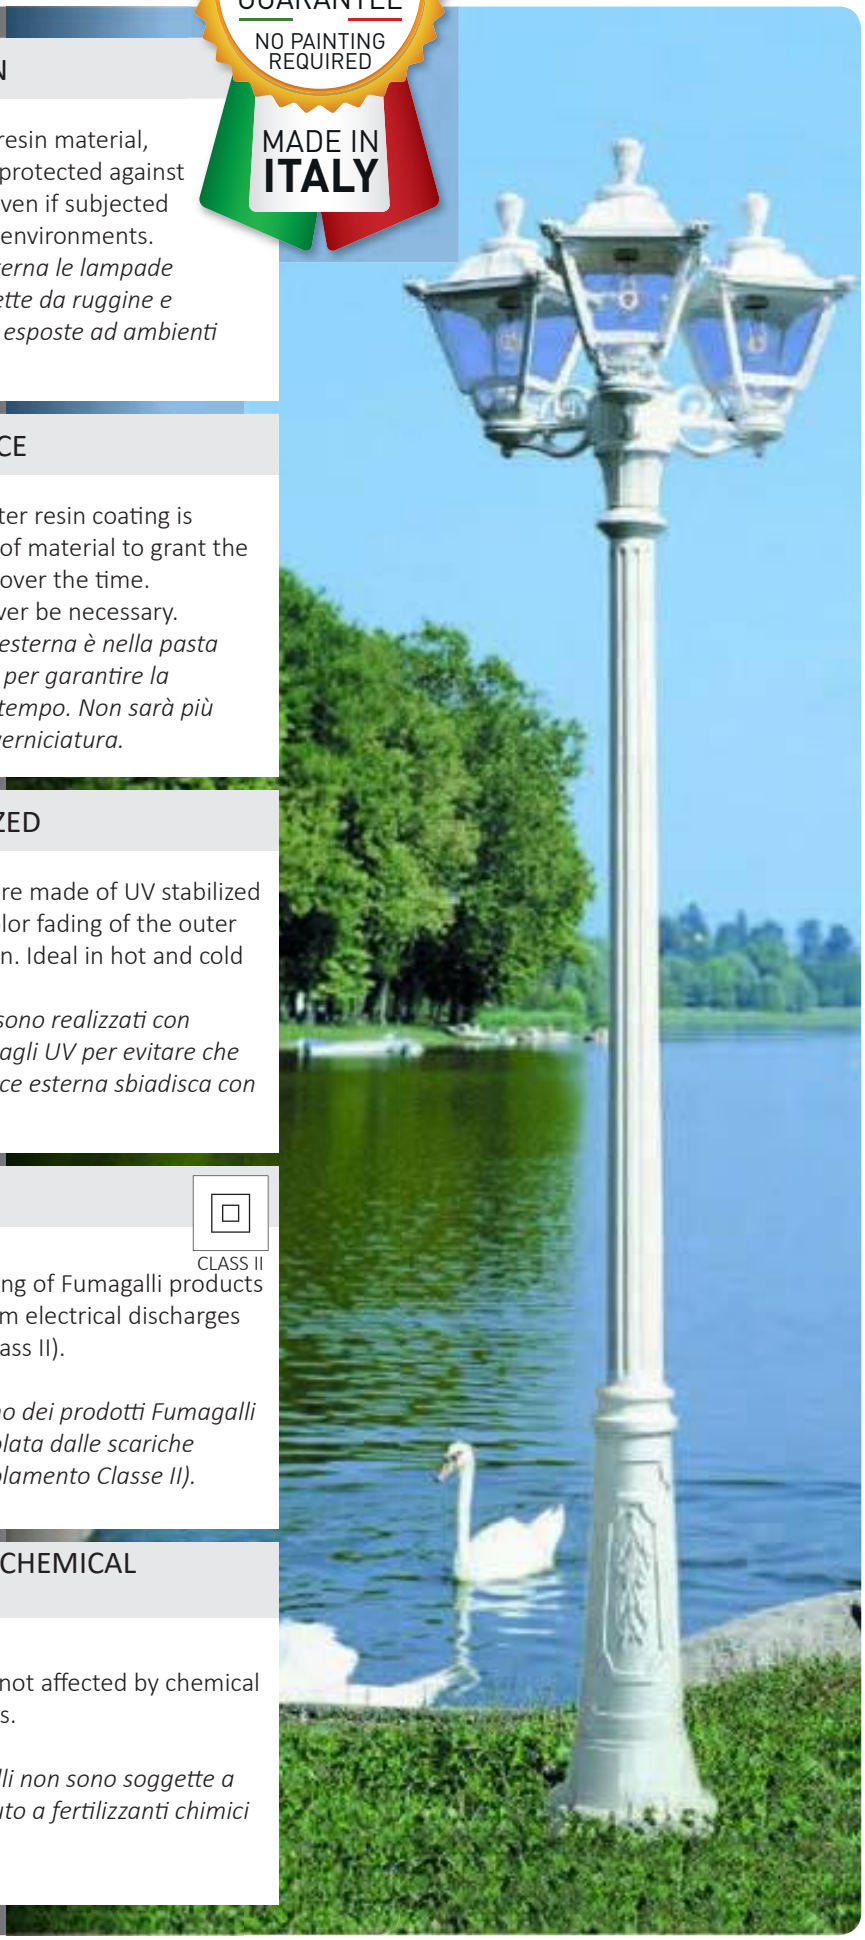

CERTIFIED QUALITY

MADE IN ITALY

fumagalli since 1973

ISO 9001:2015

In order to assure the reliability of its manufacturing and marketing process, the company Fumagalli Srl has implemented and maintains a management system, which meets the requirements of the standard **ISO 9001:2015**, as certified by The International Certification Network **IQNET**, which is the largest provider of management system certification in the world, and by the Swiss Association for Quality and Management Systems **SQS**.

*Per garantire l'affidabilità del proprio processo produttivo e commerciale, la ditta Fumagalli Srl possiede e mantiene un sistema di gestione aziendale che soddisfa i requisiti della norma ISO **9001:2015**, come certificato sia dall'International Certification Network **IQNET**, che è il più grande organismo al mondo preposto a certificare sistemi di gestione per la qualità, sia dall'Associazione Svizzera per Sistemi di Qualità e di Managment **SQS**.*



CE

All Fumagalli products are manufactured according to the most updated international standards and regulation and are CE marked in order to ensure to our worldwide customers the highest levels of quality in the full respect of enviroment and person.

Tutti i prodotti Fumagalli sono fabbricati secondo le più aggiornate norme e standard internazionali e sono marcati CE, in modo da assicurare ai nostri clienti in tutto il mondo i più alti livelli di qualità nel pieno rispetto dell'ambiente e delle persone.

SASO
Saudi Standards

Fumagalli lamps meet the Saudi energy efficiency and functionality requirements according to SASO Directive 2870:2018/ADM1:2021.
A SASO version packaging with Energy Efficiency label, according to 6.000 hours EEI test report, is available upon request.

Le lampade Fumagalli soddisfano i requisiti sauditi di efficienza energetica e funzionalità secondo la Direttiva SASO 2870:2018/ADM1:2021. Su richiesta, è disponibile un imballo in versione SASO con etichetta di efficienza energetica, conforme al rapporto di prova EEI di 6.000 ore.



CB

IECEE CB SCHEME

To allow a direct market access of our products in more than 50 countries all over the world, most of Fumagalli products have been tested and certified by third party accredited laboratories within the **IECEE CB scheme** – the most internationally recognized system for Conformity and Certification of Electrotechnical Equipment and Components.

*Per permettere ai nostri apparecchi di avere un accesso diretto in più di 50 paesi in tutto il mondo, una larga parte dei prodotti Fumagalli è stata anche testata e certificata da laboratori terzi accreditati secondo le direttive **IECEE CB** – il sistema di conformità e certificazione più riconosciuto a livello internazionale relativamente ai prodotti e componenti elettrotecnici.*

IECEE Member Countries at present:

- Argentina
- Australia
- Austria
- Bahrain
- Belarus
- Belgium
- Brazil
- Bulgaria
- Canada
- China
- Colombia
- Croatia
- Czech Republic
- Denmark
- Finland
- France
- Germany
- Greece
- Hungary
- India
- Indonesia
- Ireland
- Israel
- Italy
- Japan
- Kenya
- Korea,Rep.Of
- Malaysia
- Mexico
- Netherlands
- New Zealand
- Nigeria
- Norway
- Pakistan
- Poland
- Portugal
- Russian Federation
- Saudi Arabia
- Serbia, Rep.Of
- Singapore
- Slovakia
- Slovenia
- South Africa
- Spain
- Sweden
- Switzerland
- Thailand
- Turkey
- Ukraine
- United Arab Emirates
- United Kingdom
- USA
- Vietnam



Available CB certificates and CB test reports can be provided to Fumagalli customers upon request.

CERTIFIED QUALITY

MADE IN ITALY

fumagalli since 1973

With the aim of offering to our customers very reliable and safe LED solutions with certified quality and certified performances, all Fumagalli LED lamps (*GX53, GU10, G9, E27, R7s*) obtained the prestigious TÜV SÜD German certification mark, as they comply with the international standards EN 62560:2012/A11:2019, EN 62493:2015/A1:2022. **TÜV Certificate of Compliance** includes also the following test reports:

Al fine di offrire ai nostri clienti soluzioni a Led affidabili e sicure con qualità e prestazioni certificate, tutte le lampadine a LED Fumagalli (GX53, GU10, G9, E27, R7s) hanno ottenuto la prestigiosa certificazione TÜV SÜD, poichè sono conformi ai seguenti standard internazionali: EN 62560:2012/A11:2019, EN 62493:2015/A1:2022. Il **Certificato di Conformità TÜV** *include anche i seguenti test report:*

EMC TESTED

EMC Certificate: Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU and its amendments.
Certificato EMC: l*e lampadine Fumagalli sono conformi alla Direttiva di Compatibilità Elettromagnetica 2014/30/EU.*

LVD TESTED

LVD Certificate: Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.
Certificato LVD: l*e lampadine Fumagalli rispettano la Direttiva Bassa Tensione 2014/35/EU 2015/1428, sono perciò marchiate CE e conformi a requisiti di sicurezza quali protezione contro scosse elettriche, resistenza al calore e all'umidità, resistenza alla fiamma e alle accensioni.*

NEW ERP

New ERP Attestation of conformity: *Fumagalli lamps fulfil the NEW European Ecodesign Directive EU 2019/2020, which sets stricter energy efficiency requirements, new verification tolerances and other factors such as bulb lifetime and warm-up time.*
Nuova attestazione di conformità ERP: *Le lampadine Fumagalli sono conformi alla NUOVA Direttiva Europea Ecodesign EU 2019/2020, che stabilisce requisiti di efficienza energetica più severi, nuove verifiche sulle tolleranze e altri fattori come la durata di vita della lampadina e il suo tempo di accensione.*

CB IECEE CB SCHEME

IECEE CB Certificate: Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.
Certificato IECEE CB: *le lampadine Fumagalli sono conformi al Sistema Internazionale di Conformità e Certificazione dei prodotti e componenti elettrotecnici, che ne garantisce un accesso diretto accesso ai mercati di oltre 50 paesi in tutto il modo.*

RoHS REACH COMPLIANT

RoHS REACH compliant: Fumagali lamps fulfil the RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendements and the REACH regulation (EC) No. 1907/2006, regarding the concentration of Very High Concern Substances (SVHC).
RoHS and REACH test report: le lampadine Fumagalli sono conformi alla direttiva RoHS 2011/65/EU e ai suoi emendamenti (restrizioni sull'uso di sostanze pericolose) e al regolamento REACH (EC) No. 1907/2006 sulla concentrazione di sostanze ad alto rischio.









A specialized team of lighting professionals is permanently at our customers' disposal to provide a qualified product technical support, to supply lighting diagrams and to give advice about the optimal article selection and light sources distribution, according the customer's needs.
In addition, our technical division can provide at any time the following information and services to our worldwide customers:

- photometric data for all Fumagalli diffusers with different wattages: they are available on request in eulumdat, iesna 86/91/95, cibse\1, ltli
- calculation of the average horizontal luminance and of the isolux curves at a given high level
- wind load calculations

From Fumagalli web site www.fumagalli.it it's possible to download the technical specification and the photometric data in .eulumdat or .ies format of all Fumagalli luminaries.

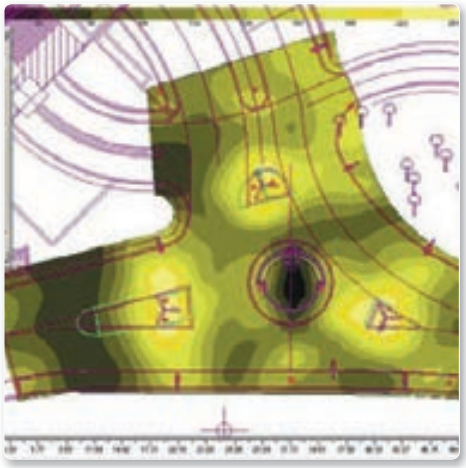



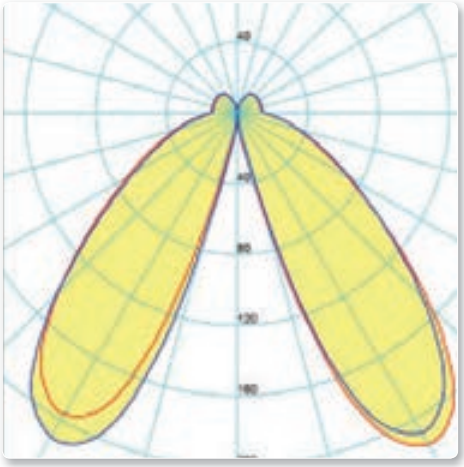

Un team dedicato di professionisti della luce è permanentemente a disposizione dei nostri clienti per fornire un qualificato supporto tecnico relativo al prodotto, per elaborare studi fotometrici e per fornire consigli sulle soluzioni ottimali relative alla selezione degli articoli e alla distribuzione delle sorgenti luminose in una data area.
In aggiunta, il nostro dipartimento tecnico può fornire in ogni momento ai nostri clienti in tutto il mondo le seguenti informazioni e servizi:

- ***dati fotometrici** di tutti i diffusori Fumagalli con diversi wattaggi: questi sono disponibili su richiesta nei formati eulumdat, iesna 86/91/95, cibse\1, ltli*
- ***calcolo dell'illuminamento** medio orizzontale e delle curve isolux ad una data altezza*
- ***calcoli relativi alla resistenza al vento***

È possibile scaricare dal sito Fumagalli www.fumagalli.it le schede tecniche e le fotometrie di tutti i diffusori Fumagalli in formato .eulumdat o .ies.

MARKETING TOOLS

PRODUCT DISPLAY STAND

MARKETING TOOLS

We put at our dealers' disposal a wide range of marketing tools, such as product display stands, wall panels, floor bases and vertical banners.
Creating in every showroom a corner dedicated to Fumagalli products has never been easier!

MARKETING TOOLS

Mettiamo a disposizione dei nostri distributori alcuni accattivanti strumenti di marketing, come espositori per prodotti, pannelli a parete, basi da pavimento e banner verticali.
Creare in ogni showroom un angolo dedicato ai prodotti Fumagalli non è mai stato così facile!

WALL PANEL
H.STAND.02



PRODUCT DISPLAY STAND
H.STAND.01



SCAN ME!
VIDEO PRESENTATION

BASE FOR POLES
H.STAND.03



SUGGESTED COMBINATION











GARDEN REVIVAL

FABIO

SMALL SIZE

Half lantern in modern revival style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Mezza lanterna in stile revival moderno con portalampada E27, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



FABIO
M20.000

S *M21.000 SMART PACK*





M20.000.V1K

Discover the collection

CE · CB IECEE CB SCHEME · UV-TREATED · CLASS II DOUBLE INSULATION · RESIDENTIAL
RECYCLABLE · ANTI-SHOCK · +90° -60° TEMPERATURE · 360° FILAMENT LED · WALL

MADE IN ITALY

FABIO - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.*

WALL PLATE *made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Provided with double cable entry and supplied complete with E27 lampholder.*

BASE A MURO *realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvista di doppia entrata per il cavo elettrico e fornita completa di portalampada E27.*

FABIO

M20.000




Dimensions and weight
Height: 290 mm
Width: 215 mm
Depth: 115 mm
Weight: 0,8 Kg

Moulded colours:
Black *White*
Grey


Diffuser PMMA:
Clear *Opal*

E27 FILAMENT

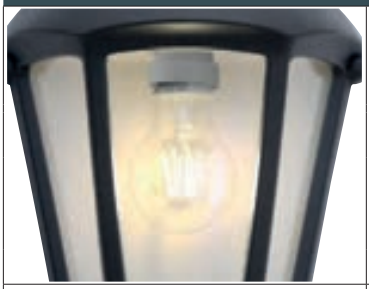

- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET

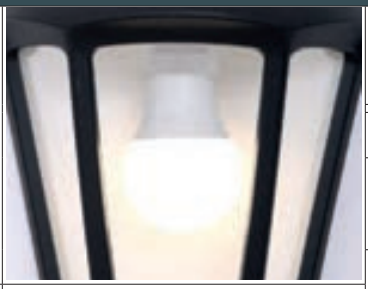

- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 150 mm	E27 lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	



6,5W filament
8,5W CCT
= 60W incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





FABIO *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

height wall mounting: 2mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GIULIO

MEDIUM SIZE

Half lantern in modern revival style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Mezza lanterna in stile revival moderno con portalampada E27, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



GIULIO
M24.000

S *M25.000 SMART PACK*



M24.000.T1K

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RESIDENTIAL
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
360° FILAMENT LED
WALL

MADE IN ITALY

GIULIO - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA), one piece only closed on the top to ensure high protection against external agents. Available in clear or opal colour.

DIFFUSORE *in polimetilmetacrilato (PMMA), realizzato in un unico pezzo chiuso in cima per garantire un alto livello di protezione contro gli agenti esterni. Disponibile in colore trasparente od opale.*



WALL PLATE *made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Provided with double cable entry and supplied complete with E27 lampholder.*

BASE A MURO *realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvista di doppia entrata per il cavo elettrico e fornita completa di portalampada E27.*

GIULIO

M24.000



Dimensions and weight
Height: 375 mm
Width: 265 mm
Depth: 140 mm
Weight: 1,1 Kg

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

suitable lamps: CFL-LED max 160 mm	E27 lampholder only	*ADD. SUFFIX .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K



6,5W filament = 60W incandescent

8,5W CCT

11W CCT = 75W incandescent

SAVE up to 89%


LED LAMPS

TÜV SÜD CE CB

LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





GIULIO *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

height wall mounting: 2mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

HALF LANTERNS

GARDEN REVIVAL


M20.000.F1R



M24.000.T1K


M20.000.V1K


M24.000.T1K


FABIO	
E27 lampholder	M20.000.E27
6,5W filament	M20.000.F1R
8,5W CCT set	M20.000.V1K

Pcs 18
Kg 15,4
mc 0,172



GIULIO	
E27 lampholder	M24.000.E27
6,5W filament	M24.000.F1R
8,5W CCT set	M24.000.V1K
11W CCT set	M24.000.T1K

Pcs 12
Kg 13,6
mc 0,20

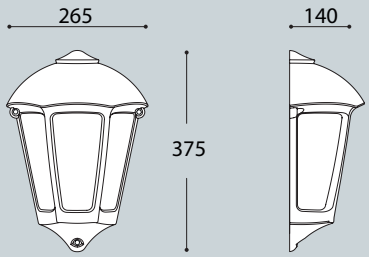

GIAMPY

SMALL SIZE

fumagalli since 1973

E27 hexagonal lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



Discover the collection

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II
DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60°
TEMPERATURE

RESIDENTIAL
360°
FILAMENT LED
WALL
HANGING
POST

H21.114.V1K

MADE IN ITALY

GIAMPY - LANTERN COMPONENTS

IP55







Decorative **PINNACLE** provided with silicone rubber gasket to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo completo di guarnizione in gomma siliconica applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Easy opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Facilmente rimovibile per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

GIAMPY

H21.000 *



Dimensions and weight
Height: 260 mm
Width: 210 mm
Depth: 200 mm
Weight: 0,85 Kg

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

				*ADD. SUFFIX
suitable lamps: CFL-LED max 150 mm		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K



6,5W filament
8,5W CCT
= **60W** incandescent

SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





GIAMPY *lantern clear with Fumagalli Filament Led Lamp 6,5W.*


POST height 1mt
6x6mt area: average 6 lux


The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GIAMPY

SMALL SIZE

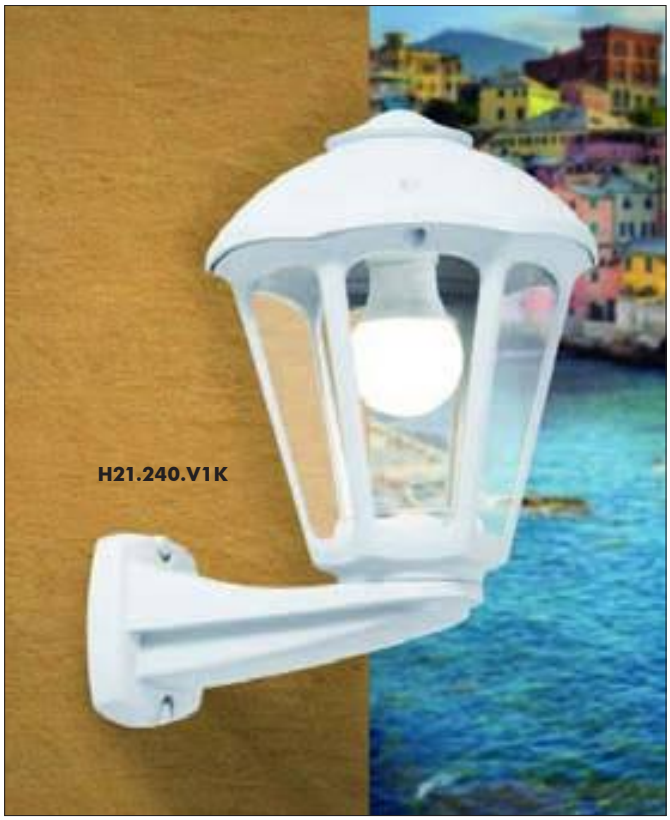

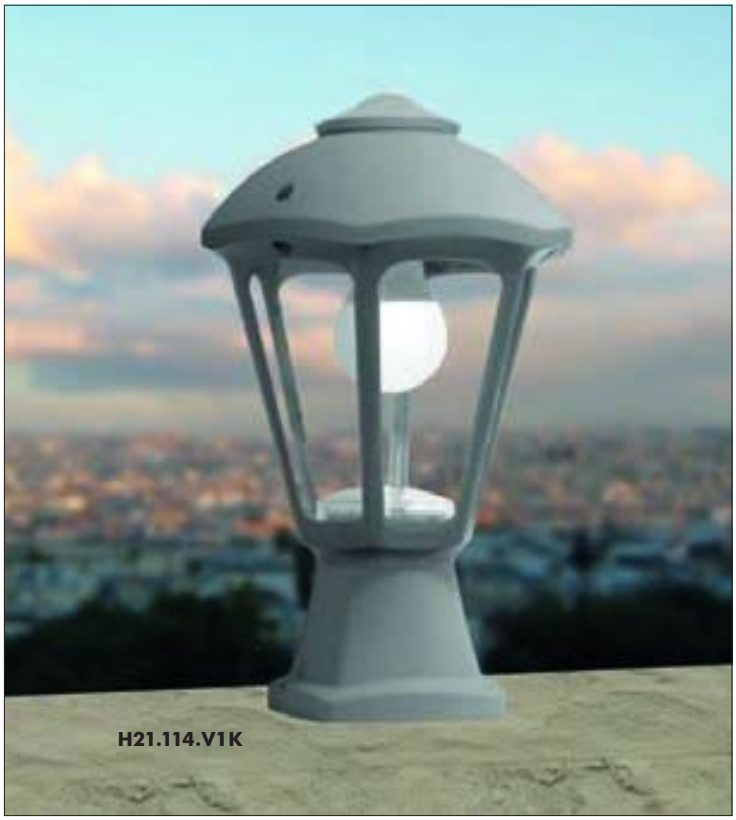





NARDO/GIAMPY

E27 lampholder	H21.240.E27
6,5W filament	H21.240.F1R
8,5W CCT set	H21.240.V1K


Pcs 18
Kg 18,3
mc 0,207



SICAR/GIAMPY

E27 lampholder	H21.125.E27
6,5W filament	H21.125.F1R
8,5W CCT set	H21.125.V1K

Pcs 18
Kg 21,1
mc 0,207



GIAMPY

H21.000


Pcs 1
Kg 0,8
mc 0,011



DISMA/GIAMPY

E27 lampholder	H21.114.E27
6,5W filament	H21.114.F1R
8,5W CCT set	H21.114.V1K


Pcs 18
Kg 17,5
mc 0,207



GIAFFA/GIAMPY resin

E27 lampholder	H21.242.E27
6,5W filament	H21.242.F1R
8,5W CCT set	H21.242.V1K

Pcs 1
Kg 1,9
mc 0,048

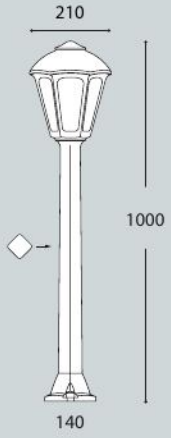

GIAMPY

SMALL SIZE









DANILO/GIAMPY	
E27 lampholder	H21.305.E27
6,5W filament	H21.305.F1R
8,5W CCT set	H21.305.V1K

Pcs 1
Kg 8,9
mc 0,125

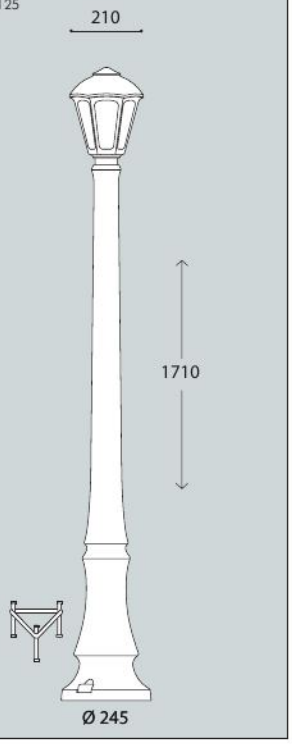


DANILO NARDO/GIAMPY 2L	
E27 lampholder	H21.305.D20.E27
6,5W filament	H21.305.D20.F1R
8,5W CCT set	H21.305.D20.V1K

Pcs 1
Kg 9,8
mc 0,176

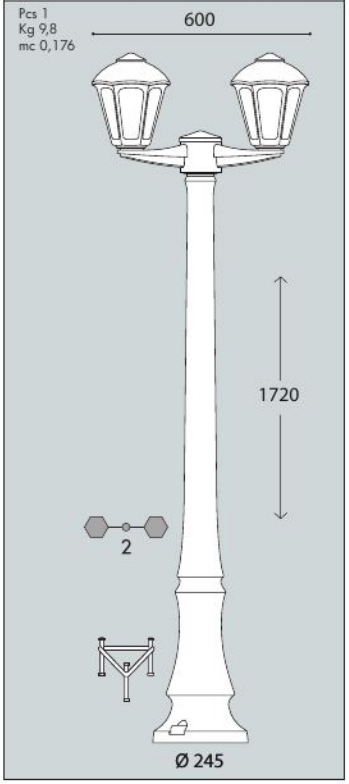


DANILO NARDO/GIAMPY 3L	
E27 lampholder	H21.305.D30.E27
6,5W filament	H21.305.D30.F1R
8,5W CCT set	H21.305.D30.V1K

Pcs 1
Kg 10,8
mc 0,176

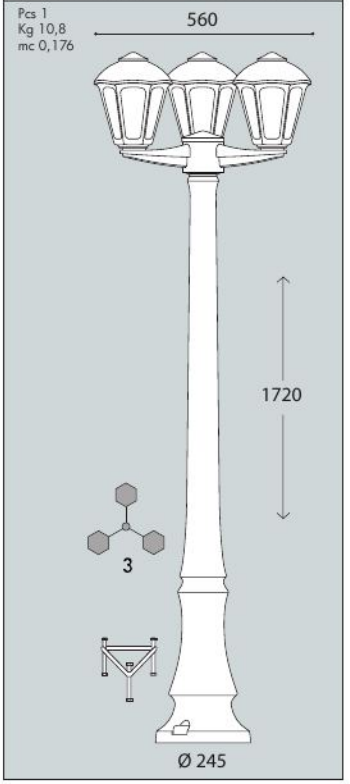


DINO NARDO/GIAMPY 2L	
E27 lampholder	H21.306.D20.E27
6,5W filament	H21.306.D20.F1R
8,5W CCT set	H21.306.D20.V1K

Pcs 1
Kg 11,5
mc 0,186

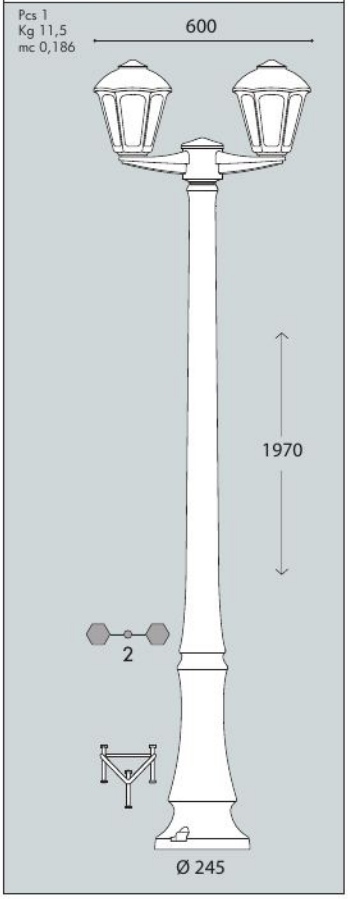

DINO NARDO/GIAMPY 3L	
E27 lampholder	H21.306.D30.E27
6,5W filament	H21.306.D30.F1R
8,5W CCT set	H21.306.D30.V1K

Pcs 1
Kg 12,2
mc 0,186

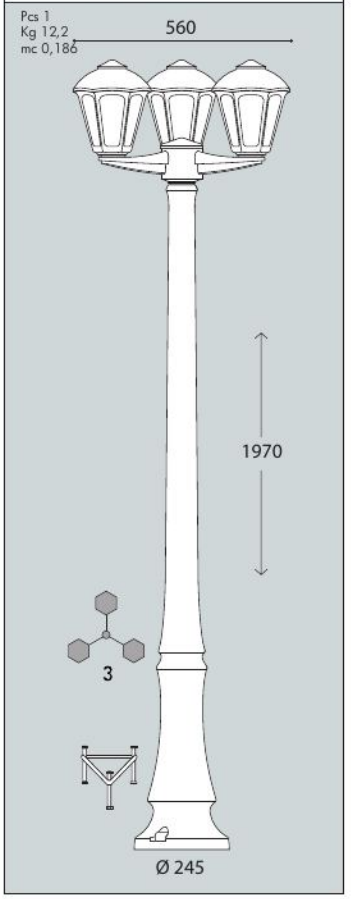

SANDRO

MEDIUM SIZE

E27 hexagonal lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



H24.240.V1K

Discover the collection

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE

RESIDENTIAL
360° FILAMENT LED
WALL
HANGING
POST

MADE IN ITALY

SANDRO - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** provided with silicone rubber gasket to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo completo di guarnizione in gomma siliconica applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Easy opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Facilmente rimovibile per manutenzione e cambio lampadina.*



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SANDRO

H24.000 *



Dimensions and weight
Height: 310 mm
Width: 240 mm
Depth: 230 mm
Weight: 1,1 Kg

Moulded colours:
Black White
Grey

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

suitable lamps: CFL-LED max 160 mm	E27 lampholder only	*ADD. SUFFIX .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K / 4000 K / 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K / 4000 K / 2700 K	.T1K



6,5W filament = 60W incandescent
8,5W CCT
11W CCT = 75W incandescent

SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





SANDRO *lantern clear with Fumagalli Led Lamp CCT set 8,5W.*

POST height 2mt
6x6mt area: average 6 lux


The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SANDRO

MEDIUM SIZE


H24.306.V1K

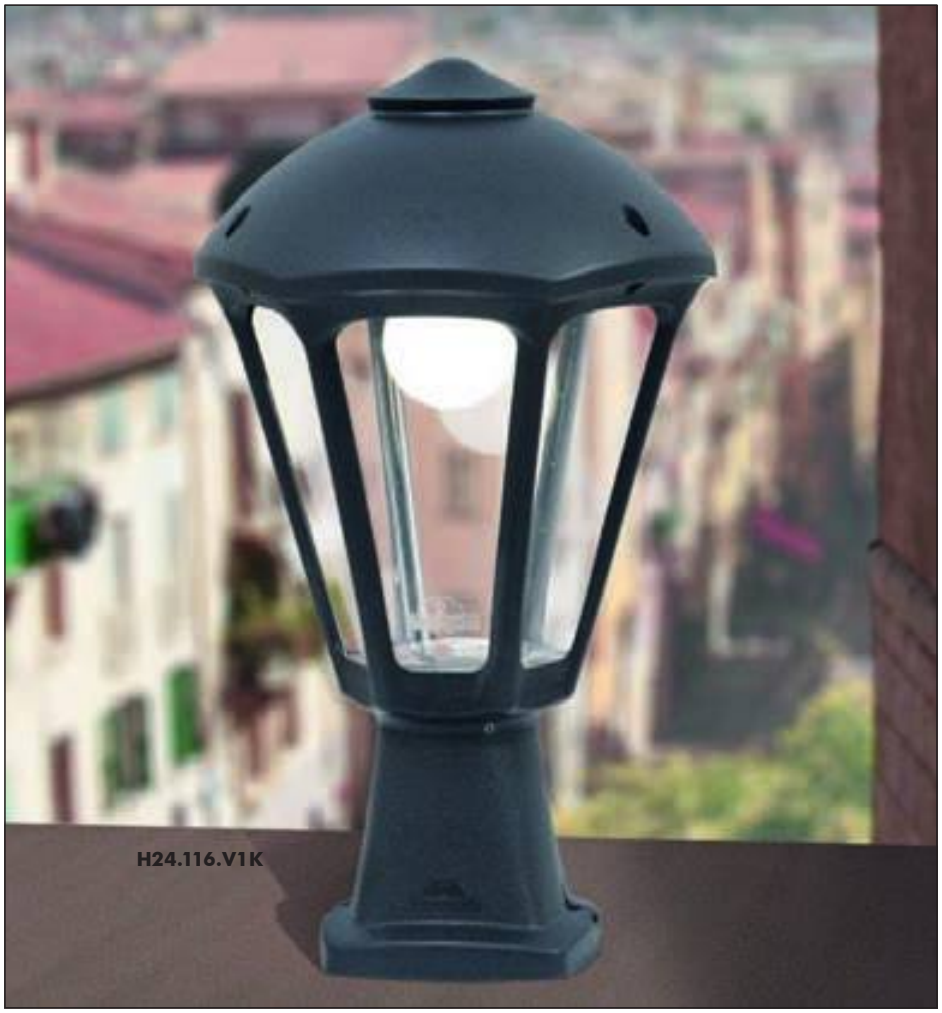

H24.116.V1K


H24.242.V1K


H24.125.V1K

NARDO/SANDRO	
E27 lampholder	H24.240.E27
6,5W filament	H24.240.F1R
8,5W CCT set	H24.240.V1K
11W CCT set	H24.240.T1K

Pcs 12
Kg 15,7
mc 0,216




MIDIDISMA/SANDRO	
E27 lampholder	H24.116.E27
6,5W filament	H24.116.F1R
8,5W CCT set	H24.116.V1K
11W CCT set	H24.116.T1K

Pcs 12
Kg 15,6
mc 0,216



SICAR/SANDRO	
E27 lampholder	H24.125.E27
6,5W filament	H24.125.F1R
8,5W CCT set	H24.125.V1K
11W CCT set	H24.125.T1K

Pcs 12
Kg 17,5
mc 0,216




SANDRO
H24.000

Pcs 1
Kg 1,1
mc 0,018




GIAFFA/SANDRO resin	
E27 lampholder	H24.242.E27
6,5W filament	H24.242.F1R
8,5W CCT set	H24.242.V1K
11W CCT set	H24.242.T1K

Pcs 1
Kg 2,1
mc 0,07

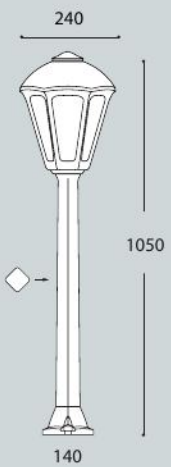


DANILO/SANDRO	
E27 lampholder	H24.305.E27
6,5W filament	H24.305.F1R
8,5W CCT set	H24.305.V1K
11W CCT set	H24.305.T1K

Pcs 1
Kg 9,1
mc 0,125

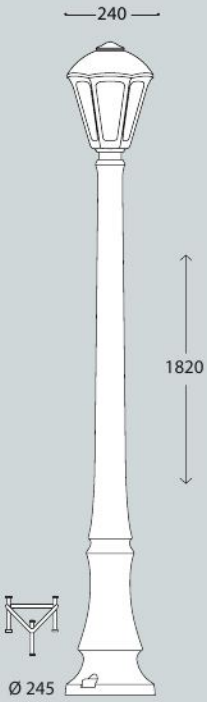

DINO/SANDRO	
E27 lampholder	H24.306.E27
6,5W filament	H24.306.F1R
8,5W CCT set	H24.306.V1K
11W CCT set	H24.306.T1K

Pcs 1
Kg 10,4
mc 0,143

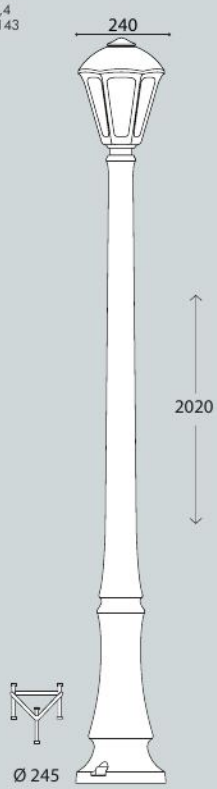

SANDRO


MEDIUM SIZE






DINO NARDO/SANDRO 2L	
E27 lampholder	H24.306.D20.E27
6,5W filament	H24.306.D20.F1R
8,5W CCT set	H24.306.D20.V1K
11W CCT set	H24.306.D20.T1K

Pcs 1
Kg 11,9
mc 0,186

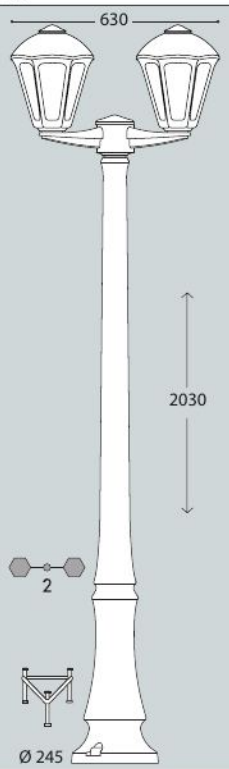


DINO NARDO/SANDRO 3L	
E27 lampholder	H24.306.D30.E27
6,5W filament	H24.306.D30.F1R
8,5W CCT set	H24.306.D30.V1K
11W CCT set	H24.306.D30.T1K

Pcs 1
Kg 12,1
mc 0,186

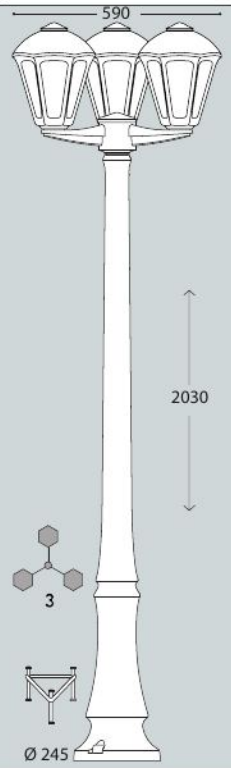


EMILIO NARDO/SANDRO 1L	
E27 lampholder	H24.307.D10.E27
6,5W filament	H24.307.D10.F1R
8,5W CCT set	H24.307.D10.V1K
11W CCT set	H24.307.D10.T1K

Pcs 1
Kg 11,5
mc 0,212

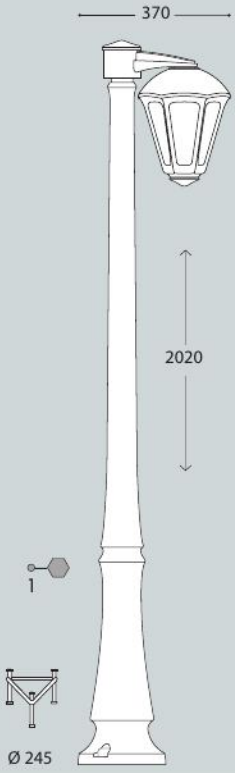


EMILIO NARDO/SANDRO 2L	
E27 lampholder	H24.307.D20.E27
6,5W filament	H24.307.D20.F1R
8,5W CCT set	H24.307.D20.V1K
11W CCT set	H24.307.D20.T1K

Pcs 1
Kg 12,5
mc 0,212

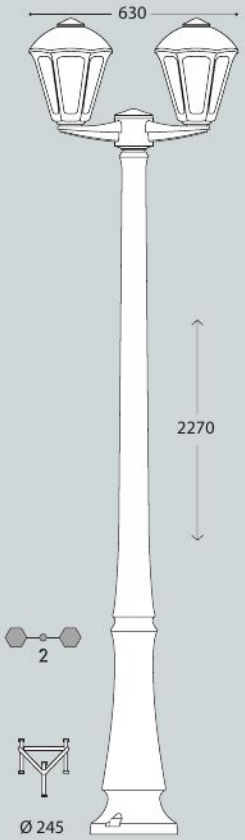

EMILIO NARDO/SANDRO 3L	
E27 lampholder	H24.307.D30.E27
6,5W filament	H24.307.D30.F1R
8,5W CCT set	H24.307.D30.V1K
11W CCT set	H24.307.D30.T1K

Pcs 1
Kg 13,4
mc 0,212

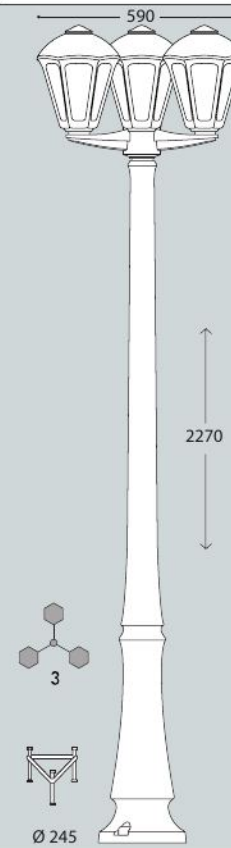

ROBY

SMALL SIZE

fumagalli since 1973

E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna quadra E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



T20.240.V1K

Discover the collection

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II
DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60°
TEMPERATURE

RESIDENTIAL
360°
FILAMENT LED
WALL
HANGING
POST

MADE IN ITALY

ROBY - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** provided with silicone rubber gasket to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo completo di guarnizione in gomma siliconica applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ROBY

T20.000 *



Dimensions and weight
Height: 210 mm
Width: 200 mm
Depth: 200 mm
Weight: 0,8 Kg

Moulded colours:
Black White
Grey

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 150 mm	E27 lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K



6,5W filament
8,5W CCT
= 60W incandescent


SAVE up to 89%

LED LAMPS

TUV SUD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





ROBY *lantern clear with*
Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ROBY


SMALL SIZE



T20.242.V1K



T20.114.V1K

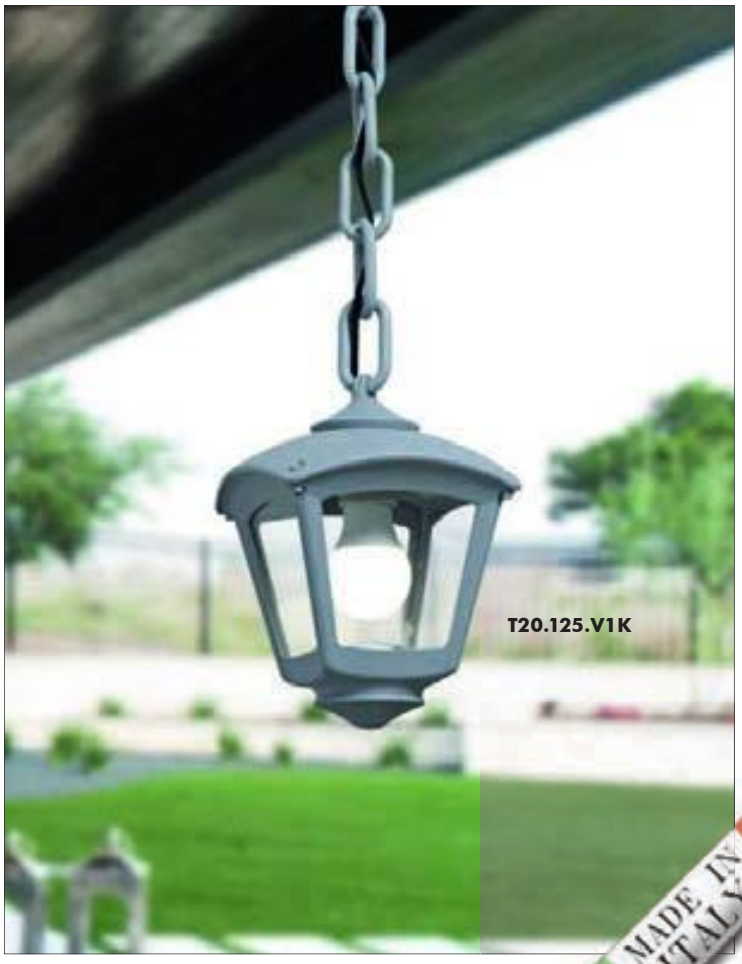


T20.125.V1K

NARDO/ROBY

E27 lampholder	T20.240.E27
6,5W filament	T20.240.F1R
8,5W CCT set	T20.240.V1K


Pcs 18
Kg 17,8
mc 0,207



SICAR/ROBY

E27 lampholder	T20.125.E27
6,5W filament	T20.125.F1R
8,5W CCT set	T20.125.V1K


Pcs 18
Kg 20,6
mc 0,207



ROBY

T20.000


Pcs 1
Kg 0,8
mc 0,011



DISMA/ROBY

E27 lampholder	T20.114.E27
6,5W filament	T20.114.F1R
8,5W CCT set	T20.114.V1K


Pcs 18
Kg 17,1
mc 0,207



GIAFFA/ROBY resin

E27 lampholder	T20.242.E27
6,5W filament	T20.242.F1R
8,5W CCT set	T20.242.V1K

Pcs 1
Kg 1,9
mc 0,048

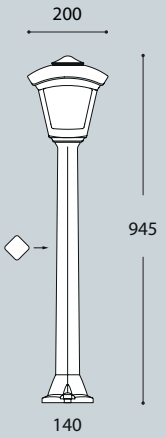

ROBY

SMALL SIZE








MADE IN ITALY


DANILO NARDO/ROBY 2L	
E27 lampholder	T20.305.D20.E27
6,5W filament	T20.305.D20.F1R
8,5W CCT set	T20.305.D20.V1K

Pcs 1
Kg 10,9
mc 0,176

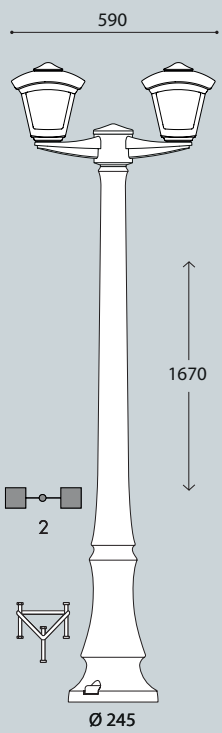


DANILO NARDO/ROBY 3L	
E27 lampholder	T20.305.D30.E27
6,5W filament	T20.305.D30.F1R
8,5W CCT set	T20.305.D30.V1K

Pcs 1
Kg 11,6
mc 0,176

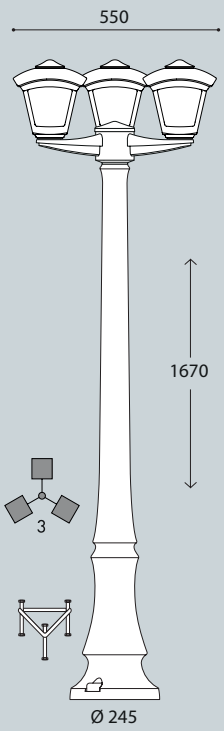


DINO NARDO/ROBY 2L	
E27 lampholder	T20.306.D20.E27
6,5W filament	T20.306.D20.F1R
8,5W CCT set	T20.306.D20.V1K

Pcs 1
Kg 11,3
mc 0,182

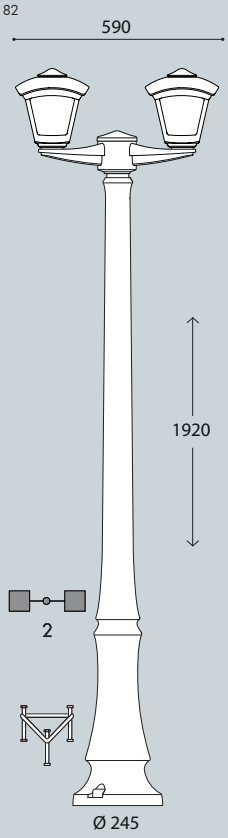

DINO NARDO/ROBY 3L	
E27 lampholder	T20.306.D30.E27
6,5W filament	T20.306.D30.F1R
8,5W CCT set	T20.306.D30.V1K

Pcs 1
Kg 12,4
mc 0,182

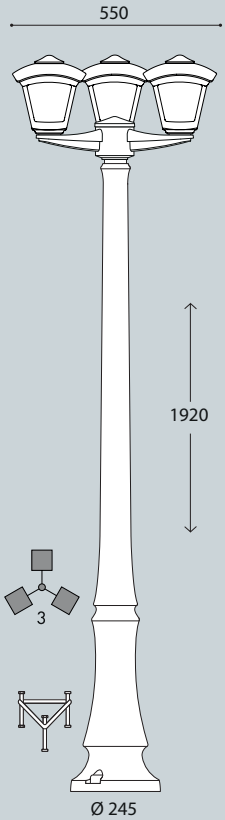

DARIO

MEDIUM SIZE

fumagalli since 1973

E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna quadra E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



Discover the collection

T24.116.V1K

CE · CB IECEE CB SCHEME · UV-TREATED · CLASS II DOUBLE INSULATION · RECYCLABLE · ANTI-SHOCK · +90° -60° TEMPERATURE

RESIDENTIAL · 360° FILAMENT LED · WALL · HANGING · POST

MADE IN ITALY

DARIO - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** provided with silicone rubber gasket to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo completo di guarnizione in gomma siliconica applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Easy opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Facilmente rimovibile per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni* ***(IP 55)****.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DARIO

T24.000 *



Dimensions and weight
Height: 240 mm
Width: 240 mm
Depth: 240 mm
Weight: 1,1 Kg

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm	E27 lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K




6,5W filament
8,5W CCT
= 60W incandescent

SAVE up to 89%

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





DARIO *lantern clear with Fumagalli Led Lamp CCT set 8,5W.*

POST height 2mt
6x6mt area: average 6 lux


The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

DARIO

MEDIUM SIZE




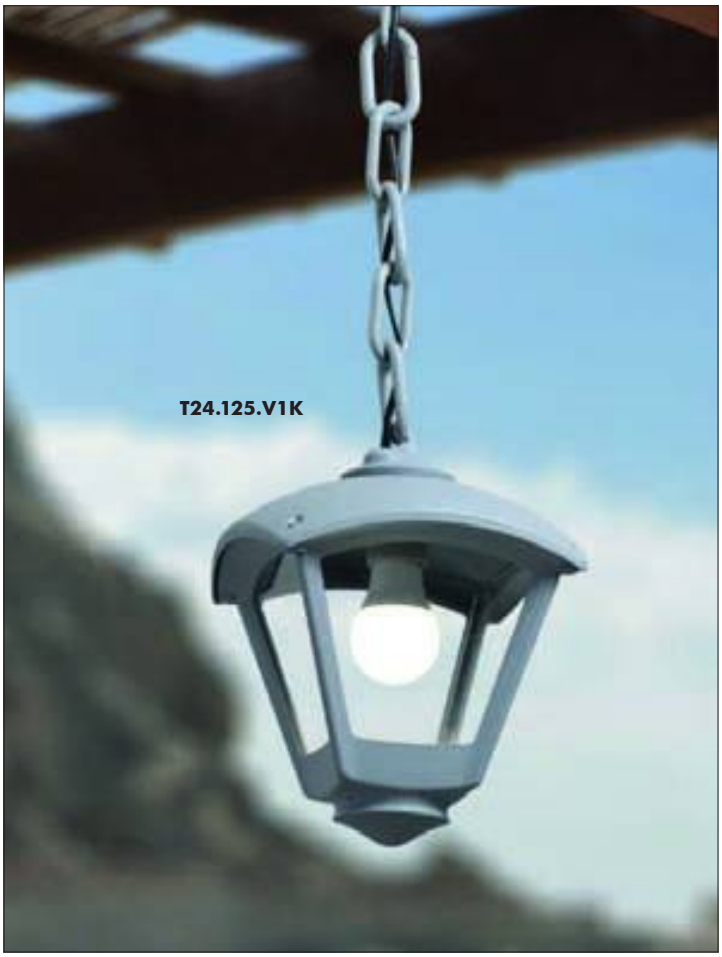




NARDO/DARIO	
E27 lampholder	T24.240.E27
6,5W filament	T24.240.F1R
8,5W CCT set	T24.240.V1K

Pcs 12
Kg 15
mc 0,216




MIDIDISMA/DARIO	
E27 lampholder	T24.116.E27
6,5W filament	T24.116.F1R
8,5W CCT set	T24.116.V1K

Pcs 12
Kg 14.8
mc 0,21




SICAR/DARIO	
E27 lampholder	T24.125.E27
6,5W filament	T24.125.F1R
8,5W CCT set	T24.125.V1K

Pcs 12
Kg 16,9
mc 0,216




DARIO
T24.000

Pcs 1
Kg 1,1
mc 0,016




GIAFFA/DARIO resin	
E27 lampholder	T24.242.E27
6,5W filament	T24.242.F1R
8,5W CCT set	T24.242.V1K

Pcs 1
Kg 2,1
mc 0,070

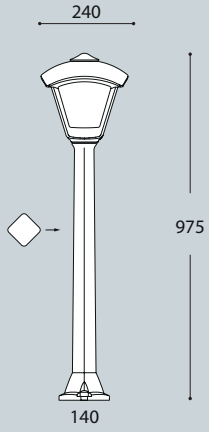


DANILO/DARIO	
E27 lampholder	T24.305.E27
6,5W filament	T24.305.F1R
8,5W CCT set	T24.305.V1K

Pcs 1
Kg 8,6
mc 0,148

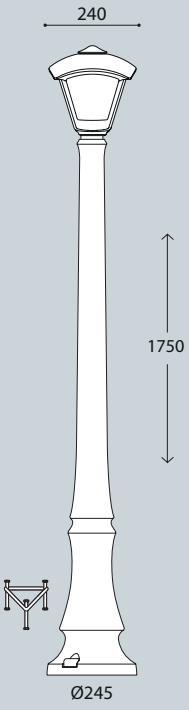

DINO/DARIO	
E27 lampholder	T24.306.E27
6,5W filament	T24.306.F1R
8,5W CCT set	T24.306.V1K

Pcs 1
Kg 9,6
mc 0,143

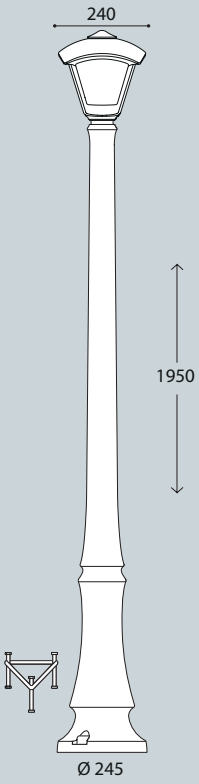

DARIO

MEDIUM SIZE








MADE IN ITALY


DINO NARDO/DARIO 2L	
E27 lampholder	T24.306.D20.E27
6,5W filament	T24.306.D20.F1R
8,5W CCT set	T24.306.D20.V1K

Pcs 1
Kg 11,9
mc 0,186

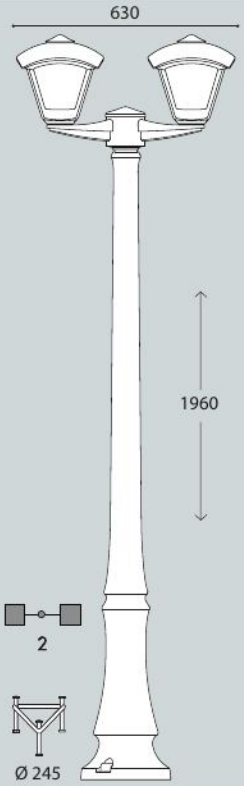


DINO NARDO/DARIO 3L	
E27 lampholder	T24.306.D30.E27
6,5W filament	T24.306.D30.F1R
8,5W CCT set	T24.306.D30.V1K

Pcs 1
Kg 12,9
mc 0,186

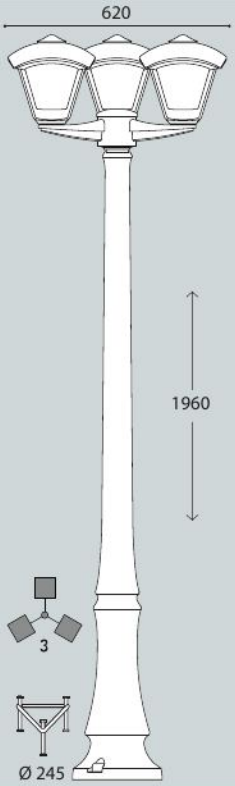


EMILIO NARDO/DARIO 1L	
E27 lampholder	T24.307.D10.E27
6,5W filament	T24.307.D10.F1R
8,5W CCT set	T24.307.D10.V1K

Pcs 1
Kg 11,4
mc 0,212

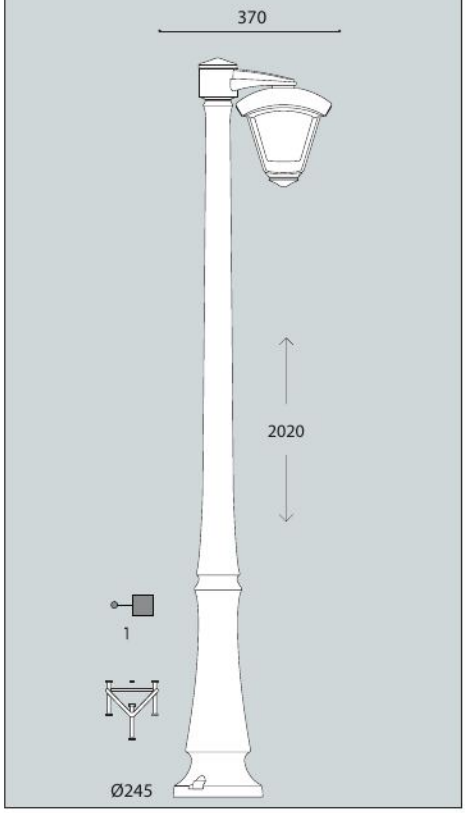


EMILIO NARDO/DARIO 2L	
E27 lampholder	T24.307.D20.E27
6,5W filament	T24.307.D20.F1R
8,5W CCT set	T24.307.D20.V1K

Pcs 1
Kg 12,5
mc 0,212

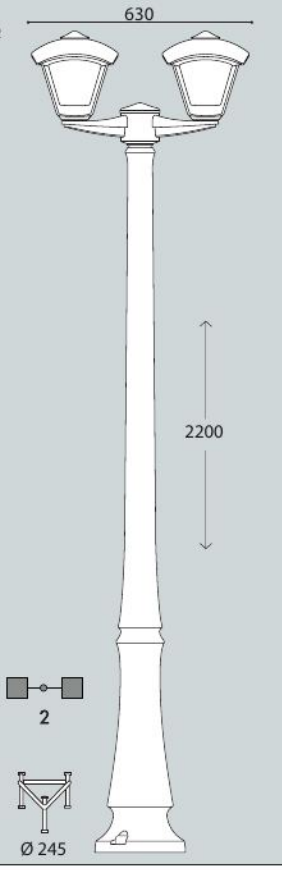

EMILIO NARDO/DARIO 3L	
E27 lampholder	T24.307.D30.E27
6,5W filament	T24.307.D30.F1R
8,5W CCT set	T24.307.D30.V1K

Pcs 1
Kg 13,5
mc 0,212

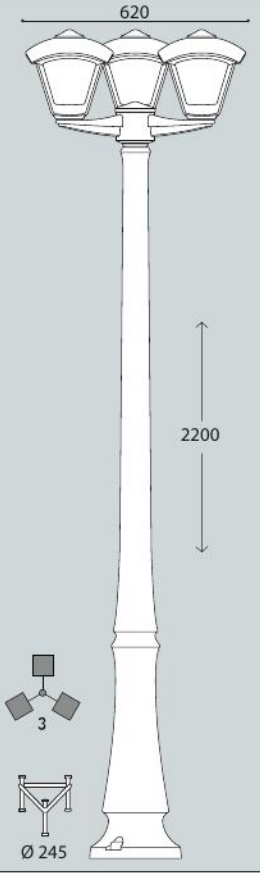

GLOBE 250 MODERN


SMALL SIZE

Ø 250 mm PMMA globe, complete with modern globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Globo Ø 250 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito anche completo di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



G26.114

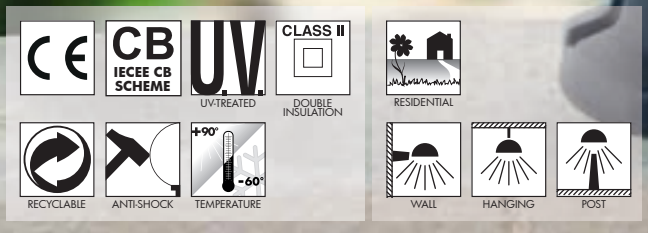

GLOBE 250 MODERN - COMPONENTS

IP55



Ø 250 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO *Ø 250 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)





GLOBE BASE with modern design, made of shockproof resin material, UV-rays stabilized, rust and corrsoion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA *con disegno moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampada E27.*

GLOBE 250 MODERN

G26.B26 *



Dimensions and weight
Height: 260 mm
Diameter: 250 mm
Weight: 0,8 Kg

Moulded colours:
Black | White | Grey

Diffuser PMMA:
Clear | Opal | Smoked

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET




- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

suitable lamps: CFL-LED	E27 lampholder only	*ADD. SUFFIX .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K

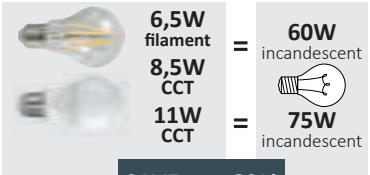


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

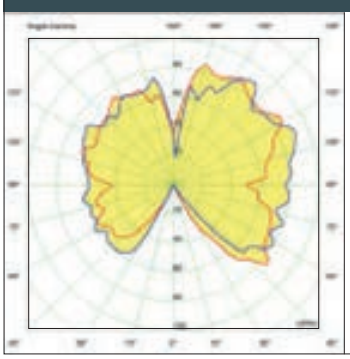



GLOBE 250 MODERN *clear with Fumagalli Filament Led Lamp 6,5W.*

POST height 1mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GLOBE 250 MODERN

SMALL SIZE










DISMA/G250

E27 lampholder	G26.114.E27
6,5W filament	G26.114.F1R
8,5W CCT set	G26.114.V1K
11W CCT set	G26.114.T1K


Pcs 36
Kg 42
mc 0,829



NARDO/G250

E27 lampholder	G26.240.E27
6,5W filament	G26.240.F1R
8,5W CCT set	G26.240.V1K
11W CCT set	G26.240.T1K


Pcs 36
Kg 42
mc 0,829



GLOBE 250 MODERN

G26.B26


Pcs 2
Kg 1,6
mc 0,025



GIAFFA/G250 resin

E27 lampholder	G26.242.E27
6,5W filament	G26.242.F1R
8,5W CCT set	G26.242.V1K
11W CCT set	G26.242.T1K


Pcs 2
Kg 4
mc 0,078

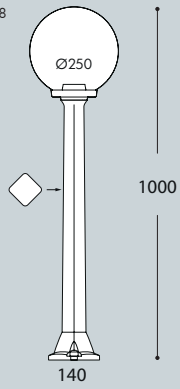

SICAR/G250

E27 lampholder	G26.125.E27
6,5W filament	G26.125.F1R
8,5W CCT set	G26.125.V1K
11W CCT set	G26.125.T1K


Pcs 36
Kg 46,1
mc 0,852



DINO NARDO/G250 3L

E27	G26.306.D30.E27
6,5W filament	G26.306.D30.F1R
8,5W CCT set	G26.306.D30.V1K
11W CCT set	G26.306.D30. T1K


Pcs 2
Kg 22,5
mc 0,310



EMILIO NARDO/G250 3L

E27	G26.307.D30.E27
6,5W filament	G26.307.D30.F1R
8,5W CCT set	G26.307.D30.V1K
11W CCT set	G26.307.D30.T1K


Pcs 2
Kg 32,2
mc 0,339



DINO NARDO/G250 2L

E27	G26.306.D20.E27
6,5W filament	G26.306.D20.F1R
8,5W CCT set	G26.306.D20.V1K
11W CCT set	G26.306.D20.T1K


Pcs 2
Kg 20,6
mc 0,270

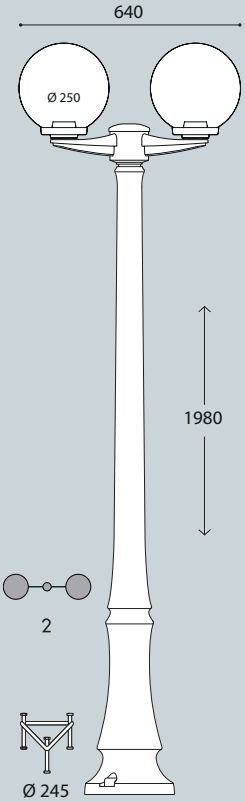

EMILIO NARDO/G250 2L

E27	G26.307.D20.E27
6,5W filament	G26.307.D20.F1R
8,5W CCT set	G26.307.D20.V1K
11W CCT set	G26.307.D20.T1K


Pcs 2
Kg 27,8
mc 0,304

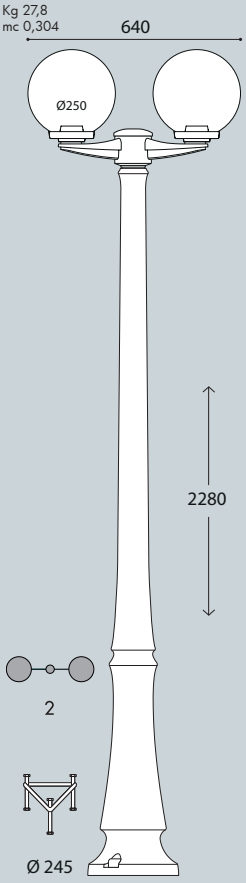

EMILIO NARDO/G250 1L

E27 lampholder	G26.307.D10.E27
6,5W filament	G26.307.D10.F1R
8,5W CCT set	G26.307.D10.V1K
11W CCT set	G26.307.D10.T1K


Pcs 2
Kg 11,a
mc 0,270

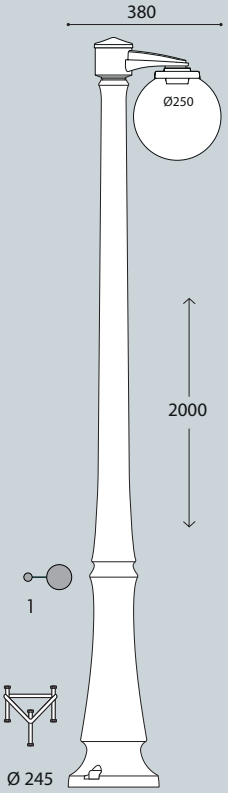

DANILO/G250

E27 lampholder	G26.305.E27
6,5W filament	G26.305.F1R
8,5W CCT set	G26.305.V1K
11W CCT set	G26.305.T1K


Pcs 2
Kg 9,1
mc 0,186

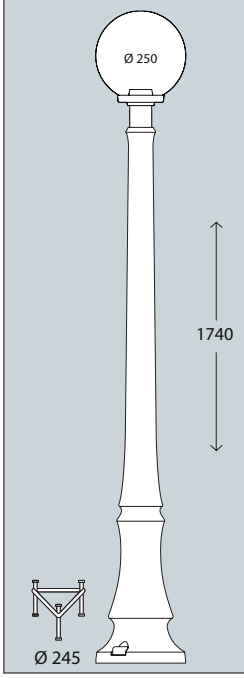

DINO/G250

E27 lampholder	G26.306.E27
6,5W filament	G26.306.F1R
8,5W CCT set	G26.306.V1K
11W CCT set	G26.306.T1K

Pcs 2
Kg 17,6
mc 0,222

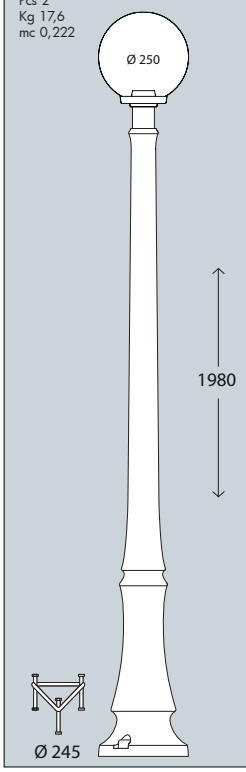

GLOBE 250 MODERN

SMALL SIZE



G26.125.V1K




G26.256



G26.257

ARGO 300/G250 resin *	
E27 lampholder	G26.255.E27
6,5W filament	G26.255.F1R
8,5W CCT set	G26.255.V1K
11W CCT set	G26.255.T1K


Pcs 2
Kg 4,3
mc 0,061



*available colour: black

ARGO 500/G250 resin *	
E27 lampholder	G26.256.E27
6,5W filament	G26.256.F1R
8,5W CCT set	G26.256.V1K
11W CCT set	G26.256.T1K


Pcs 2
Kg 5
mc 0,070



*available colour: black

ARGO 800/G250 resin *	
E27 lampholder	G26.257.E27
6,5W filament	G26.257.F1R
8,5W CCT set	G26.257.V1K
11W CCT set	G26.257.T1K


Pcs 2
Kg 6,1
mc 0,093

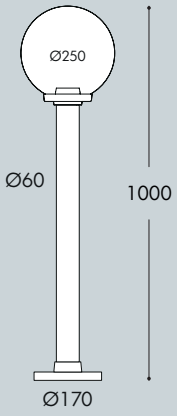

*available colour: black

FEBO 1500/G250 *	
E27 lampholder	G26.263.E27
6,5W filament	G26.263.F1R
8,5W CCT set	G26.263.V1K
11W CCT set	G26.263.T1K

Pcs 2
Kg 11,4
mc 0,173

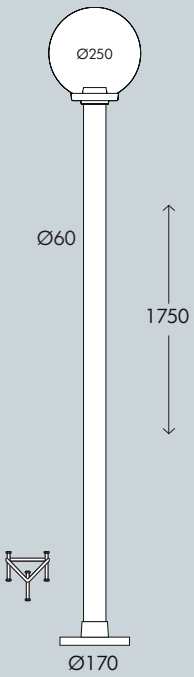

*available colour: black

GLOBE 300 MODERN

MEDIUM SIZE

Ø 300 mm PMMA globe, complete with modern globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito anche completo di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



G31.240

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE

RESIDENTIAL
WALL
HANGING
POST

MADE IN ITALY

GLOBE 300 MODERN - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO *Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)






GLOBE BASE with modern design, made of shockproof resin material, UV-rays stabilized, rust and corrsoion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA *con disegno moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampada E27.*

GLOBE 300 MODERN

G31.B31 *



Dimensions and weight
Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:
Black | White | Grey

Diffuser PMMA:
Clear | Opal | Smoked

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

		*ADD. SUFFIX
suitable lamps: CFL-LED	**E27** lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K



6,5W filament = **60W** incandescent
8,5W CCT
11W CCT = **75W** incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

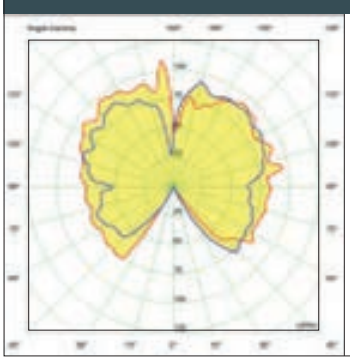



GLOBE 300 MODERN *clear with Fumagalli Led Lamp CCT set 8,5W.*

POST height 2mt
6x6mt area: average 3,5 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GLOBE 300 MODERN

MEDIUM SIZE


G31.307.D30.V1K


G31.116


G31.125.T1K


G31.306



G31.242.F1R

MADE IN ITALY

MIDIDISMA /G300

E27 lampholder	G31.116.E27
6,5W filament	G31.116.F1R
8,5W CCT set	G31.116.V1K
11W CCT set	G31.116.T1K


Pcs 24
Kg 36,5
mc 0,829



NARDO /G300

E27 lampholder	G31.240.E27
6,5W filament	G31.240.F1R
8,5W CCT set	G31.240.V1K
11W CCT set	G31.240.T1K


Pcs 24
Kg 32,9
mc 0,829

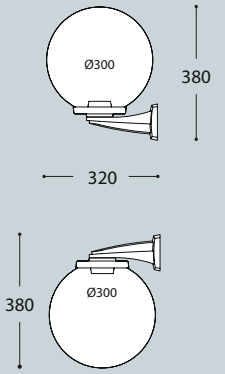

SICAR /G300

E27 lampholder	G31.125.E27
6,5W filament	G31.125.F1R
8,5W CCT set	G31.125.V1K
11W CCT set	G31.125.T1K


Pcs 24
Kg 38
mc 0,840



GIAFFA/G300 resin

E27 lampholder	G31.242.E27
6,5W filament	G31.242.F1R
8,5W CCT set	G31.242.V1K
11W CCT set	G31.242.T1K


Pcs 2
Kg 7
mc 0,122

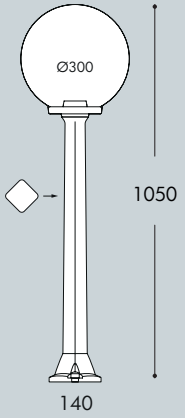

GLOBE 300 MODERN

G31.B31


Pcs 2
Kg 1,6
mc 0,025



DANILO/G300

E27 lampholder	G31.305.E27
6,5W filament	G31.305.F1R
8,5W CCT set	G31.305.V1K
11W CCT set	G31.305.T1K


Pcs 2
Kg 17,8
mc 0,420

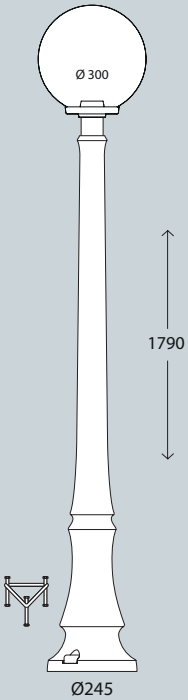

DINO/G300

E27 lampholder	G31.306.E27
6,5W filament	G31.306.F1R
8,5W CCT set	G31.306.V1K
11W CCT set	G31.306.T1K


Pcs 2
Kg 18,2
mc 0,490

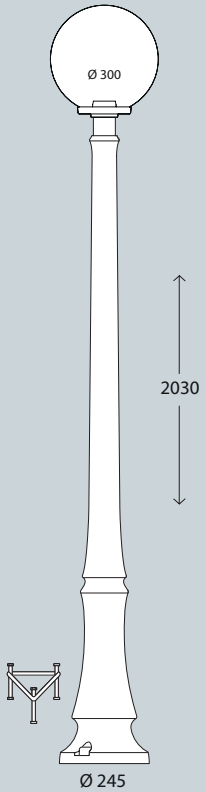

EMILIO/G300

E27 lampholder	G31.307.E27
6,5W filament	G31.307.F1R
8,5W CCT set	G31.307.V1K
11W CCT set	G31.307.T1K


Pcs 2
Kg 21,4
mc 0,560

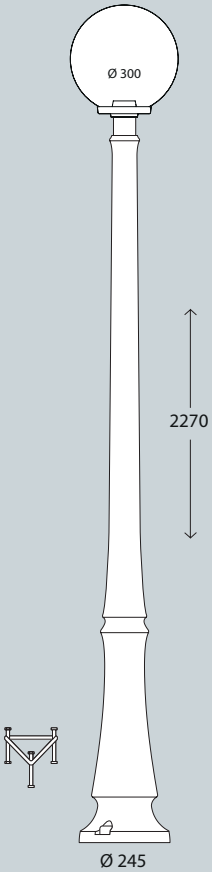

EMILIO NARDO/G300 2L

E27 lampholder	G31.307.D20.E27
6,5W filament	G31.307.D20.F1R
8,5W CCT set	G31.307.D20.V1K
11W CCT set	G31.307.D20.T1K


Pcs 2
Kg 23,2
mc 0,757

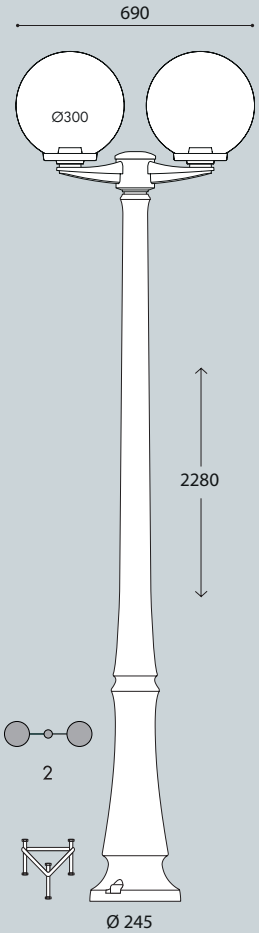

EMILIO NARDO/G300 3L

E27 lampholder	G31.307.D30.E27
6,5W filament	G31.307.D30.F1R
8,5W CCT set	G31.307.D30.V1K
11W CCT set	G31.307.D30.T1K

Pcs 2
Kg 25,8
mc 0,864

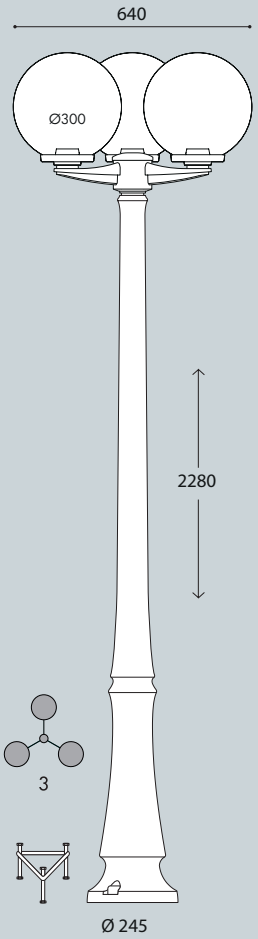

GLOBE 300 MODERN

MEDIUM SIZE








MADE IN ITALY

ARGO 300/G300 resin *	
E27 lampholder	G31.255.E27
6,5W filament	G31.255.F1R
8,5W CCT set	G31.255.V1K
11W CCT set	G31.255.T1K


Pcs 2
Kg 4,9
mc 0,08



*available colour: black

ARGO 500/G300 resin *	
E27 lampholder	G31.256.E27
6,5W filament	G31.256.F1R
8,5W CCT set	G31.256.V1K
11W CCT set	G31.256.T1K


Pcs 2
Kg 5,6
mc 0,094



*available colour: black

ARGO 800/G300 resin *	
E27 lampholder	G31.257.E27
6,5W filament	G31.257.F1R
8,5W CCT set	G31.257.V1K
11W CCT set	G31.257.T1K


Pcs 2
Kg 6,7
mc 0,117

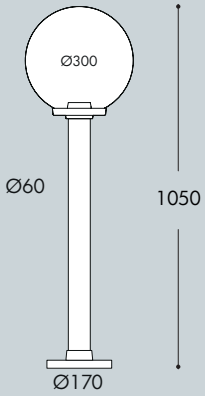

*available colour: black

FEBO 1500/G300 *	
E27 lampholder	G31.263.E27
6,5W filament	G31.263.F1R
8,5W CCT set	G31.263.V1K
11W CCT set	G31.263.T1K


Pcs 2
Kg 12
mc 0,207

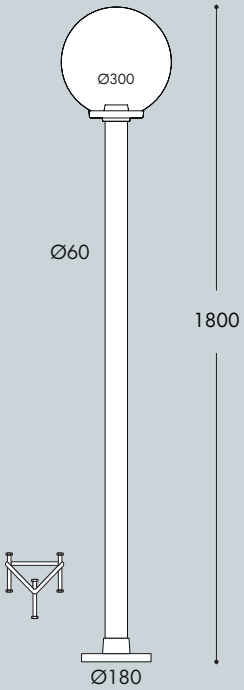

*available colour: black

ENEA 2000/G300 *	
E27 lampholder	G31.264.E27
6,5W filament	G31.264.F1R
8,5W CCT set	G31.264.V1K
11W CCT set	G31.264.T1K


Pcs 2
Kg 18,2
mc 0,281

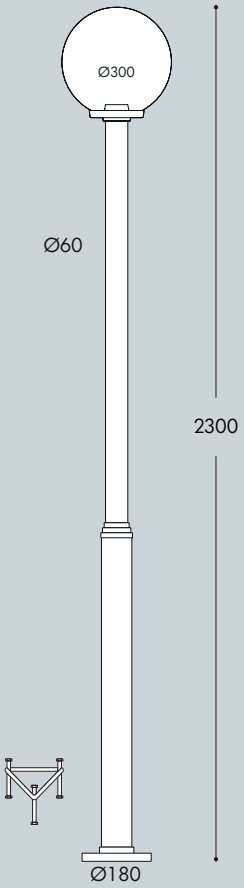

*available colour: black

ENEA 2400/G300 *	
E27 lampholder	G31.265.E27
6,5W filament	G31.265.F1R
8,5W CCT set	G31.265.V1K
11W CCT set	G31.265.T1K

Pcs 2
Kg 22,2
mc 0,323

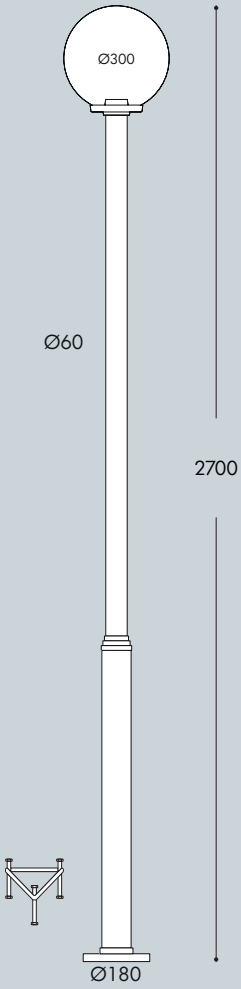

*available colour: black





GARDEN CLASSIC

PIERO

SMALL SIZE

Half lantern in classic style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Mezza lanterna in stile classico con portalampada E27, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



PIERO
M18.000
M19.000 SMART PACK





M18.000.F1R

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RESIDENTIAL
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
360° FILAMENT LED
WALL



IESSE - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.*

WALL PLATE *made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Provided with double cable entry and supplied complete with E27 lampholder.*

BASE A MURO *realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvista di doppia entrata per il cavo elettrico e fornita completa di portalampada E27.*

PIERO

M18.000




Dimensions and weight
Height: 305 mm
Width: 220 mm
Depth: 110 mm
Weight: 0,8 Kg

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze


Diffuser PMMA:
Clear Opal

E27 FILAMENT

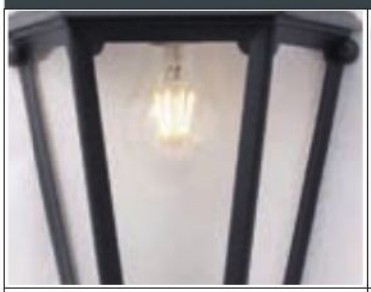

- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY: 90% ENERGY SAVING**.

E27 CCT SET

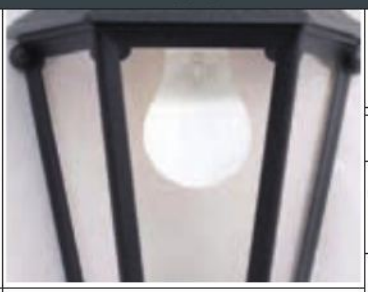

- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

				*ADD. SUFFIX
suitable lamps: CFL-LED max 150 mm		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K




SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





PIERO *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

height wall mounting: 2mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

IESSE

SMALL SIZE

Half lantern in classic style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Mezza lanterna in stile classico con portalampada E27, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

IESSE
M22.000
M23.000 SMART PACK





M22.000.F1R

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II DOUBLE INSULATION
RESIDENTIAL
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
360° FILAMENT LED
WALL

MADE IN ITALY

IESSE - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.*

WALL PLATE *made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.*

BASE A MURO *realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita completa di portalampada E27.*

IESSE

M22.000




Dimensions and weight
Height: 355 mm
Width: 220 mm
Depth: 110 mm
Weight: 0,8 Kg

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze


Diffuser PMMA:
Clear Opal

E27 FILAMENT

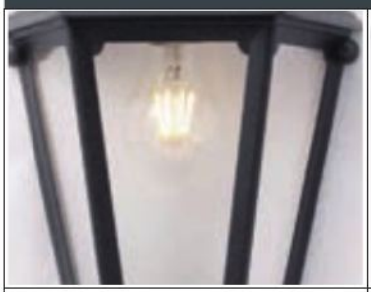

- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY: 90% ENERGY SAVING**.


E27 CCT SET

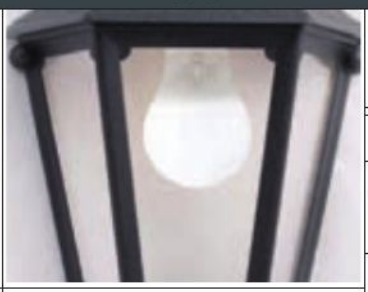

- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

				*ADD. SUFFIX
suitable lamps: CFL-LED max 160 mm		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K



6,5W filament
8,5W CCT
= **60W** incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





IESSE *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

height wall mounting: 2mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ESAU

MEDIUM SIZE

Half lantern in classic style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Mezza lanterna in stile classico con portalampada E27, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

ESAU
M26.000
M27.000 SMART PACK



M26.000.V1K

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II
DOUBLE INSULATION
RESIDENTIAL
RECYCLABLE
ANTI-SHOCK
+90° -60°
TEMPERATURE
360°
FILAMENT LED
WALL

MADE IN ITALY

ESAU - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA), one piece only closed on the top to ensure high protection against external agents. Available in clear or opal colour.

DIFFUSORE *in polimetilmetacrilato (PMMA), realizzato in un unico pezzo chiuso in cima per garantire un alto livello di protezione contro gli agenti esterni. Disponibile in colore trasparente od opale.*



WALL PLATE *made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.*

BASE A MURO *realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita completa di portalampada E27.*

ESAU

M26.000



Dimensions and weight
Height: 425mm
Width: 265 mm
Depth: 135 mm
Weight: 1,3 Kg

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

				*ADD. SUFFIX
suitable lamps: CFL-LED max 160 mm		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K



6,5W filament = **60W** incandescent
8,5W CCT
11W CCT = **75W** incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





ESAU *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

height wall mounting: 2mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

DARIA

LARGE SIZE

Half lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. E27 version with support for ballast fixation or supplied with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.


*Mezza lanterna in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Versione E27 idonea all'utilizzo di reattori o fornita completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



DARIA
M28.000



M28.000.F1R

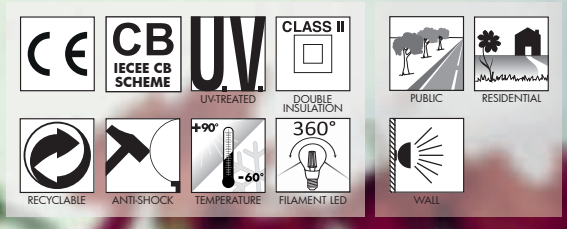

DARIA - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.*



WALL PLATE *made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.*

BASE A MURO *realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita completa di portalampada E27.*

DARIA

M28.000




Dimensions and weight
Height: 515 mm
Width: 315 mm
Depth: 170 mm
Weight: 2,3 Kg

Moulded colours:
Black

Painted colours:
Antique green
Antique bronze


Diffuser PMMA:
Clear
Opal

E27 FILAMENT

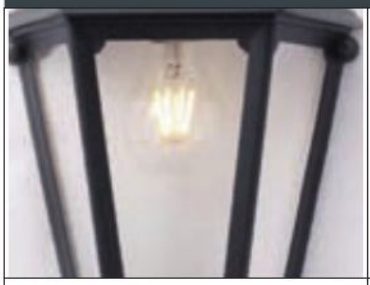

- Perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET

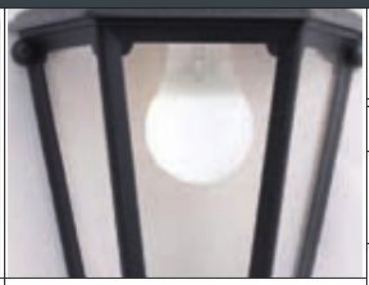

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

				*ADD. SUFFIX
suitable lamps: CFL-LED		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K



6,5W filament = **60W** incandescent



11W CCT = **75W** incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





DARIA *lantern clear with Fumagalli Led Lamp CCT set 11W.*


height wall mounting: 2,5mt
10x10mt area: average 8 lux


The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

HALF LANTERNS

GARDEN CLASSIC

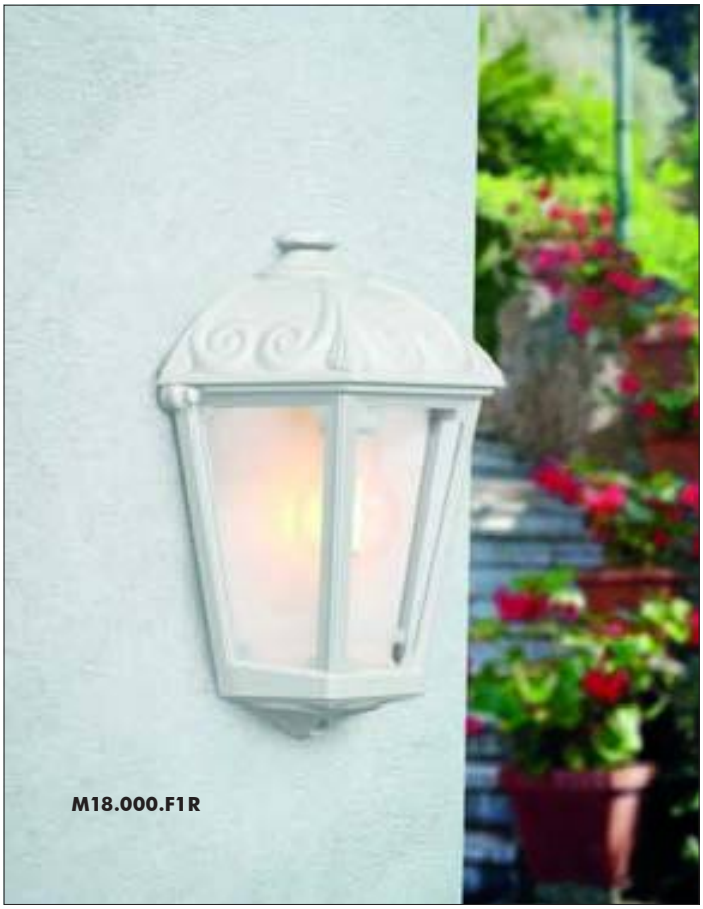
M18.000.F1R

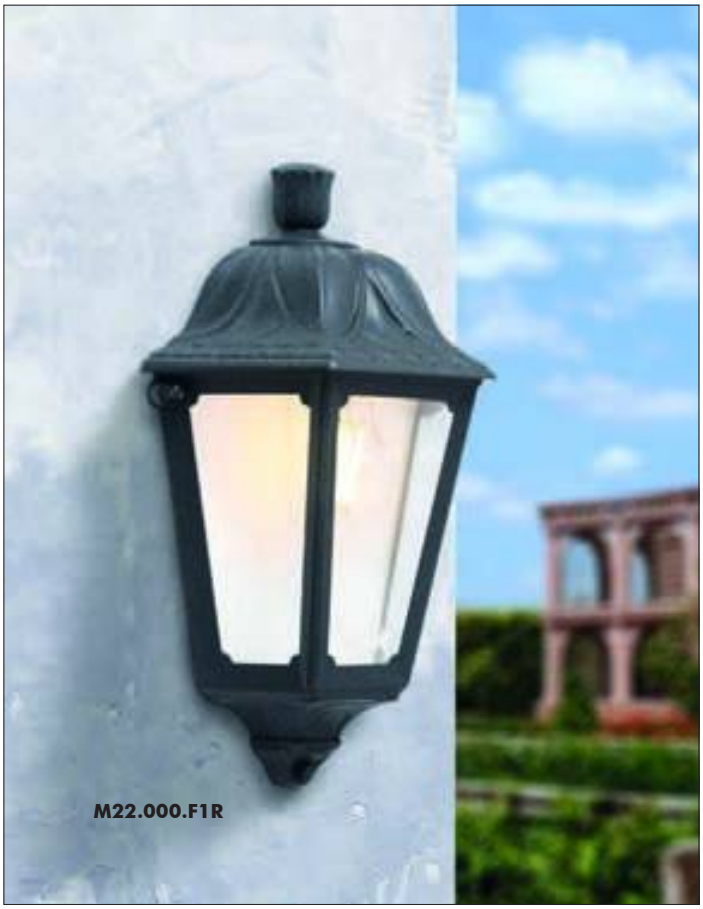
M22.000.F1R



M26.000.T1K


M28.000.F1R




PIERO	
E27	M18.000.E27
6,5W filament	M18.000.F1R
8,5W CCT set	M18.000.V1K

Pcs 18
Kg 15,4
mc 0,172




IESSE	
E27	M22.000.E27
6,5W filament	M22.000.F1R
8,5W CCT set	M22.000.V1K

Pcs 16
Kg 14
mc 0,224




ESAU	
E27	M26.000.E27
6,5W filament	M26.000.F1R
8,5W CCT set	M26.000.V1K
11W CCT set	M26.000.T1K

Pcs 10
Kg 13,12
mc 0,20



DARIA	
E27	M28.000.E27
6,5W filament	M28.000.F1R
11W CCT set	M28.000.T1K

Pcs 1
Kg 2,3
mc 0,03

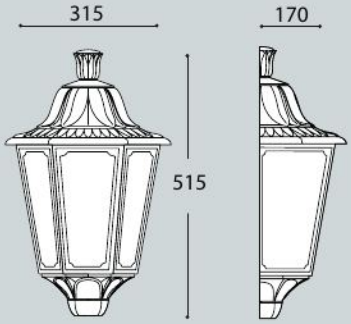

MARY

SMALL SIZE

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.


Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



Q18.110.F1R

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
RESIDENTIAL
360° FILAMENT LED
WALL
HANGING
POST

MADE IN ITALY

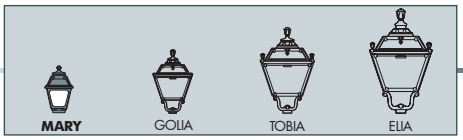

MARY - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*



CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

MARY

Q18.000 *



Dimensions and weight
Height: 290 mm
Width: 180 mm
Depth: 180 mm
Weight: 1 Kg

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

suitable lamps: CFL-LED max 150 mm	E27 lampholder only	*ADD. SUFFIX .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K




6,5W filament = 60W incandescent
8,5W CCT

SAVE up to 89%

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





MARY *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

MARY

SMALL SIZE



Q18.151.F1R



Q18.131.F1R




Q18.120.F1R

BISSO/MARY

E27 lampholder	Q18.131.E27
6,5W filament	Q18.131.F1R
8,5W CCT set	Q18.131.V1K


Pcs 18
Kg 27,6
mc 0,209



SICHEM/MARY

E27 lampholder	Q18.120.E27
6,5W filament	Q18.120.F1R
8,5W CCT set	Q18.120.V1K

Pcs 18
Kg 29,1
mc 0,209



MARY

Q18.000

Pcs 1
Kg 1
mc 0,011



MIKROLOT/MARY

E27 lampholder	Q18.110.E27
6,5W filament	Q18.110.F1R
8,5W CCT set	Q18.110.V1K


Pcs 18
Kg 25,4
mc 0,209



PORPORA/MARY

E27 lampholder	Q18.141.E27
6,5W filament	Q18.141.F1R
8,5W CCT set	Q18.141.V1K


Pcs 1
Kg 3,5
mc 0,024



MIZAR/MARY resin

E27 lampholder	Q18.151.E27
6,5W filament	Q18.151.F1R
8,5W CCT set	Q18.151.V1K

Pcs 1
Kg 2,8
mc 0,044

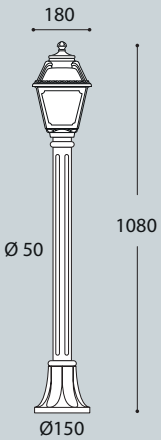

MARY

SMALL SIZE









ARTU' BISSO/MARY 2+1	
E27 lampholder	Q18.158.S21.E27
6,5W filament	Q18.158.S21.F1R
8,5W CCT set	Q18.158.S21.V1K

Pcs 1
Kg 17,5
mc 0,176




ARTU' BISSO/MARY 3+1	
E27 lampholder	Q18.158.S31.E27
6,5W filament	Q18.158.S31.F1R
8,5W CCT set	Q18.158.S31.V1K

Pcs 1
Kg 17,9
mc 0,176




GIGI BISSO/MARY 2+1	
E27 lampholder	Q18.156.S21.E27
6,5W filament	Q18.156.S21.F1R
8,5W CCT set	Q18.156.S21.V1K

Pcs 1
Kg 18,8
mc 0,182




GIGI BISSO/MARY 3+1	
E27 lampholder	Q18.156.S31.E27
6,5W filament	Q18.156.S31.F1R
8,5W CCT set	Q18.156.S31.V1K

Pcs 1
Kg 20,3
mc 0,182




ARTU' BISSO/MARY 2L	
E27 lampholder	Q18.158.S20.E27
6,5W filament	Q18.158.S20.F1R
8,5W CCT set	Q18.158.S20.V1K

Pcs 1
Kg 16,5
mc 0,176

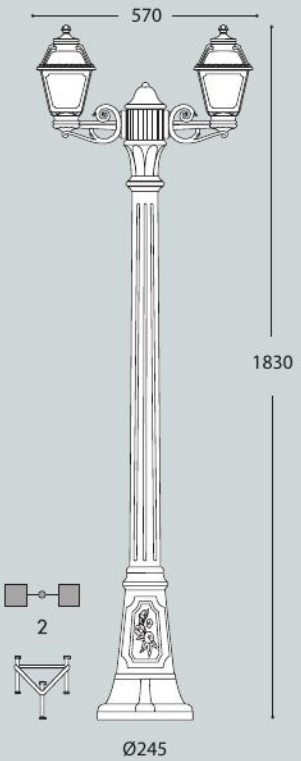


ARTU' BISSO/MARY 3L	
E27 lampholder	Q18.158.S30.E27
6,5W filament	Q18.158.S30.F1R
8,5W CCT set	Q18.158.S30.V1K

Pcs 1
Kg 17,4
mc 0,176

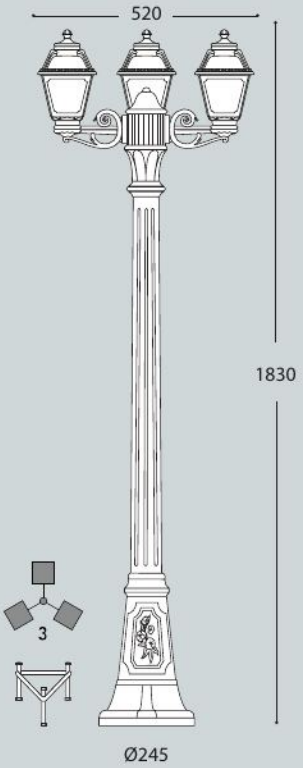


GIGI BISSO/MARY 2L	
E27 lampholder	Q18.156.S20.E27
6,5W filament	Q18.156.S20.F1R
8,5W CCT set	Q18.156.S20.V1K

Pcs 1
Kg 18,4
mc 0,182

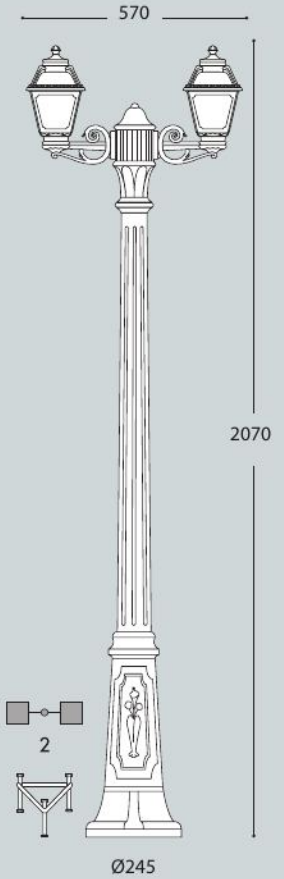

GIGI BISSO/MARY 3L	
E27 lampholder	Q18.156.S30.E27
6,5W filament	Q18.156.S30.F1R
8,5W CCT set	Q18.156.S30.V1K

Pcs 1
Kg 19,5
mc 0,182

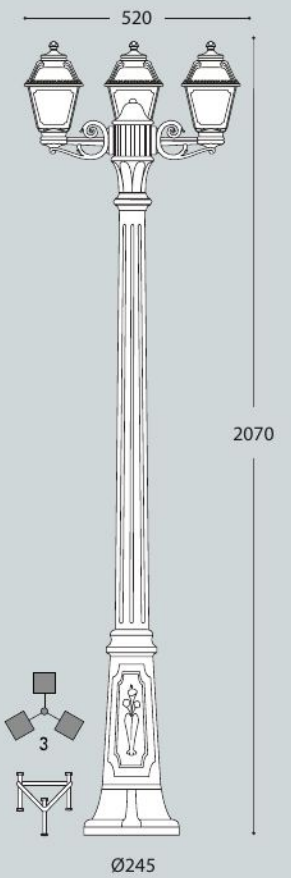

ANNA

SMALL SIZE

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



E22.110.V1K

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II
DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60°
TEMPERATURE

RESIDENTIAL
360°
FILAMENT LED
WALL
HANGING
POST

MADE IN ITALY

ANNA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ANNA

E22.000 *



Dimensions and weight
Height: 310 mm
Width: 220 mm
Depth: 192 mm
Weight: 1 Kg

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm

E27 lampholder only — .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	




6,5W filament
8,5W CCT
= 60W incandescent

SAVE up to 89%

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





ANNA *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ANNA

SMALL SIZE








MADE IN ITALY

BISSO/ANNA

E27 lampholder	E22.131.E27
6,5W filament	E22.131.F1R
8,5W CCT set	E22.131.V1K


Pcs 18
Kg 21,2
mc 0,209



SICHEM/ANNA

E27 lampholder	E22.120.E27
6,5W filament	E22.120.F1R
8,5W CCT set	E22.120.V1K

Pcs 18
Kg 21,2
mc 0,209



ANNA

E22.000

Pcs 1
Kg 1
mc 0,011



MIKROLOT/ANNA

E27 lampholder	E22.110.E27
6,5W filament	E22.110.F1R
8,5W CCT set	E22.110.V1K


Pcs 18
Kg 21,2
mc 0,209



PORPORA/ANNA

E27 lampholder	E22.141.E27
6,5W filament	E22.141.F1R
8,5W CCT set	E22.141.V1K


Pcs 1
Kg 3,5
mc 0,024



MIZAR/ANNA resin

E27 lampholder	E22.151.E27
6,5W filament	E22.151.F1R
8,5W CCT set	E22.151.V1K


Pcs 1
Kg 2,4
mc 0,044

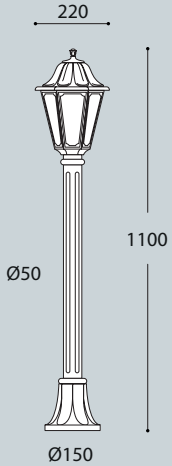

ALOE'.R/ANNA resin

E27 lampholder	E22.163.E27
6,5W filament	E22.163.F1R
8,5W CCT set	E22.163.V1K


Pcs 2
Kg 8
mc 0,121

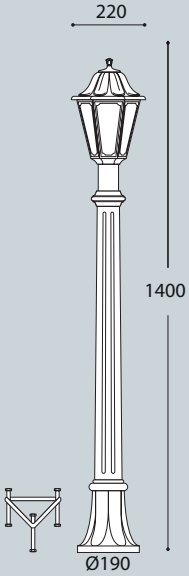

ARTU'/ANNA

E27 lampholder	E22.158.E27
6,5W filament	E22.158.F1R
8,5W CCT set	E22.158.V1K

Pcs 1
Kg 9
mc 0,148

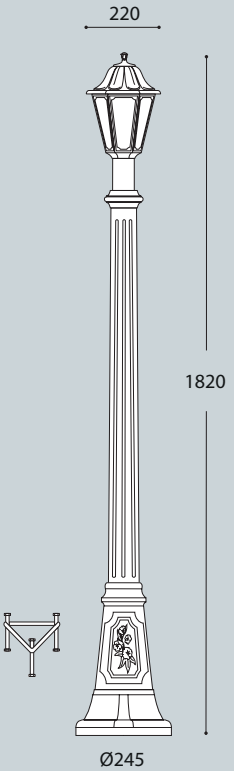

ANNA

SMALL SIZE







MADE IN ITALY




ANNA
SMALL SIZE

ARTU' BISSO/ANNA 2+1

E27 lampholder	E22.158.S21.E27
6,5W filament	E22.158.S21.F1R
8,5W CCT set	E22.158.S21.V1K


Pcs 1
Kg 12,1
mc 0,176



ARTU' BISSO/ANNA 3+1

E27 lampholder	E22.158.S31.E27
6,5W filament	E22.158.S31.F1R
8,5W CCT set	E22.158.S31.V1K


Pcs 1
Kg 13,1
mc 0,176



GIGI BISSO/ANNA 2+1

E27 lampholder	E22.156.S21.E27
6,5W filament	E22.156.S21.F1R
8,5W CCT set	E22.156.S21.V1K


Pcs 1
Kg 14,1
mc 0,182



GIGI BISSO/ANNA 3+1

E27 lampholder	E22.156.S31.E27
6,5W filament	E22.156.S31.F1R
8,5W CCT set	E22.156.S31.V1K


Pcs 1
Kg 15,1
mc 0,182



ARTU' BISSO/ANNA 2L

E27 lampholder	E22.158.S20.E27
6,5W filament	E22.158.S20.F1R
8,5W CCT set	E22.158.S20.V1K


Pcs 1
Kg 11,1
mc 0,176

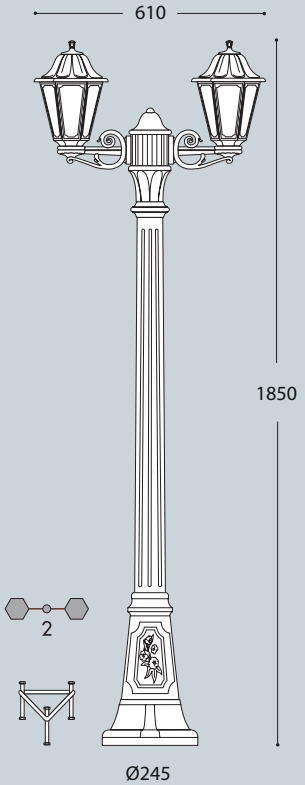

ARTU' BISSO/ANNA 3L

E27 lampholder	E22.158.S30.E27
6,5W filament	E22.158.S30.F1R
8,5W CCT set	E22.158.S30.V1K


Pcs 1
Kg 12,1
mc 0,176

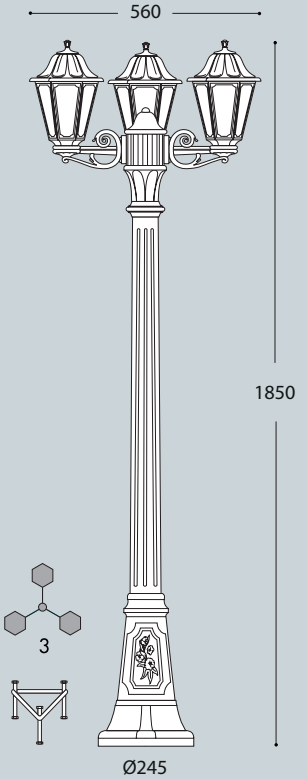

GIGI BISSO/ANNA 2L

E27 lampholder	E22.156.S20.E27
6,5W filament	E22.156.S20.F1R
8,5W CCT set	E22.156.S20.V1K


Pcs 1
Kg 13,1
mc 0,182

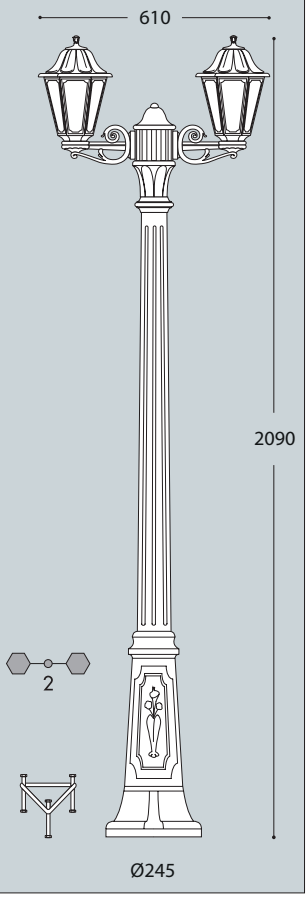

GIGI BISSO/ANNA 3L

E27 lampholder	E22.156.S30.E27
6,5W filament	E22.156.S30.F1R
8,5W CCT set	E22.156.S30.V1K

Pcs 1
Kg 14,1
mc 0,182

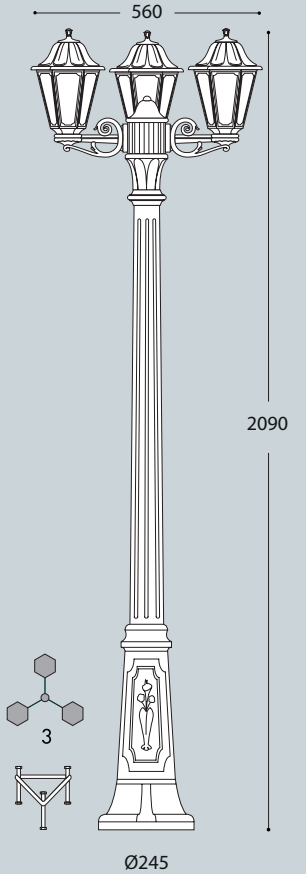

SABA


SMALL SIZE

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



K22.131.V1K

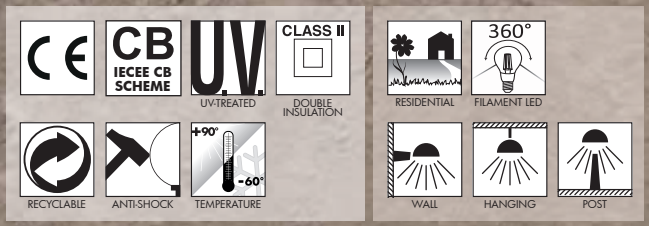

SABA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance,.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SABA

K22.000 *



Dimensions and weight
Height: 320 mm
Width: 220 mm
Depth: 192 mm
Weight: 1 Kg

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR** USE: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm

E27 lampholder only — .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K	.V1K
			4000 K	
			2700 K	



6,5W filament
8,5W CCT
= **60W** incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





SABA *lantern clear with Fumagalli Filament Led Lamp 6,5W.*

POST height 1mt
6x6mt area: average 6 lux


The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SABA

SMALL SIZE



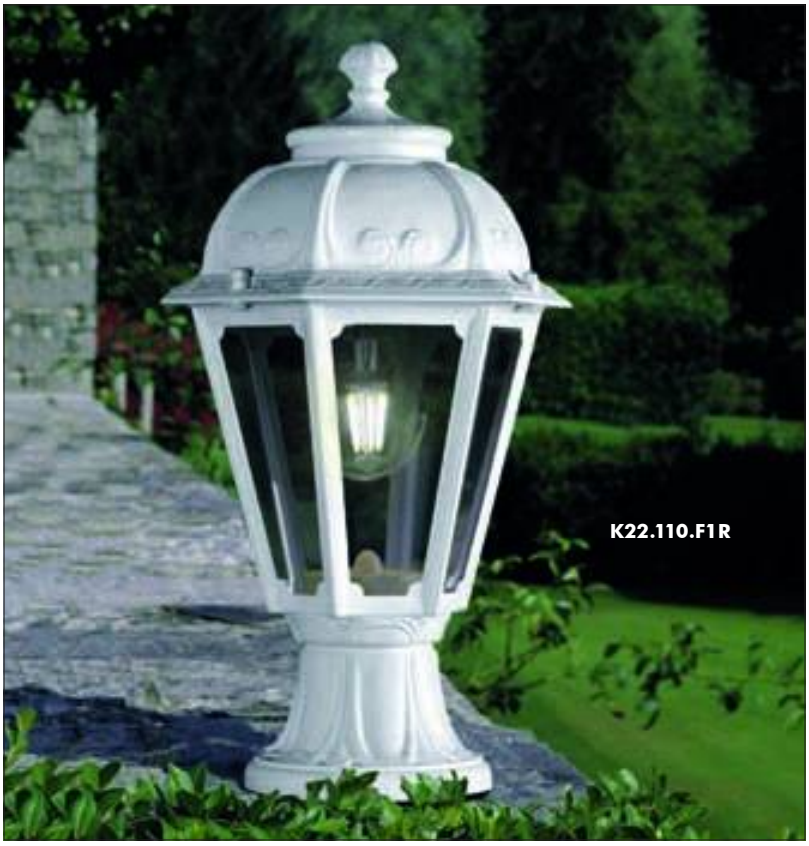




MADE IN ITALY

BISSO/SABA

E27 lampholder	K22.131.E27
6,5W filament	K22.131.F1R
8,5W CCT set	K22.131.V1K


Pcs 18
Kg 21,2
mc 0,209



SICHEM/SABA

E27 lampholder	K22.120.E27
6,5W filament	K22.120.F1R
8,5W CCT set	K22.120.V1K


Pcs 18
Kg 21,2
mc 0,209



SABA

K22.000


Pcs 1
Kg 1
mc 0,011



MIKROLOT/SABA

E27 lampholder	K22.110.E27
6,5W filament	K22.110.F1R
8,5W CCT set	K22.110.V1K


Pcs 18
Kg 21,2
mc 0,209



PORPORA/SABA

E27 lampholder	K22.141.E27
6,5W filament	K22.141.F1R
8,5W CCT set	K22.141.V1K


Pcs 1
Kg 3,5
mc 0,024



MIZAR/SABA resin

E27 lampholder	K22.151.E27
6,5W filament	K22.151.F1R
8,5W CCT set	K22.151.V1K


Pcs 1
Kg 2,4
mc 0,044

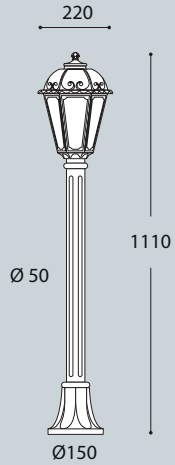

ALOE'.R/SABA resin

E27 lampholder	K22.163.E27
6,5W filament	K22.163.F1R
8,5W CCT set	K22.163.V1K


Pcs 2
Kg 8
mc 0,121

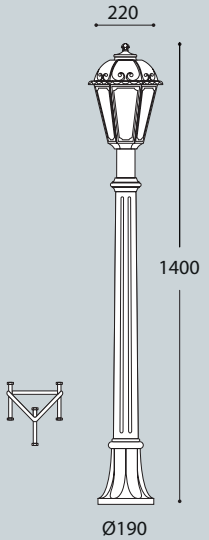

ARTU'/SABA

E27 lampholder	K22.158.E27
6,5W filament	K22.158.F1R
8,5W CCT set	K22.158.V1K

Pcs 1
Kg 9
mc 0,148

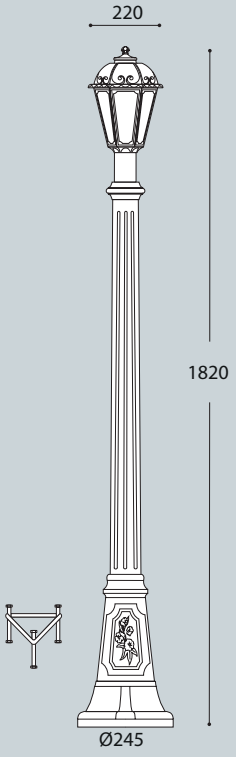

SABA

SMALL SIZE









ARTU' BISSO/SABA 2+1	
E27 lampholder	K22.158.S21.E27
6,5W filament	K22.158.S21.F1R
8,5W CCT set	K22.158.S21.V1K

Pcs 1
Kg 12,1
mc 0,176




ARTU' BISSO/SABA 3+1	
E27 lampholder	K22.158.S31.E27
6,5W filament	K22.158.S31.F1R
8,5W CCT set	K22.158.S31.V1K

Pcs 1
Kg 13,1
mc 0,176




GIGI BISSO/SABA 2+1	
E27 lampholder	K22.156.S21.E27
6,5W filament	K22.156.S21.F1R
8,5W CCT set	K22.156.S21.V1K

Pcs 1
Kg 14,1
mc 0,182




GIGI BISSO/SABA 3+1	
E27 lampholder	K22.156.S31.E27
6,5W filament	K22.156.S31.F1R
8,5W CCT set	K22.156.S31.V1K

Pcs 1
Kg 15,1
mc 0,182




ARTU' BISSO/SABA 2L	
E27 lampholder	K22.158.S20.E27
6,5W filament	K22.158.S20.F1R
8,5W CCT set	K22.158.S20.V1K

Pcs 1
Kg 11,1
mc 0,176

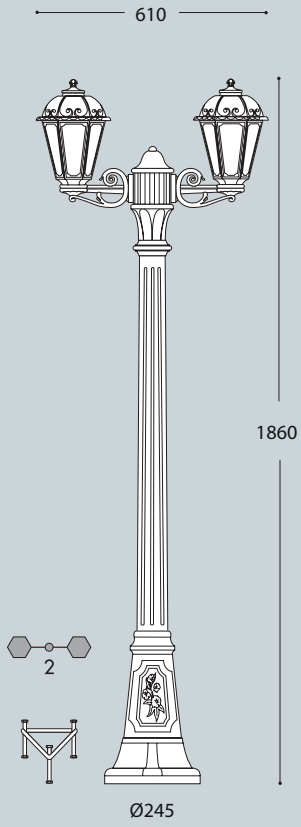


ARTU' BISSO/SABA 3L	
E27 lampholder	K22.158.S30.E27
6,5W filament	K22.158.S30.F1R
8,5W CCT set	K22.158.S30.V1K

Pcs 1
Kg 12,1
mc 0,176

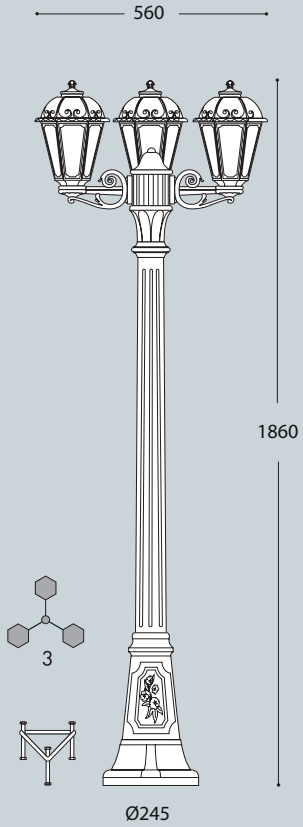


GIGI BISSO/SABA 2L	
E27 lampholder	K22.156.S20.E27
6,5W filament	K22.156.S20.F1R
8,5W CCT set	K22.156.S20.V1K

Pcs 1
Kg 13,1
mc 0,182

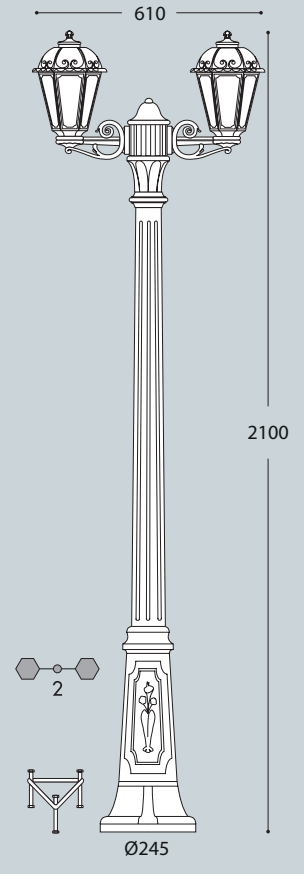

GIGI BISSO/SABA 3L	
E27 lampholder	K22.156.S30.E27
6,5W filament	K22.156.S30.F1R
8,5W CCT set	K22.156.S30.V1K

Pcs 1
Kg 14,1
mc 0,182

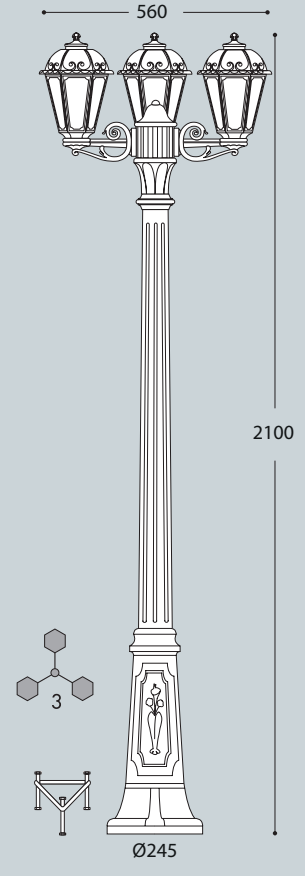

RUT


MEDIUM SIZE

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E26.111.T1K



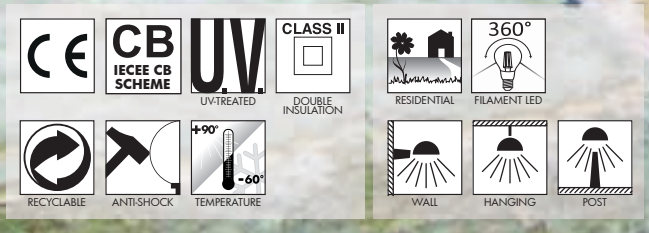

RUT - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

RUT

E26.000 *



Dimensions and weight
Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm

E27 lampholder only — .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K



6,5W filament = 60W incandescent

8,5W CCT

11W CCT = 75W incandescent


SAVE up to 89%

LED LAMPS

CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





RUT *lantern clear with Fumagalli Led Lamp CCT set 8,5W.*

POST height 2mt
6x6mt area: average 6 lux


The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

RUT

MEDIUM SIZE

fumagalli® since 1973

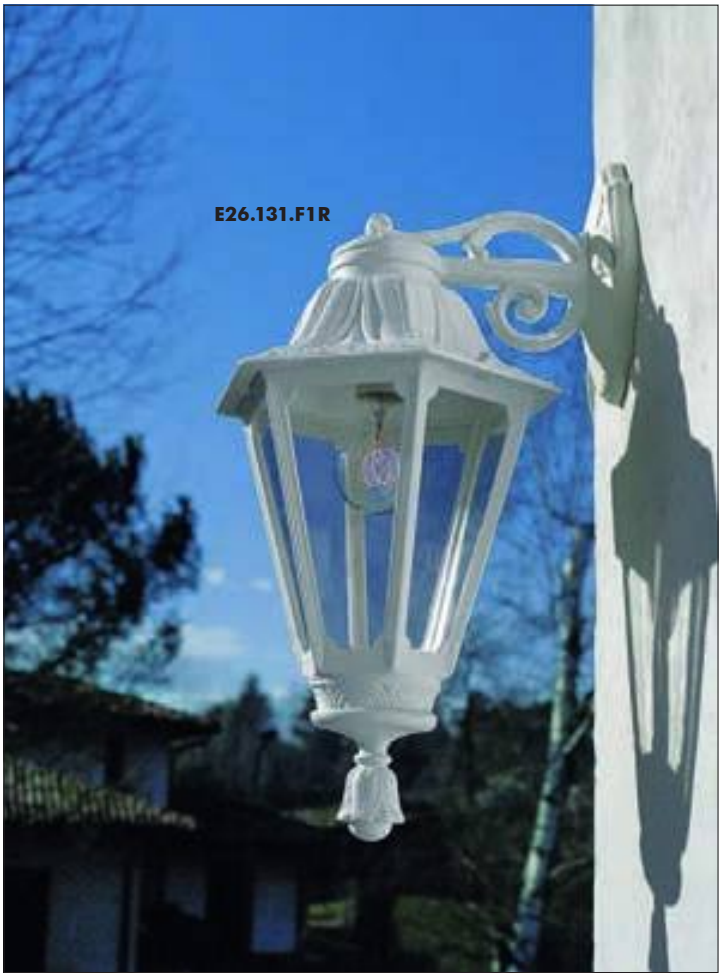






MADE IN ITALY

BISSO/RUT

E27 lampholder	E26.131.E27
6,5W filament	E26.131.F1R
8,5W CCT set	E26.131.V1K
11W CCT set	E26.131.T1K


Pcs 12
Kg 19
mc 0,225



SICHEM/RUT

E27 lampholder	E26.120.E27
6,5W filament	E26.120.F1R
8,5W CCT set	E26.120.V1K
11W CCT set	E26.120.T1K

Pcs 12
Kg 19
mc 0,225



RUT

E26.000


Pcs 1
Kg 1,3
mc 0,018



MINILOT/RUT

E27 lampholder	E26.111.E27
6,5W filament	E26.111.F1R
8,5W CCT set	E26.111.V1K
11W CCT set	E26.111.T1K


Pcs 12
Kg 19
mc 0,225



PORPORA/RUT

E27 lampholder	E26.141.E27
6,5W filament	E26.141.F1R
8,5W CCT set	E26.141.V1K
11W CCT set	E26.141.T1K


Pcs 1
Kg 4
mc 0,034



IAFET/RUT resin

E27 lampholder	E26.162.E27
6,5W filament	E26.162.F1R
8,5W CCT set	E26.162.V1K
11W CCT set	E26.162.T1K


Pcs 2
Kg 7,9
mc 0,086

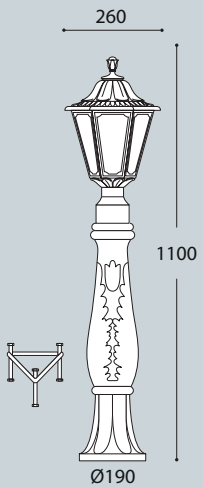

MIZAR/RUT resin

E27 lampholder	E26.151.E27
6,5W filament	E26.151.F1R
8,5W CCT set	E26.151.V1K
11W CCT set	E26.151.T1K


Pcs 1
Kg 3
mc 0,07

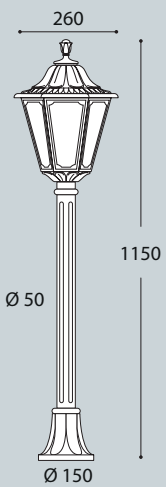

ALOE'.R/RUT resin

E27 lampholder	E26.163.E27
6,5W filament	E26.163.F1R
8,5W CCT set	E26.163.V1K
11W CCT set	E26.163.T1K


Pcs 2
Kg 8,6
mc 0,121

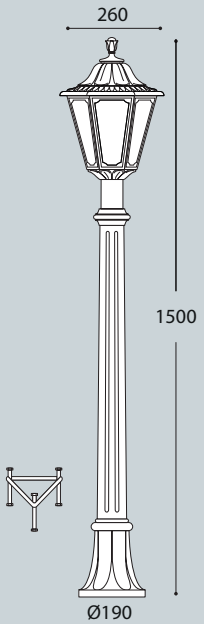

ARTU'/RUT

E27 lampholder	E26.158.E27
6,5W filament	E26.158.F1R
8,5W CCT set	E26.158.V1K
11W CCT set	E26.158. T1K

Pcs 1
Kg 9,6
mc 0,148

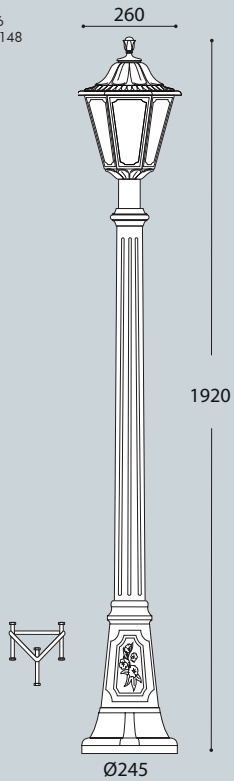

RUT

MEDIUM SIZE








MADE IN ITALY


RICU BISSO/RUT 2+1	
E27 lampholder	E26.157.S21.E27
6,5W filament	E26.157.S21.F1R
8,5W CCT set	E26.157.S21.V1K
11W CCT set	E26.157.S21.T1K

Pcs 1
Kg 15,2
mc 0,214

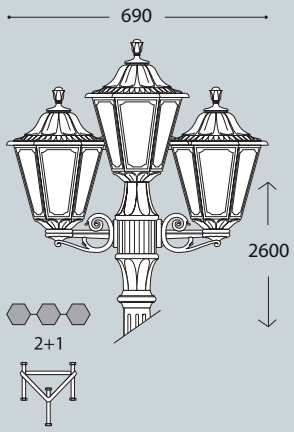


RICU BISSO/RUT 3+1	
E27 lampholder	E26.157.S31.E27
6,5W filament	E26.157.S31.F1R
8,5W CCT set	E26.157.S31.V1K
11W CCT set	E26.157.S31.T1K

Pcs 1
Kg 16,5
mc 0,214

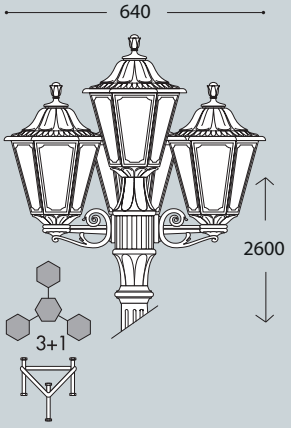


GIGI/RUT	
E27 lampholder	E26.156.E27
6,5W filament	E26.156.F1R
8,5W CCT set	E26.156.V1K
11W CCT set	E26.156.T1K

Pcs 1
Kg 10,9
mc 0,172

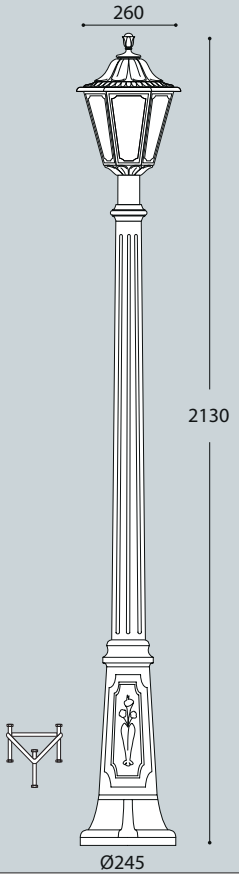


RICU/RUT	
E27 lampholder	E26.157.E27
6,5W filament	E26.157.F1R
8,5W CCT set	E26.157.V1K
11W CCT set	E26.157.T1K

Pcs 1
Kg 11,7
mc 0,18

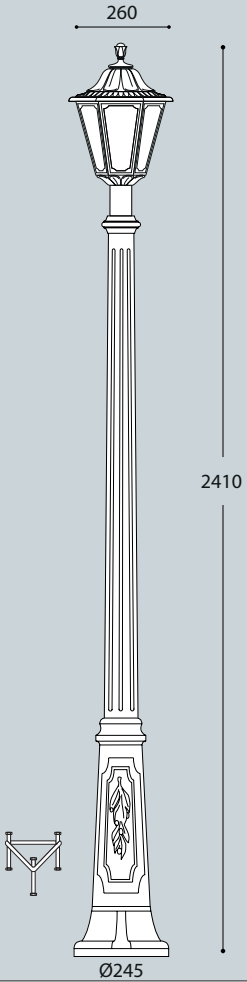


RICU BISSO/RUT 2L	
E27 lampholder	E26.157.S20.E27
6,5W filament	E26.157.S20.F1R
8,5W CCT set	E26.157.S20.V1K
11W CCT set	E26.157.S20.T1K

Pcs 1
Kg 14,2
mc 0,214

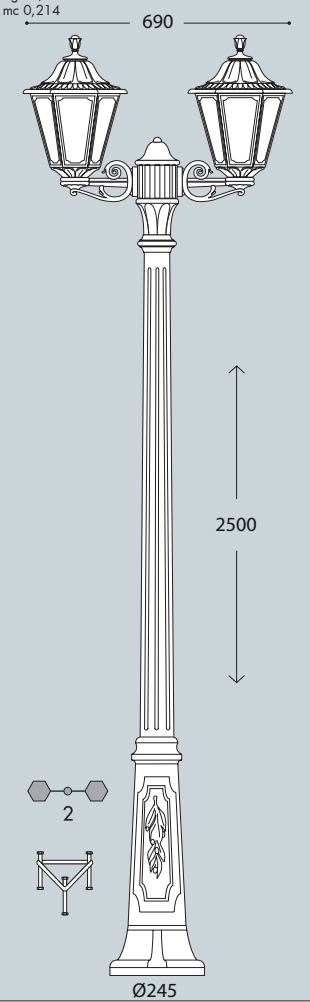

RICU BISSO/RUT 3L	
E27 lampholder	E26.157.S30.E27
6,5W filament	E26.157.S30.F1R
8,5W CCT set	E26.157.S30.V1K
11W CCT set	E26.157.S30.T1K

Pcs 1
Kg 15,2
mc 0,214

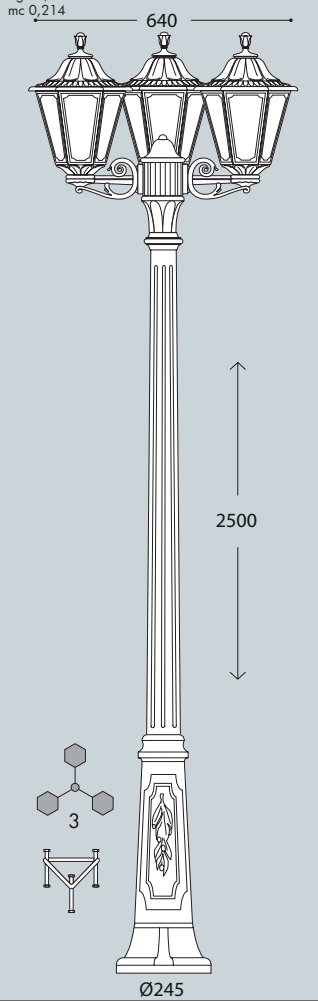

SALEM

MEDIUM SIZE

fumagalli since 1973

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



K26.111.F1R

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II
DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90°
-60°
TEMPERATURE
RESIDENTIAL
360°
FILAMENT LED
WALL
HANGING
POST

MADE IN ITALY

SALEM - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance,.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SALEM

K26.000 *



Dimensions and weight
Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:
Black | White

Painted colours:
Antique green | Antique bronze

Diffuser PMMA:
Clear | Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm	E27 lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K



6,5W filament = 60W incandescent

8,5W CCT

11W CCT = 75W incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





SALEM *lantern clear with Fumagalli Led Lamp CCT set 8,5W.*

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SALEM

MEDIUM SIZE








MADE IN ITALY


BISSO/SALEM	
E27 lampholder	K26.131.E27
6,5W filament	K26.131.F1R
8,5W CCT set	K26.131.V1K
11W CCT set	K26.131.T1K

Pcs 12
Kg 19
mc 0,225




SICHEM/SALEM	
E27 lampholder	K26.120.E27
6,5W filament	K26.120.F1R
8,5W CCT set	K26.120.V1K
11W CCT set	K26.120.T1K

Pcs 12
Kg 19
mc 0,225




SALEM
K26.000

Pcs 1
Kg 1,3
mc 0,018




MINILOT/SALEM	
E27 lampholder	K26.111.E27
6,5W filament	K26.111.F1R
8,5W CCT set	K26.111.V1K
11W CCT set	K26.111.T1K

Pcs 12
Kg 19
mc 0,225




PORPORA/SALEM	
E27 lampholder	K26.141.E27
6,5W filament	K26.141.F1R
8,5W CCT set	K26.141.V1K
11W CCT set	K26.141.T1K

Pcs 1
Kg 4
mc 0,034




IAFET/SALEM resin	
E27 lampholder	K26.162.E27
6,5W filament	K26.162.F1R
8,5W CCT set	K26.162.V1K
11W CCT set	K26.162.T1K

Pcs 2
Kg 7,9
mc 0,086

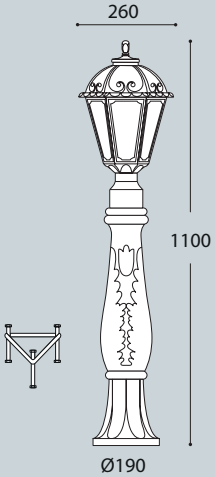


MIZAR/SALEM resin	
E27 lampholder	K26.151.E27
6,5W filament	K26.151.F1R
8,5W CCT set	K26.151.V1K
11W CCT set	K26.151.T1K

Pcs 1
Kg 3
mc 0,07

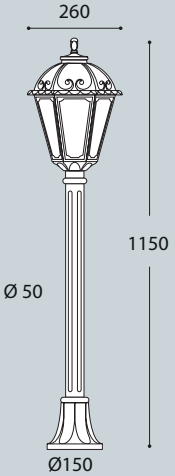


ALOE'.R/SALEM resin	
E27 lampholder	K26.163.E27
6,5W filament	K26.163.F1R
8,5W CCT set	K26.163.V1K
11W CCT set	K26.163.T1K

Pcs 2
Kg 8,6
mc 0,121

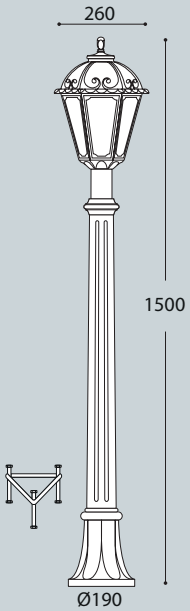

ARTU'/SALEM	
E27 lampholder	K26.158.E27
6,5W filament	K26.158.F1R
8,5W CCT set	K26.158.V1K
11W CCT set	K26.158.T1K

Pcs 1
Kg 9,6
mc 0,148

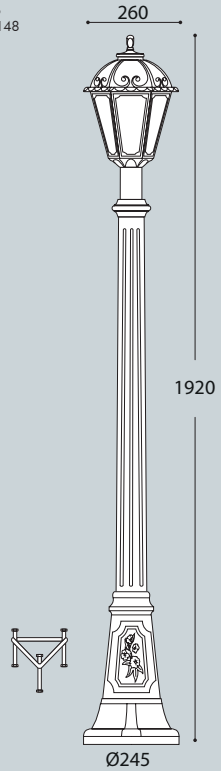

SALEM

MEDIUM SIZE









RICU BISSO/SALEM 2+1	
E27 lampholder	K26.157.S21.E27
6,5W filament	K26.157.S21.F1R
8,5W CCT set	K26.157.S21.V1K
11W CCT set	K26.157.S21.T1K

Pcs 1
Kg 13
mc 0,214

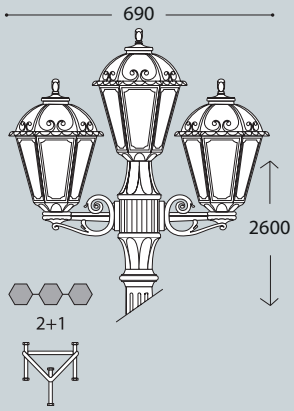


RICU BISSO/SALEM 3+1	
E27 lampholder	K26.157.S31.E27
6,5W filament	K26.157.S31.F1R
8,5W CCT set	K26.157.S31.V1K
11W CCT set	K26.157.S31.T1K

Pcs 1
Kg 14,3
mc 0,214

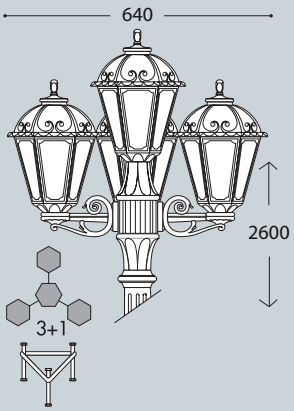


GIGI/SALEM	
E27 lampholder	K26.156.E27
6,5W filament	K26.156.F1R
8,5W CCT set	K26.156.V1K
11W CCT set	K26.156.T1K

Pcs 1
Kg 10,9
mc 0,172

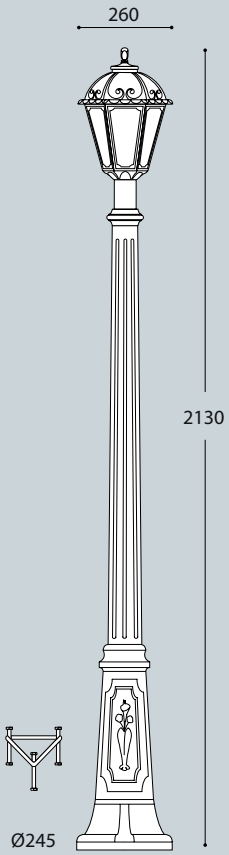


RICU/SALEM	
E27 lampholder	K26.157.E27
6,5W filament	K26.157.F1R
8,5W CCT set	K26.157.V1K
11W CCT set	K26.157.T1K

Pcs 1
Kg 11,7
mc 0,18

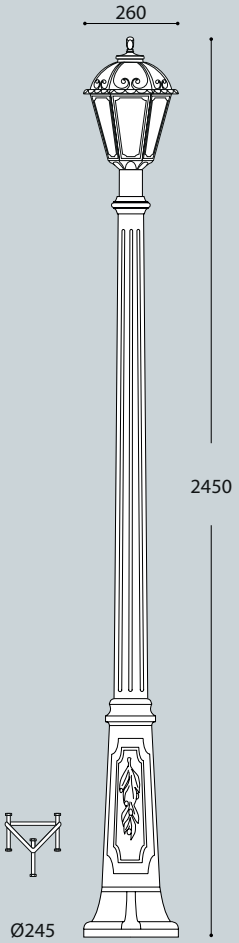


RICU BISSO/SALEM 2L	
E27 lampholder	K26.157.S20.E27
6,5W filament	K26.157.S20.F1R
8,5W CCT set	K26.157.S20.V1K
11W CCT set	K26.157.S20.T1K

Pcs 1
Kg 14,2
mc 0,214

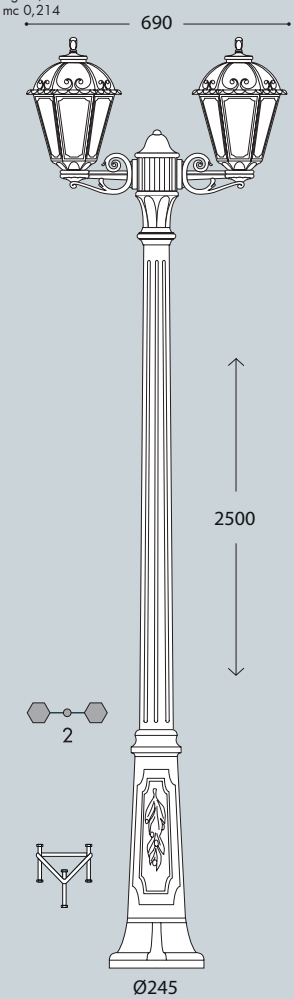

RICU BISSO/SALEM 3L	
E27 lampholder	K26.157.S30.E27
6,5W filament	K26.157.S30.F1R
8,5W CCT set	K26.157.S30.V1K
11W CCT set	K26.157.S30.T1K

Pcs 1
Kg 15,2
mc 0,214

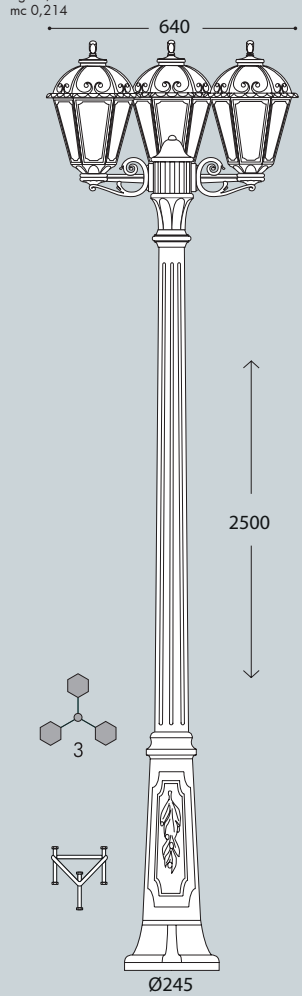

GOLIA

MEDIUM SIZE


E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



Q23.131.F1R

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RESIDENTIAL
360° FILAMENT LED
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
WALL
HANGING
POST

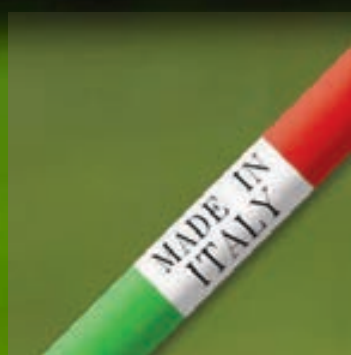

GOLIA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

GOLIA

Q23.000 *



Dimensions and weight
Height: 360 mm
Width: 230 mm
Depth: 230 mm
Weight: 1,3 Kg

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY: 90% ENERGY SAVING**.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm	E27 lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K



6,5W filament = 60W incandescent

8,5W CCT


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





GOLIA *lantern clear with Fumagalli Led Lamp CCT set 8,5W.*

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GOLIA

MEDIUM SIZE








MADE IN ITALY

BISSO/GOLIA

E27 lampholder	Q23.131.E27
6,5W filament	Q23.131.F1R
8,5W CCT set	Q23.131.V1K


Pcs 12
Kg 19
mc 0,225



PORPORA/GOLIA

E27 lampholder	Q23.141.E27
6,5W filament	Q23.141.F1R
8,5W CCT set	Q23.141.V1K


Pcs 1
Kg 4
mc 0,034



MINILOT/GOLIA

E27 lampholder	Q23.111.E27
6,5W filament	Q23.111.F1R
8,5W CCT set	Q23.111.V1K


Pcs 12
Kg 19
mc 0,225



GOLIA

Q23.000


Pcs 1
Kg 1,3
mc 0,018



SICHEM/GOLIA

E27 lampholder	Q23.120.E27
6,5W filament	Q23.120.F1R
8,5W CCT set	Q23.120.V1K


Pcs 12
Kg 19
mc 0,225



MIZAR/GOLIA resin

E27 lampholder	Q23.151.E27
6,5W filament	Q23.151.F1R
8,5W CCT set	Q23.151.V1K


Pcs 1
Kg 3
mc 0,07



IAFET/GOLIA resin

E27 lampholder	Q23.162.E27
6,5W filament	Q23.162.F1R
8,5W CCT set	Q23.162.V1K


Pcs 2
Kg 7,9
mc 0,086

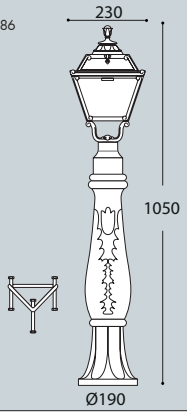

ALOE'.R/GOLIA resin

E27 lampholder	Q23.163.E27
6,5W filament	Q23.163.F1R
8,5W CCT set	Q23.163.V1K


Pcs 2
Kg 8,6
mc 0,121

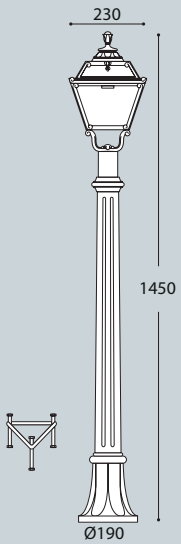

ARTU'/GOLIA

E27 lampholder	Q23.158.E27
6,5W filament	Q23.158.F1R
8,5W CCT set	Q23.158.V1K


Pcs 1
Kg 9,6
mc 0,148

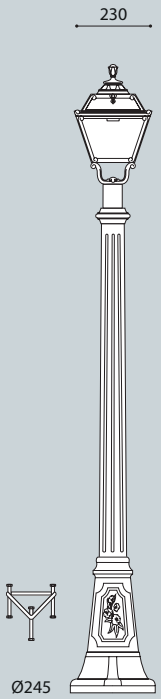

GIGI/GOLIA

E27 lampholder	Q23.156.E27
6,5W filament	Q23.156.F1R
8,5W CCT set	Q23.156.V1K


Pcs 1
Kg 10,9
mc 0,172

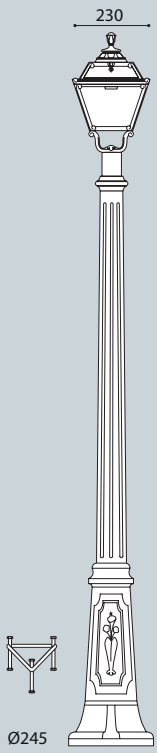

RICU/GOLIA

E27 lampholder	Q23.157.E27
6,5W filament	Q23.157.F1R
8,5W CCT set	Q23.157. V1K

Pcs 1
Kg 11,7
mc 0,18

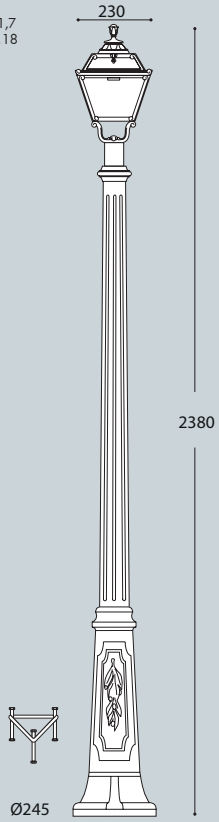

GOLIA

MEDIUM SIZE








MADE IN ITALY

GIGI BISSO/GOLIA 2L

E27 lampholder	Q23.156.S20.E27
6,5W filament	Q23.156.S20.F1R
8,5W CCT set	Q23.156.S20.V1K


Pcs 1
Kg 13,5
mc 0,182

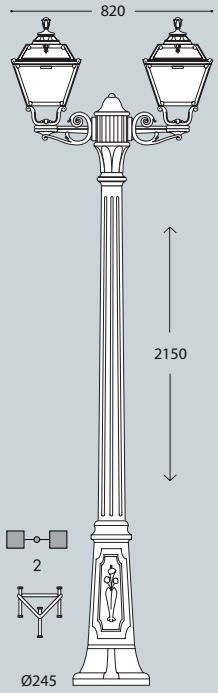

GIGI BISSO/GOLIA 3L

E27 lampholder	Q23.156.S30.E27
6,5W filament	Q23.156.S30.F1R
8,5W CCT set	Q23.156.S30.V1K


Pcs 1
Kg 14,7
mc 0,182

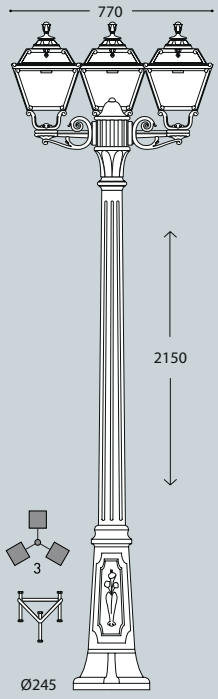

GIGI BISSO/GOLIA 2+1

E27 lampholder	Q23.156.S21.E27
6,5W filament	Q23.156.S21.F1R
8,5W CCT set	Q23.156.S21.V1K


Pcs 1
Kg 14,7
mc 0,182



GIGI BISSO/GOLIA 3+1

E27 lampholder	Q23.156.S31.E27
6,5W filament	Q23.156.S31.F1R
8,5W CCT set	Q23.156.S31.V1K


Pcs 1
Kg 16
mc 0,182



RICU BISSO/GOLIA 2L

E27 lampholder	Q23.157.S20.E27
6,5W filament	Q23.157.S20.F1R
8,5W CCT set	Q23.157.S20. V1K


Pcs 1
Kg 14,2
mc 0,214

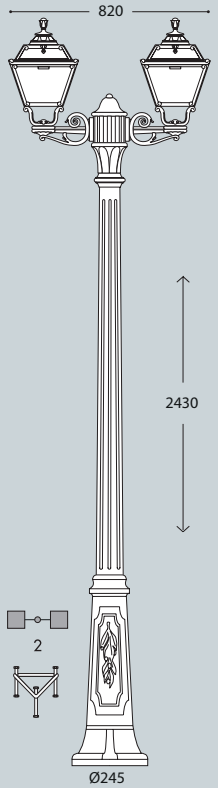

RICU BISSO/GOLIA 3L

E27 lampholder	Q23.157.S30.E27
6,5W filament	Q23.157.S30.F1R
8,5W CCT set	Q23.157.S30.V1K


Pcs 1
Kg 15,2
mc 0,214

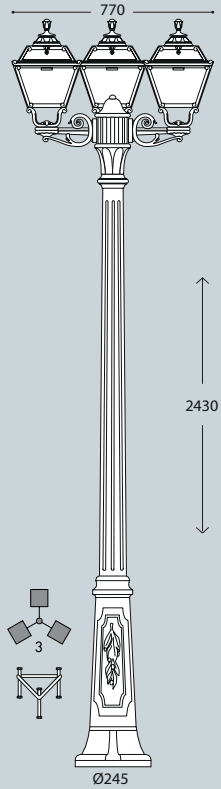

RICU BISSO/GOLIA 2+1

E27 lampholder	Q23.157.S21.E27
6,5W filament	Q23.157.S21.F1R
8,5W CCT set	Q23.157.S21.V1K


Pcs 1
Kg 15,2
mc 0,214



RICU BISSO/GOLIA 3+1

E27 lampholder	Q23.157.S31.E27
6,5W filament	Q23.157.S31.F1R
8,5W CCT set	Q23.157.S31.V1K

Pcs 1
Kg 16,5
mc 0,214



CEFA

MEDIUM SIZE


fumagalli since 1973

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



U23.111.F1R

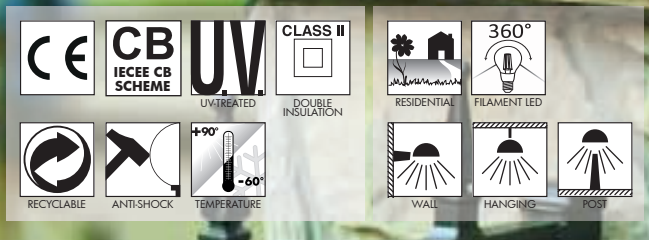

MADE IN ITALY

CEFA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (**IP 55**).

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (**IP 55**).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

CEFA

U23.000 *



Dimensions and weight
Height: 380 mm
Width: 230 mm
Depth: 230 mm
Weight: 1,3 Kg

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**.
- **HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm	E27 lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K



6,5W filament
8,5W CCT
= 60W incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE





CEFA *lantern clear with*
Fumagalli Led Lamp CCT set 8,5W.


POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

CEFA

MEDIUM SIZE

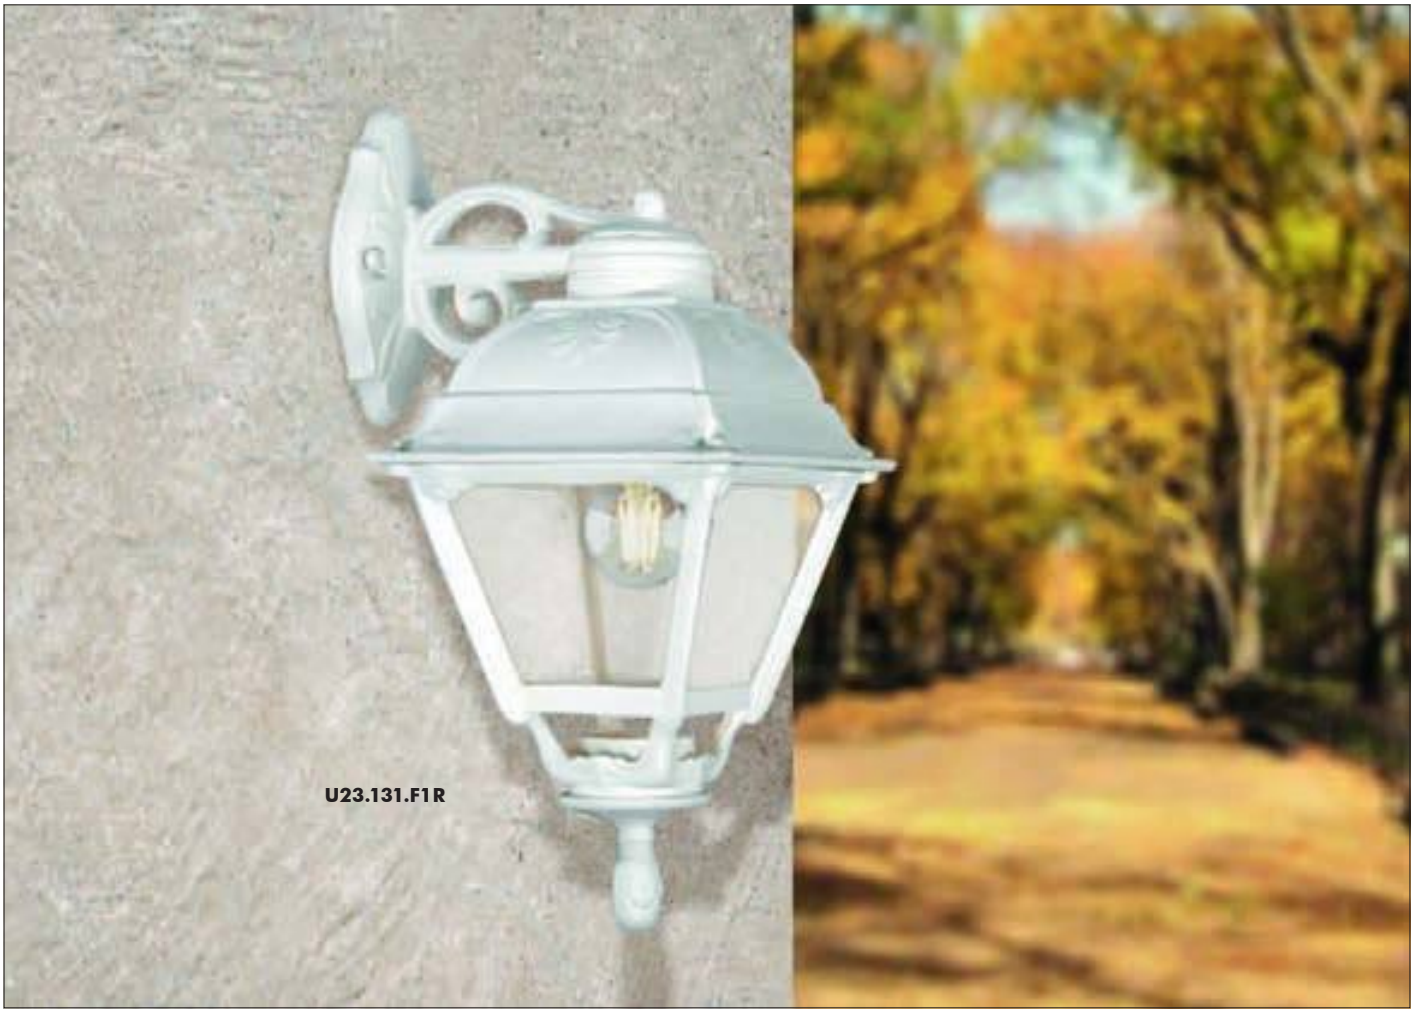








MADE IN ITALY

BISSO/CEFA

E27 lampholder	U23.131.E27
6,5W filament	U23.131.F1R
8,5W CCT set	U23.131.V1K


Pcs 12
Kg 19
mc 0,225



PORPORA/CEFA

E27 lampholder	U23.141.E27
6,5W filament	U23.141.F1R
8,5W CCT set	U23.141.V1K


Pcs 1
Kg 4
mc 0,034



MINILOT/CEFA

E27 lampholder	U23.111.E27
6,5W filament	U23.111.F1R
8,5W CCT set	U23.111.V1K


Pcs 12
Kg 19
mc 0,225



CEFA

U23.000


Pcs 1
Kg 1,3
mc 0,018



SICHEM/CEFA

E27 lampholder	U23.120.E27
6,5W filament	U23.120.F1R
8,5W CCT set	U23.120.V1K


Pcs 12
Kg 19
mc 0,225



MIZAR/CEFA resin

E27 lampholder	U23.151.E27
6,5W filament	U23.151.F1R
8,5W CCT set	U23.151.V1K


Pcs 1
Kg 3
mc 0,07

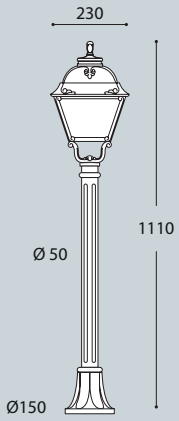

IAFET/CEFA resin

E27 lampholder	U23.162.E27
6,5W filament	U23.162.F1R
8,5W CCT set	U23.162.V1K


Pcs 2
Kg 7,9
mc 0,086

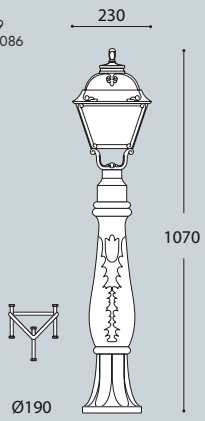

ALOE'.R/CEFA resin

E27 lampholder	U23.163.E27
6,5W filament	U23.163.F1R
8,5W CCT set	U23.163.V1K


Pcs 2
Kg 8,6
mc 0,121

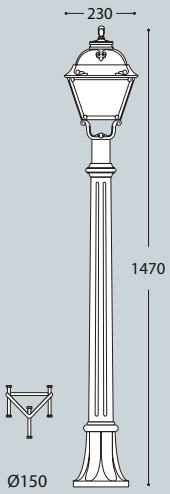

ARTU'/CEFA

E27 lampholder	U23.158.E27
6,5W filament	U23.158.F1R
8,5W CCT set	U23.158.V1K


Pcs 1
Kg 9,6
mc 0,148

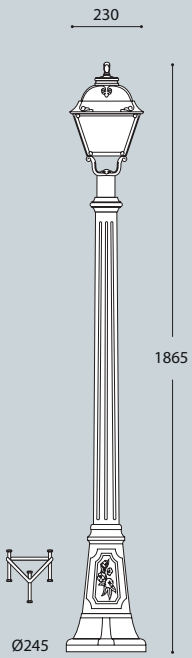

GIGI/CEFA

E27 lampholder	U23.156.E27
6,5W filament	U23.156.F1R
8,5W CCT set	U23.156.V1K


Pcs 1
Kg 10,9
mc 0,172

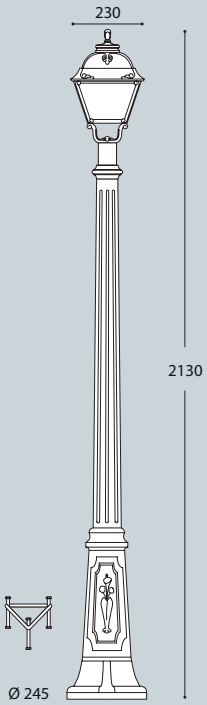

RICU/CEFA

E27 lampholder	U23.157.E27
6,5W filament	U23.157.F1R
8,5W CCT set	U23.157. V1K

Pcs 1
Kg 11,7
mc 0,18

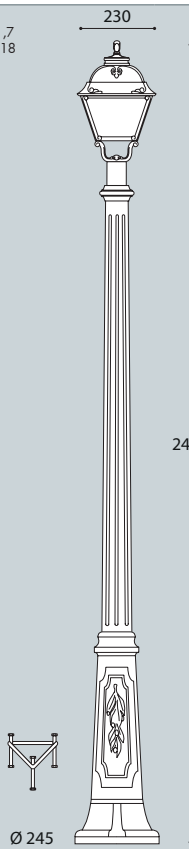

CEFA

MEDIUM SIZE








MADE IN ITALY


GIGI BISSO/CEFA 2L	
E27 lampholder	U23.156.S20.E27
6,5W filament	U23.156.S20.F1R
8,5W CCT set	U23.156.S20.V1K

Pcs 1
Kg 13,5
mc 0,182

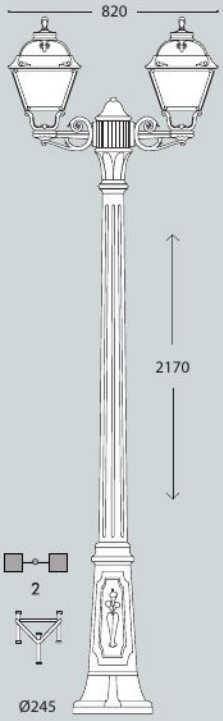


GIGI BISSO/CEFA 3L	
E27 lampholder	U23.156.S30.E27
6,5W filament	U23.156.S30.F1R
8,5W CCT set	U23.156.S30.V1K

Pcs 1
Kg 14,7
mc 0,182

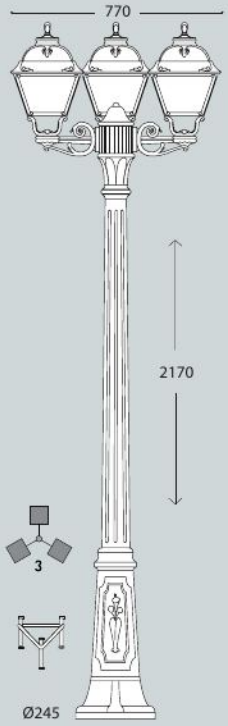


GIGI BISSO/CEFA 2+1	
E27 lampholder	U23.156.S21.E27
6,5W filament	U23.156.S21.F1R
8,5W CCT set	U23.156.S21.V1K

Pcs 1
Kg 14,7
mc 0,182




GIGI BISSO/CEFA 3+1	
E27 lampholder	U23.156.S31.E27
6,5W filament	U23.156.S31.F1R
8,5W CCT set	U23.156.S31.V1K

Pcs 1
Kg 16
mc 0,182




RICU BISSO/CEFA 2L	
E27 lampholder	U23.157.S20.E27
6,5W filament	U23.157.S20.F1R
8,5W CCT set	U23.157.S20.V1K

Pcs 1
Kg 14,2
mc 0,214

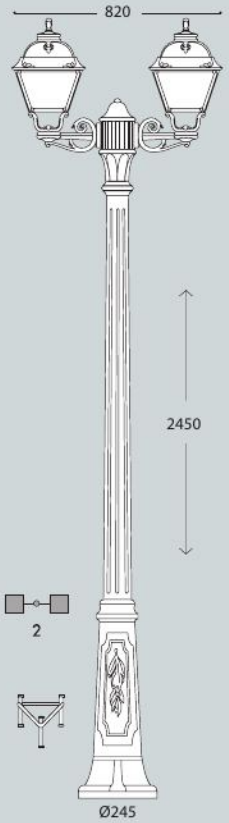


RICU BISSO/CEFA 3L	
E27 lampholder	U23.157.S30.E27
6,5W filament	U23.157.S30.F1R
8,5W CCT set	U23.157.S30.V1K

Pcs 1
Kg 15,2
mc 0,214

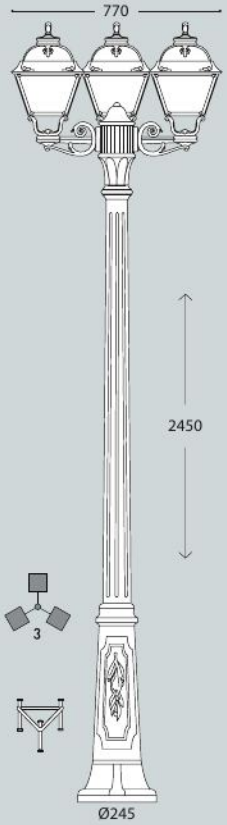


RICU BISSO/CEFA 2+1	
E27 lampholder	U23.157.S21.E27
6,5W filament	U23.157.S21.F1R
8,5W CCT set	U23.157.S21. V1K

Pcs 1
Kg 15,2
mc 0,214



RICU BISSO/CEFA 3+1	
E27 lampholder	U23.157.S31.E27
6,5W filament	U23.157.S31.F1R
8,5W CCT set	U23.157.S31. V1K

Pcs 1
Kg 16,5
mc 0,214



GLOBE 250 CLASSIC


SMALL SIZE


Ø 250 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Globo Ø 250 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di **lampadine LED** *adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

G25.131



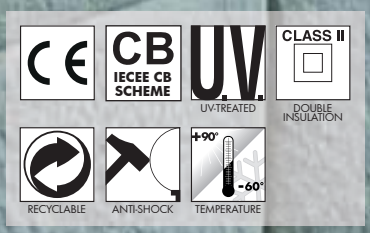



GLOBE 250 CLASSIC - COMPONENTS

IP55



Ø 250 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO *Ø 250 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)





GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrsoion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA *con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampada E27.*

GLOBE 250 CLASSIC

G25.B25 *



Dimensions and weight
Height: 260 mm
Diameter: 250 mm
Weight: 0,8 Kg

Moulded colours:
Black | White

Painted colours:
Antique green | Antique bronze

Diffuser PMMA:
Clear | Opal | Smoked

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT. HIGH EFFICIENCY**: 90% ENERGY SAVING.

E27 CCT SET




- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

suitable lamps: CFL-LED	E27 lampholder only	*ADD. SUFFIX .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K

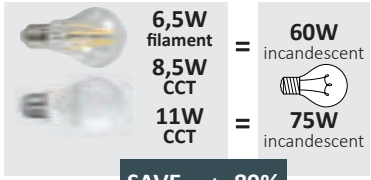


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

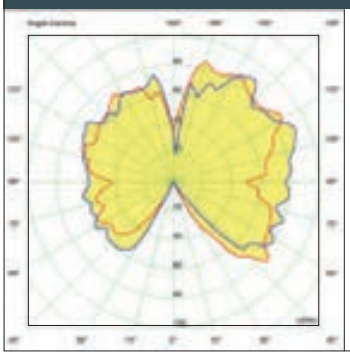



GLOBE 250 CLASSIC *clear with Fumagalli Filament Led Lamp 6,5W.*


POST height 1mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GLOBE 250 CLASSIC

SMALL SIZE

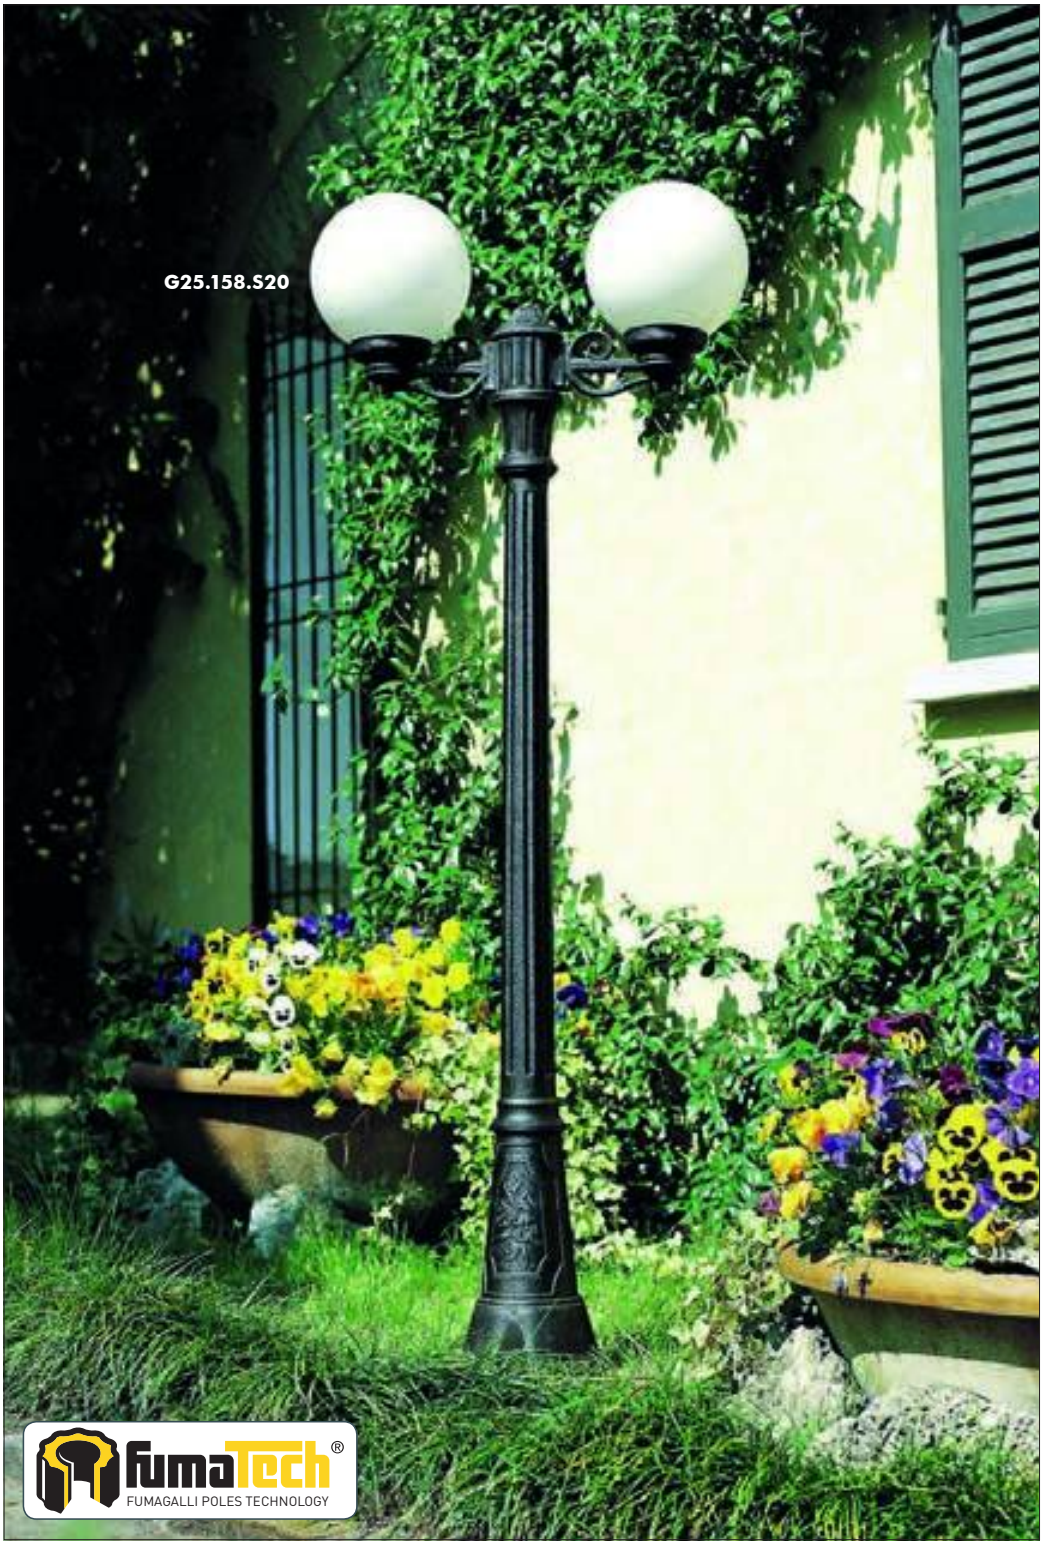












MIKROLOT/G250

E27	G25.110.E27
6,5W filament	G25.110.F1R
8,5W CCT set	G25.110.V1K
11W CCT set	G25.110.T1K


Pcs 36
Kg 42
mc 0,829



BISSO/G250

E27	G25.131.E27
6,5W filament	G25.131.F1R
8,5W CCT set	G25.131.V1K
11W CCT set	G25.131.T1K


Pcs 36
Kg 42
mc 0,829



PORPORA/G250

E27	G25.141.E27
6,5W filament	G25.141.F1R
8,5W CCT set	G25.141.V1K
11W CCT set	G25.141.T1K


Pcs 1
Kg 4
mc 0,028



GLOBE 250 CLASSIC

G25.B25.E27


Pcs 2
Kg 1,6
mc 0,025



MIZAR/G250 resin

E27	G25.151.E27
6,5W filament	G25.151.F1R
8,5W CCT set	G25.151.V1K
11W CCT set	G25.151.T1K


Pcs 2
Kg 4
mc 0,078

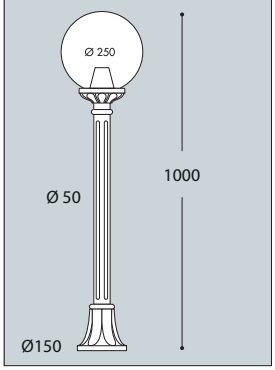

IAFET.R/G250 resin

E27	G25.162.E27
6,5W filament	G25.162.F1R
8,5W CCT set	G25.162.V1K
11W CCT set	G25.162.T1K


Pcs 2
Kg 6,9
mc 0,092

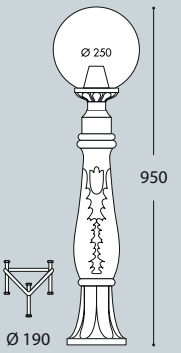

SICHEM/G250

E27	G25.120.E27
6,5W filament	G25.120.F1R
8,5W CCT set	G25.120.V1K
11W CCT set	G25.120.T1K


Pcs 36
Kg 42
mc 0,829



GIGI BISSO/G250 3L

E27	G25.156.S30.E27
6,5W filament	G25.156.S30.F1R
8,5W CCT set	G25.156.S30.V1K
11W CCT set	G25.156.S30. T1K


Pcs 2
Kg 25,4
mc 0,31



RICU BISSO/G250 3L

E27	G25.157.S30.E27
6,5W filament	G25.157.S30.F1R
8,5W CCT set	G25.157.S30.V1K
11W CCT set	G25.157.S30.T1K


Pcs 2
Kg 27,5
mc 0,339



GIGI/G250

E27	G25.156.E27
6,5W filament	G25.156.F1R
8,5W CCT set	G25.156.V1K
12W CCT set	G25.156.T1K


Pcs 2
Kg 20,1
mc 0,217

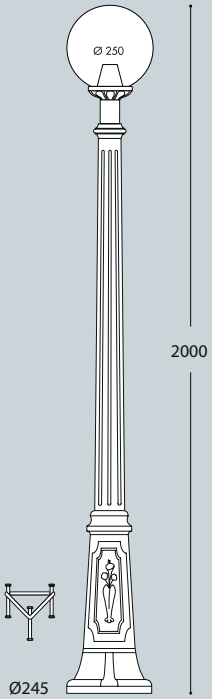

GIGI BISSO/G250 2L

E27	G25.156.S20.E27
6,5W filament	G25.156.S20.F1R
8,5W CCT set	G25.156.S20.V1K
11W CCT set	G25.156.S20.T1K


Pcs 2
Kg 23,7
mc 0,27

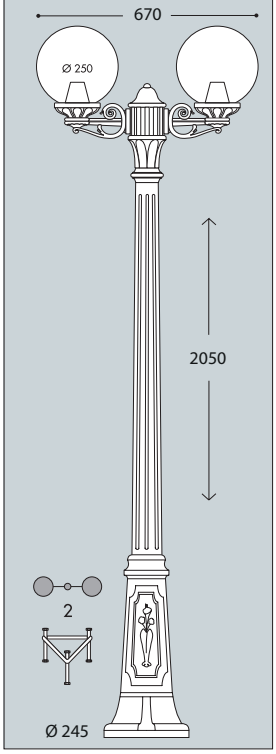

RICU BISSO/G250 2L

E27	G25.157.S20.E27
6,5W filament	G25.157.S20.F1R
8,5W CCT set	G25.157.S20.V1K
11W CCT set	G25.157.S20.T1K


Pcs 2
Kg 24,8
mc 0,304

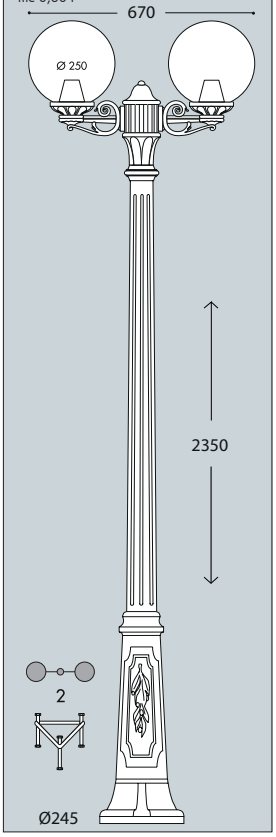

ALOE'.R/G250 resin

E27	G25.163.E27
6,5W filament	G25.163.F1R
8,5W CCT set	G25.163.V1K
11W CCT set	G25.163.T1K


Pcs 2
Kg 7
mc 0,122

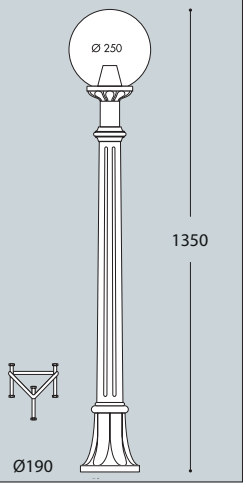

ARTU'/G250

E27	G25.158.E27
6,5W filament	G25.158.F1R
8,5W CCT set	G25.158.V1K
11W CCT set	G25.158.T1K

Pcs 2
Kg 17,1
mc 0,186

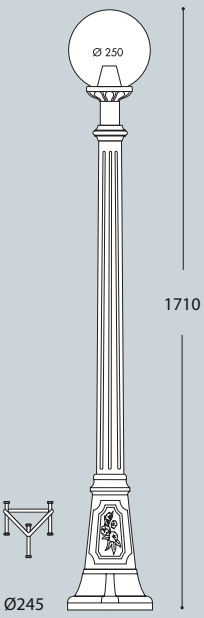

GLOBE 300 CLASSIC

MEDIUM SIZE


Ø 300 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.


*Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

G30.111

G30.162



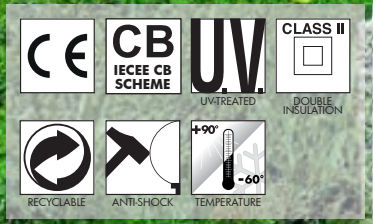



GLOBE 300 CLASSIC

MEDIUM SIZE

GLOBE 300 CLASSIC - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO *Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)





GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrsoion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA *con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampada E27.*

GLOBE 300 CLASSIC

G30.B30 *



Dimensions and weight
Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:
Black | White

Painted colours:
Antique green | Antique bronze

Diffuser PMMA:
Clear | Opal | Smoked

E27 FILAMENT



- Perfect **MATCHING WITH DECORATIVE LANTERNS**.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT**. HIGH EFFICIENCY: 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE**: 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE**: 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY**: >85% ENERGY SAVING.

100 - 240 V

		*ADD. SUFFIX
suitable lamps: CFL-LED	**E27** lampholder only	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K



6,5W filament = **60W** incandescent

8,5W CCT



11W CCT = **75W** incandescent


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

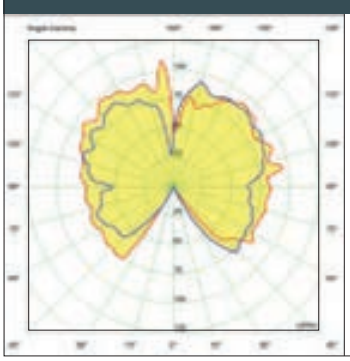



GLOBE 300 CLASSIC *clear with Fumagalli Led Lamp CCT set 8,5W.*

POST height 2mt
6x6mt area: average 3,5 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


GLOBE 300 CLASSIC

MEDIUM SIZE







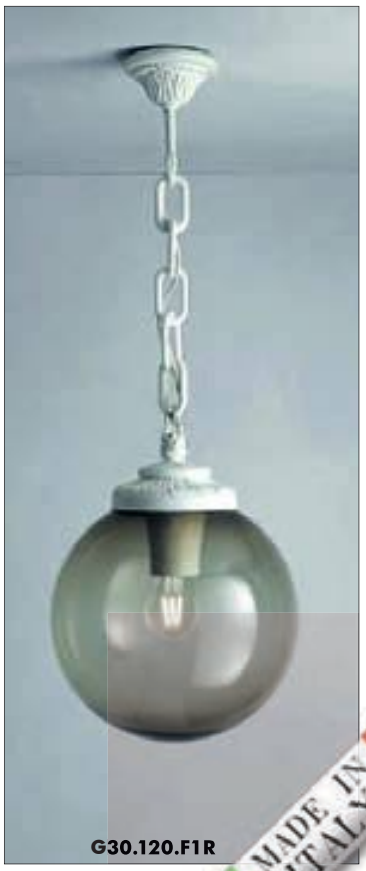


MADE IN ITALY

RICU BISSO/G300 2L

E27	G30.157.S20.E27
6,5W filament	G30.157.S20.F1R
8,5W CCT set	G30.157.S20.V1K
11W CCT set	G30.157.S20.T1K


Pcs 2
Kg 29,4
mc 0,366



RICU BISSO/G300 3L

E27	G30.157.S30.E27
6,5W filament	G30.157.S30.F1R
8,5W CCT set	G30.157.S30.V1K
11W CCT set	G30.157.S30.T1K


Pcs 2
Kg 31,8
mc 0,401



BISSO/G300

E27	G30.131.E27
6,5W filament	G30.131.F1R
8,5W CCT set	G30.131.V1K
11W CCT set	G30.131.T1K


Pcs 24
Kg 44,2
mc 0,638

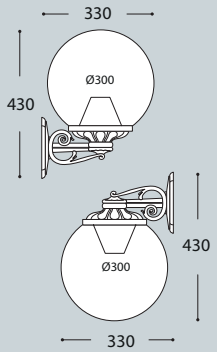

SICHEM/G300

E27	G30.120.E27
6,5W filament	G30.120.F1R
8,5W CCT set	G30.120.V1K
11W CCT set	G30.120.T1K


Pcs 24
Kg 44,2
mc 0,638



GLOBE 300 CLASSIC

G30.B30.E27


Pcs 2
Kg 2,2
mc 0,059



RICU/G300

E27	G30.157.E27
6,5W filament	G30.157.F1R
8,5W CCT set	G30.157.V1K
11W CCT set	G30.157.T1K


Pcs 2
Kg 22,2
mc 0,274

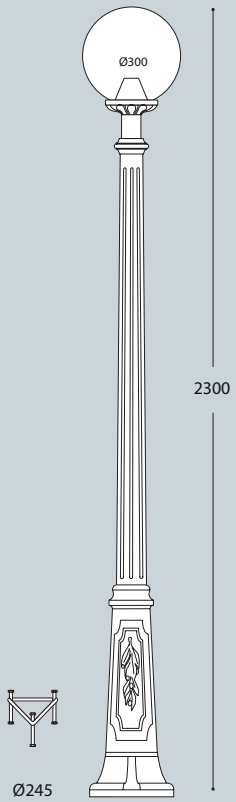

GIGI/G300

E27	G30.156.E27
6,5W filament	G30.156.F1R
8,5W CCT set	G30.156.V1K
11W CCT set	G30.156.T1K


Pcs 2
Kg 20,7
mc 0,242

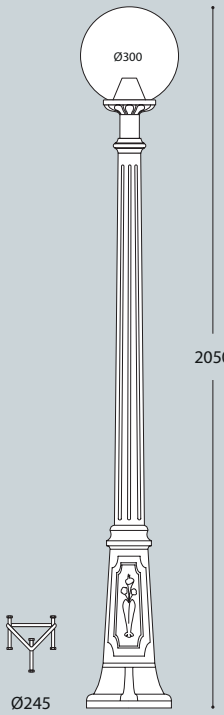

ARTU'/G300

E27	G30.158.E27
6,5W filament	G30.158.F1R
8,5W CCT set	G30.158.V1K
11W CCT set	G30.158.T1K


Pcs 2
Kg 17,7
mc 0,211

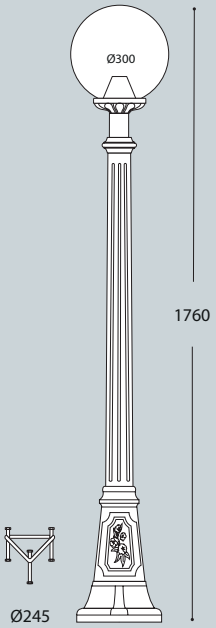

ALOE'.R/G300

E27	G30.163.E27
6,5W filament	G30.163.F1R
8,5W CCT set	G30.163.V1K
11W CCT set	G30.163.T1K


Pcs 2
Kg 8,2
mc 0,146

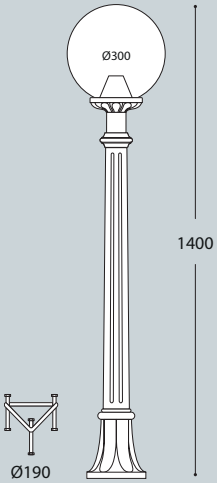

MINILOT/G300

E27	G30.111.E27
6,5W filament	G30.111.F1R
8,5W CCT set	G30.111.V1K
11W CCT set	G30.111.T1K


Pcs 24
Kg 44,2
mc 0,638



IAFET.R/G300 resin


E27	G30.162.E27
6,5W filament	G30.162.F1R
8,5W CCT set	G30.162.V1K
11W CCT set	G30.162.T1K

Pcs 2
Kg 7,5
mc 0,117

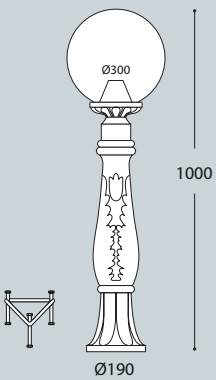

GLOBE 300 CLASSIC

MEDIUM SIZE

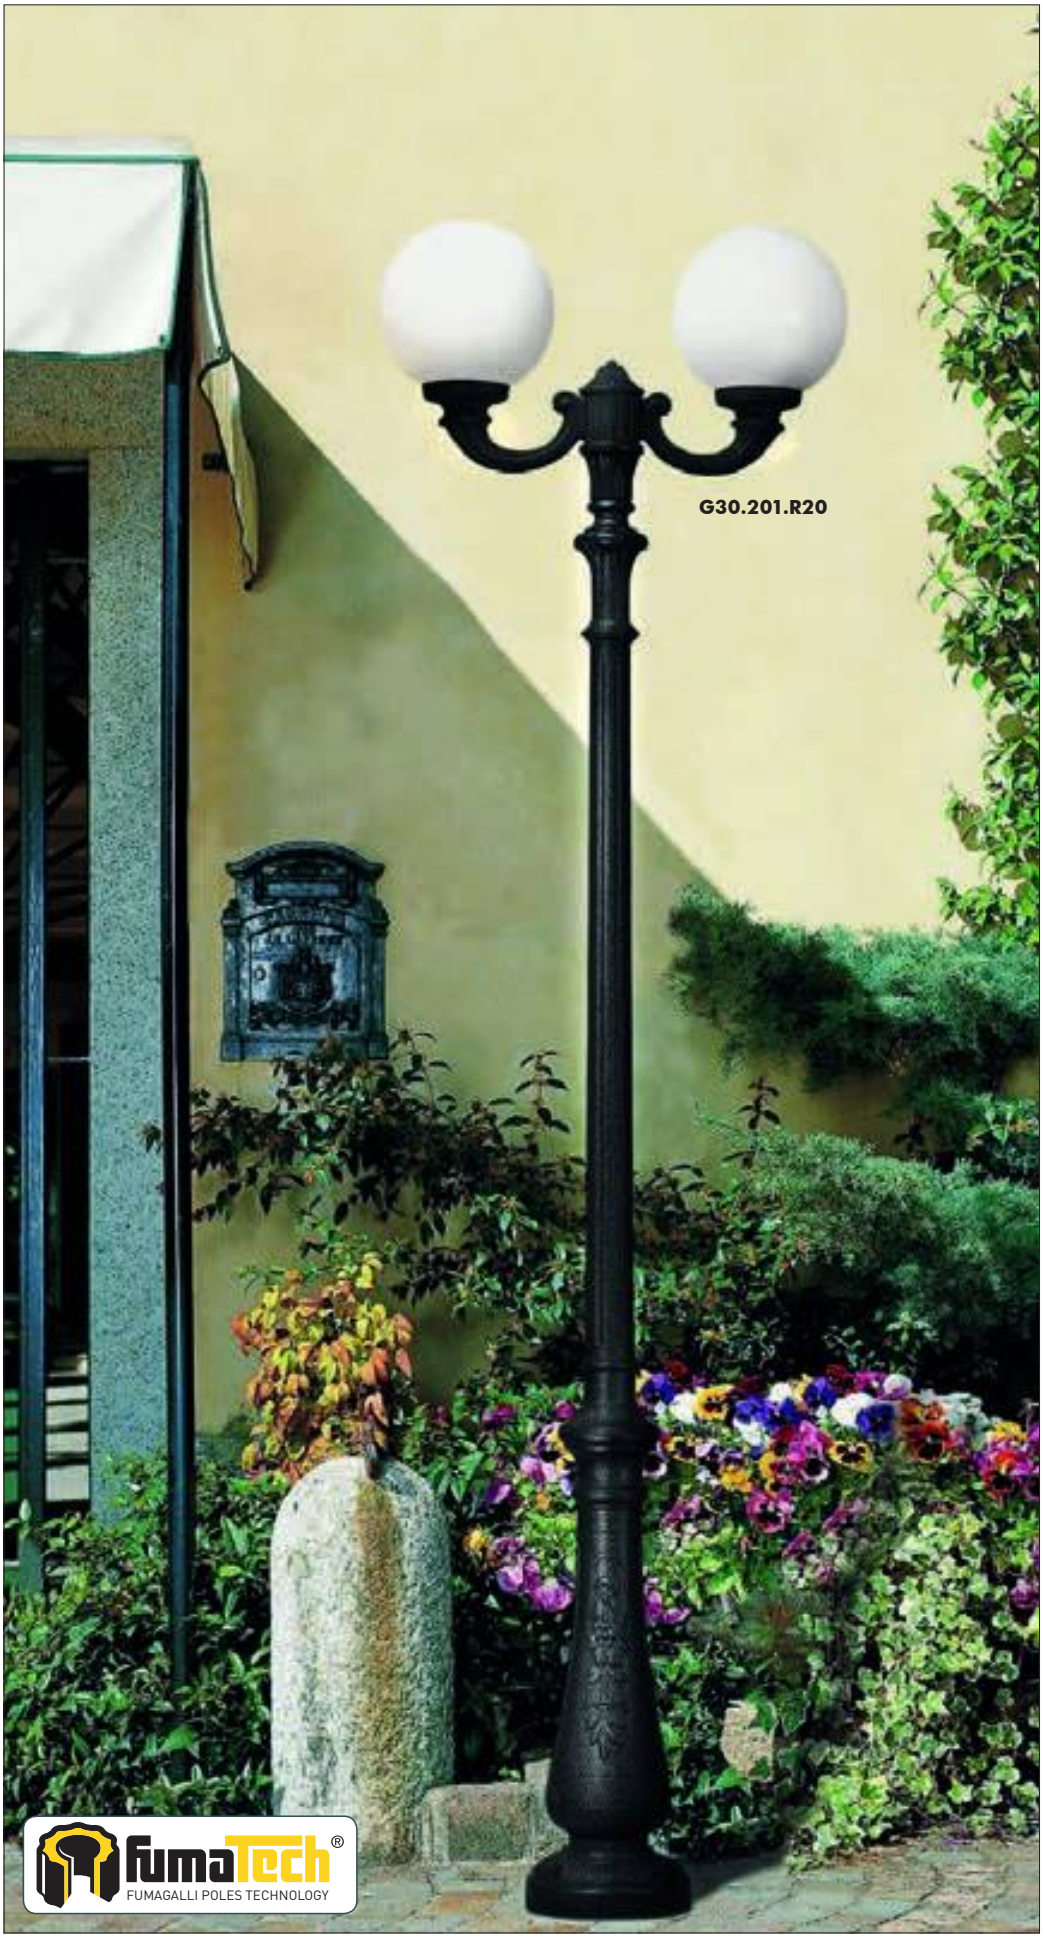








MADE IN ITALY




GLOBE 300 CLASSIC

MEDIUM SIZE

RICU OFIR/G300 3L

E27	G30.157.R30.E27
6,5W filament	G30.157.R30.F1R
8,5W CCT set	G30.157.R30.V1K
11W CCT set	G30.157.R30.T1K


Pcs 2
Kg 29,9
mc 0,439



MIRRA/G300

E27	G30.142.E27
6,5W filament	G30.142.F1R
8,5W CCT set	G30.142.V1K
11W CCT set	G30.142.T1K


Pcs 1
Kg 5,1
mc 0,077



OFIR/G300

E27	G30.132.E27
6,5W filament	G30.132.F1R
8,5W CCT set	G30.132.V1K
11W CCT set	G30.132.T1K


Pcs 2
Kg 4,6
mc 0,077



RICU OFIR/G300 2L

E27	G30.157.R20.E27
6,5W filament	G30.157.R20.F1R
8,5W CCT set	G30.157.R20.V1K
11W CCT set	G30.157.R20.T1K


Pcs 2
Kg 26,3
mc 0,379

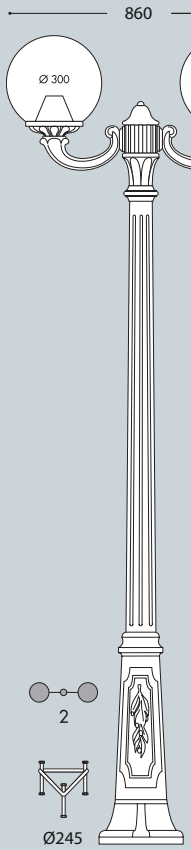

NEBO/G300

E27	G30.201.E27
6,5W filament	G30.201.F1R
8,5W CCT set	G30.201.V1K
11W CCT set	G30.201.T1K


Pcs 1
Kg 22,2
mc 0,163

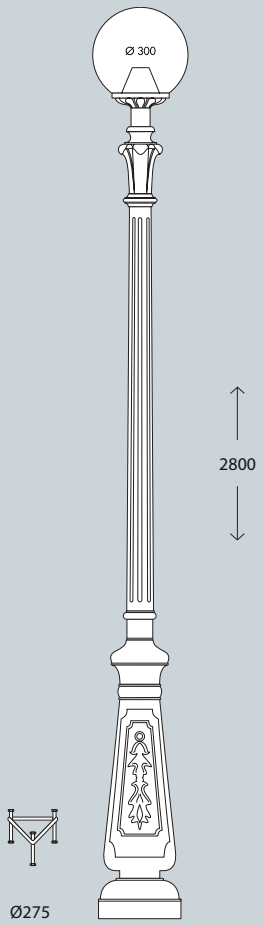

NEBO OFIR/G300 2L

E27	G30.201.R20.E27
6,5W filament	G30.201.R20.F1R
8,5W CCT set	G30.201.R20.V1K
11W CCT set	G30.201.R20.T1K


Pcs 1
Kg 25,7
mc 0,208

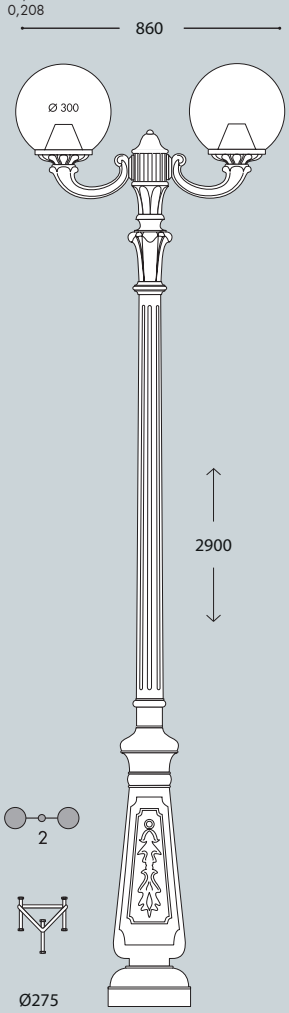


NEBO OFIR/G300 3L

E27	G30.201.R30.E27
6,5W filament	G30.201.R30.F1R
8,5W CCT set	G30.201.R30.V1K
11W CCT set	G30.201.R30.T1K

Pcs 1
Kg 30,8
mc 0,237

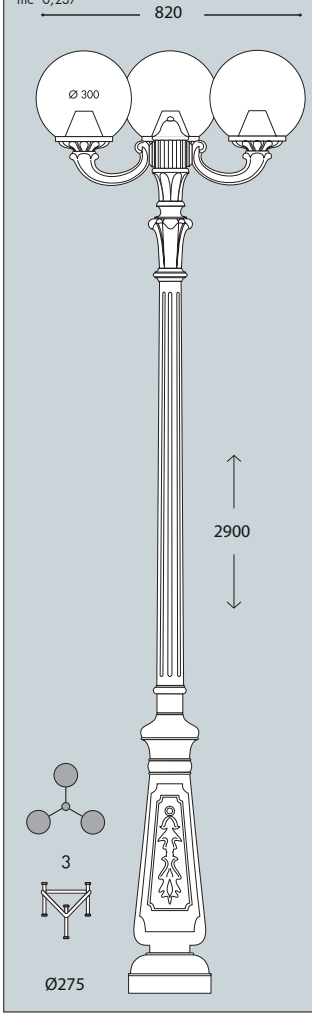

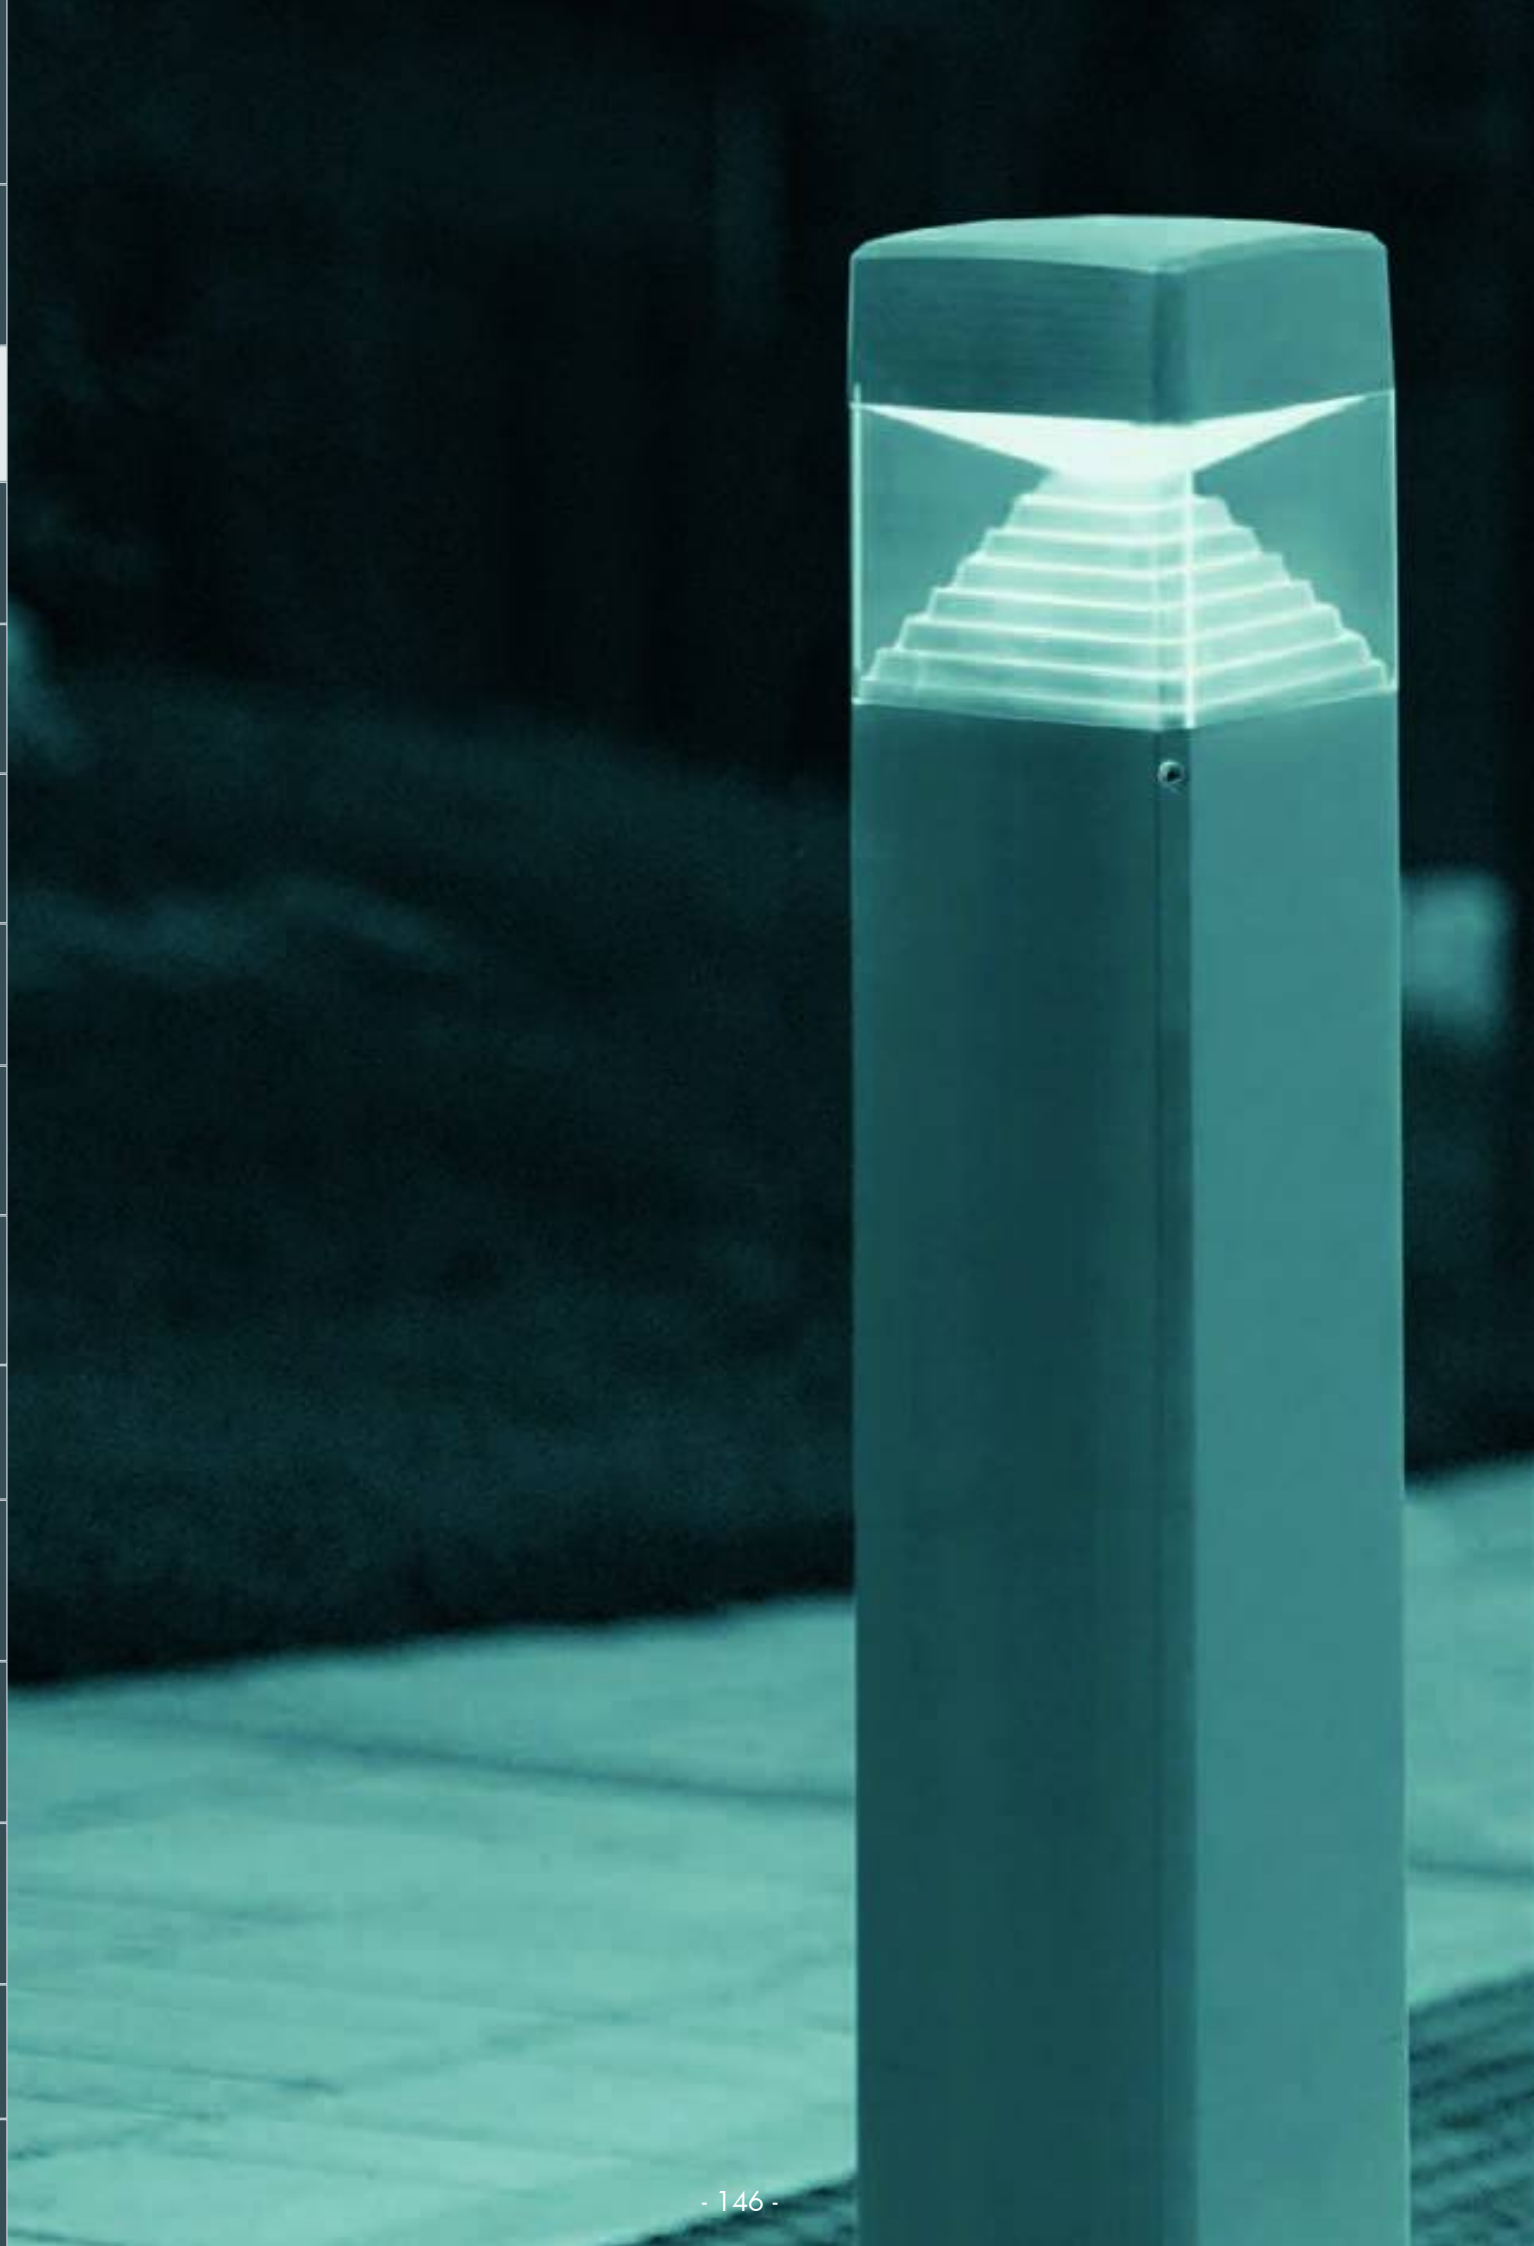



BOLLARD

VIRGILIO

SQUARE BOLLARD


Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Provided with opal PMMA diffuser to get a uniform light distribution. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable E27 **LED lamp** included. Insulation class II, protection rating IP55.


*Collezione di lampade architetturali a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard quadrato in diverse altezze, con picchetto o a parete. Lampada provvista di diffusore in metacrilato opale che garantisce un'uniforme distribuzione della luce. Fornita con inclusa **lampadina LED** E27 con Kelvin impostabile, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



DS3.562.T1K



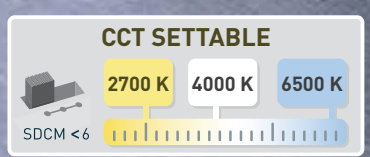

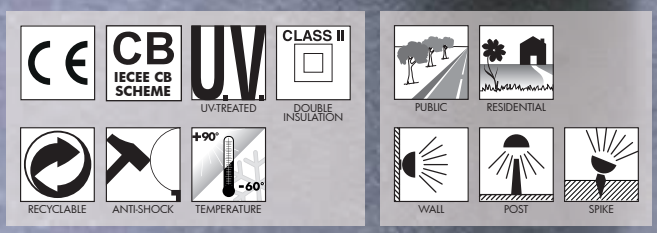



VIRGILIO COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA *fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER in opal colour to get a uniform light distribution. Made of UV-rays stabilized polymethylmethacrilate (PMMA) and provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *in colore opale per garantire un'uniforme distribuzione della luce. Realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

CONNECTION RING made of shockproof resin material, provided with E27 lampholder.

GHIERA *di raccordo realizzata in resina antiurto fornita completa di portalampada E27.*

INSTALLATION ELEMENTS:
-POLES for bollard versions
-BRACKETS for wall mounted versions
-SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:
-STELI per versione bollard
-SUPPORTI per installazione a parete
-PICCHETTO per istallazione nel terreno

VIRGILIO



Dimensions
Height: 250/480/800 mm
Width: 131 mm
Depth: 131 mm

Moulded colours:
Black
White
Grey


Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

E27 LED

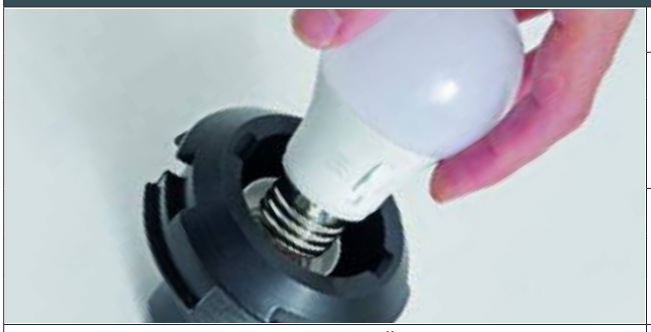

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11W	1200 lm	6500 K 4000 K 2700 K	.T1K

Bollard supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable E27 LED lamp** included. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING**: long life and efficient LED light sources.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **100-240V**: to protect the driver from power surges.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to the latest technology developments.
- **HIGH EFFICIENCY**: > 85% energy saving.



8,5W
11W
=
60W
75W
incandescent

SAVE 85%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

VIRGILIO

SQUARE BOLLARD


DS3.564.T1K


DS3.562 T1K


DS3.559.T1K



DS3.563.T1K

MADE IN ITALY

VIRGILIO APPLIQUE

8,5W	DS3.562.V1K
11W	DS3.562.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 16
Kg 15,3
mc 0,136

VIRGILIO 250 SPIKE

8,5W	DS3.559.V1K
11W	DS3.559.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

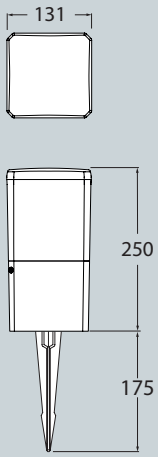


Pcs 16
Kg 14,5
mc 0,136

VIRGILIO 800

8,5W	DS3.564.V1K
11W	DS3.564.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

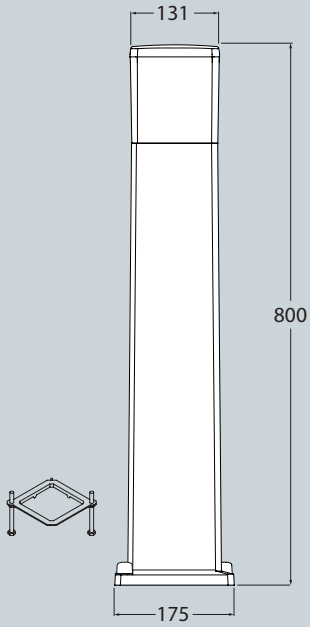


Pcs 6
Kg 14,5
mc 0,147

VIRGILIO 500

8,5W	DS3.563.V1K
11W	DS3.563.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

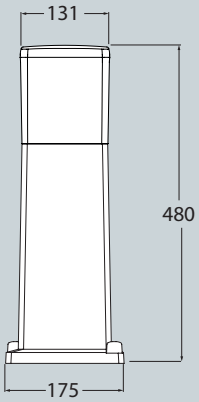


Pcs 12
Kg 17,3
mc 0,147

VIRGILIO 250

8,5W	DS3.558.V1K
11W	DS3.558.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K



Pcs 16
Kg 13,8
mc 0,136


ESTER


SQUARE BOLLARD


Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with stepped shape reflector and with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, Protection rating IP55.

*Collezione di lampade architetturali a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per istallazioni su stelo bollard quadro in diverse altezze, con picchetto o a parete. Provvista di riflettore a scaletta piramidale e fornita con **incluse lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

DS1.564.D1K

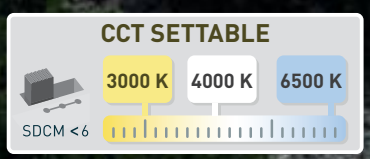

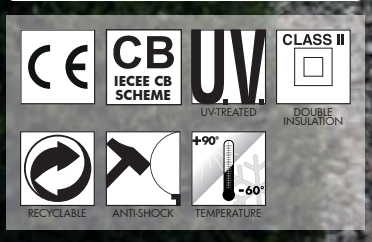



ESTER COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.
CALOTTA *fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA) and provided with silicone rubber gaskets to ensure high protection against external agents.


DIFFUSORE *trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV. Fornito completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

REFLECTOR with stepped shape spreading the lighting output to emphasize the shape of the product. Made of shockproof resin material.
RIFLETTORE *a scaletta piramidale che consente al fascio di luce di enfatizzare la sagoma del prodotto. Realizzato in resina antiurto.*

INSTALLATION ELEMENTS:
-POLES for bollard versions
-BASE for wall and surface installation
-SPIKE for in ground installation
-BRACKET for wall mounted version

ELEMENTI DI FISSAGGIO:
-STELI per versione bollard
-BASE per installazione a parete e al suolo
-PICCHETTO per istallazione nel terreno
-SUPPORTO per istallazione a parete

ESTER

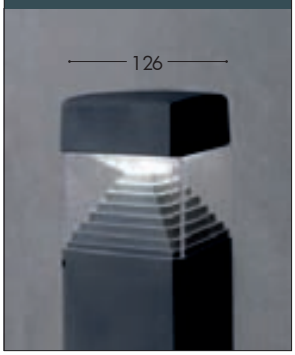

Dimensions
Height: 165/250/500/800 mm
Width: 126 mm
Depth: 126 mm

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED




Bollard supplied with TÜV-CB certfied, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K 4000 K 3000 K	.G1K
GX53 LED	10 W	1290 lm	6500 K 4000 K 3000 K	.D1K


- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: easy to upgrade.
- **SUITABLE FOR OUTDOOR USE**: driver fully protected against heat and humidity by silicone paste.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

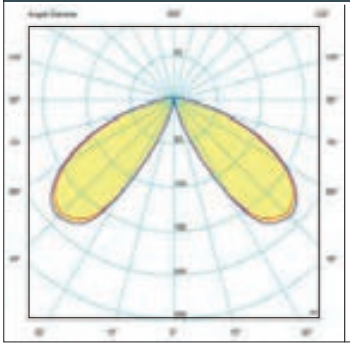



ESTER 800 *clear GX53 10W.*

Bollard height 0,8 mt
Area: 6x6 mt - average 15 lux

The photometric data for all the versions are available upon request or on our website.



3W **410 Lm** = **40W** incandescent

SAVE 93%



10W **1290 Lm** = **100W** incandescent

SAVE 90%

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ESTER

SQUARE BOLLARD


DS1.562.D1K


DS1.560.D1K


DS1.564.D1K



DS1.559.D1K


DS1.563.D1K

ESTER APPLIQUE

3W	DS1.562.G1K
10W	DS1.562.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 16
Kg 17,8
mc 0,136

ESTER WALL

3W	DS1.560.G1K
10W	DS1.560.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

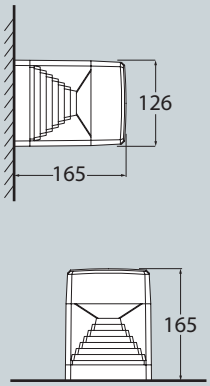


Pcs 18
Kg 22
mc 0,092

ESTER SPIKE

3W	DS1.561.G1K
10W	DS1.561.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

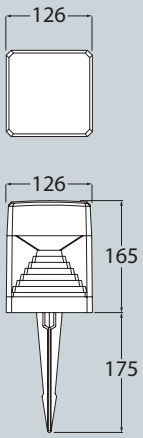


Pcs 18
Kg 23
mc 0,092

ESTER 250 SPIKE

3W	DS1.559.G1K
10W	DS1.559.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 16
Kg 16,9
mc 0,136

ESTER 800

3W	DS1.564.G1K
10W	DS1.564.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

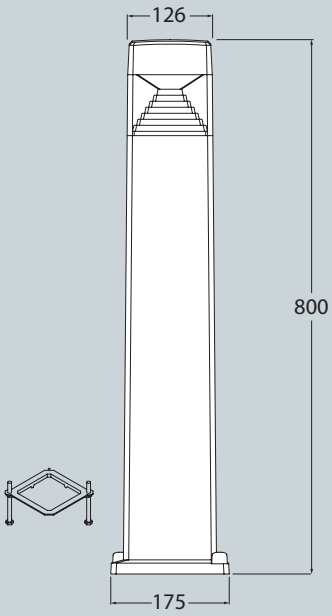


Pcs 6
Kg 15,4
mc 0,147

ESTER 500

3W	DS1.563.G1K
10W	DS1.563.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

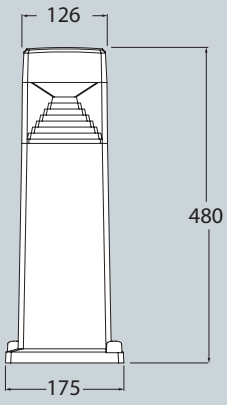


Pcs 12
Kg 19,1
mc 0,147

ESTER 250

3W	DS1.558.G1K
10W	DS1.558.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K



Pcs 16
Kg 16,3
mc 0,137


ELISA


SQUARE BOLLARD


Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with white square reflector and with TÜV-CB certified, long-life , efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, Protection rating IP55.

Collezione di lampade architetturali a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per istallazioni su stelo bollard in diverse altezze, con picchetto o a parete. Provvista di riflettore quadro in colore bianco e fornita con **incluse lampadine a LED GX53 con Kelvin impostabile** *certificate TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

DS2.564.D1K

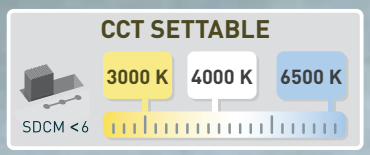

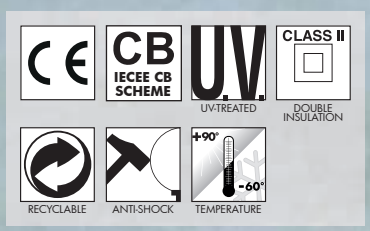





ELISA COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA *fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA) and provided with silicone rubber gaskets to ensure high protection against external agents.

DIFFUSORE *trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV. Fornito completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

REFLECTOR with stepped shape spreading the lighting output to emphasize the shape of the product. Made of shockproof resin material.
RIFLETTORE *a scaletta piramidale che consente al fascio di luce di enfatizzare la sagoma del prodotto. Realizzato in resina antiurto.*

INSTALLATION ELEMENTS:
-POLES for bollard versions
-BASE for wall and surface installation
-SPIKE for in ground installation
-BRACKET for wall mounted version

ELEMENTI DI FISSAGGIO:
-STELI per versione bollard
-BASE per installazione a parete e al suolo
-PICCHETTO per istallazione nel terreno
-SUPPORTO per istallazione a parete

ELISA



Dimensions
Height: 165/250/500/800 mm
Width: 126 mm
Depth: 126 mm

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED




Bollard supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K 4000 K 3000 K	.G1K
GX53 LED	10 W	1290 lm	6500 K 4000 K 3000 K	.D1K


- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: easy to upgrade.
- **SUITABLE FOR OUTDOOR USE**: driver fully protected against heat and humidity by silicone paste.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

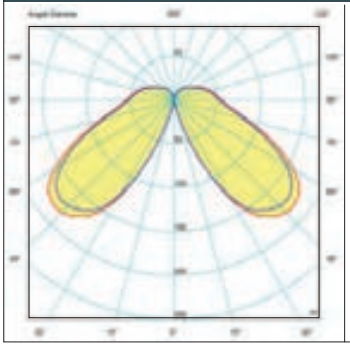



ELISA 800 *clear GX53 10W.*

Bollard height 0,8 mt
Area: 6x6 mt - average 13 lux

The photometric data for all the versions are available upon request or on our website.



3W = **40W** incandescent
410 Lm
SAVE 93%



10W = **100W** incandescent
1290 Lm
SAVE 90%

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ELISA

SQUARE BOLLARD


DS2.562.D1K


DS2.558.D1K


DS2.564.D1K


DS2.561.D1K



DS2.563.D1K

MADE IN ITALY

ELISA APPLIQUE

3W	DS2.562.G1K
10W	DS2.562.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 16
Kg 17,8
mc 0,136

ELISA WALL

3W	DS2.560.G1K
10W	DS2.560.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

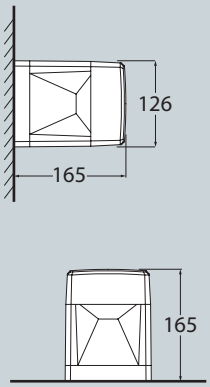


Pcs 18
Kg 22
mc 0,092

ELISA SPIKE

3W	DS2.561.G1K
10W	DS2.561.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

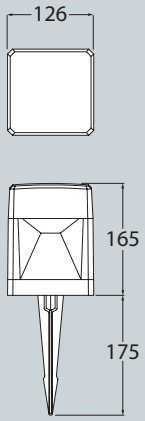


Pcs 18
Kg 23
mc 0,092

ELISA 250 SPIKE

3W	DS2.559.G1K
10W	DS2.559.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 16
Kg 16,9
mc 0,136

ELISA 800

3W	DS2.564.G1K
10W	DS2.564.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

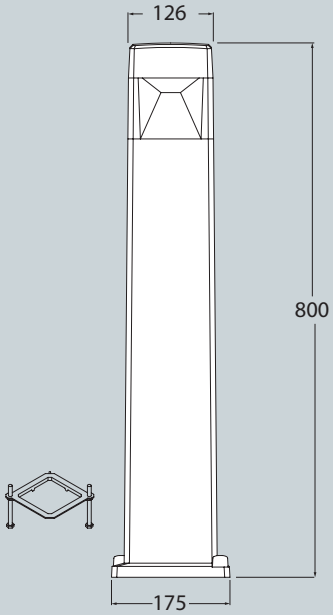


Pcs 6
Kg 15,4
mc 0,147

ELISA 500

3W	DS2.563.G1K
10W	DS2.563.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

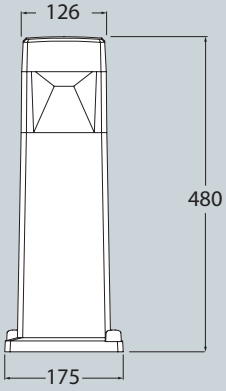


Pcs 12
Kg 19,1
mc 0,147

ELISA 250

3W	DS2.558.G1K
10W	DS2.558.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K



Pcs 16
Kg 16,3
mc 0,137

STEVEN

BOLLARD

LED bollard with modern design and directed light emission, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Dual use: suitable both for spike and ground installation. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP67.

Bollard a led in stile moderno con emissione della luce direzionata, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Doppia modalità di installazione al suolo, con picchetto o tasselli. Fornito con ***inclusa lampadina a LED G9****, certificata TUV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.*

ST1.531.Z1R

Discover the collection

CE CB IECEE CB SCHEME U.V. UV-TREATED CLASS II DOUBLE INSULATION
RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE
PUBLIC RESIDENTIAL POST

MADE IN ITALY

STEVEN - COMPONENTS

IP67




HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA *realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

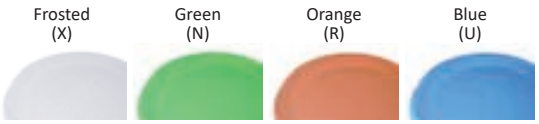

COVER with no visible screws made in shockproof resin material.

COVER *senza viti a vista realizzata in resina antiurto.*



GROUND INSTALLATION

SPIKE INSTALLATION

POLE in one piece only complete with spike. Made in shockproof resin material, UV rays stabilized, rust and corrosion free. Dual use: you can fix the spike outside the pole for in-ground installation, or inside the pole for surface installation with screws.

PALO *in un unico pezzo completo di picchetto. Fabbricato in resina antiurto stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Duplice utilizzo: il picchetto può essere montato all'esterno del palo per installazione diretta nel terreno o al suo interno per istallazione al suolo mediante tasselli di fissaggio.*

STEVEN



Dimensions and weight
Diameter: 50 mm
Height: 450 mm
Weight: 0,65 Kg

Cover colours:
Black White Grey

Diffuser PC:
Frosted
Blue Green Orange

G9 LED



Bollard supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **100-240V**: wide voltage range to protect the driver from power surges.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
G9 LED	1,7 W	150 lm	4000 K	.Z1L
			3000 K	.Z1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

STEVEN


BOLLARD








MADE IN ITALY



STEVEN
BOLLARD

STEVEN		
ST1.531.Z1L	**1,7W**	ST1.531.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*

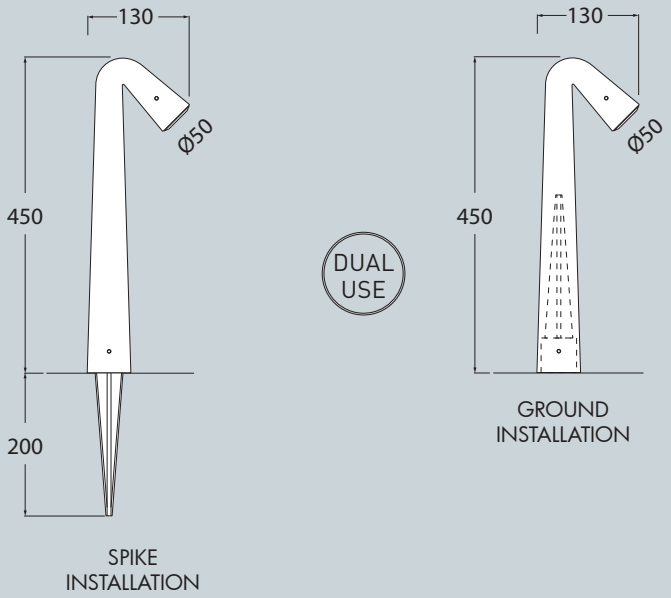

Pcs 10
Kg 8,5
mc 0,092

CARLO - CARLO DECO

ROUND BOLLARD

LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions available. Provided with double PMMA diffusers and ornamental screen on deco version. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, protection rating IP55.

Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per istallazioni su stelo bollard in diverse altezze, con picchetto o a parete. Lampada provvista di un doppio diffusore in metacrilato e di schermo ornamentale nella versione deco. Fornita con **inclusa lampadina a LED GU10 con Kelvin impostabile**, *certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

CARLO DECO VERSION on page 168



DR1.575.L1K

CCT SETTABLE

2700 K 4000 K

SDCM <3

CE · CB IECEE CB SCHEME · U.V. UV-TREATED · CLASS II DOUBLE INSULATION · PUBLIC · RESIDENTIAL

RECYCLABLE · ANTI-SHOCK · +90° -60° TEMPERATURE · WALL · POST · SPIKE



CARLO COMPONENTS

IP55



CAP made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

OUTER DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA) provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE ESTERNO *in colore trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV. Fornito completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

ORNAMENTAL SCREEN (DECO version only) made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

SCHERMO ORNAMENTALE (solo sulla versione DECO) *realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.*

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO *realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.*

CONNECTION RING made of shockproof resin material, provided with GU10 lampholder.

GHIERA *di raccordo realizzata in resina antiurto fornita completa di portalampada GU10.*

INSTALLATION ELEMENTS:
-POLES for bollard versions
-BRACKETS for wall mounted versions
-SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:
-STELI per versione bollard
-SUPPORTI per installazione a parete
-PICCHETTO per istallazione nel terreno

CARLO



Dimensions
Diameter: Ø100mm
Height: 250/400/800 mm

Moulded colours:
Black *White* *Grey*

Outer Diffuser PMMA:
Clear

Inner Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED



Bollard supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	2,9W	390 Lm	4000 K	.U1K
			2700 K	
GU10 LED	4,8W	625 Lm	4000 K	.L1K
			2700 K	



2.9W
390 lm
=
35W
HALOGEN

SAVE 92%



4.8W
625 lm
=
50W
HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

CARLO

ROUND BOLLARD












MADE IN ITALY




CARLO
ROUND BOLLARD

CARLO 800

2,9W	DR1.575.U1K
4,8W	DR1.575.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

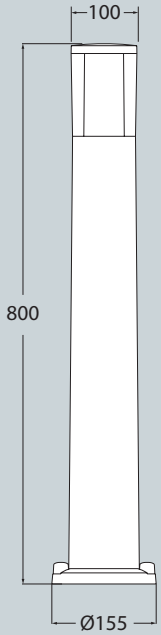


Pcs 6
Kg 15
mc 0,147

CARLO 400

2,9W	DR1.574.U1K
4,8W	DR1.574.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

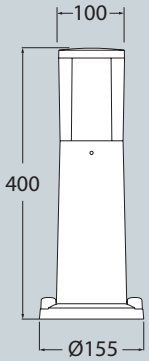


Pcs 12
Kg 22,5
mc 0,147

CARLO 250

2,9W	DR1.573.U1K
4,8W	DR1.573.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 20
Kg 21
mc 0,121

CARLO-FS

2,9W	DR1.571.U1K
4,8W	DR1.571.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 20
Kg 21
mc 0,121

CARLO WALL

2,9W	DR1.570.U1K
4,8W	DR1.570.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 20
Kg 21
mc 0,121

CARLO SPIKE

2,9W	DR1.572.U1K
4,8W	DR1.572.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 20
Kg 21
mc 0,121

CARLO DECO

ROUND BOLLARD


DR3.570.L1K


DR3.571.L1K


DR3.573.U1K



DR3.574.L1K


DR3.575.L1K

CARLO 800 DECO

2,9W	DR3.575.U1K
4,8W	DR3.575.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

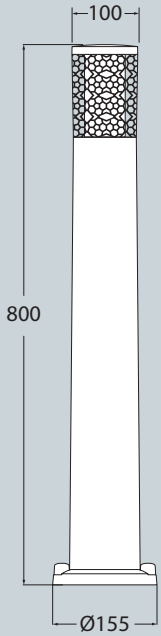


Pcs 6
Kg 15
mc 0,147

CARLO 400 DECO

2,9W	DR3.574.U1K
4,8W	DR3.574.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 12
Kg 22,5
mc 0,147

CARLO 250 DECO

2,9W	DR3.573.U1K
4,8W	DR3.573.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 20
Kg 21
mc 0,121

CARLO-FS DECO

2,9W	DR3.571.U1K
4,8W	DR3.571.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 20
Kg 21
mc 0,121

CARLO WALL DECO

2,9W	DR3.570.U1K
4,8W	DR3.570.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 20
Kg 21
mc 0,121

CARLO SPIKE DECO

2,9W	DR3.572.U1K
4,8W	DR3.572.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 20
Kg 21
mc 0,121

AMELIA


ROUND BOLLARD


LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions available. Provided with opal PMMA diffuser to get a uniform light distribution. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable E27 LED lamp included**. Insulation class II, protection rating IP55.


*Collezione di lampdae a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard in diverse altezze, con picchetto o a parete. Lampada provvista di diffusore in metacrilato opale che garantisce un'uniforme distribuzione della luce. Fornita con **inclusa lampadina LED E27 con Kelvin impostabile**, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



DR2.575.T1K

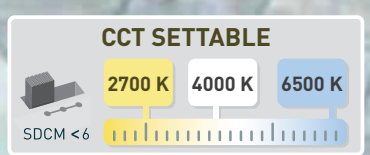

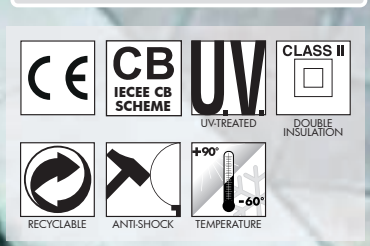



MADE IN ITALY

AMELIA COMPONENTS

IP55



CAP made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER in opal colour to get a uniform light distribution. Made of UV-rays stabilized polymethylmethacrilate (PMMA) and provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *in colore opale per garantire un'uniforme distribuzione della luce. Realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*


CONNECTION RING made of shockproof resin material, provided with E27 lampholder.

GHIERA *di raccordo realizzata in resina antiurto fornita completa di portalampada E27.*

INSTALLATION ELEMENTS:
-*POLES for bollard versions*
-*BRACKETS for wall mounted versions*
-*SPIKE for in ground installation*

ELEMENTI DI FISSAGGIO:
-*STELI per versione bollard*
-*SUPPORTI per installazione a parete*
-*PICCHETTO per istallazione nel terreno*

AMELIA

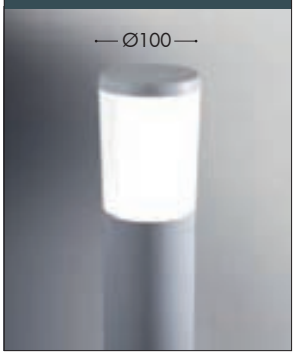

Dimensions
Diameter: Ø100mm
Height: 250/400/800 mm

Moulded colours:
Black *White*
Grey


Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

E27 LED

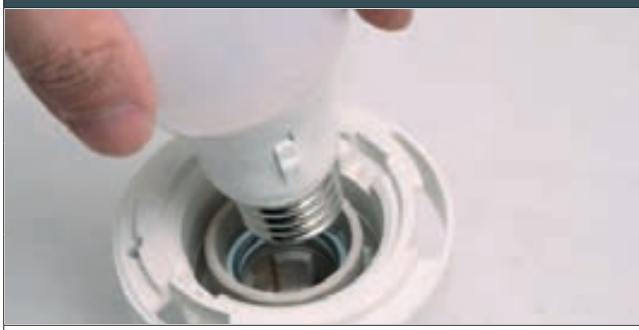

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	
CCT SET LED E27	11W	1200 lm	6500 K	.T1K
			4000 K	
			2700 K	

Bollard supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable E27 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING**: long life and efficient LED light sources.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **100-240V**: to protect the driver from power surges.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to the latest technology developments.
- **HIGH EFFICIENCY**: > 85% energy saving.



8,5W
11W
=
60W
75W
incandescent

SAVE 85%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4a000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

AMELIA

ROUND BOLLARD












AMELIA 800

8,5W	DR2.575.V1K
11W	DR2.575.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

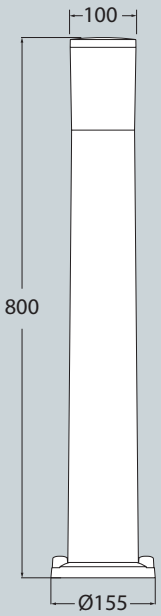


Pcs 6
Kg 15
mc 0,147

AMELIA 400

8,5W	DR2.574.V1K
11W	DR2.574.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 12
Kg 22,5
mc 0,147

AMELIA 250

8,5W	DR2.573.V1K
11W	DR2.573.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 20
Kg 21
mc 0,121

AMELIA-FS

8,5W	DR2.571.V1K
11W	DR2.571.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 20
Kg 21
mc 0,121

AMELIA WALL

8,5W	DR2.570.V1K
11W	DR2.570.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 20
Kg 21
mc 0,121

AMELIA SPIKE

8,5W	DR2.572.V1K
11W	DR2.572.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K



Pcs 20
Kg 21
mc 0,121


SAURO LED


ROUND BOLLARD- CLASSIC


Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Uniform light distribution for a safer and more enjoyable night atmosphere. Insulation class II, protection rating IP55.

*Gamma di bollard in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **inclusa lampadina a LED GX53 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Uniforme distribuzione della luce per un'atmosfera notturna sicura e gradevole. Classe di isolamento II, grado di protezione IP55.*

D15.555.D1KCRB

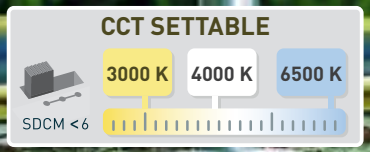

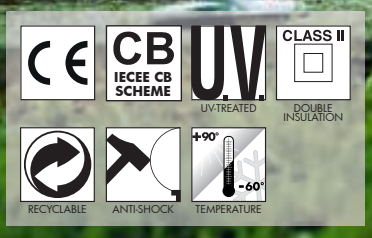



SAURO LED COMPONENTS

IP55



CAP made of shockproof resin material, locked to the diffuser and equipped with GX53 led lamp. To be removed for relamping by the supplied hexagonal key for locking screws.

CALOTTA *fissata al diffusore, realizzata in resina antiurto e completa di lampadina led GX53. Removibile tramite vite di sicurezza per permettere il cambio della lampadina.*

DISK made of UV-rays stabilized PMMA to spread the light and to get a lower dazzle.

DISCO *in polimetilmetacrilato (PMMA) per diffondere la luce e ridurre l'abbagliamento.*

DIFFUSER of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal colour.

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, disponibile in colore trasparente o opale.*

White **REFLECTOR** with conical shape made of shockproof resin material.

RIFLETTORE *bianco a forma conica, realizzato in resina antiurto.*

CONNECTION RING made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GHIERA *di raccordo realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SAURO LED



Dimensions
Diameter: Ø150 mm
Height: 500/800/1100 mm

Moulded colours:
Black, White, Grey

Painted colours:
Antique green, Antique bronze

Diffuser PMMA:
Clear, Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED




Bollard supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	


- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: driver fully protected against heat and humidity by silicone paste.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

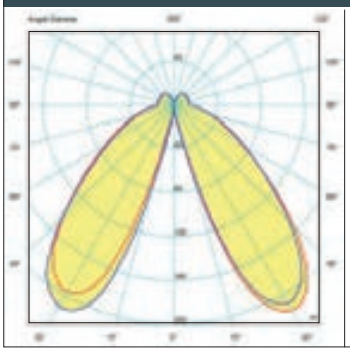



SAURO 1100 GX53 LED-clear 10W.

Sauro height 1,1 mt
Area: 6x6 mt - average 11 lux

The photometric data for all the versions are available upon request or on our website.



10W
1290 Lm
=
100W
incandescent


SAVE 90%

SAURO LED

ROUND BOLLARD- CLASSIC





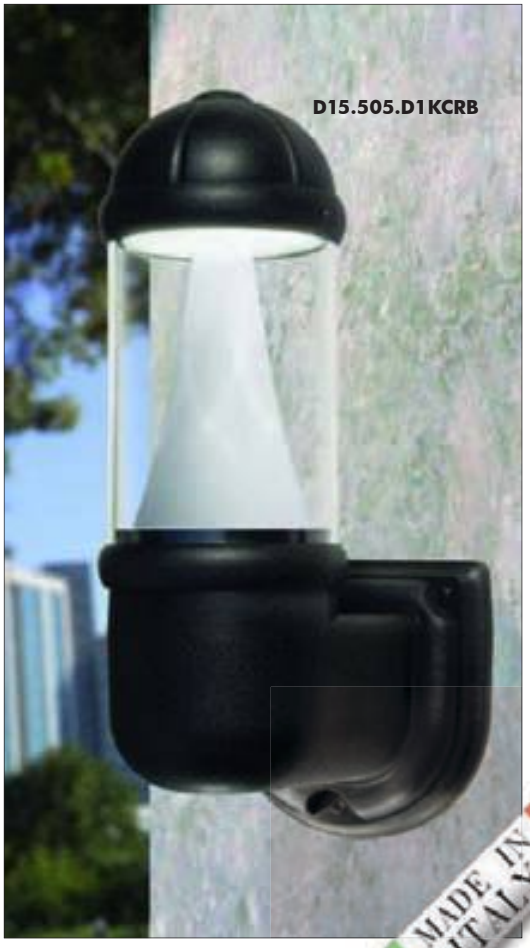


MADE IN ITALY

SAURO 1100 LED

10W D15.555.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

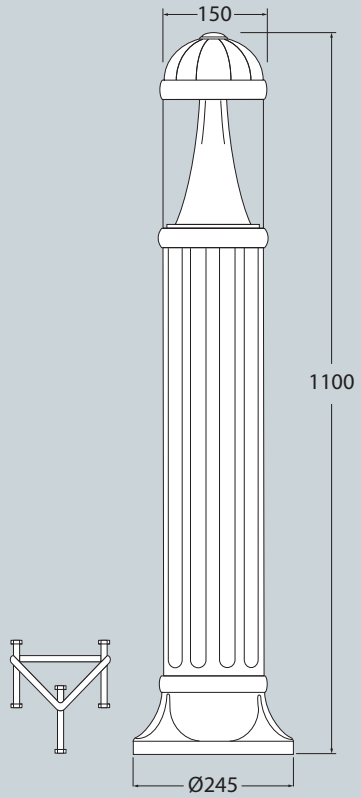


Pcs 1
Kg 4,2
mc 0,068

SAURO 800 LED

10W D15.554.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

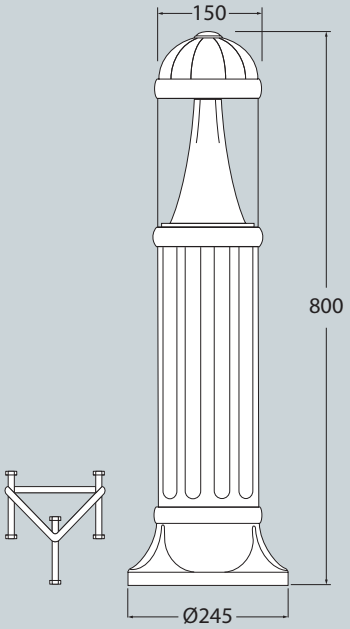


Pcs 1
Kg 3,4
mc 0,05

MIRELLA LED

10W D15.505.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

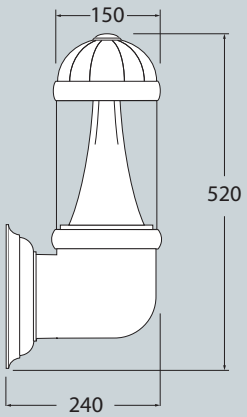


Pcs 1
Kg 2,7
mc 0,032

SAURO 500 LED

10W D15.553.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

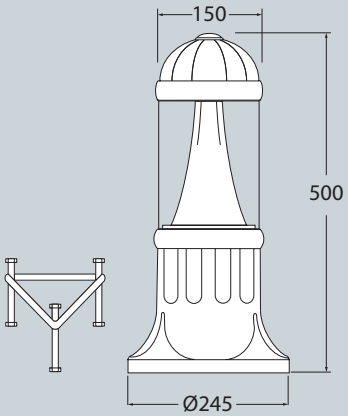

Pcs 1
Kg 2
mc 0,032


SAURO E27

ROUND BOLLARD- CLASSIC

Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Gamma di bollard in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con portalampada E27 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.

D15.554

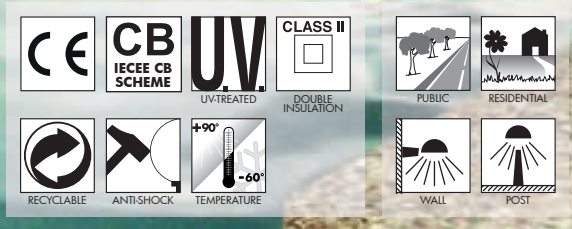

SAURO E27 COMPONENTS



CAP locked to the diffuser and made of shockproof resin material. To be removed for relamping by the supplied hexagonal key for locking screws.

CALOTTA *fissata al diffusore e realizzata in resina antiurto. Removibile tramite vite di sicurezza per permettere il cambio della lampadina.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), available in clear or opal colour.

DIFFUSORE *in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, disponibile in colore trasparente o opale.*

LOUVRE (Optional) with a laminar symmetrical optic system, to direct the lighting output and to get a lower dazzle. Available in white resin material or in chrome aluminium. Recommended use with clear diffuser bollard.

FRANGILUCE *(Optional) con sistema ottico lamellare a ripartizione simmetrica, per orientare il fascio di luce e ridurre l'abbagliamento, disponibile nella versione in resina bianca o in alluminio cromato (utilizzo raccomandato con diffusore trasparente).*

CLOSED RING
White Resin
(H.FRA.D15)



CLOSED RING
Aluminium Chrome
(H.FC1)



CONNECTION RING provided with E27 lampholder seat in its upper side.

GHIERA *di raccordo nella cui parte superiore si trova l'alloggiamento del portalampada E27.*

SAURO E27



Dimensions
Diameter: Ø150 mm
Height: 500/800/1100 mm

Moulded colours:
Black | White | Grey

Painted colours:
Antique green | Antique bronze

Diffuser PMMA:
Clear | Opal

E27 VERSIONS




100 - 240 V				*ADD. SUFFIX
suitable lamps: CFL-LED max 190 mm ↔ max 23W		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5 W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K


LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

PHOTOMETRIC DATA SAMPLE

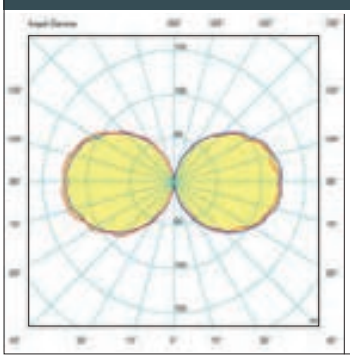



SAURO1100 **E27 CCT SET***-opal 11W.*

Sauro height 1,1mt
Area: 6x6 mt - average 8,5 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SAURO E27

ROUND BOLLARD- CLASSIC








SAURO 1100

D15.555


Pcs 1
Kg 4
mc 0,068

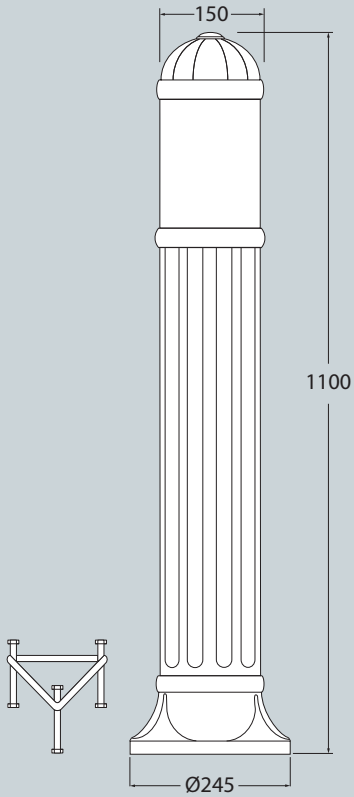

SAURO 800

D15.554


Pcs 1
Kg 3,2
mc 0,05

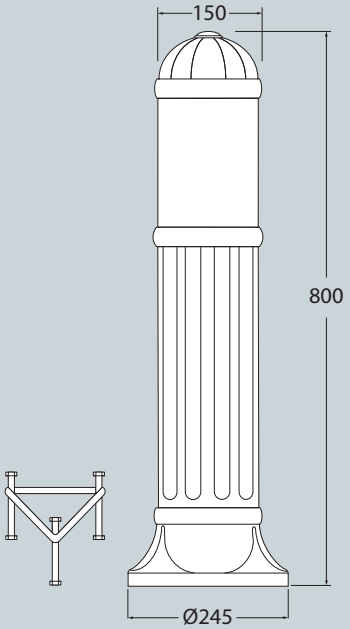

MIRELLA

D15.505


Pcs 1
Kg 2,5
mc 0,037

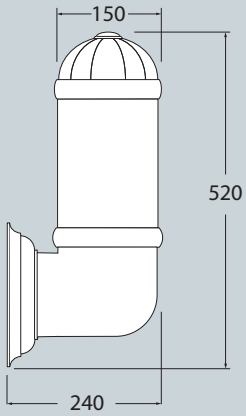

SAURO 500

D15.553

Pcs 1
Kg 1,8
mc 0,032

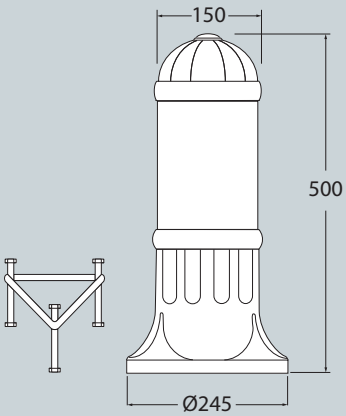


GABRI - MINIGABRI/ RANGE


BULKHEAD BOLLARD

Bollard range in modern style, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Poles available in two different sizes. Modular system for single or double luminaries installation. To be combined with LUCIA and MADDI bulkhead range (pag. 378 - 382). Insulation class II, protection rating IP66.

Gamma di bollard in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Palo disponibile in due diverse misure. Sistema modulare per permettere l' installazione singola o doppia dei corpi illuminanti. Da combinarsi con la gamma di plafoniere LUCIA e MADDI (pag. 378 - 382). Classe di isolamento II, grado di protezione IP66.

1R3.613.X10

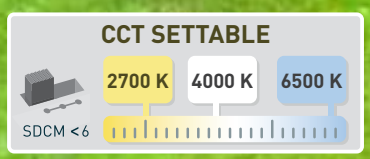

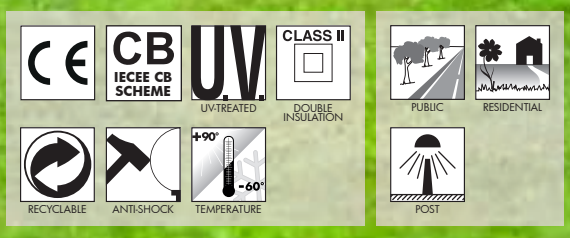

POLES



POST made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Post and base are made of one piece only without joints to withstand the most strong stress. Provided with screws for ground fixation.

PALO *realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Palo e basamento sono fabbricati in un unico pezzo senza giunzioni per resistere alle più forti sollecitazioni. Provvisto di viti per il fissaggio a terra.*

GABRI POST



Dimensions
Height: 800 mm
Width: 240 mm
Depth: 240 mm

MINIGABRI POST




Dimensions
Height: 500 mm
Width: 240 mm
Depth: 240 mm

Moulded colours:
Black *White*
Grey

Diffuser PMMA:
Opal

LUMINARIES INSTALLATION

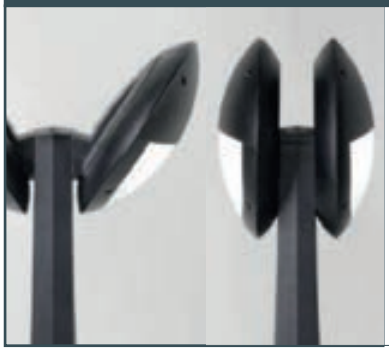

IP66

MODULAR SYSTEM for single or double luminaries installation. LUCIA and MADDI bulkheads can be fixed straight on the post or angled at 35° by adding the REMI bracket.

SISTEMA MODULARE *per permettere l'installazione singola o doppia dei corpi illuminanti. Le plafoniere LUCIA e MADDI possono essere fissate direttamente a palo o angolate a 35° aggiungendo il braccio REMI.*

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

SUITABLE BULKHEADS FOR POST INSTALLATION

BULKHEAD



LUCIA
1R3.000



LUCIA-EL
2R3.000



LUCIA-GD
3R3.000


See page 378 for full details about **LUCIA** bulkhead.

*Informazioni complete sulla plafoniera **LUCIA** a pag.378.*

BULKHEAD



MADDI
1V3.000



MADDI-VE
2V3.000



MADDI-HL
3V3.000

See page 382 for full details about **MADDI** range.

*Informazioni complete sulla plafoniera **MADDI** a pag.382.*

AVAILABLE LAMPS

GX53 LED			
POWER SETTABLE	LUM. FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
15 W	1940 Lm	4000 K	.E1P
		2700 K	
9 W eco mode	1300 Lm	4000 K	
		2700 K	

	E27	*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm ⟷	.E27

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GABRI/LUCIA RANGE

BULKHEAD BOLLARD









GABRI/LUCIA 1L
1R3.613.010

Pcs 1
Kg 4
mc 0,097

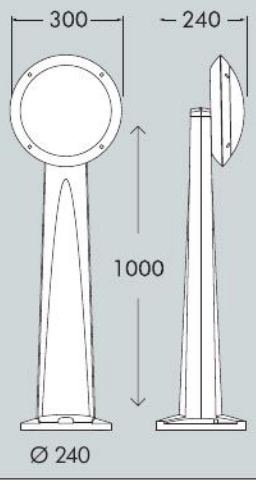


GABRI/LUCIA 2L
1R3.613.020

Pcs 1
Kg 5
mc 0,097

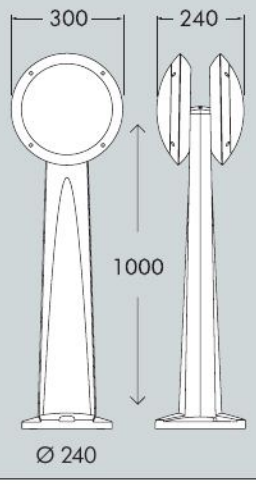


GABRI REMI/LUCIA 1L
1R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

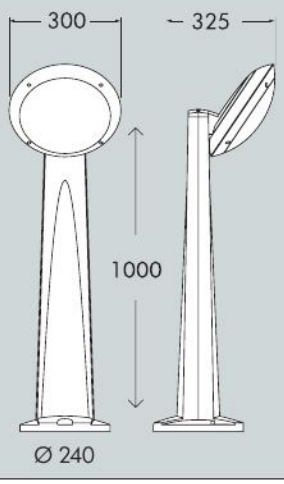


GABRI REMI/LUCIA 2L
1R3.613.X20

Pcs 1
Kg 6
mc 0,097

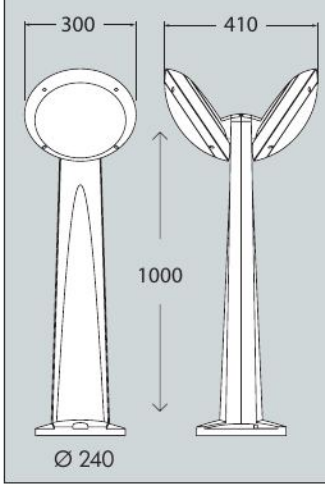


GABRI/LUCIA-EL 1L
2R3.613.010

Pcs 1
Kg 4
mc 0,097

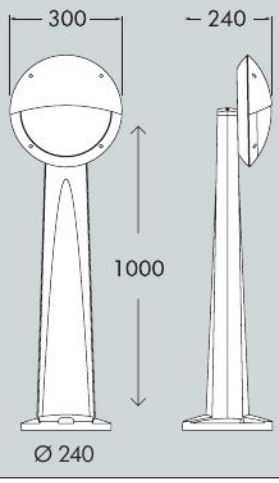


GABRI/LUCIA-EL 2L
2R3.613.020

Pcs 1
Kg 5
mc 0,097

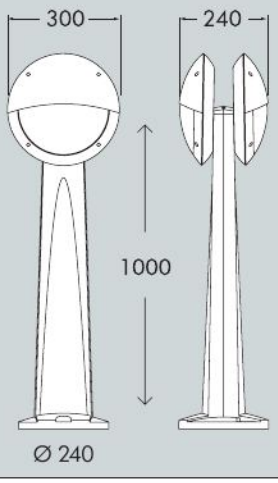


GABRI REMI/LUCIA-EL 1L
2R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

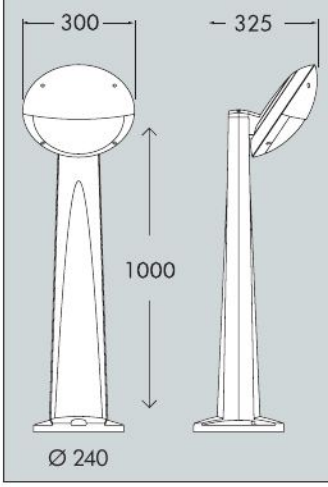


GABRI REMI/LUCIA-EL 2L
2R3.613.X20

Pcs 1
Kg 6
mc 0,097

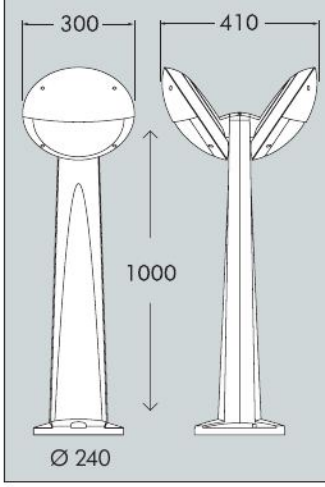


GABRI/LUCIA-GD 1L
3R3.613.010

Pcs 1
Kg 4
mc 0,097

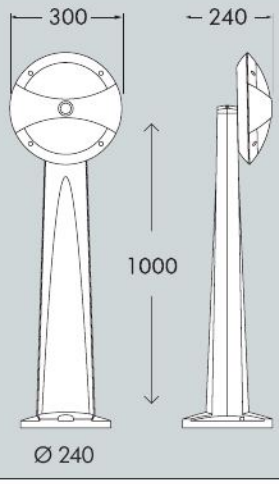


GABRI/LUCIA-GD 2L
3R3.613.020

Pcs 1
Kg 5
mc 0,097

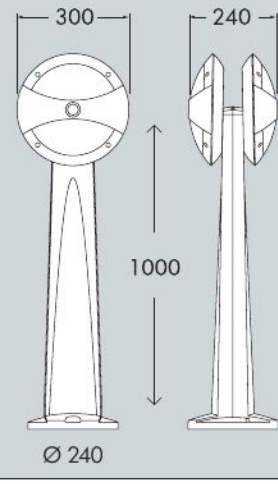


GABRI REMI/LUCIA-GD 1L
3R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

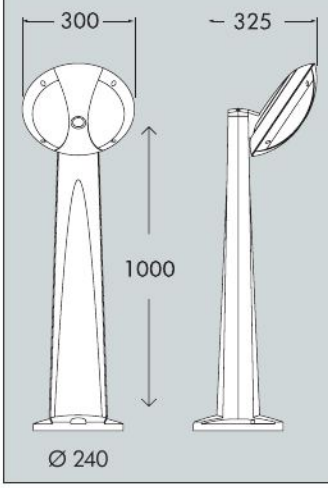

GABRI REMI/LUCIA-GD 2L
3R3.613.X20

Pcs 1
Kg 6
mc 0,097

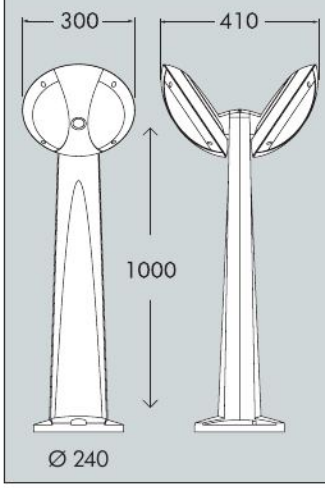

MINIGABRI/LUCIA RANGE

BULKHEAD BOLLARD









MINIGABRI/LUCIA 1L
1R3.612.010

Pcs 1
Kg 3,5
mc 0,065

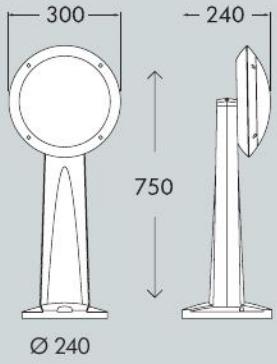


MINIGABRI/LUCIA 2L
1R3.612.020

Pcs 1
Kg 4,5
mc 0,065

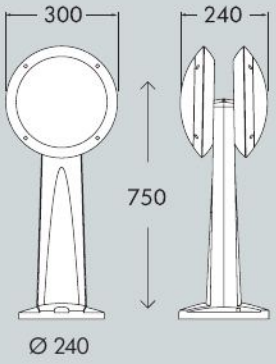


MINIGABRI REMI/LUCIA 1L
1R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

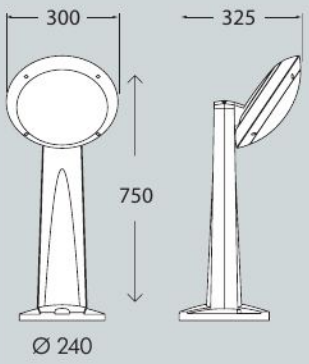


MINIGABRI REMI/LUCIA 2L
1R3.612.X20

Pcs 1
Kg 5
mc 0,065

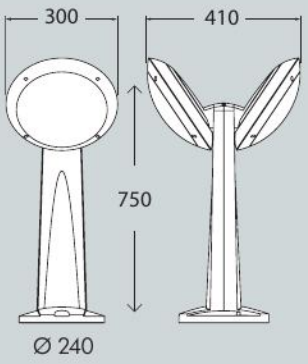


MINIGABRI/LUCIA-EL 1L
2R3.612.010

Pcs 1
Kg 3,5
mc 0,065

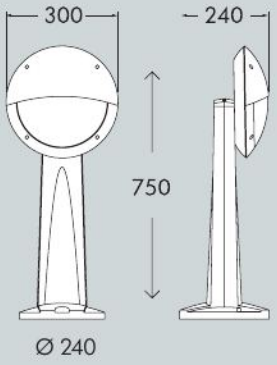


MINIGABRI/LUCIA-EL 2L
2R3.612.020

Pcs 1
Kg 4,5
mc 0,065

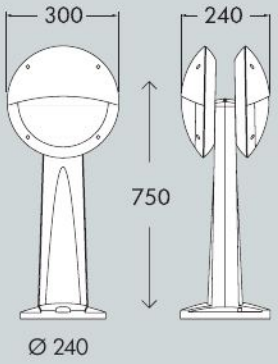


MINIGABRI REMI/LUCIA-EL 1L
2R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

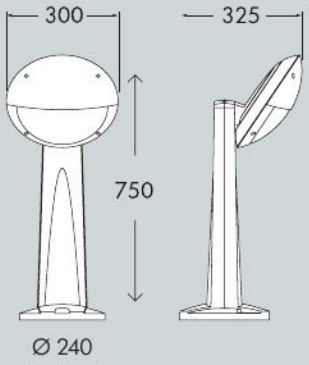


MINIGABRI REMI/LUCIA-EL 2L
2R3.612.X20

Pcs 1
Kg 5
mc 0,065

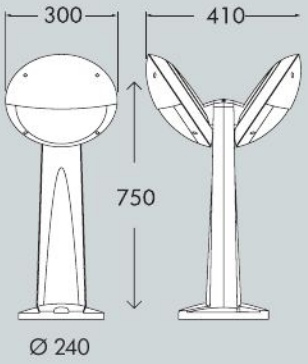


MINIGABRI/LUCIA-GD 1L
3R3.612.010

Pcs 1
Kg 3,5
mc 0,065

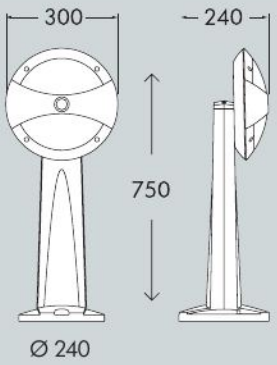


MINIGABRI/LUCIA-GD 2L
3R3.612.020

Pcs 1
Kg 4,5
mc 0,065

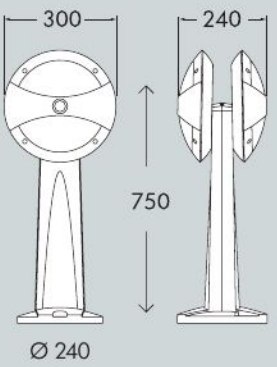


MINIGABRI REMI/LUCIA-GD 1L
3R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

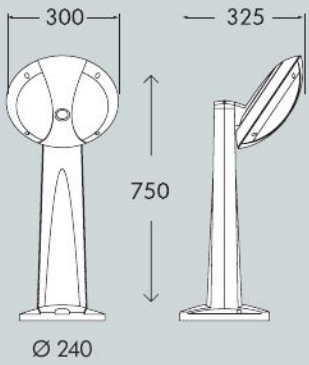

MINIGABRI REMI/LUCIA-GD 2L
3R3.612.X20

Pcs 1
Kg 5
mc 0,065

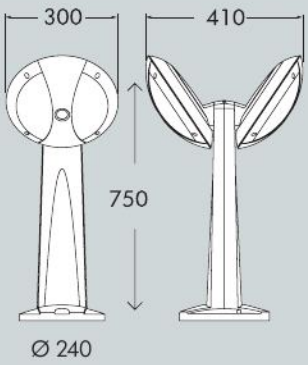

GABRI/MADDI RANGE

BULKHEAD BOLLARD








MADE IN ITALY

GABRI/MADDI 1L

1V3.613.010


Pcs 1
Kg 4
mc 0,097

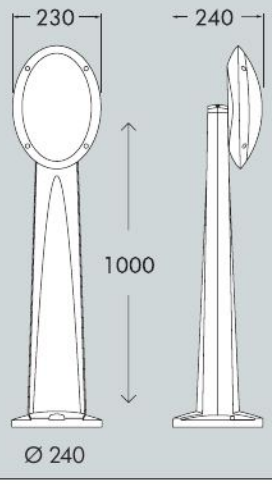

GABRI/MADDI 2L

1V3.613.020


Pcs 1
Kg 5
mc 0,097

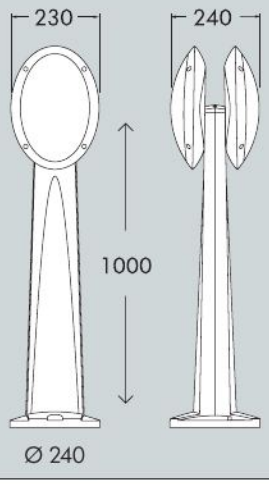

GABRI REMI/MADDI 1L

1V3.613.X10


Pcs 1
Kg 4,5
mc 0,097

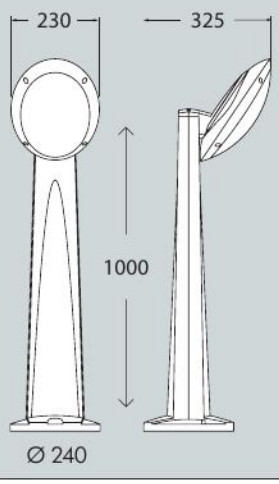

GABRI REMI/MADDI 2L

1V3.613.X20


Pcs 1
Kg 6
mc 0,097

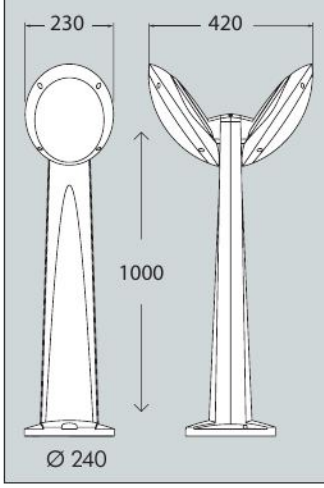

GABRI/MADDI-VE 1L

2V3.613.010


Pcs 1
Kg 4
mc 0,097

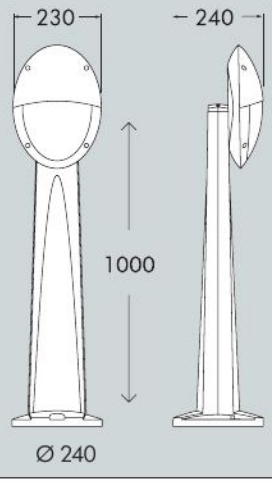

GABRI/MADDI-VE 2L

2V3.613.020


Pcs 1
Kg 5
mc 0,097

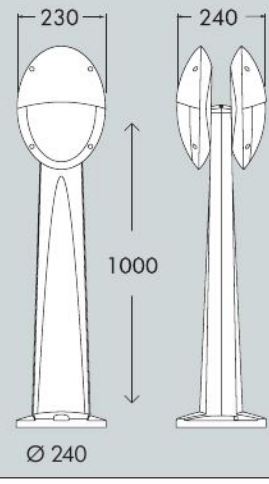

GABRI REMI/MADDI-VE 1L

2V3.613.X10


Pcs 1
Kg 4,5
mc 0,097

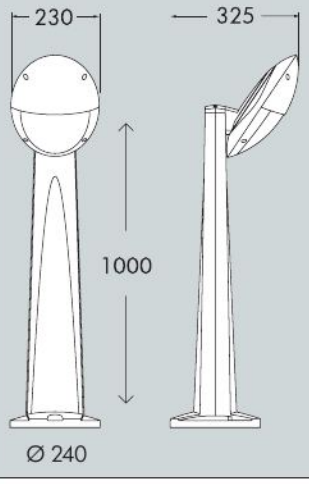

GABRI REMI/MADDI-VE 2L

2V3.613.X20


Pcs 1
Kg 6
mc 0,097

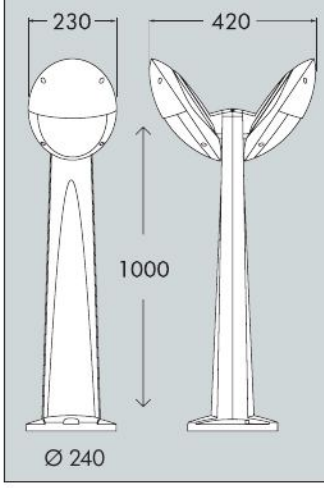

GABRI REMI/MADDI-HL 1L

3V3.613.X10


Pcs 1
Kg 4,5
mc 0,097

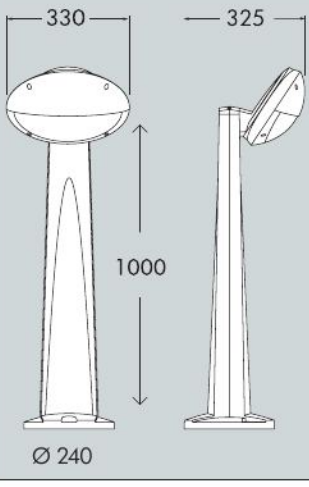

GABRI REMI/MADDI-HL 2L

3V3.613.X20

Pcs 1
Kg 6
mc 0,097

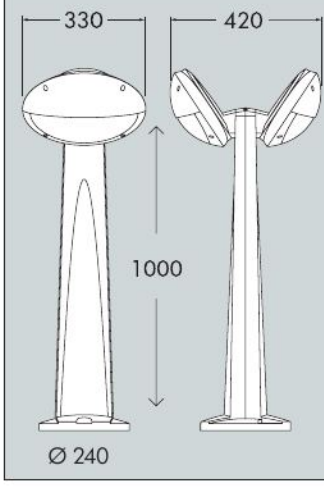

MINIGABRI/MADDI RANGE

BULKHEAD BOLLARD









MINIGABRI/MADDI 1L
1V3.612.010

Pcs 1
Kg 3,5
mc 0,065

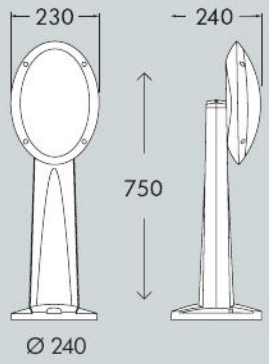


MINIGABRI/MADDI 2L
1V3.612.020

Pcs 1
Kg 4,5
mc 0,065

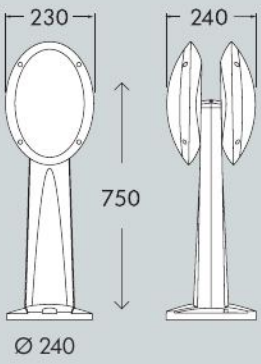


MINIGABRI REMI/MADDI 1L
1V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

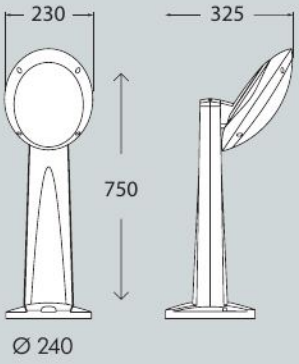


MINIGABRI REMI/MADDI 2L
1V3.612.X20

Pcs 1
Kg 5
mc 0,065

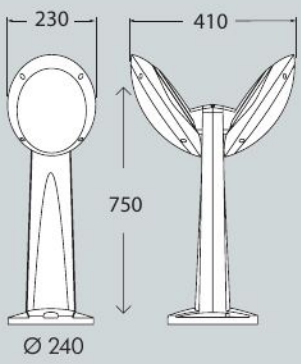


MINIGABRI/MADDI-VE 1L
2V3.612.010

Pcs 1
Kg 3,5
mc 0,065

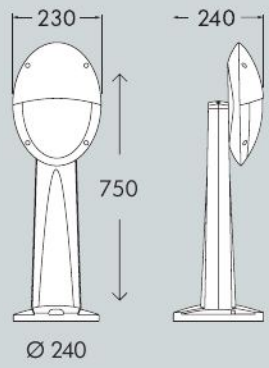


MINIGABRI/MADDI-VE 2L
2V3.612.020

Pcs 1
Kg 4,5
mc 0,065

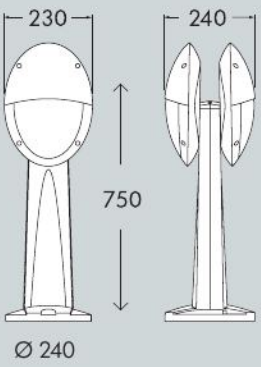


MINIGABRI REMI/MADDI-VE 1L
2V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

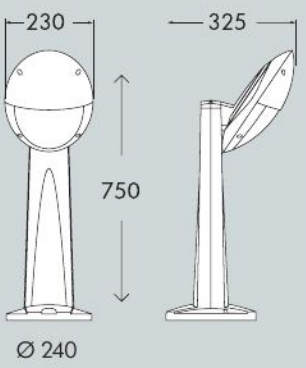


MINIGABRI REMI/MADDI-VE 2L
2V3.612.X20

Pcs 1
Kg 5
mc 0,065

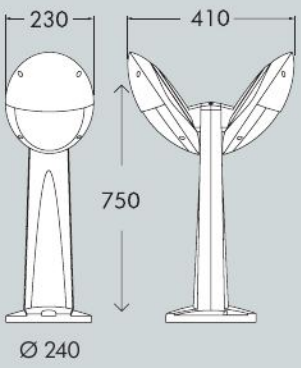


MINIGABRI REMI/MADDI-HL 1L
3V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

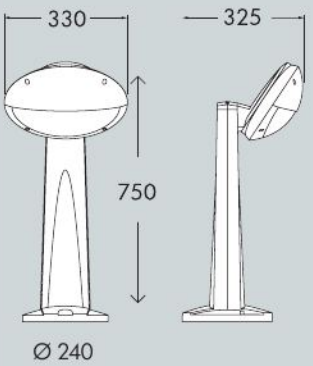

MINIGABRI REMI/MADDI-HL 2L
3V3.612.X20

Pcs 1
Kg 5
mc 0,065

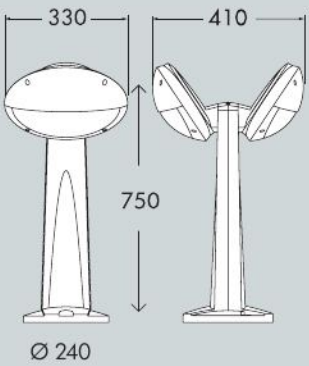


PINA - PINELA/ RANGE


BULKHEAD BOLLARD


Bollard range in modern style, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Poles available in two different sizes. Modular system for single or double luminaries installation. To be combined with GERMANA and GIUSEPPE floodlight range (pag. 326 - 334). Insulation class II, protection rating IP66.

Gamma di bollard in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Palo disponibile in due diverse misure. Sistema modulare per permettere l' installazione singola o doppia dei corpi illuminanti. Da combinarsi con la gamma di apparecchi GERMANA e GIUSEPPE (pag. 326 - 334). Classe di isolamento II, grado di protezione IP66.

2N1.613.020

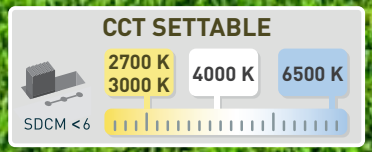

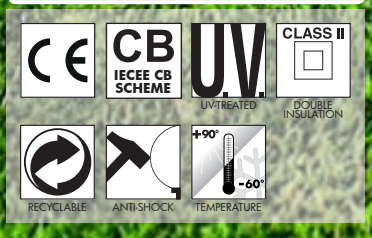



POLES



POST made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Post and base are made of one piece only without joints to withstand the most strong stress. Provided with screws for ground fixation.

PALO *realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Palo e basamento sono fabbricati in un unico pezzo senza giunzioni per resistere alle più forti sollecitazioni. Provvisto di viti per il fissaggio a terra.*

PINA - PINELA POST



Dimensions
Height: 800 mm
Width: 240 mm
Depth: 240 mm

MINIPINELA POST



Dimensions
Height: 500 mm
Width: 240 mm
Depth: 240 mm

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LUMINARIES INSTALLATION



IP66

MODULAR SYSTEM for single or double luminaries installation.

SISTEMA MODULARE *per permettere l'installazione singola o doppia dei corpi illuminanti.*

SUITABLE LUMINARIES FOR POST INSTALLATION

FLOODLIGHT



GERMANA
2N1.000

See page 326 for full details about **GERMANA** floodlight.

Informazioni complete sull'apparecchio ***GERMANA*** *a pag.326.*

AVAILABLE LAMPS

GX53 LED

POWER	LUM. FLUX (Φ TOTAL)	COLOUR TEMP.	*ADD. SUFFIX
2x 3W **6W**	**820 lm**	6500 K	.G2K
		4000 K	
		3000 K	
2x 10W **14W**	**2580 lm**	6500 K	.D2K
		4000 K	
		3000 K	
E27			
E27 (CFL -LED)	max 160 mm ⟷		.P27

LED LAMPS

CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

FLOODLIGHT



GIUSEPPE
4P1.000
4P2.000

See page 334 for full details about **GIUSEPPE** floodlight.

Informazioni complete sull'apparecchio ***GIUSEPPE*** *a pag.334.*

AVAILABLE LAMPS

GX53 LED

POWER SETTABLE	LUM. FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
15 W	**1940 Lm**	4000 K	.E1P
		2700 K	
9 W eco mode	**1300 Lm**	4000 K	
		2700 K	

AVAILABLE LAMPS

4X GX53 LED

POWER	LUM. FLUX (Φ TOTAL)	COLOUR TEMP.	*ADD. SUFFIX
4x 10W **40W**	**5160 lm**	6500 K	.D4K
		4000 K	
		3000 K	
2x E27			
2xE27 (CFL -LED)	max 160 mm ⟷		.P27

PINA - PINELA RANGE

BULKHEAD BOLLARD








MADE IN ITALY

MINIPINELA 1L

6W	2N1.612.010.G2K
20W	2N1.612.010.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

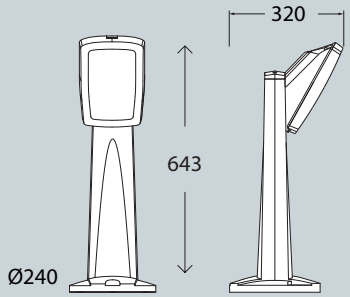


Pcs 1
Kg 3,5
mc 0,06

E27 lampholder	2N1.612.010.P27
E27 with sensor	2N1.612.010.PS7

MINIPINELA 2L

2x6W	2N1.612.020.G2K
2x20W	2N1.612.020.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

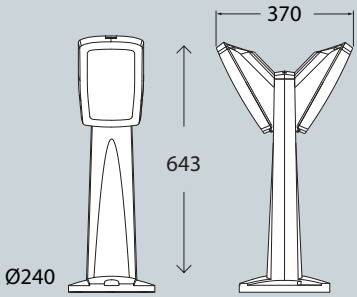


Pcs 1
Kg 4
mc 0,06

E27 lampholder	2N1.612.020.P27
E27 with sensor	2N1.612.020.PS7

PINELA 1L

6W	2N1.613.010.G2K
20W	2N1.613.010.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

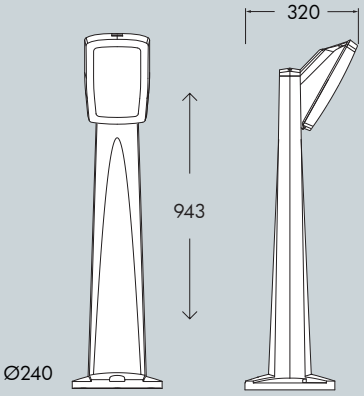


Pcs 1
Kg 4
mc 0,097

E27 lampholder	2N1.613.010.P27
E27 with sensor	2N1.613.010.PS7

PINELA 2L

2x6W	2N1.613.020.G2K
2x20W	2N1.613.020.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

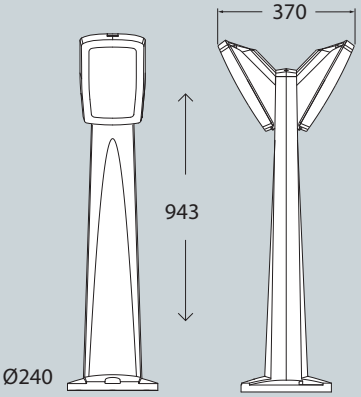


Pcs 1
Kg 5
mc 0,097

E27 lampholder	2N1.613.020.P27
E27 with sensor	2N1.613.020.PS7

PINA 1L

15W/9W	4P1.613.010.E1P
40W	4P2.613.010.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED

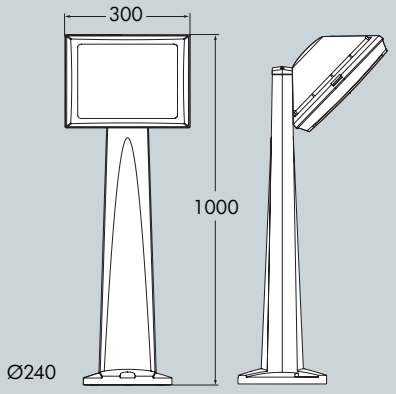


Pcs 1
Kg 4,5
mc 0,097

2xE27 lampholder	4P2.613.010.E28
2xE27 with sensor	4P2.613.010.ES8

PINA 2L

2x 15W/9W	4P1.613.020.E1P
2x 40W	4P2.613.020.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED

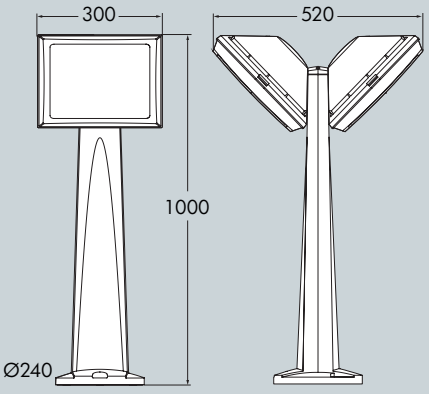

Pcs 1
Kg 7
mc 0,097

2xE27 lampholder	4P2.613.020.E28
2xE27 with sensor	4P2.613.020.ES8





UP&DOWN

MAMETE

UP & DOWN

Luminaries suitable for wall or ground installation with directed light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP67.

*Lampada idonea ad installazione a parete o al suolo con emissione della luce direzionata. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare. Fornita con **inclusa lampadina a LED G9**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.*



MAMETE SQUARE
1A3.000



MAMETE ROUND
2A3.000





2A3.000.Z1L

GROUND INSTALLATION



1A3.000.Z1L

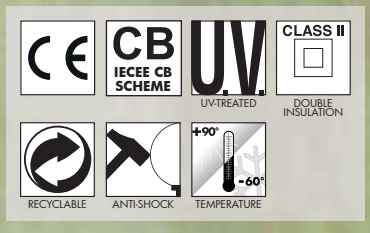



Discover the collection

MAMETE - COMPONENTS

IP67



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Round or square shape available.

COVER *in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in versione squadrata o tondeggiante.*

BASE made in shockproof resin material, UV rays stabilized, rust and corrosion free. Suitable for wall or ground installation.

BASE *in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per installazione a parete o al suolo.*

HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA *realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X)	Green (N)	Orange (R)	Blue (U)
			

MAMETE




Dimensions and weight
Height:134mm (round) -130mm (square)
Width : 60 mm
Depth: 60 mm
Weight: 0,20 Kg

Cover colours:
Black *White* *Grey*

Diffuser PC:
Frosted
Blue *Green* *Orange*

G9 LED

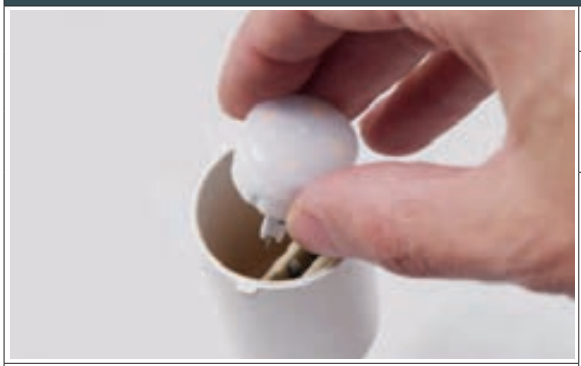

Luminaries supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation:

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **100-240V**: wide voltage range to protect the driver from power surges.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
G9 LED	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

MAMETE

UP&DOWN









MAMETE SQUARE

1A3.000.Z1L	**1,7W**	1A3.000.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*

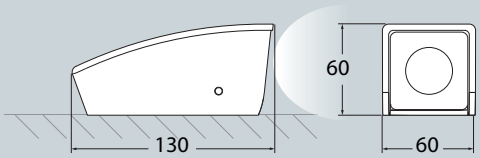

GROUND INSTALLATION




WALL INSTALLATION


Pcs 50
Kg 13,1
mc 0,057

MAMETE ROUND

2A3.000.Z1L	**1,7W**	2A3.000.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*

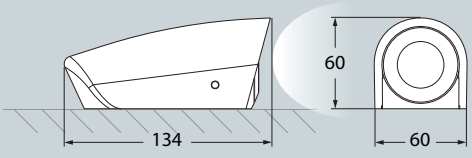

GROUND INSTALLATION



WALL INSTALLATION

Pcs 50
Kg 13,7
mc 0,057

ABRAM

UP & DOWN

Bulkhead lamp with UP&DOWN light emission, available in three different sizes and wattage versions. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamps included**. Insulation class II, Protection rating IP55.

*Plafoniera con emissione della luce UP&DOWN, disponibile in tre diverse misure e potenze. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **inclusa lampadina a LED R7s con Kelvin impostabile**, certificata TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*




ABRAM 150
AB1.000


ABRAM 190
AB2.000


ABRAM 270
AB3.000




AB1.000.J1K

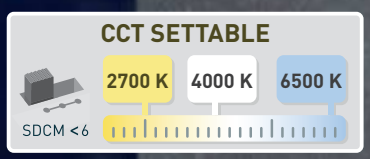

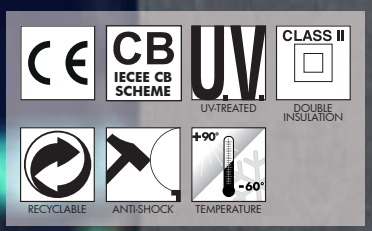







ABRAM
UP & DOWN


ABRAM - COMPONENTS

IP55



COVER made in shockproof resin material, UV-rays stabilized, rust and corrosion free. Designed for getting up&down light emission. Three different sizes available.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disegnata per ottenere un'emissione bidirezionale della luce. Disponibile in tre diverse misure.*

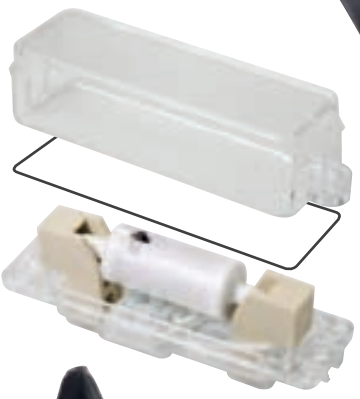

Clear **MODULE** made in shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with R7s led lamp.

MODULO *trasparente realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di lampadina led R7s.*



Wall **BASE** designed for hosting the led module. Made in shockproof resin material, UV-rays stabilized, rust and corrosion free.

BASE *a muro disegnata per accogliere il modulo led. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ABRAM



Dimensions and weight
Width: 155/195/265 mm
Height: 120 mm
Depth: 60 mm
Weight: 0,36/0,44/0,60 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PC:
Clear

LED LAMPS




TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

R7s LED




100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
 R7s LED	3,5 W	365 lm	6500 K	.J1K
			4000 K	
			2700 K	
 R7s LED	7,5 W	790 lm	6500 K	.K1K
			4000 K	
			2700 K	
 R7s LED	10,5 W	1160 lm	6500 K	.P1K
			4000 K	
			2700 K	

Up&down bulkhead supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: R7s standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ABRAM

UP&DOWN

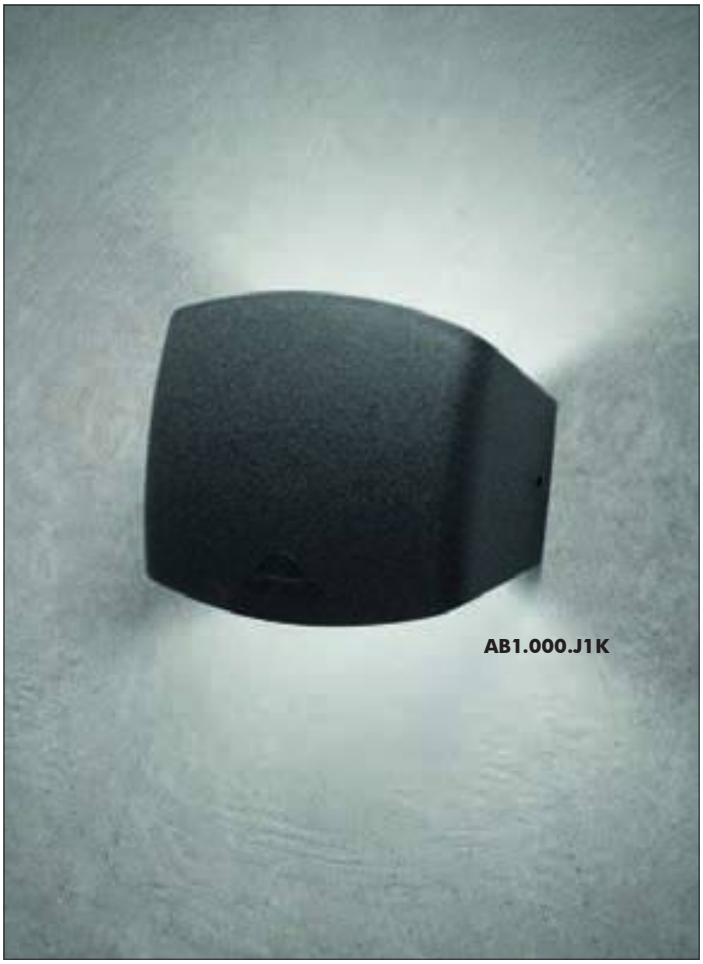


AB1.000.J1K

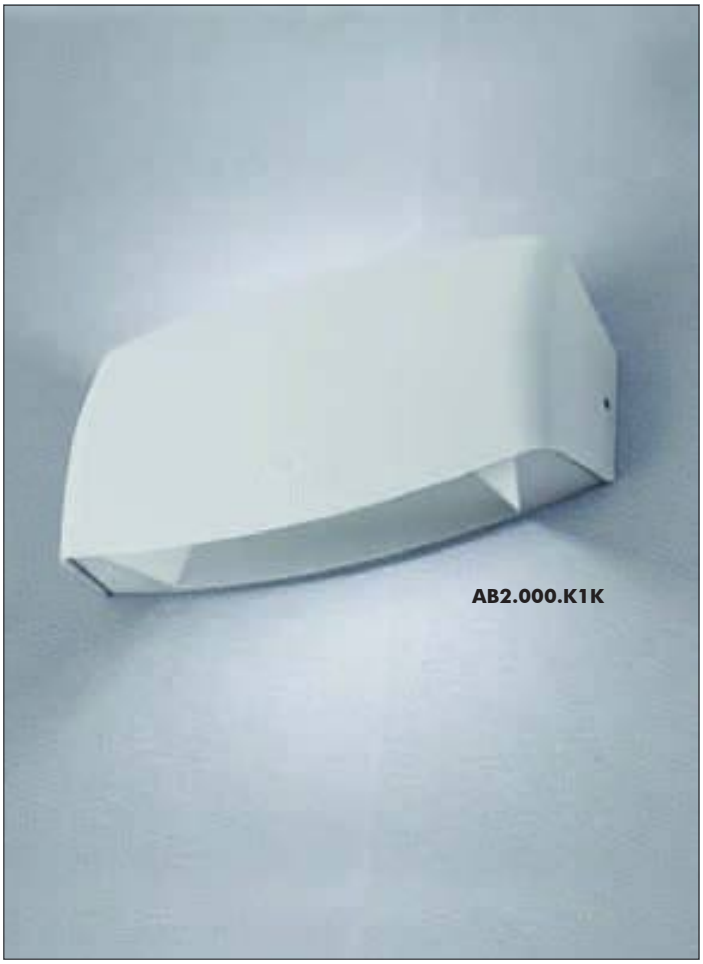

AB2.000.K1K




AB3.000.P1K



ABRAM 150

3,5W AB1.000.J1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

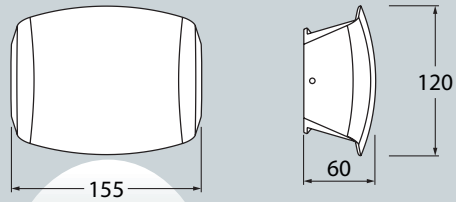


Pcs 30
Kg 11
mc 0,057

ABRAM 190

7,5W AB2.000.K1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

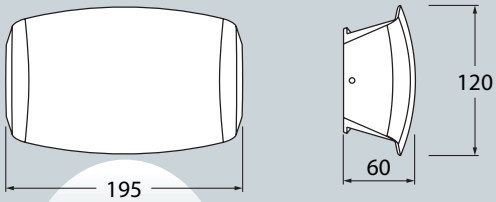


Pcs 30
Kg 13,3
mc 0,057

ABRAM 270

10,5W AB3.000.P1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

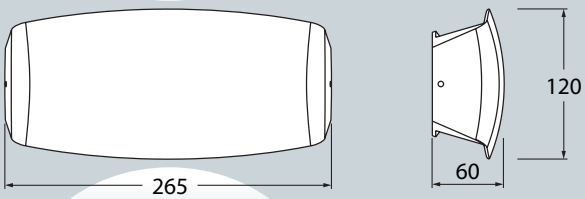

Pcs 14
Kg 8,5
mc 0.057

FRANCY

UP & DOWN


Bulkhead lamp with no visible screws and UP&DOWN light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient **E27 LED lamp** suitable for outdoor use. Insulation class II, protection rating IP66.


*Plafoniera senza viti a vista con emissione della luce UP&DOWN. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di **lampadina LED E27** adatta ad uso in ambiente esterno, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP66.*






1A1.000.F1R

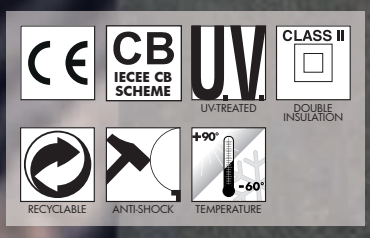







FRANCY - COMPONENTS

IP66



COVER with no visible screws made of shockproof resin material UV-rays stabilized. Designed for getting UP&DOWN or side light emission.

COVER *senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV. Disegnata per ottenere un'emissione laterale della luce.*



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.


DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.*



BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE *realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampada E27 e di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

FRANCY

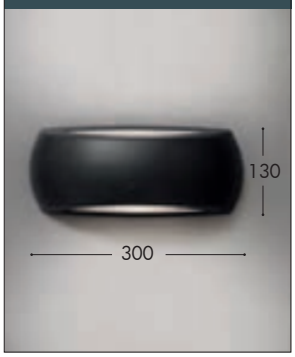

Dimensions and weight
Width: 130 mm
Height: 300 mm
Depth: 90 mm
Weight: 0,7 Kg

Moulded Colours:
Black *Grey* *White*

Diffuser PMMA:
Opal

E27



Bulkhead supplied **complete** with **E27** lampholder. Provided as an option with TÜV-CB certified, long-life, efficient **E27 LED lamp** suitable for outdoor use. Quick and easy lamp replacement for a very simple maintenance after installation.


E27 (CFL -LED)	max 160 mm		*ADD. SUFFIX .E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5 W**	**800 lm**	2700 K	.F1R
(*) CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K

E27 with sensor



Bulkhead supplied **complete** with **E27** lampholder and **LED lamps** as an option. Provided with microwave daylight and motion **sensor**. Sensor operating voltage: 220-240V. (120V version available on demand).

E27 (CFL -LED)	max 160 mm		*ADD. SUFFIX .E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
FILAMENT LED E27	**6,5 W**	**800 lm**	2700 K	.S1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.VSK

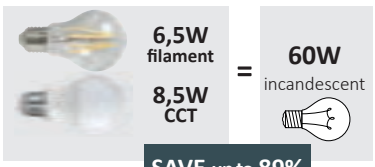


SAVE up to 89%

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


FRANCY

UP&DOWN






MADE IN ITALY



FRANCY

UP&DOWN

FRANCY		
E27 lampholder		1A1.000.E27
6,5W filament	2700K	1A1.000.F1R
8,5W CCT set	2700K/4000K/6500K	1A1.000.V1K

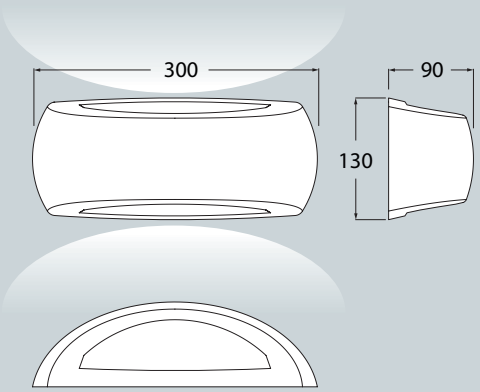


Pcs 24
Kg 18,2
mc 0,12

MARTA 90


UP & DOWN

Up&down bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamps**. Insulation class II, Protection rating IP55.

*Plafoniera up&down realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornito nella versione standard con inclusa lampadina a **LED GU10 con Kelvin impostabile** certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*





MARTA 90-1L
1A4.000



MARTA 90-2L
2A4.000

2A4.000.L2K

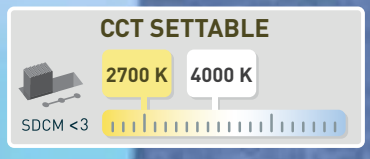

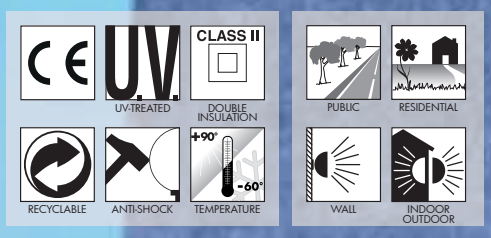



MARTA 90 - COMPONENTS

IP55



BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Available with double openings for up&down light emission or with single opening for one side light emission.

CORPO *in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura doppia ed emissione della luce UP&DOWN o con apertura singola ed emissione della luce in una sola direzione.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X) | Green (N) | Orange (R) | Blue (U)



BASE made of shockproof resin material suitable for the electrical devices fixation and provided with single or double GU10 lampholder.

BASE *in resina antiurto predisposta per il fissaggio degli accessori elettrici. Fornita completa di portalampade GU10 singolo o doppio.*

MARTA 90



Dimensions and weight
Width: 92 mm
Height: 170 mm
Depth: 80 mm
Weight: 0,5 Kg

Moulded colours:
Black | White | Grey

Diffuser PC:
Frosted | Green | Orange | Blue

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED



100 - 240 V

	LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
MARTA 90-1L	GU10 LED	2,9 W	390 lm	4000 K	.U1K
				2700 K	
	GU10 LED	4,8 W	625 lm	4000 K	.L1K
				2700 K	
MARTA 90-2L	GU10 LED	2x 2,9W 5,8 W	780 lm	4000 K	.U2K
				2700 K	
	GU10 LED	2x 4,8W 9,6 W	1250 lm	4000 K	.L2K
				2700 K	

Up&down bulkhead supplied as standard with single or double TÜV-CB certified long-life, efficient and **Kelvin settable GU10 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.



2.9W 390 lm = **35W** HALOGEN


SAVE 92%



4.8W 625 lm = **50W** HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP







CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

MARTA 90

UP & DOWN

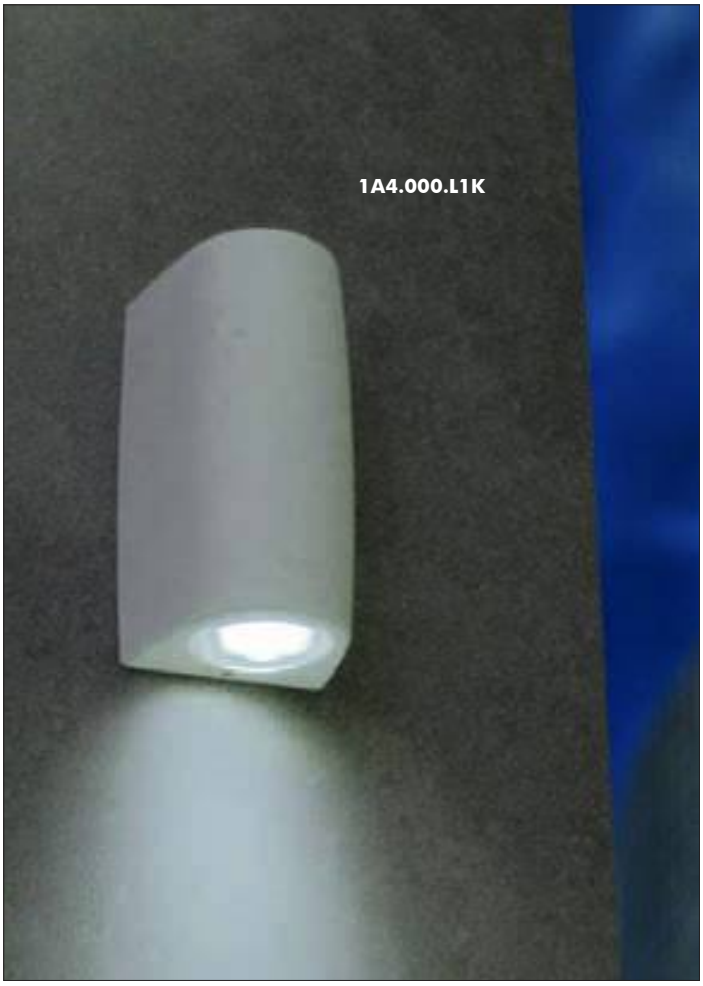

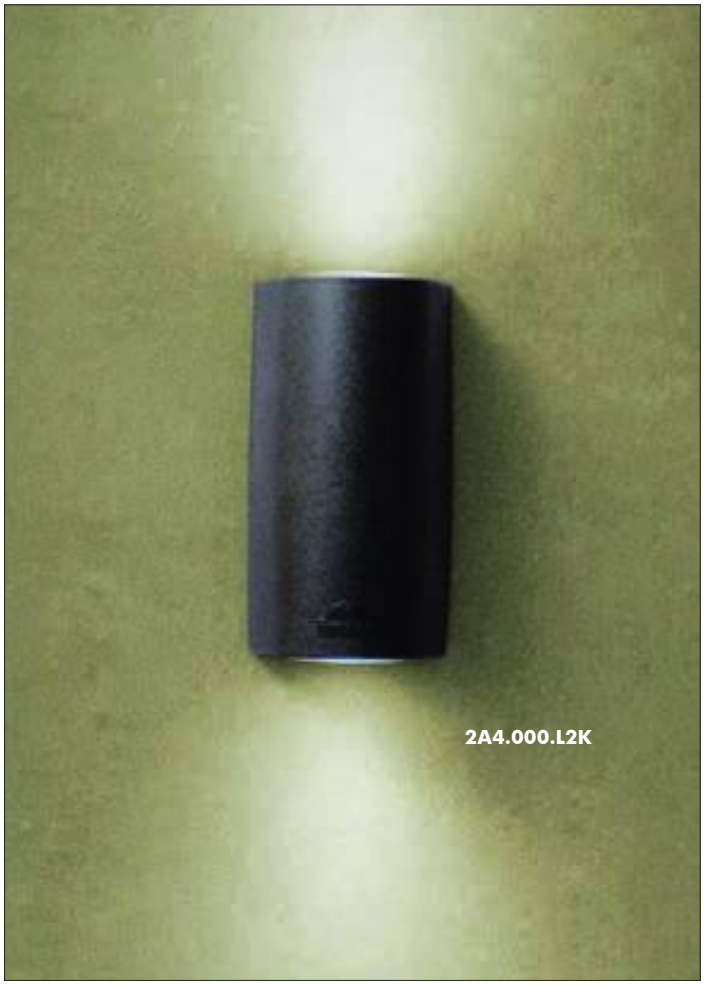






MARTA 90

UP & DOWN

MARTA 90-1L	
2,9W	1A4.000.U1K
4,8W	1A4.000.L1K


CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

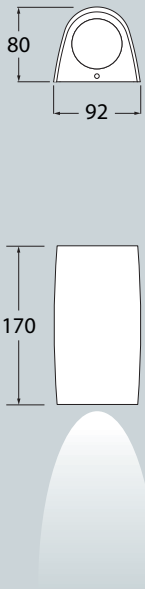

Pcs 36
Kg 17,3
mc 0,12

MARTA 90-2L	
2x2,9W	2A4.000.U2K
2x4,8W	2A4.000.L2K

2 CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

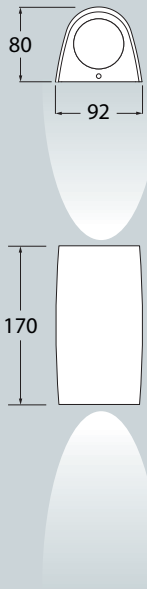

Pcs 36
Kg 21,9
mc 0,12

MARTA 160

UP & DOWN


Up&down bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Single opening version available also with E27 lampholder. Insulation class II, Protection rating IP55.


*Plafoniera up&down realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornita con **incluse lampadine a LED GX53 con kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza o provvista di portalampada E27. Classe di isolamento II, grado di protezione IP55.*


MARTA 160-1L
1A6.000


MARTA 160-2L
2A6.000


2A6.000.D2K

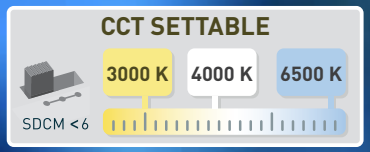

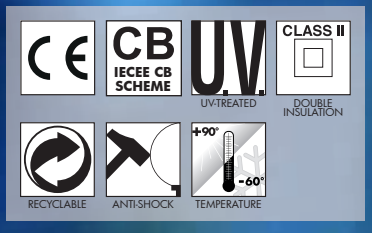







MARTA 160

UP & DOWN

MARTA 160 - COMPONENTS

IP55



BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Available with double openings for up&down light emission or with single opening for one side light emission.

CORPO *in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura doppia ed emissione della luce up&down o con apertura singola ed emissione della luce in una sola direzione.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*


Frosted (X) | Green (N) | Orange (R) | Blue (U)



BASE made of shockproof resin material suitable for the electrical devices fixation and provided with single or double GX53 lampholder. For single opening version, the base can be supplied also with E27 lampholder.

BASE *in resina antiurto predisposta per il fissaggio degli accessori elettrici. Fornita completa di portalampada GX53 singolo o doppio. Nella versione con apertura singola la base può essere fornita anche con portalampada E27.*

MARTA 160

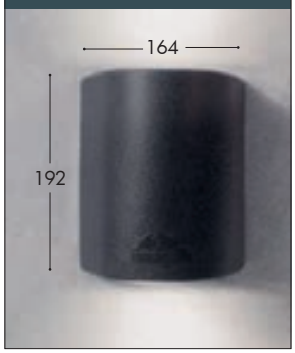

Dimensions and weight
Width: 164 mm
Height: 192 mm
Depth: 145 mm
Weight: 1,1 Kg

Moulded colours:
Black | White | Grey

Diffuser PC:
Frosted | Green | Orange | Blue

GX53 LED



Up&Down bulkhead supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

	LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
MARTA 160-1L	GX53 LED	3 W	410 lm	6500 K	.G1K
				4000 K	
				3000 K	
	GX53 LED	10 W	1290 lm	6500 K	.D1K
				4000 K	
				3000 K	
MARTA 160-2L	GX53 LED	2x3 W 6 W	820 lm	6500 K	.G2K
				4000 K	
				3000 K	
	GX53 LED	2x10 W 20 W	2580 lm	6500 K	.D2K
				4000 K	
				3000 K	

E27



100 - 240 V


			*ADD. SUFFIX
MARTA 160-1L E27	**E27** (CFL -LED)	max 110 mm	.E27

The E27 version is avaiable only with single opening for one side light emission.

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


MARTA 160

UP & DOWN

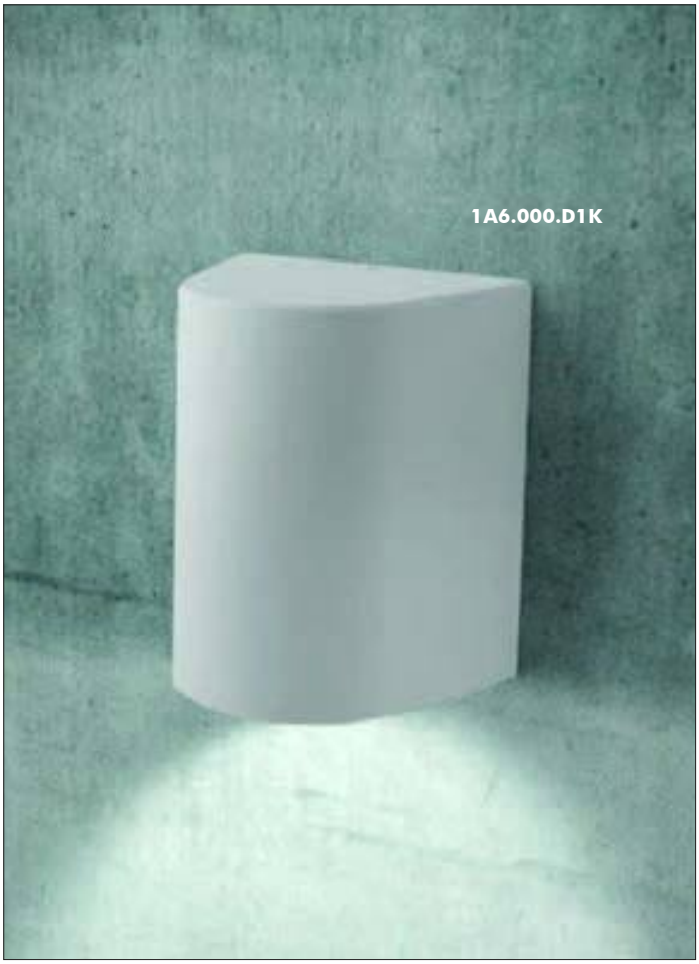








MARTA 160

UP & DOWN

MARTA 160-1L GX53

3W	1A6.000.G1K
10W	1A6.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

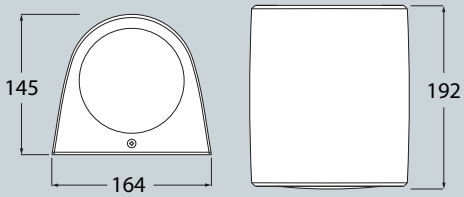


Pcs 18
Kg 26
mc 0,12

MARTA 160-2L GX53

2x3W	2A6.000.G2K
2x10W	2A6.000.D2K


2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

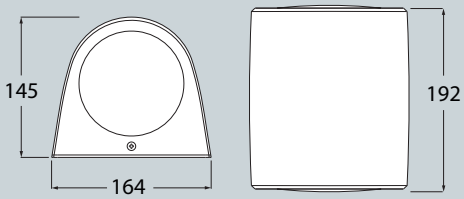

Pcs 18
Kg 28
mc 0,12

MARTA 160-1L E27

E27 lampholder	1A6.000.E27

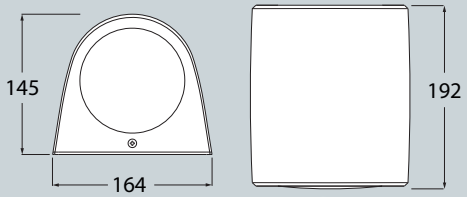


Pcs 18
Kg 20
mc 0,12

FRANCA 90


UP & DOWN


LED lamp range in modern style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings or on spike. Wall version available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, protection rating IP55.

*Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per istallazioni a muro a parete, a soffitto o su picchetto. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornita con inclusa lampadina a **LED GU10 con Kelvin impostabile**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*


FRANCA 90
3A7.000


FRANCA 90-1L WALL
3A7.002


FRANCA 90-2L WALL
3A7.003


FRANCA 90 SPIKE
3A7.001

3A7.003.U2K

CCT SETTABLE

2700 K 4000 K

SDCM <3

CE CB IECEE CB SCHEME UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE

PUBLIC RESIDENTIAL INDOOR OUTDOOR

WALL CEILING SPIKE

MADE IN ITALY

FRANCA 90 - COMPONENTS

IP55




COVER with no visible screws made of shockproof resin material.

COVER *senza viti a vista realizzata in resina antiurto.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X) | Green (N) | Orange (R) | Blue (U)



CONNECTION RING made of shockproof resin material, provided with GU10 lampholder.

GHIERA *di raccordo realizzata in resina antiurto fornita completa di portalampada GU10.*

BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

INSTALLATION ELEMENTS:
-BRACKETS for single or double lights versions
-SPIKE for in ground installation.

ELEMENTI DI FISSAGGIO:
-SUPPORTI per installazione a parete con luce singola o doppia
-PICCHETTO per l'istallazione nel terreno.

FRANCA 90



Dimensions and weight
Diameter: Ø95 mm
Height: 115 mm
Weight: 0,4 Kg

Moulded colours:
Black | White | Grey

Diffuser PC:
Frosted | Green | Orange | Blue

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED



Up&down bulkhead supplied as standard with single or double TÜV-CB certified long-life, efficient and **Kelvin settable GU10 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	2,9 W	390 lm	4000 K	.U1K
			2700 K	
GU10 LED	4,8 W	625 lm	4000 K	.L1K
			2700 K	



2.9W 390 lm = **35W** HALOGEN


SAVE 92%



4.8W 625 lm = **50W** HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

FRANCA 90


UP & DOWN





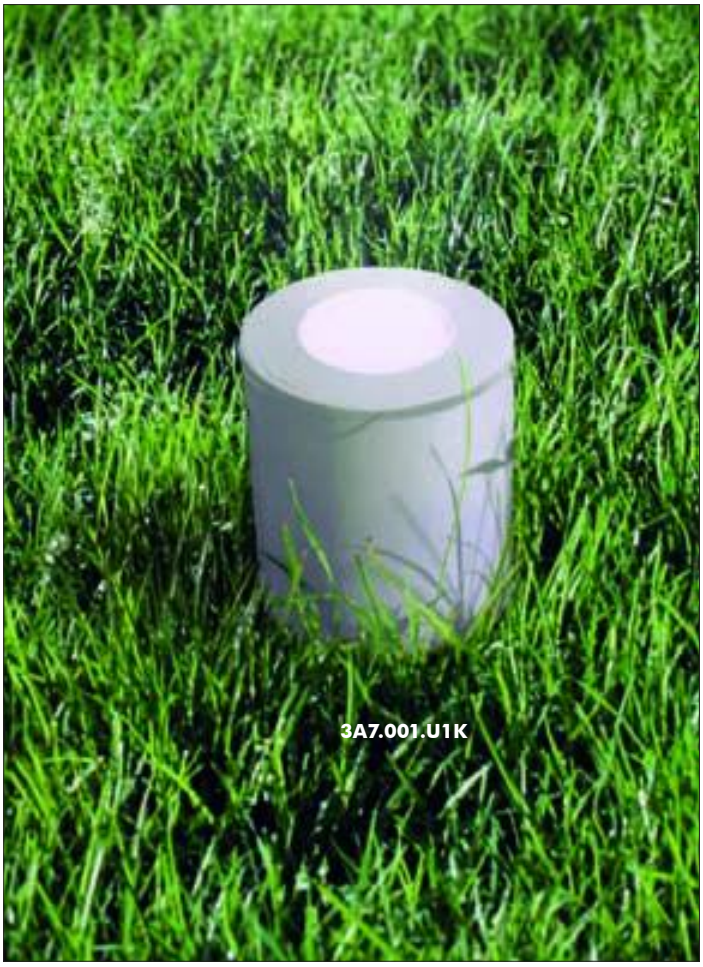



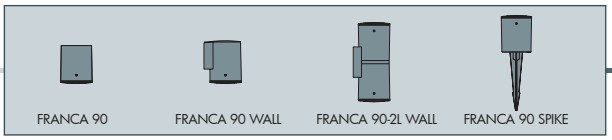


FRANCA 90

UP & DOWN

FRANCA 90

2,9W	3A7.000.U1K
4,8W	3A7.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

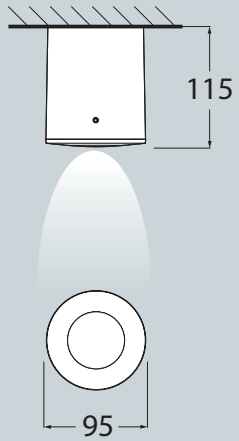


Pcs 30
Kg 12,6
mc 0,09

FRANCA 90 SPIKE

2,9W	3A7.001.U1K
4,8W	3A7.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

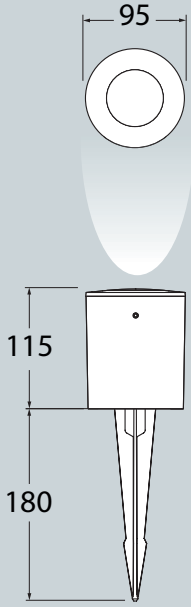


Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-1L WALL

2,9W	3A7.002.U1K
4,8W	3A7.002.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

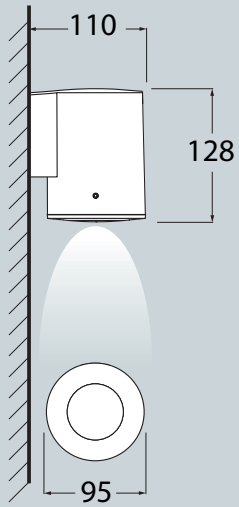


Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-2L WALL

2x2,9W	3A7.003.U2K
2x4,8W	3A7.003.L2K

2 CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

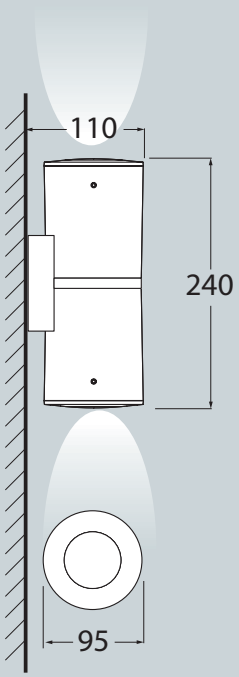

Pcs 20
Kg 22
mc 0,12





DOWNLIGHT

TERESA 50

DOWNLIGHT/DECKLIGHT

Luminaries suitable for downlight and decklight installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP 67.


*Lampada idonea ad incasso a soffitto e a muro senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornita con **inclusa lampadina a LED G9**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.*







2L0.000.Z1L



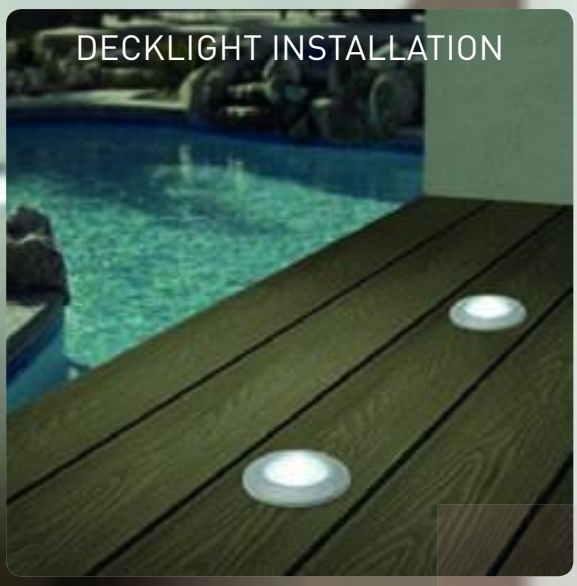

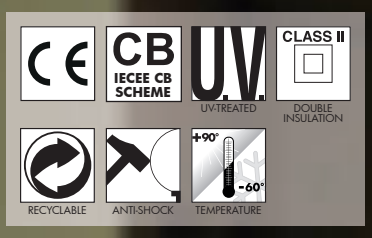

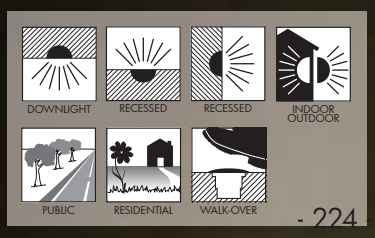

Discover the collection

MADE IN ITALY

TERESA 50 - COMPONENTS

IP67



METAL SPRING suitable for downlight and deklight installation.

MOLLETTA METALLICA *per permettere l'installazione in controsoffitti, pavimenti e divisori in legno.*

HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA *realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*


Frosted (X) | Green (N) | Orange (R) | Blue (U)



COVER with no visible screws made in shockproof resin material, UV rays stabilized, rust and corrosion free. Plain (round or square), one-opening or two-opening versions available, for a diffuse or directed light emission.

COVER *senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione aperta (quadrata o ad anello), con una apertura o con due aperture, per permettere un'emissione della luce diffusa o direzionata.*

TERESA 50



Dimensions and weight
Installation housing depth: 70mm
Diameter: Ø 50 mm
Weight: 0,2 Kg

Cover colours:
Black | White | Grey


Diffuser PC:
Frosted
Blue | Green | Orange

LED LAMPS

CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

G9 LED

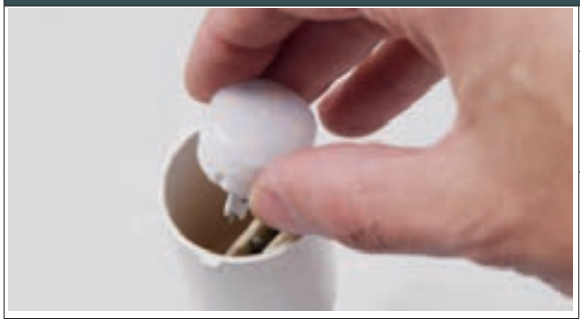

Recessed, downlight or decklight luminaries supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **100-240V**: wide voltage range to protect the driver from power surges.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
G9 LED	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

TERESA 50

DOWNLIGHT/DECKLIGHT


fumagalli since 1973



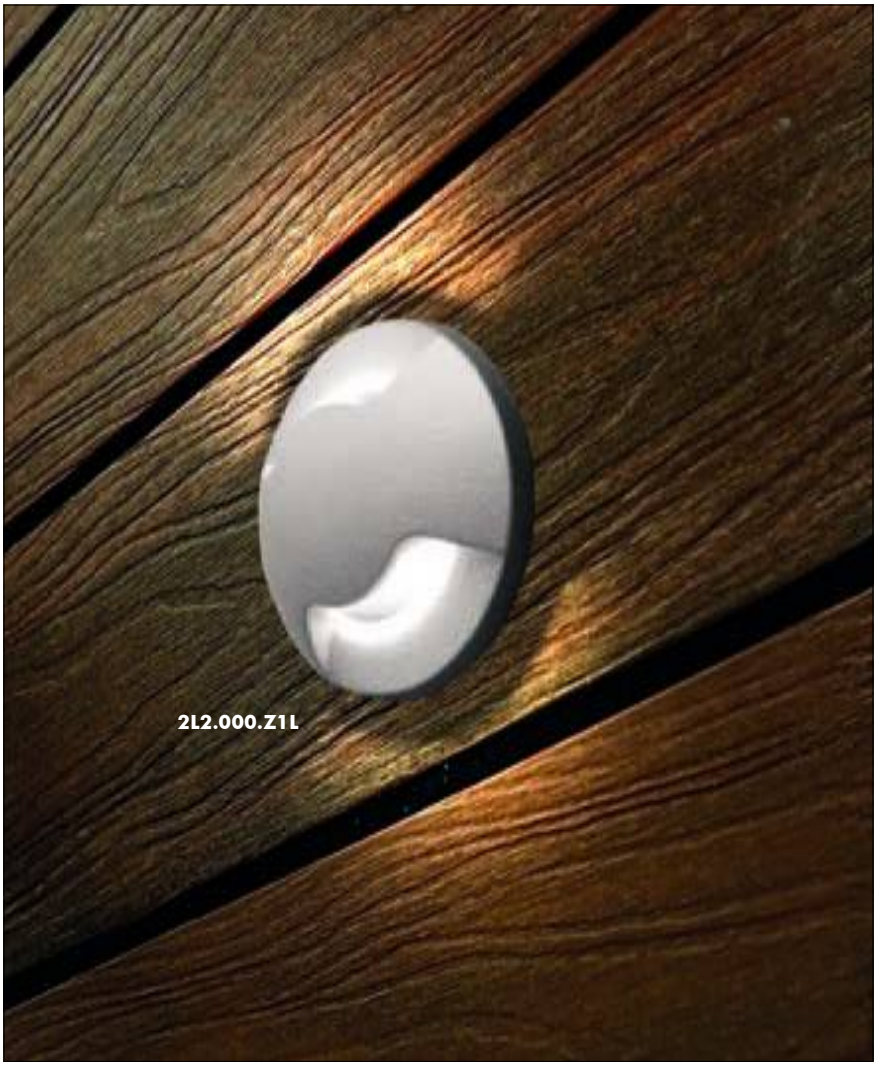



MADE IN ITALY




TERESA 50

DOWNLIGHT/DECKLIGHT

TERESA 50


2L0.000.Z1L	**1,7W**	2L0.000.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*

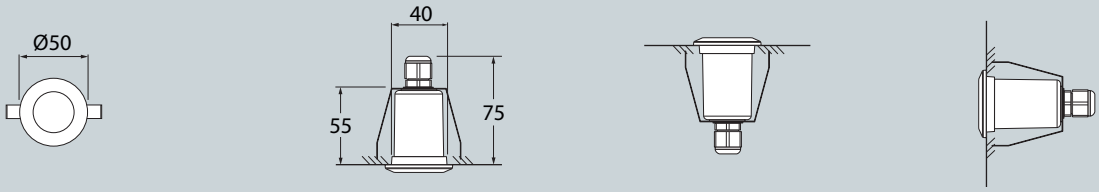

Pcs 75
Kg 13,1
mc 0,057

TERESA 50 SQUARE


2L4.000.Z1L	**1,7W**	2L4.000.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*

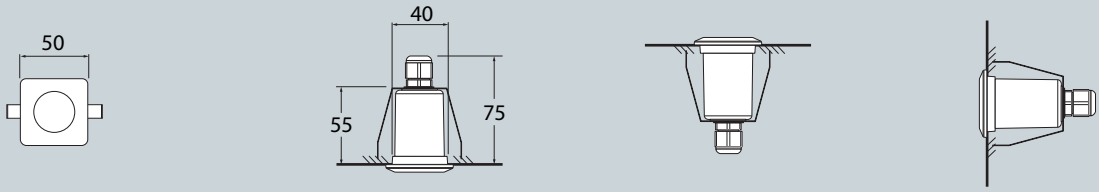

Pcs 75
Kg 13,1
mc 0,057

TERESA 50 1L


2L1.000.Z1L	**1,7W**	2L1.000.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*

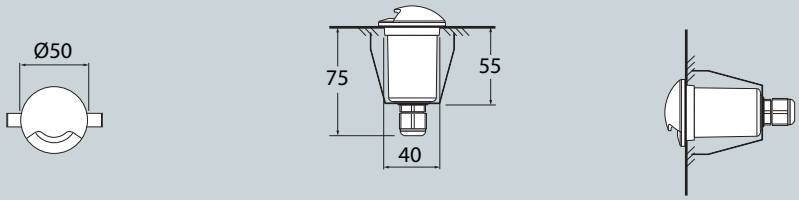

Pcs 75
Kg 13,1
mc 0,057

TERESA 50 2L

2L2.000.Z1L	**1,7W**	2L2.000.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*

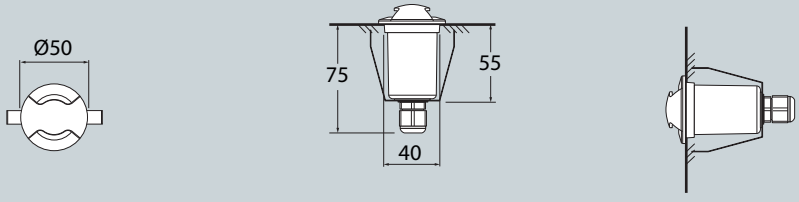


Pcs 75
Kg 13,1
mc 0,057

TERESA 90

DOWNLIGHT

Recessed downlight luminaries with round shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamps included**. Insulation class II, protection rating IP55 (optical unit).

Lampada circolare per incasso a soffitto, senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con ***inclusa lampadina a LED GU10****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55 (vano ottico).*

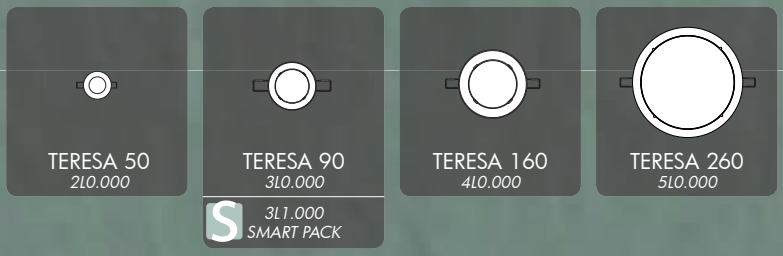

TERESA 50
2L0.000

TERESA 90
3L0.000
3L1.000 SMART PACK

TERESA 160
4L0.000

TERESA 260
5L0.000



3L0.000.U1K

CCT SETTABLE
2700 K
4000 K
SDCM <3

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE

PUBLIC
RESIDENTIAL
DOWNLIGHT
INDOOR OUTDOOR

Discover the collection

MADE IN ITALY

TERESA 90 - COMPONENTS

RECESSED UNIT IP20
IP55 OPTICAL UNIT



COVER made of shockproof resin material, designed to grant protection and safety to the electrical connections. Provided of holes with cable tearproof function.

CALOTTA *realizzata in resina antiurto, atta a garantire protezione e sicurezza alle connessioni elettriche. Provvista di fori con funzione antistrappo del cavo.*



HOUSING made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with GU10 lampholder and metal spring to allow recessed downlight installation.

CASSA *realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvista di portalampada GU10 e molletta metallica per permetterne l'installazione in controsoffitti.*



DIFFUSER in opal color to grant a uniform spread of the lighting output and get a lower dazzle. Made of shockproof resin material (PC) and complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *in colore opale per garantire una distribuzione uniforme del fascio luminoso e ridurne l'abbagliamento. Realizzato in resina antiurto (PC) e completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

TERESA 90



Dimensions and weight
Installation housing depth: 100mm
Diameter: Ø 90 mm
Weight: 0,192 Kg

Moulded colours:
Black White Grey

Diffuser PC:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED



Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	2,9W	390 Lm	4000 K	.U1K
			2700 K	
GU10 LED	4,8W	625 Lm	4000 K	.L1K
			2700 K	



2.9W 390 lm = **35W** HALOGEN


SAVE 92%



4.8W 625 lm = **50W** HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

TERESA 160

DOWNLIGHT

Recessed downlight luminaries with round shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, protection rating IP55.

*Lampada circolare per incasso a soffitto, senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa **lampadina a LED GX53 con Kelvin impostabile**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



TERESA 50
2L0.000

TERESA 90
3L0.000

S *3L1.000 SMART PACK*

TERESA 160
4L0.000

TERESA 260
5L0.000



4L0.000.D1K

CCT SETTABLE

3000 K | 4000 K | 6500 K

SDCM < 6

CE | CB IECEE CB SCHEME | UV UV-TREATED | CLASS II DOUBLE INSULATION

RECYCLABLE | ANTI-SHOCK | +90° -60° TEMPERATURE

PUBLIC | RESIDENTIAL | DOWNLIGHT | INDOOR OUTDOOR

Discover the collection



TERESA 160 - COMPONENTS

IP55



HOUSING made of shockproof resin material, suitable for the electrical devices fixation into it. Provided complete with GX53 lampholder and metal spring for recessed downlight installation.

CASSA *realizzata in resina antiurto, predisposta per il fissaggio al suo interno degli accessori elettrici. Fornita completa di portalampada GX53 e di molletta metallica per permetterne l'installazione in controsoffitti.*





DIFFUSER in opal color to grant a uniform spread of the lighting output and get a lower dazzle. Made of shockproof resin material (PC) and complete with silicone rubber gasket to ensure high protection against external agents.
DIFFUSORE in colore opale.

DIFFUSORE *in colore opale per garantire una distribuzione uniforme del fascio luminoso e ridurne l'abbagliamento. Realizzato in resina antiurto (PC) e completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

TERESA 160



Dimensions and weight
Installation housing depth: 69mm
Diameter: Ø 160 mm
Weight: 0,347 Kg

Moulted colours:
Black White Grey

Diffuser PC:
Opal

LED LAMPS

CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: easy to upgrade.
- **SUITABLE FOR OUTDOOR USE**: driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K 4000 K 3000 K	.G1K
GX53 LED	10 W	1290 lm	6500 K 4000 K 3000 K	.D1K




3W
410 Lm
=
40W
incandescent
SAVE 93%



10W
1290 Lm
=
100W
incandescent
SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

TERESA 260

DOWNLIGHT

Recessed downlight luminaries with round shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. **Kelvin & Power settable GX53 LED**, or E27 version available. Insulation class II, protection rating IP55.

*Lampada circolare per incasso a soffitto, senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita nella versione a **LED GX53 con Kelvin e Potenza impostabile**, o con E27. Classe di isolamento II, grado di protezione IP55.*


TERESA 50
2L0.000


TERESA 90
3L0.000


S *3L1.000 SMART PACK*



TERESA 160
4L0.000



TERESA 260
5L0.000



5L0.000.E1P

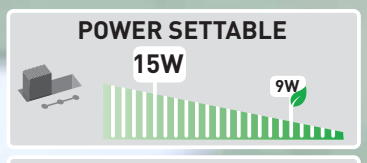

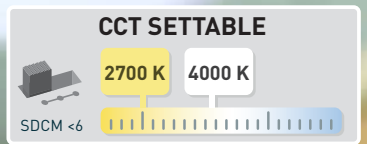

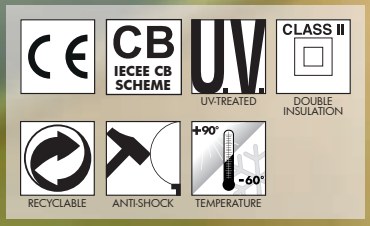



Discover the collection

TERESA 260 - COMPONENTS

IP55



HOUSING made of shockproof resin material, suitable for the electrical devices fixation into it. Provided complete with GX53 or E27 lampholder and complete with metal spring for recessed downlight installation.

CASSA *realizzata in resina antiurto, predisposta per il fissaggio al suo interno degli accessori elettrici. Fornita completa di portalampada GX53 o E27 e provvista di molletta metallica per permetterne l'installazione in controsoffitti.*

DIFFUSER in opal color to grant a uniform spread of the lighting output and get a lower dazzle. Made of shockproof resin material (PC) and complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *in colore opale per garantire una distribuzione uniforme del fascio luminoso e ridurne l'abbagliamento. Realizzato in resina antiurto (PC) e completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

TERESA 260



Dimensions and weight
Installation housing depth: 75mm
Diameter: Ø 260 mm
Weight: 0,735 Kg

Moulted colours:
Black | White | Grey

Diffuser PC:
Opal

GX53 LED



Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.EP1
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%

E27



Recessed downlight luminaries supplied f**ully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.P27
E27 + SENSOR (CFL -LED)		.PS7


LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

SETTABLE LED LAMP







POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

TERESA RANGE

DOWNLIGHT









TERESA 90 GU10

2,9 W	3L0.000.U1K
4,8 W	3L0.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K







Pcs 40
Kg 10,5
mc 0,092

TERESA 160 GX53

3W	4L0.000.G1K
10W	4L0.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K



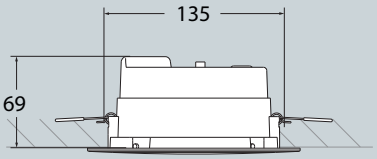



Pcs 18
Kg 8,4
mc 0,092

TERESA 260 GX53

15W/9W	5L0.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

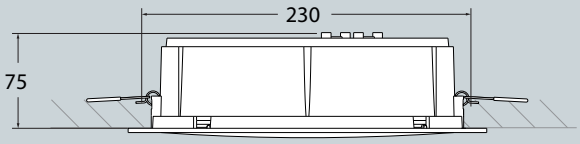


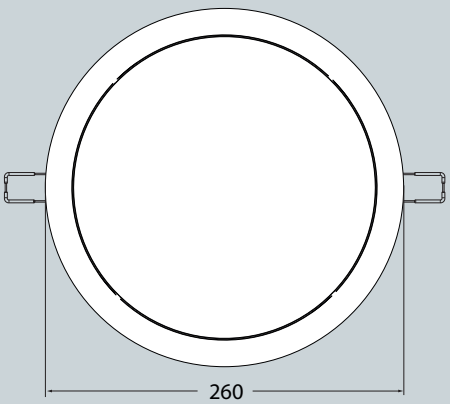


Pcs 16
Kg 14,4
mc 0,194

TERESA 260 E27

E27 lampholder	5L0.000.P27
E27 with sensor	5L0.000. PS7

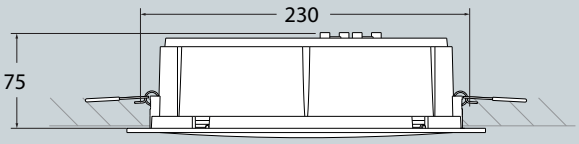

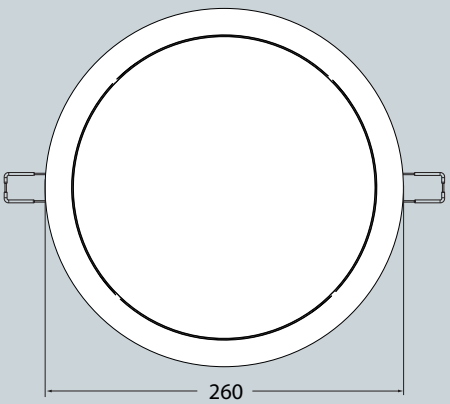

Pcs 16
Kg 14,4
mc 0,194

LIVIA 60

DOWNLIGHT

LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, and efficient **G9 LED lamps included**. Insulation class II, protection rating IP55.

*Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa **lampadina a LED G9**, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



1A9.000.Z1L

LIVIA 60 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with G9 lampholder.

BASE *in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada G9.*



DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *satinato in resina antiurto (PC) completo di guarnizione in gomma siciconica per garantire un alto livello di protezione contro gli agenti esterni.*



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.*

LIVIA 60



Dimensions and weight
Diameter: Ø60 mm
Height: 69 mm
Weight: 0,10 Kg

Moulded colours:
Black *White* *Grey*


Diffuser PC:
Frosted

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

G9 LED

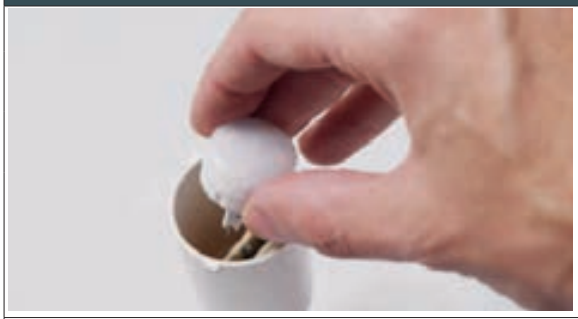

Ceiling surface downlight supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **100-240V**: wide voltage range to protect the driver from power surges.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
G9 LED	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LIVIA 90

DOWNLIGHT


LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamps included**. Insulation class II, protection rating IP 55.


*Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di **lampadine a LED GU10 con Kelvin impostabile**, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*





2A9.000.L1K

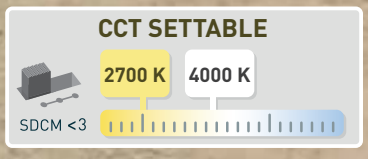

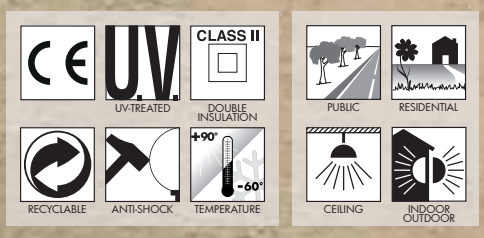

LIVIA 90 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GU10 lampholder.

BASE *in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada GU10.*


DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.*

LIVIA 90

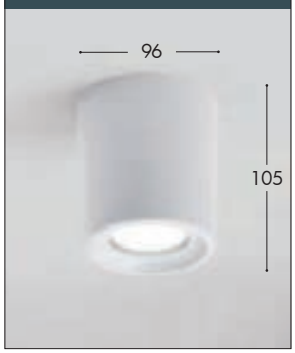

Dimensions and weight
Diameter: Ø96 mm
Height: 105 mm
Weight: 0,26 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PC:
Frosted

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	2,9W	390 Lm	4000 K	.U1K
			2700 K	
GU10 LED	4,8W	625 Lm	4000 K	.L1K
			2700 K	

Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and K**elvin settable GU10 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.



2.9W 390 lm = **35W** HALOGEN


SAVE 92%



4.8W 625 lm = **50W** HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LIVIA 160

DOWNLIGHT


LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, protection rating IP55.


*Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a **LED GX53 con Kelvin impostabile**, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

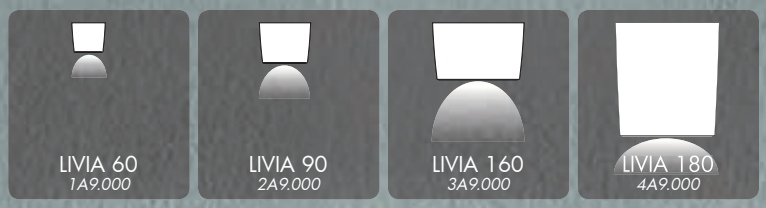



3A9.000.D1K

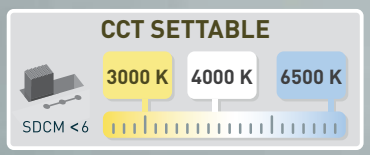

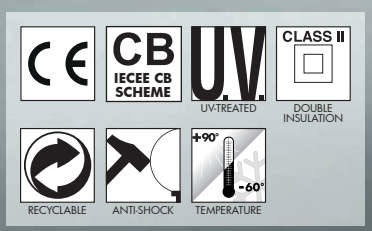





LIVIA 160 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GX53 lampholder.

BASE *in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada GX53.*


DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.*

LIVIA 160

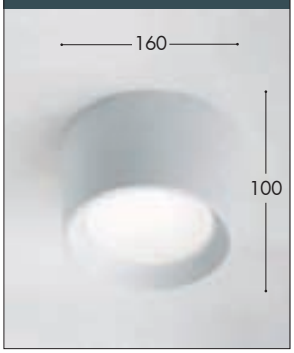

Dimensions and weight
Diameter: Ø160 mm
Height: 100 mm
Weight: 0,76 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PC:
Frosted

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Ceiling surface downlight supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	



3W
410 Lm
=
40W
incandescent


SAVE 93%



10W
1290 Lm
=
100W
incandescent

SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LIVIA 180

DOWNLIGHT

fumagalli since 1973


LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable **E27 high power LED lamps included**. Insulation class II, protection rating IP44.


*Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di **lampadine a LED E27 ad ALTA POTENZA**, con Kelvin impostabile certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP44.*






4A9.000.Q1K

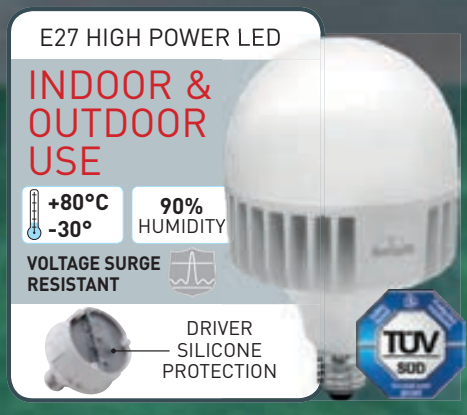

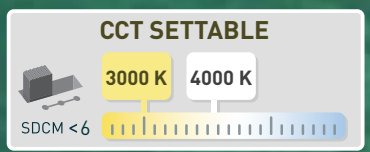

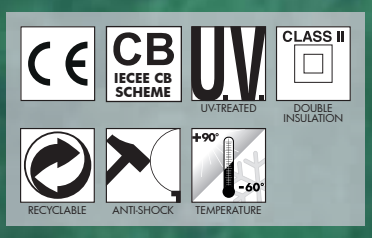





LIVIA 180 - COMPONENTS

IP44



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with E27 lampholder. Designed to allow a correct heat dissipation.

BASE *in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada E27. Progettato per permettere una corretta dissipazione del calore.*

DIFFUSER with frosted finishing made of shockproof resin material (PC).


DIFFUSORE *satinato in resina antiurto (PC).*



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.*

LIVIA 180

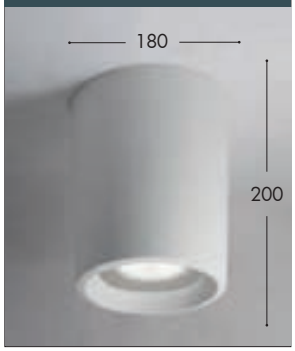

Dimensions and weight
Diameter: Ø180 mm
Height: 200 mm
Weight: 1,10 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PC:
Frosted

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

E27 HIGH POWER LED



100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27	15 W	1690 lm	4000 K 3000 K	.R1K
E27	30 W	3620 lm	4000 K 3000 K	.Q1K

Ceiling surface downlight supplied with TÜV certified, long-life, efficient and **Kelvin settable E27 high power LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.




15W
1690 Lm
SAVE 85%
=
100W
incandescent



30W
3620 Lm
SAVE 40%
=
50W
HQI-SON

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LIVIA RANGE


DOWNLIGHT





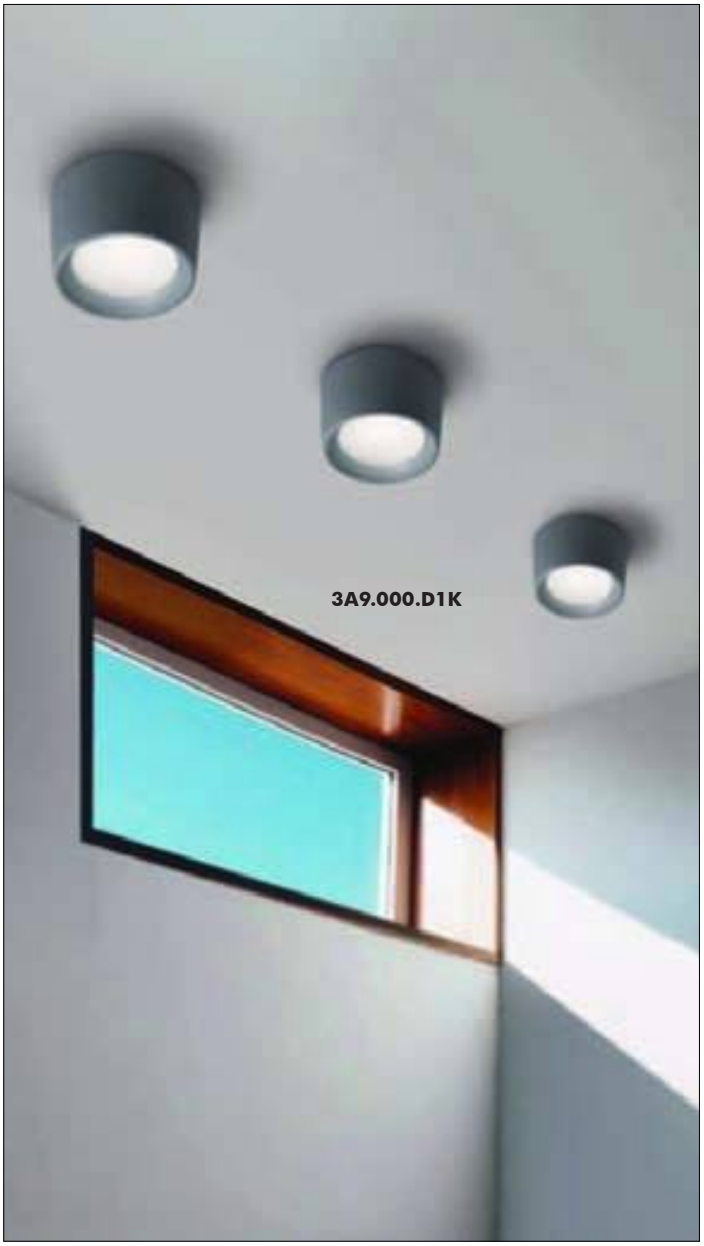






LIVIA RANGE

DOWNLIGHT

LIVIA 60

1A9.000.Z1L	**1,7W**	1A9.000.Z1R
4000K	G9 LED LAMP INCLUDED	*3000K*




Pcs 75
Kg 8,4
mc 0.057

LIVIA 90

2,9 W	2A9.000.U1K
4,8 W	2A9.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

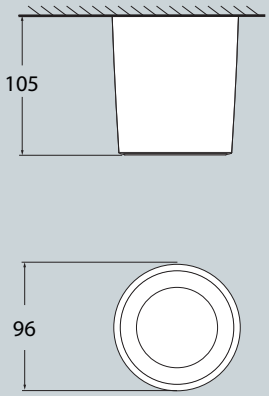


Pcs 30
Kg 12,6
mc 0,09

LIVIA 160

3W	3A9.000.G1K
10W	3A9.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

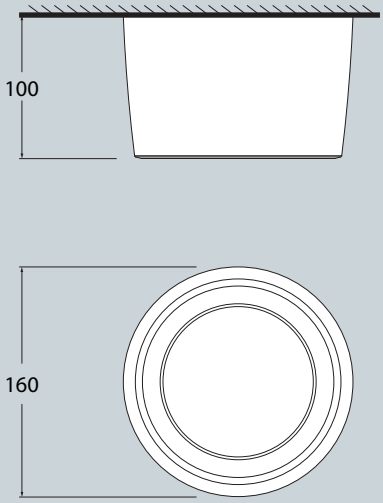


Pcs 18
Kg 15,3
mc 0,092


LIVIA 180

15W	4A9.000.R1K
30W	4A9.000.Q1K

CCT SETTABLE E27 HIGHPOWER LED LAMP INCLUDED
3000K/4000K

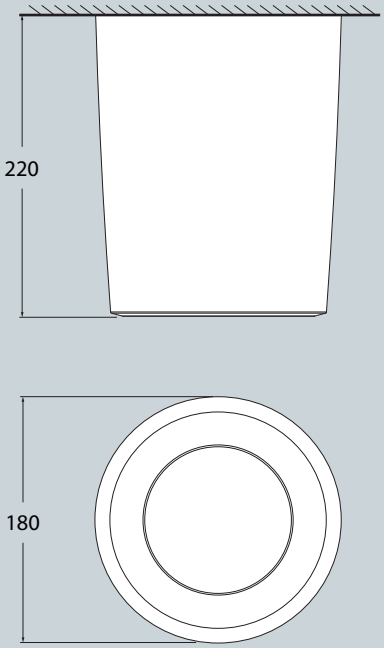

Pcs 12
Kg 22,5
mc 0,147

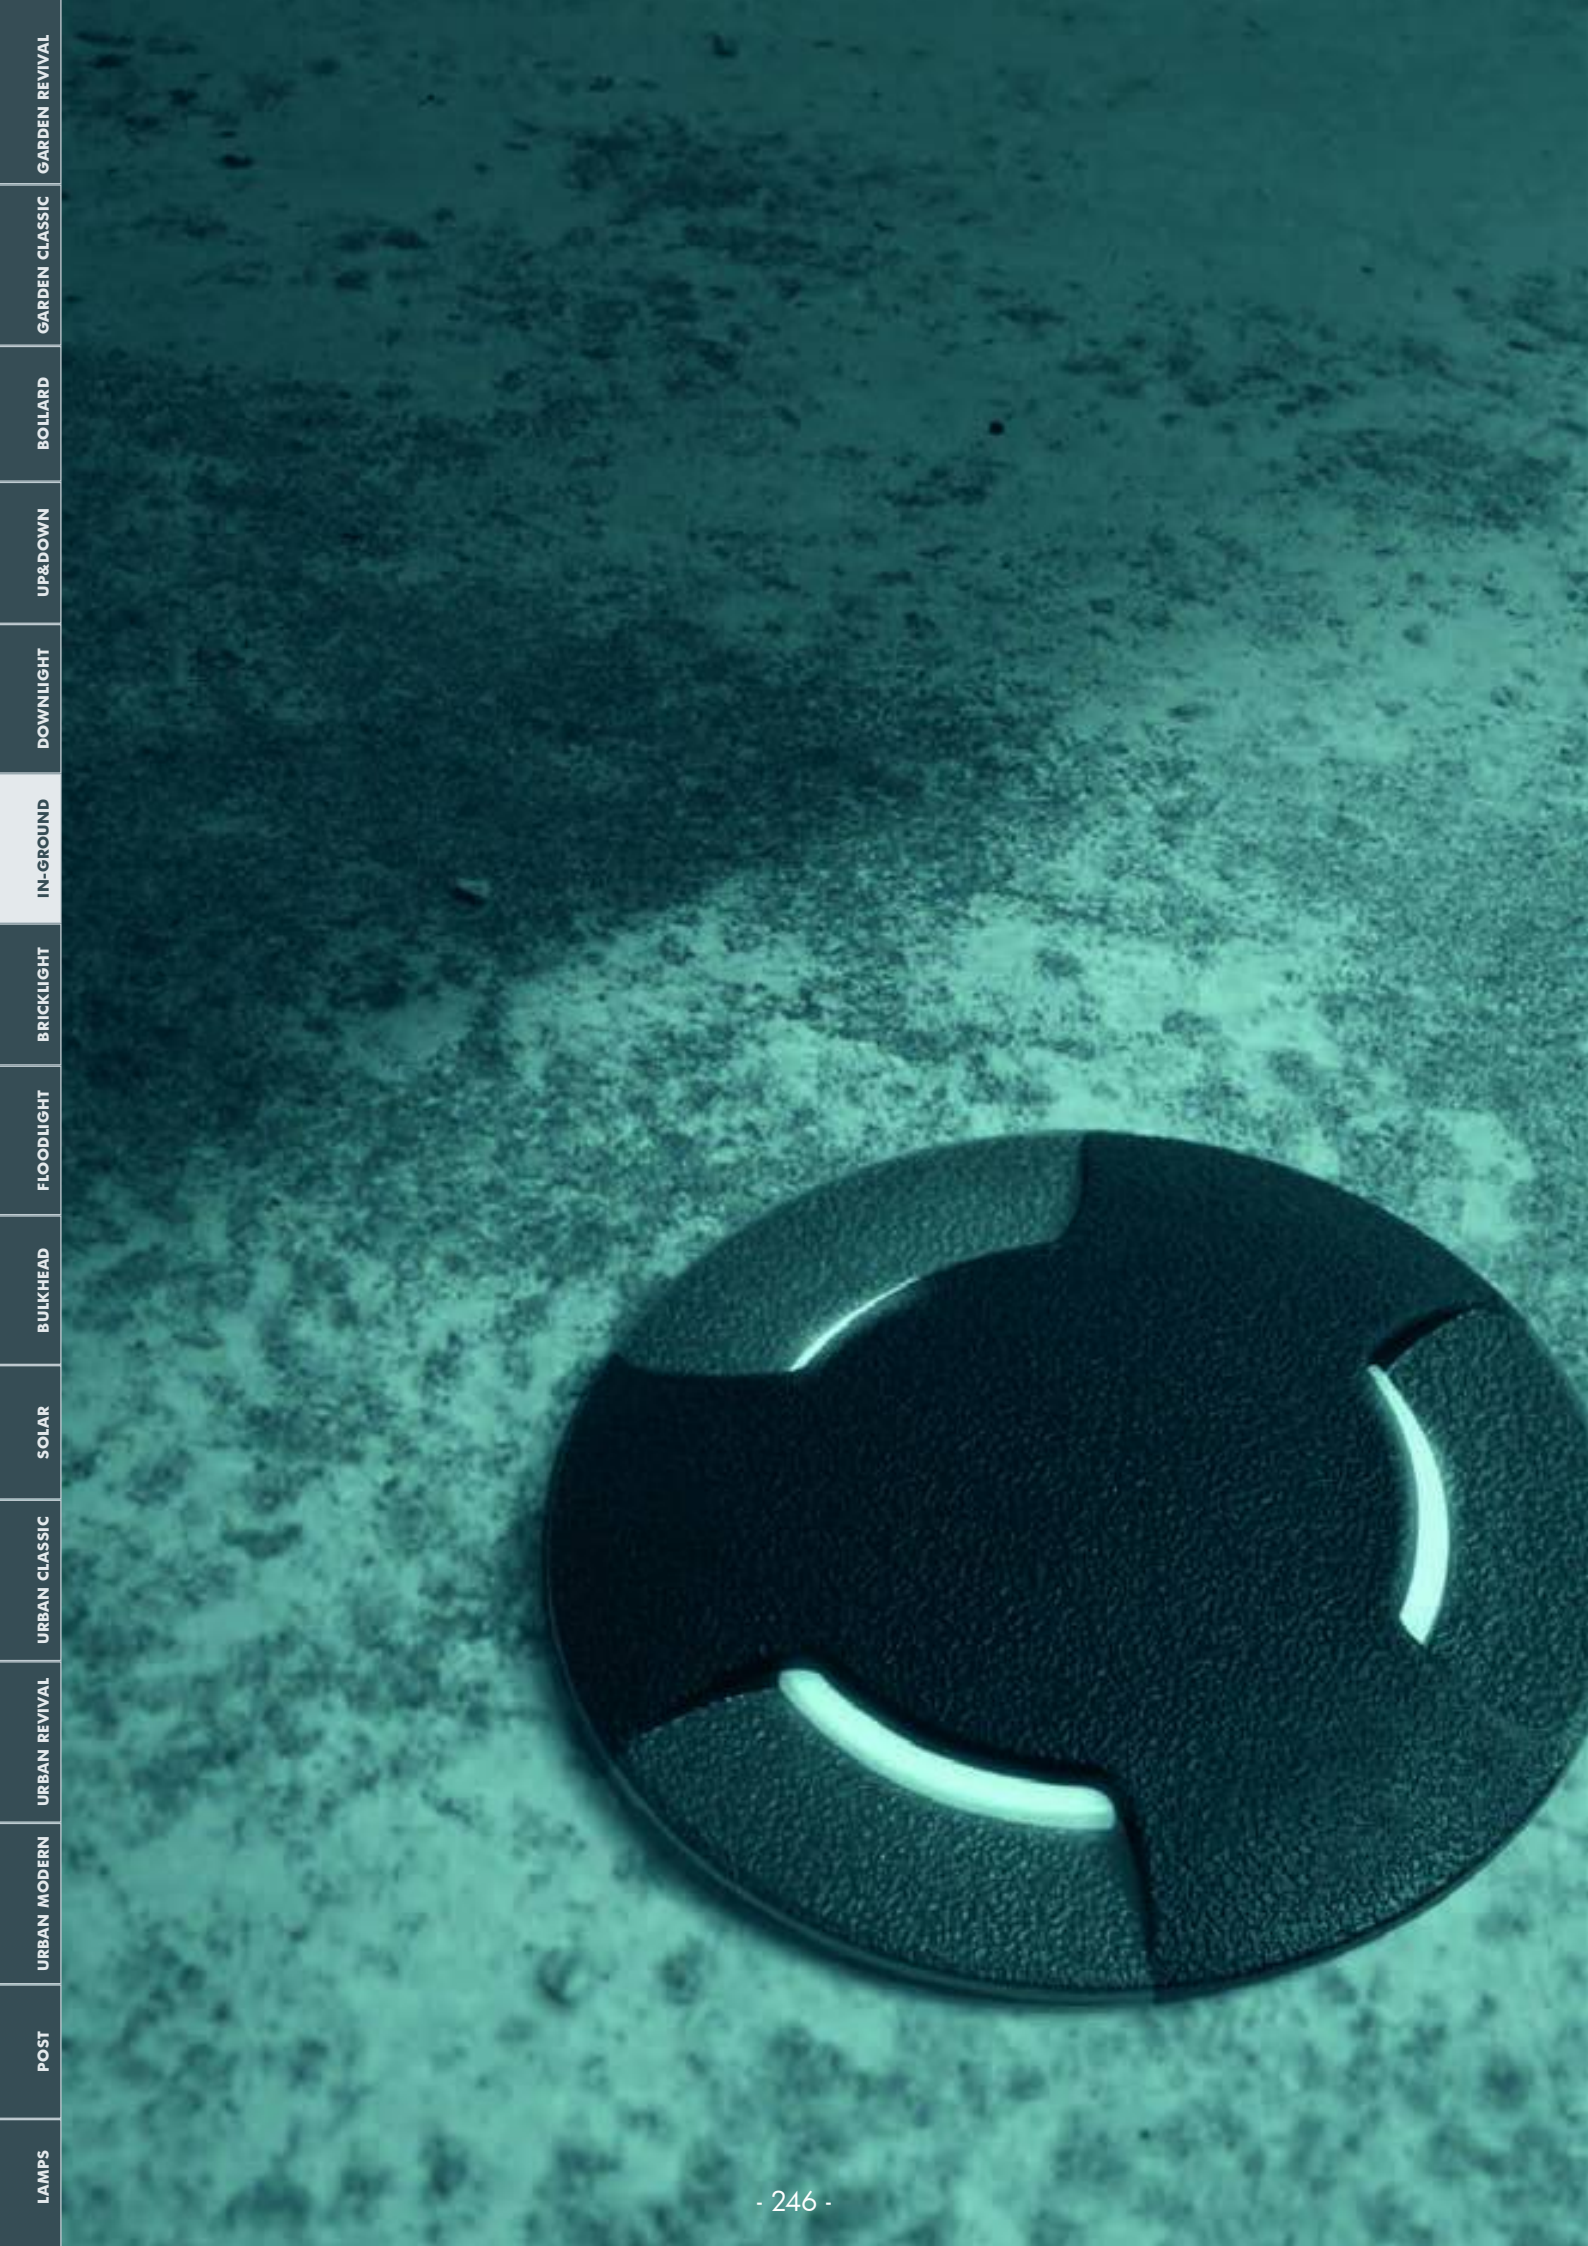



IN-GROUND

ALDO

IN-GROUND/RECESSED

Luminaries suitable for in-ground and wall recessed installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP 67.

*Lampada idonea ad incasso a terra e a muro senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornita con **inclusa lampadina a LED G9**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.*



ALDO
1L0.000

ALDO 1L
1L1.000

ALDO 2L
1L2.000


ALDO SQUARE
1L4.000




1L1.000.Z1L





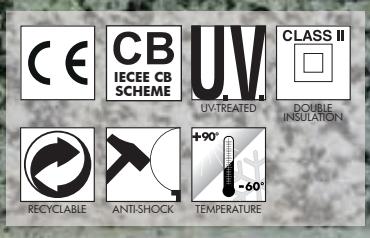





ALDO - COMPONENTS

IP67

WALK-OVER





COVER with no visible screws made in shockproof resin material, UV rays stabilized, rust and corrosion free. Plain (round or square), one-opening or two-opening versions available, for a diffuse or directed light emission.

COVER *senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione aperta (quadrata o ad anello), con una apertura o con due aperture, per permettere un'emissione della luce diffusa o direzionata.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X) | Green (N) | Orange (R) | Blue (U)



HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA *realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.*

INSTALLATION HOUSING made in shockproof resin material to be fixed into the ground or cemented into the wall before installing the luminaries. In case of wall-recessed installation, the housing can be cut to reduce its depth.

CONTRO-CASSA *in resina antiurto da fissare al suolo o da cementare nel muro prima dell'installazione degli apparecchi. Nel caso di installazione a muro, la cassa può essere tagliata per ridurre la sua profondità.*

ALDO




Dimensions and weight
Installation housing depth:110/70mm
Diameter: Ø 50 mm
Weight: 0,2 Kg

Cover colours:
Black *White* *Grey*

Diffuser PC:
Frosted

Blue *Green* *Orange*

G9 LED

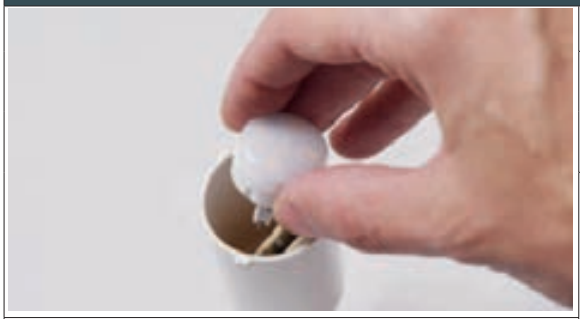

In-ground or wall recessed luminaries supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **100-240V**: wide voltage range to protect the driver from power surges.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
G9 LED	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R

LED LAMPS

TÜV SÜD CE CB


LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


ALDO

IN-GROUND/RECESSED

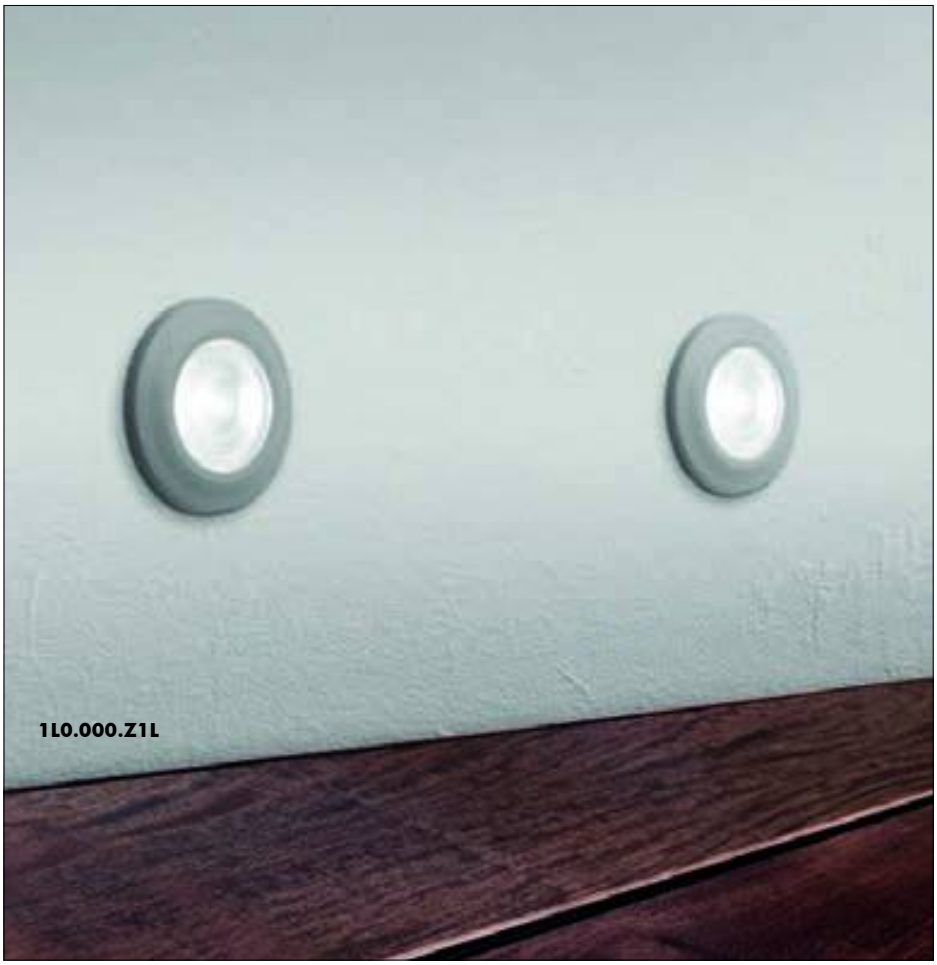
1L0.000.Z1L


1L0.000.Z1L


1L4.000.Z1L

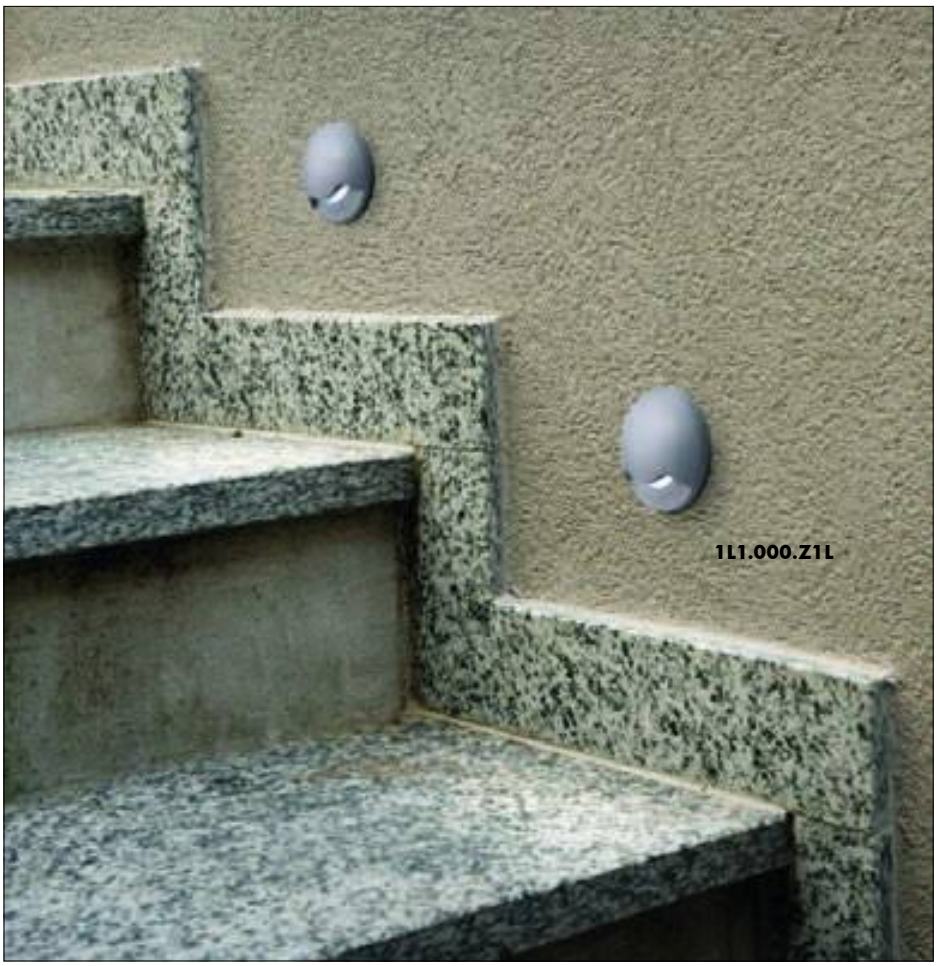
1L1.000.Z1L


1L1.000.Z1L



1L2.000.Z1L

MADE IN ITALY

ALDO

1L0.000.Z1L — **1,7W** — 1L0.000.Z1R

4000K — G9 LED LAMP INCLUDED — *3000K*

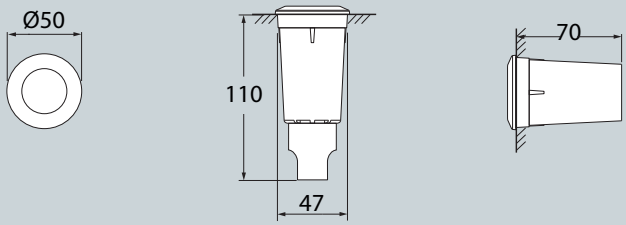


Pcs 75
Kg 13,1
mc 0,057

ALDO SQUARE

1L4.000.Z1L — **1,7W** — 1L4.000.Z1R

4000K — G9 LED LAMP INCLUDED — *3000K*

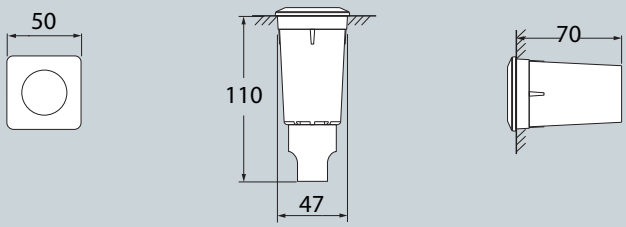


Pcs 75
Kg 13,1
mc 0,057

ALDO 1L

1L1.000.Z1L — **1,7W** — 1L1.000.Z1R

4000K — G9 LED LAMP INCLUDED — *3000K*

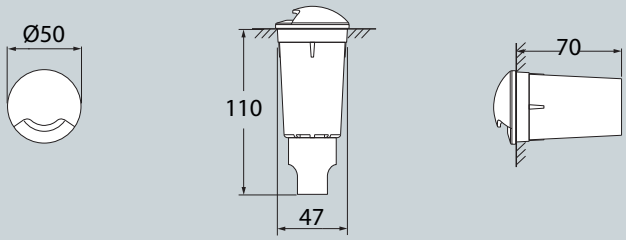


Pcs 75
Kg 13,1
mc 0,057

ALDO 2L

1L2.000.Z1L — **1,7W** — 1L2.000.Z1R

4000K — G9 LED LAMP INCLUDED — *3000K*

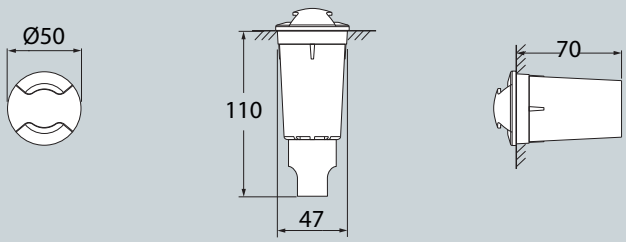

Pcs 75
Kg 13,1
mc 0,057

CECI 90

IN-GROUND

In-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, Protection rating IP67.

Apparecchio per incasso a terra senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa **lampadina a LED GU10 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



CECI 90
1F1.000

CECI 90-2L
1F2.000


CECI 90-3L
1F3.000


CECI 90-SQ
1F4.000




1F1.000.U1K

CCT SETTABLE



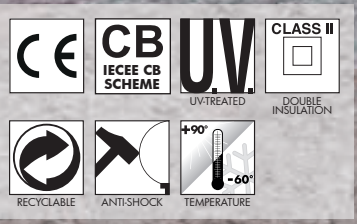



CECI 90 - COMPONENTS

IP66

IP67




COVER with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.

COVER *senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.*

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

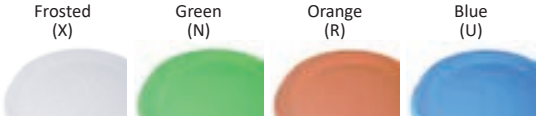

HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA *realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.*

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA *in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.*

CECI 90



Dimensions and weight
Installation housing depth: 127 mm
Diameter: Ø 92 mm
Weight: 0,35 Kg

Cover colours:
Black, Grey

Diffuser PC:
Frosted, Blue, Green, Orange

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED



In-ground supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Different wattage available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	2,9W	390 Lm	4000 K	.U1K
			2700 K	
GU10 LED	4,8W	625 Lm	4000 K	.L1K
			2700 K	



2.9W 390 lm = **35W** HALOGEN


SAVE 92%



4.8W 625 lm = **50W** HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

CECI 90

IN-GROUND



1F1.000.U1K




1F2.000.U1K



1F3.000.U1K




1F4.000.U1K



CECI 90	
2,9W	1F1.000.U1K
4,8W	1F1.000.L1K


CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 40
Kg 13,7
mc 0,084

CECI 90-3L	
2,9W	1F3.000.U1K
4,8W	1F3.000.L1K


CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 40
Kg 13,7
mc 0,084

CECI 90-2L	
2,9W	1F2.000.U1K
4,8W	1F2.000.L1K


CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 40
Kg 13,7
mc 0,084

CECI 90-SQ	
2,9W	1F4.000.U1K
4,8W	1F4.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 40
Kg 13,7
mc 0,084

CECI 120

IN-GROUND

In-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Insulation class II, Protection rating IP67.

Apparecchio per incasso a terra senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa **lampadina a LED GX53 con Kelvin impostabile** *certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.*


CECI 120
2F1.000


CECI 120-2L
2F2.000



CECI 120-3L
2F3.000



CECI 120-SQ
2F4.000




2F1.000.G1K

CCT SETTABLE



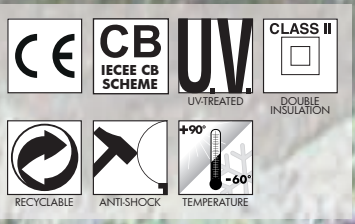



CECI 120 - COMPONENTS

IP66

IP67



COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.

COVER *senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.*

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X) | Green (N) | Orange (R) | Blue (U)



HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA *realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.*

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.

CECI 120



Dimensions and weight
Installation housing depth: 93 mm
Diameter: Ø 120 mm
Weight: 0,45 Kg

Cover colours:
Black | Grey

Diffuser PC:
Frosted | Blue | Green | Orange

LED LAMPS

TÜV SÜD | CE | CB | LVD | EMC | ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	




3W
410 Lm
=
40W
incandescent

SAVE 93%

In-ground supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

CECI 120


IN-GROUND












CECI 120

3W 2F1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

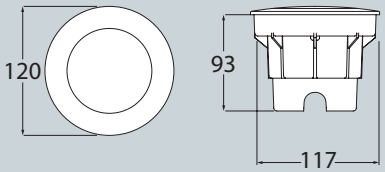


Pcs 36
Kg 15,7
mc 0,084

CECI 120-3L

3W 2F3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

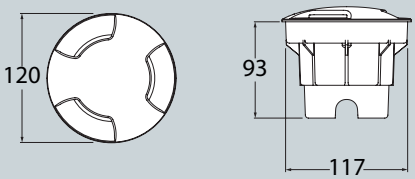


Pcs 36
Kg 15,7
mc 0,084

CECI 120-2L

3W 2F2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

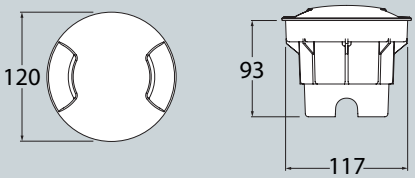


Pcs 36
Kg 15,7
mc 0,084

CECI 120-SQ

3W 2F4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

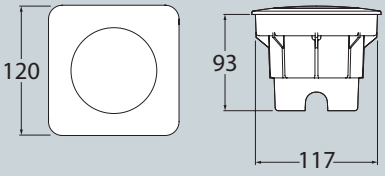

Pcs 36
Kg 15,7
mc 0,084

CECI 160

IN-GROUND

In-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Insulation class II, Protection rating IP67.

Apparecchio per incasso a terra senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa **lampadina a LED GX53 con Kelvin impostabile** *certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.*



CECI 160
3F1.000


CECI 160-2L
3F2.000


CECI 160-3L
3F3.000

CECI 160-SQ
3F4.000



3F3.000.D1K

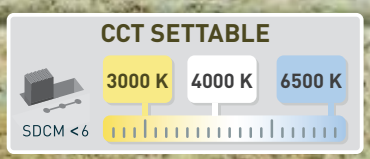

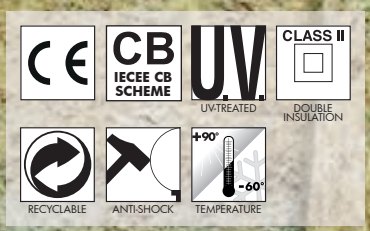



CECI 160 - COMPONENTS

IP66

IP67



COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.

COVER *senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.*

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X) | Green (N) | Orange (R) | Blue (U)

HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA *realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.*

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA *in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.*

CECI 160



Dimensions and weight
Installation housing depth: 111 mm
Diameter: Ø 160 mm
Weight: 0,8 Kg

Cover colours:
Black | Grey

Diffuser PC:
Frosted
Blue | Green | Orange

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED




100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	10 W	1290 lm	6500 K 4000 K 3000 K	.D1K

In-ground supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.



10W
1290 Lm
=
100W
incandescent

SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

CECI 160

IN-GROUND










MADE IN ITALY

CECI 160

10W 3F1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

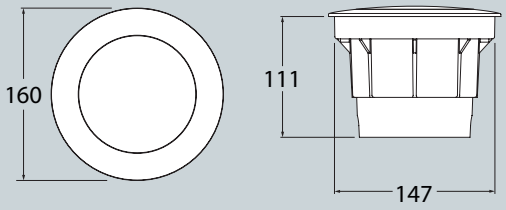


Pcs 18
Kg 14,3
mc 0,084

CECI 160-3L

10W 3F3.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

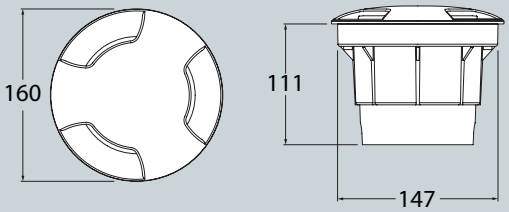


Pcs 18
Kg 14,3
mc 0,084

CECI 160-2L

10W 3F2.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

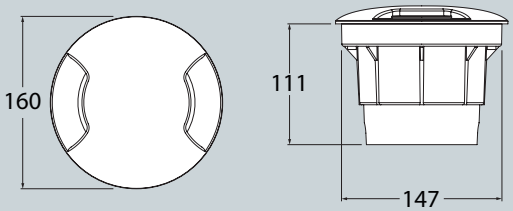


Pcs 18
Kg 14,3
mc 0,084

CECI 160-SQ

10W 3F4.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

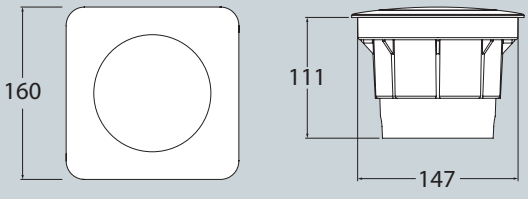

Pcs 18
Kg 14,3
mc 0,084






BRICKLIGHT

NINA


RECESSED LAMP

Slim and compact recessed wall lamp with rectangular shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life, efficient, and **Kelvin settable R7s LED lamps included**. Three different sizes and wattage versions available. Insulation class II, Protection rating IP55.


Lampada rettangolare a LED per incasso a muro dal design compatto e sottile senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **inclusa lampadina a LED R7s con Kelvin impostabile***, certificata TÜV, di lunga durata ed elevata efficienza. Disponibile in tre diverse misure e potenze. Classe di isolamento II, grado di protezione IP55.*



NINA 150
6C1.000





NINA 190
7C1.000




NINA 270
8C1.000


6C1.000.J1K

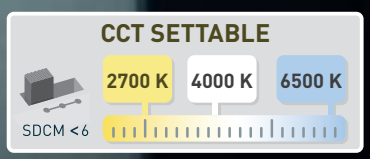

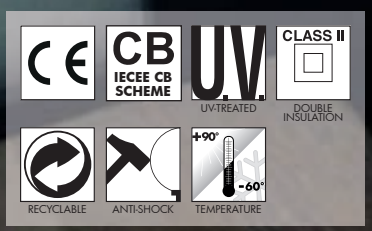







NINA
RECESSED LAMP


NINA - COMPONENTS

IP55



COVER with no visible screws and slim design, made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Three different sizes available.

COVER *dal design sottile e senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in tre diverse misure.*

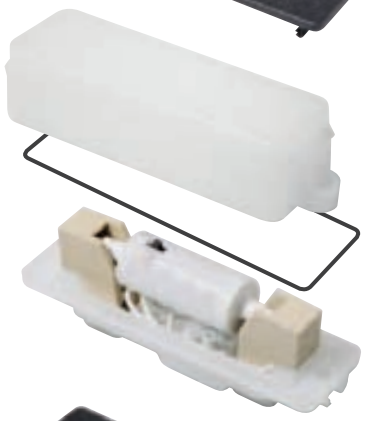

Opal **MODULE** made of shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.


MODULO *opale realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di* ***lampadina led R7s****.*



INSTALLATION HOUSING made of shockproof resin material, to be cemented into the wall before installing the luminaries. Compact size and reduced depth allowing both outdoor and indoor installation.

CONTRO-CASSA *in resina antiurto da cementare nel muro prima dell'installazione degli apparecchi. Il design compatto e la profondità ridotta ne permettono l'istallazione sia all'esterno che all'interno.*

NINA



Dimensions and weight
Width: 145/185/255 mm
Height: 50 mm
Installation housing depth: 50 mm
Weight: 0,26/0,31/0,72 Kg

Moulded colours:
Black White Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

R7s LED




100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
78 R7s LED	3,5 W	365 lm	6500 K	.J1K
			4000 K	
			2700 K	
118 R7s LED	7,5 W	790 lm	6500 K	.K1K
			4000 K	
			2700 K	
189 R7s LED	10,5 W	1160 lm	6500 K	.P1K
			4000 K	
			2700 K	

Recessed light supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources
- **BUILT-IN DRIVER**: quick and easy lamp replacement
- **GREAT FLEXIBILITY**: R7s standard lamp holder
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP





CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


NINA

RECESSED LAMP










NINA 150

3,5W 6C1.000.J1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 50
Kg 13,1
mc 0,057

NINA 190

7,5W 7C1.000.K1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 50
Kg 15,7
mc 0,057

NINA 270

10,5W 8C1.000.P1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K




Pcs 30
Kg 21,6
mc 0,057

LORENZA

SURFACE LAMP

Surface wall lamp with square or rectangular shape and downwards directed light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available in three different sizes and wattage versions. Supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamps included**. Insulation class II, Protection rating IP55.

*Lampada LED a muro dalla forma quadrata o rettangolare con emissione della luce diretta verso il basso. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in tre diverse misure e potenze. Fornita con **inclusa lampadina a LED R7s con Kelvin impostabile**, certificata TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

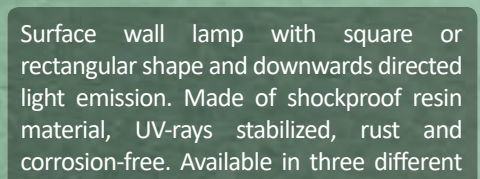

LORENZA 150
AS1.000



LORENZA 190
AS2.000



LORENZA 270
AS3.000




AS1.000.J1K

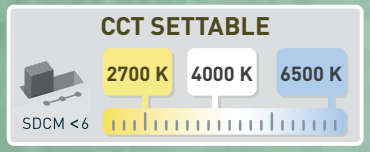

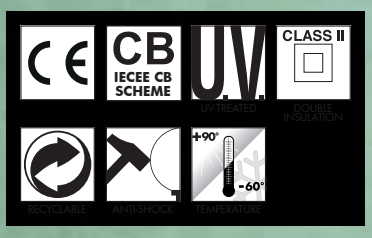







LORENZA
SURFACE LAMP

LORENZA - COMPONENTS

IP55



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Designed for hosting the led module, getting downwards directed light emission. Three different sizes available.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disegnata per accogliere il modulo led e consentire un'emissione della luce diretta verso il basso. Disponibile in tre diverse misure.*



*Clear **MODULE** made of shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.*


***MODULO** trasparente realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di **lampadina led R7s**.*



*Wall **BASE** made of shockproof resin material, UV-rays stabilized, rust and corrosion free.*

***BASE** a muro, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

LORENZA

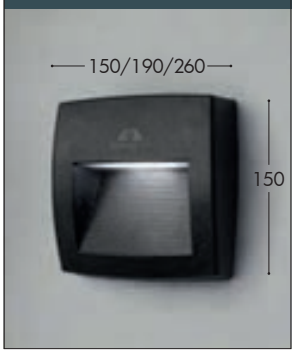

Dimensions and weight
Width: 150/190/260 mm
Height: 150 mm
Depth: 45 mm
Weight: 0,47/0,55/0,78 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PC:
Clear

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

R7s LED




Surface light supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: R7s standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
78 R7s LED	3,5 W	365 lm	6500 K	.J1K
			4000 K	
			2700 K	
118 R7s LED	7,5 W	790 lm	6500 K	.K1K
			4000 K	
			2700 K	
189 R7s LED	10,5 W	1160 lm	6500 K	.P1K
			4000 K	
			2700 K	

CCT SETTABLE LED LAMP





CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LORENZA

SURFACE LAMP




AS1.000.J1K



AS2.000.K1K



AS3.000.P1K




LORENZA

SURFACE LAMP

LORENZA 150

3,5W AS1.000.J1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

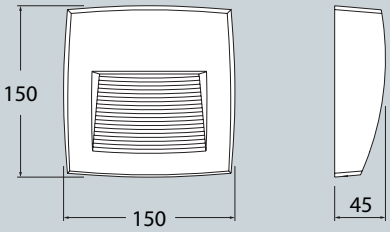


Pcs 24
Kg 11,3
mc 0,057

LORENZA 190

7,5W AS2.000.K1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

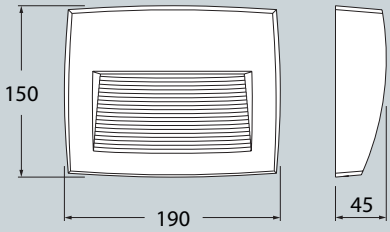


Pcs 24
Kg 13,4
mc 0,057

LORENZA 270

10,5W AS3.000.P1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

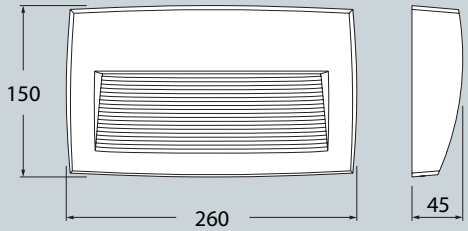

Pcs 14
Kg 11
mc 0,057

LETI 100 ROUND

RECESSED LAMP

Recessed wall lamp with round shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada LED per incasso a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con **inclusa lampadina a LED GX53 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*



LETI 100 ROUND
2C1.000



LETI 100 ROUND-GR
2C2.000




LETI 100 ROUND-EL
2C3.000





LETI 100 ROUND-ST
2C4.000



2C1.000.G1K

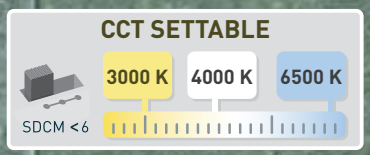

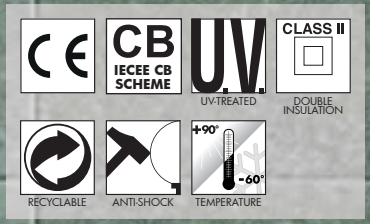





LETI 100 ROUND - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE *in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with GX53 led lamp.

CASSA *realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led GX53.*

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA *in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.*

LETI 100 ROUND



Dimensions and weight
Diameter: Ø 134 mm
Installation housing depth: 80 mm
Weight: 0,4 Kg

Moulded colours:
Black | *White* | Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	



3W = 40W incandescent
410 Lm

SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LETI 100 ROUND

RECESSED LAMP










MADE IN ITALY

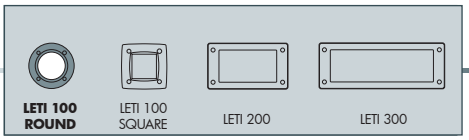


LETI 100 ROUND

RECESSED LAMP

LETI 100 ROUND

3W 2C1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

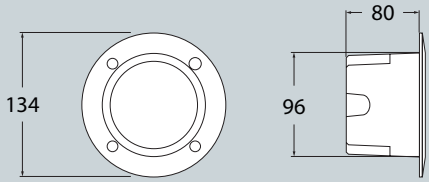


Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-GR

3W 2C2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

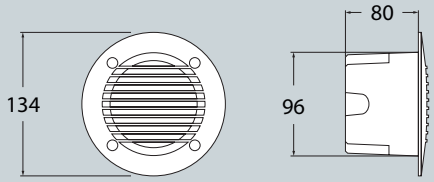


Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-EL

3W 2C3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

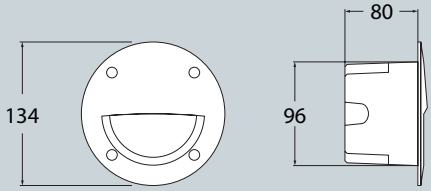


Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-ST

3W 2C4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

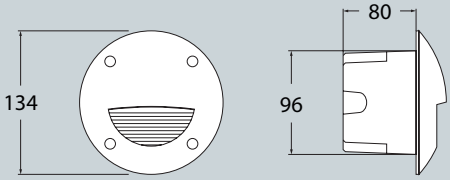


Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE

RECESSED LAMP

Recessed wall lamp with square shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada ad incasso a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a **LED GX53 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*



LETI 100 SQUARE
3C1.000



LETI 100 SQUARE-GR
3C2.000




LETI 100 SQUARE-EL
3C3.000




LETI 100 SQUARE-ST
3C4.000



3C1.000.G1K

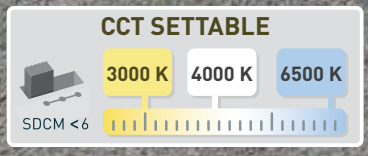

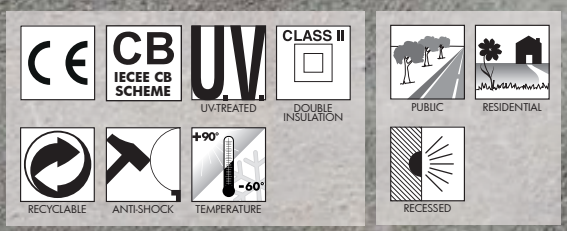



LETI 100 SQUARE - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE *in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*


HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CASSA *realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di* ***lampadina led GX53****.*

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA *in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.*

LETI 100 SQUARE

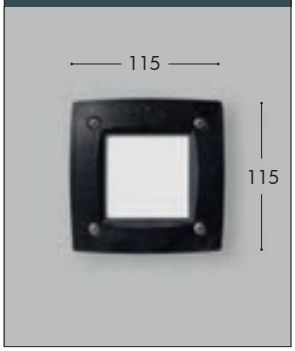

Dimensions and weight
Height: 115 mm
Width: 115 mm
Installation housing depth: 80 mm
Weight: 0,4 Kg

Moulded colours:
Black | White | Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	**3 W**	**410 lm**	6500 K 4000 K 3000 K	.G1K



3W
410 Lm
=
40W
incandescent

SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LETI 100 SQUARE

RECESSED LAMP










MADE IN ITALY

LETI 100 SQUARE

3W 3C1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

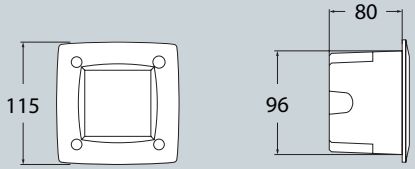


Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-GR

3W 3C2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

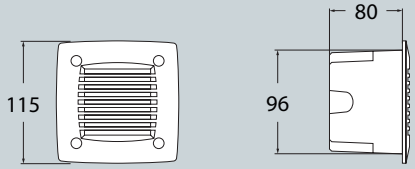


Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-EL

3W 3C3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

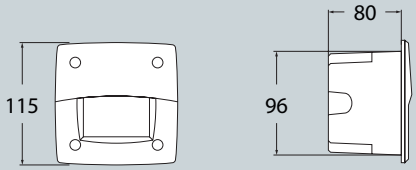


Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-ST

3W 3C4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

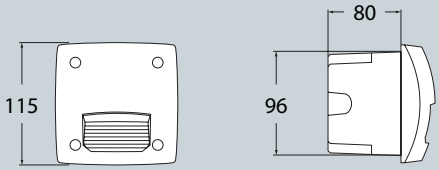

Pcs 48
Kg 20,3
mc 0,12

LETI 200

RECESSED LAMP

Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada ad incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **inclusa lampadina a LED GX53 con Kelvin impostabile** *certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*


LETI 200
4C1.000


LETI 200-GL
4C2.000



LETI 200-RS
4C3.000



LETI 200-HS
4C4.000


LETI 200-VP
4C5.000



4C4.000.G1K

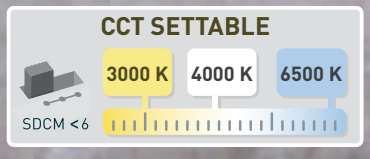

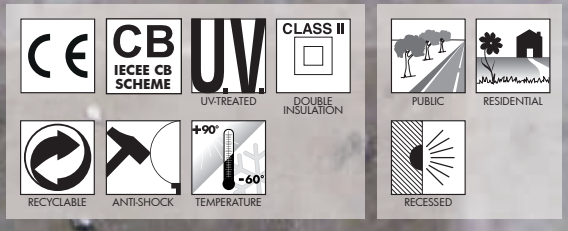



LETI 200 - COMPONENTS

IP66




COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE *in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*




HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led** lamp.

CASSA *realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina* ***led GX53****.*

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA *in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.*

LETI 200

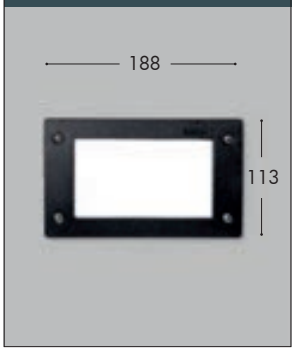

Dimensions and weight
Height: 113 mm
Width: 188 mm
Installation housing depth: 98 mm
Weight: 0,6 Kg

Moulded colours:
Black | White | Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	**3 W**	**410 lm**	6500 K 4000 K 3000 K	.G1K




3W
410 Lm
=
40W
incandescent

SAVE 93%

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LETI 200

RECESSED LAMP












MADE IN ITALY

LETI 200

3W 4C1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

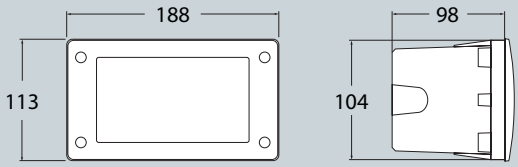


Pcs 36
Kg 22,7
mc 0,12

LETI 200-GL

3W 4C2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

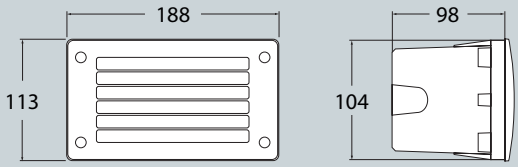


Pcs 36
Kg 22,7
mc 0,12

LETI 200-RS

3W 4C3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

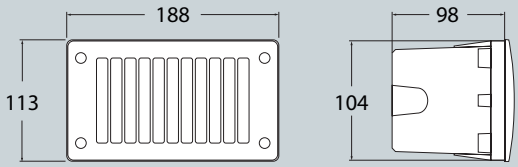


Pcs 36
Kg 22,7
mc 0,12

LETI 200-HS

3W 4C4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

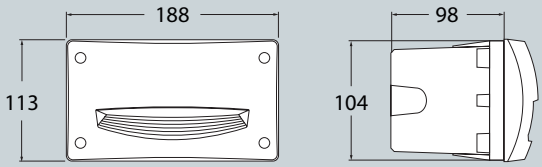


Pcs 36
Kg 22,7
mc 0,12

LETI 200-VP

3W 4C5.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

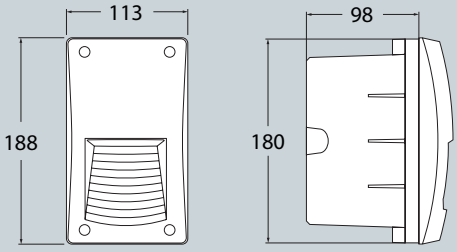


Pcs 36
Kg 22,7
mc 0,12


LETI 300

RECESSED LAMP

Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certfied, long-life, efficient and **2x Kelvin settable GX53 LED lamps included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada LED per incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **incluse 2 lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*


LETI 300
5C1.000


LETI 300-GL
5C2.000



LETI 300-RS
5C3.000



LETI 300-HS
5C4.000



LETI 300-VP
5C5.000



5C4.000.G2K

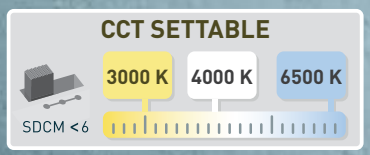

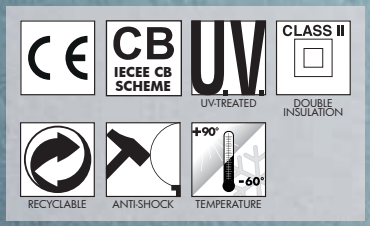





LETI 300 - COMPONENTS



IP66

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

HOUSING made of shockproof resin material, suitable for the electrical devices fixation. Provided with **2x GX53 led lamps** or with E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

CASSA *realizzata in resina antiurto, adatta ad alloggiare gli accessori elettrici. Fornita completa di* ***2 lampadine led GX53*** *o di portalampada E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA *in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.*

LETI 300



Dimensions and weight
Height: 113 mm
Width: 293 mm
Installation housing depth: 98 mm
Weight: 0,9 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Recessed lamp supplied complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	2x 3W **6W**	**820 lm**	6500 K 4000 K 3000 K	.G2K



2x 3W 820 Lm = **60W** incandescent

SAVE 93%


E27



Recessed lamp supplied complete with E27 lampholder.

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LETI 300

RECESSED LAMP


5C1.000.G2K

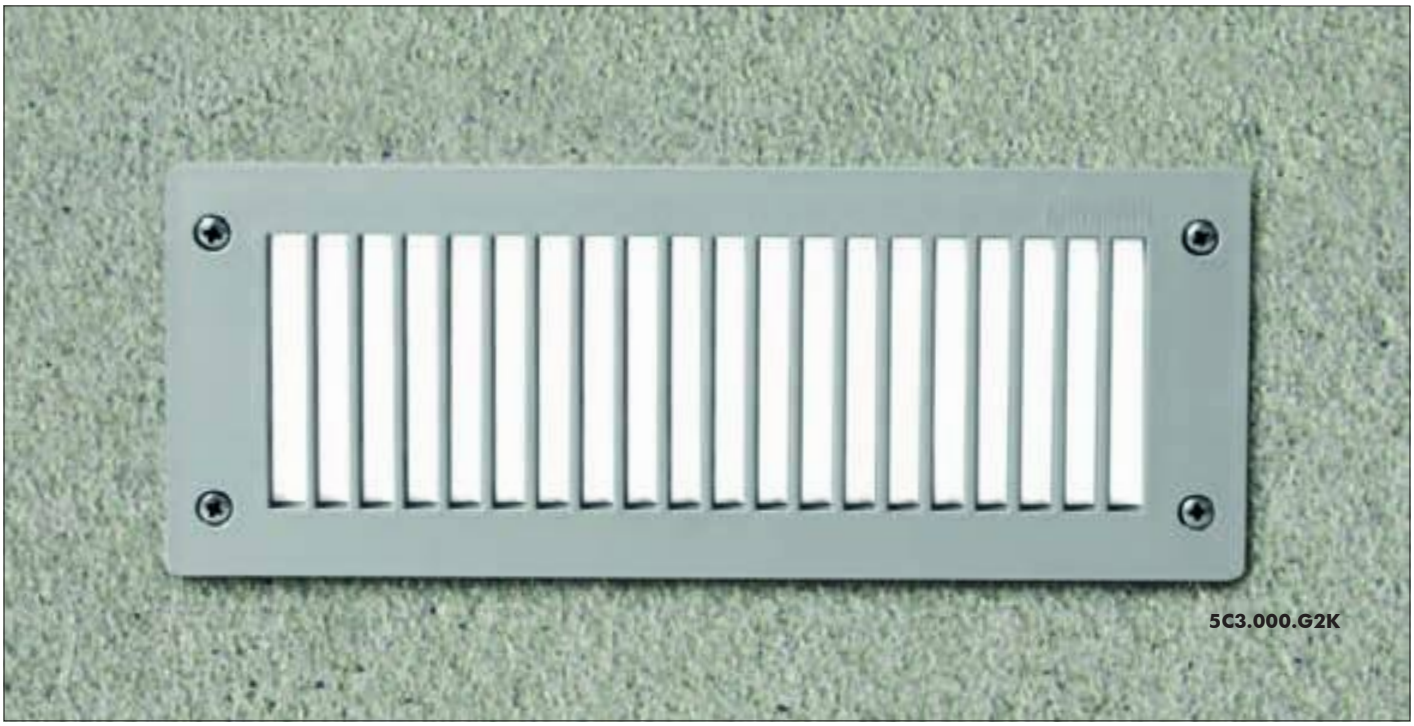
5C3.000.G2K


5C2.000.G2K


5C4.000.G2K



5C5.000.G2K

MADE IN ITALY

LETI 300

6W 5C1.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

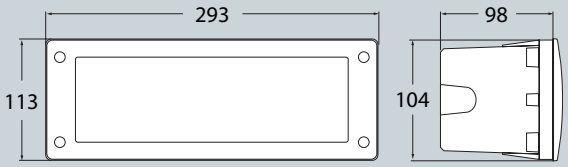


Pcs 24
Kg 22,7
mc 0,12

LETI 300-GL

6W 5C2.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

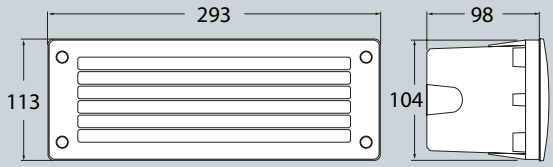


Pcs 24
Kg 22,7
mc 0,12

LETI 300-RS

6W 5C3.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

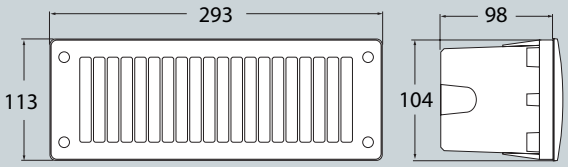


Pcs 24
Kg 22,7
mc 0,12

LETI 300-HS

6W 5C4.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

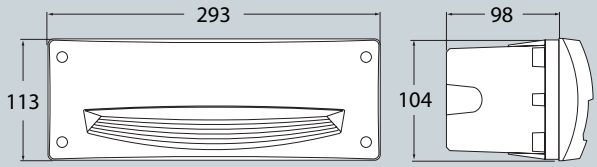


Pcs 24
Kg 22,7
mc 0,12

LETI 300-VP

6W 5C5.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

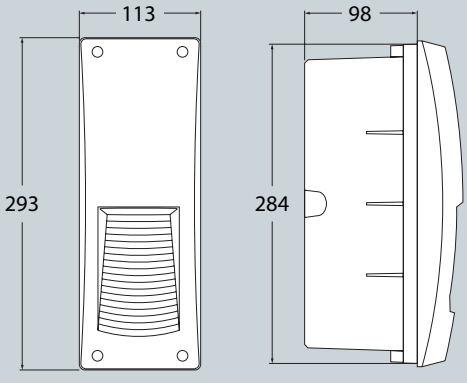

Pcs 24
Kg 22,7
mc 0,12

EXTRALETI 100 ROUND

SURFACE LAMP

Surface wall lamp with round shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp 3W included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa **lampadina a LED GX53 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*



EXTRALETI 100 ROUND
2S1.000



EXTRALETI 100 ROUND-GR
2S2.000




EXTRALETI 100 ROUND-EL
2S3.000




EXTRALETI 100 ROUND-ST
2S4.000



2S3.000.G1K

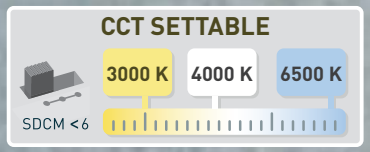

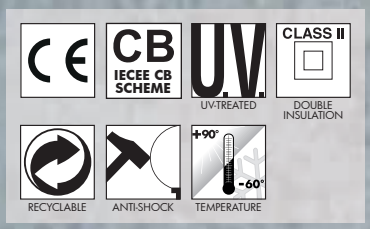





EXTRALETI 100 ROUND - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE *in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*





BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led** lamp.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina* ***led GX53****.*

EXTRALETI 100 ROUND



Dimensions and weight
Diameter: Ø 140 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:
Black White Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	



3W
410 Lm
=
40W
incandescent

SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

EXTRALETI 100 ROUND

SURFACE LAMP



2S1.000.G1K



2S4.000.G1K




2S2.000.G1K



2S3.000.G1K

MADE IN ITALY




EXTRALETI 100 ROUND

SURFACE LAMP

EXTRALETI 100 ROUND

3W 2S1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

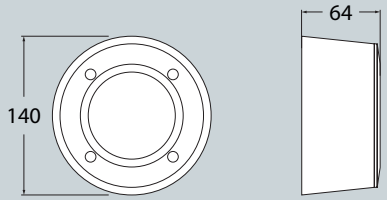


Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-GR

3W 2S2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

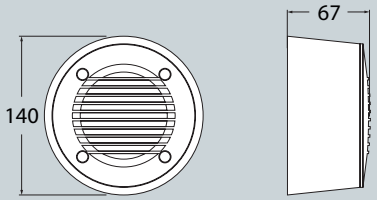


Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-EL

3W 2S3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

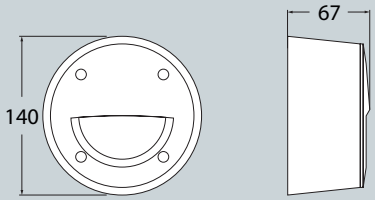


Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-ST

3W 2S4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

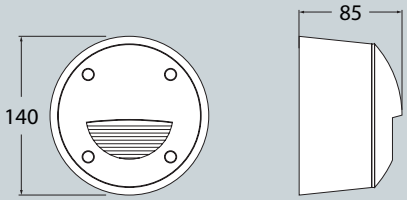


Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE


SURFACE LAMP

Surface wall lamp with square shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa **lampadina a LED GX53 con kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*



EXTRALETI 100 SQUARE
3S1.000



EXTRALETI 100 SQUARE-GR
3S2.000




EXTRALETI 100 SQUARE-EL
3S3.000




EXTRALETI 100 SQUARE-ST
3S4.000



3S4.000.G1K

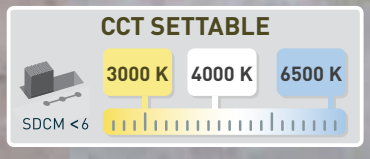

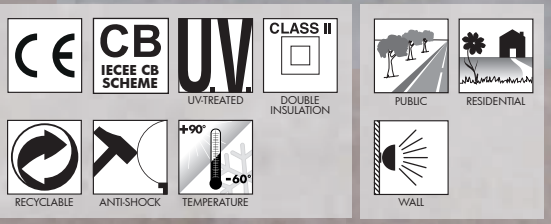

EXTRALETI 100 SQUARE - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE *in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*





BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led** lamp.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina* ***led GX53****.*

EXTRALETI 100 SQUARE



Dimensions and weight
Height: 120 mm
Width: 120 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:
Black *White* Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	



3W
410 Lm
=
40W
incandescent

SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

EXTRALETI 100 SQUARE

SURFACE LAMP










EXTRALETI 100 SQUARE

SURFACE LAMP

EXTRALETI 100 SQUARE

3W 3S1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-GR

3W 3S2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-EL

3W 3S3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-ST

3W 3S4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K



Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 200


SURFACE LAMP

Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa **lampadina a LED GX53 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*


EXTRALETI 200
4S1.000


EXTRALETI 200-GL
4S2.000



EXTRALETI 200-RS
4S3.000



EXTRALETI 200-HS
4S4.000


EXTRALETI 200-VP
4S5.000



4S1.000.G1K

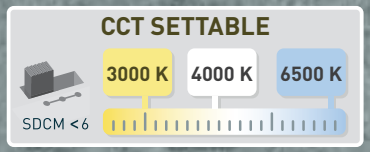

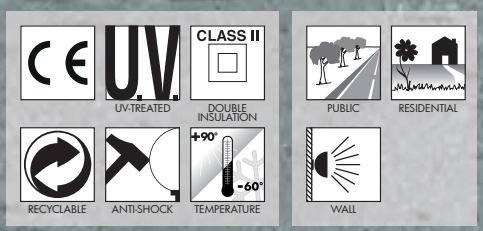



EXTRALETI 200 - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattacabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE *in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*





BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led** lamp.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina* ***led GX53****.*

EXTRALETI 200



Dimensions and weight
Height: 120 mm
Width: 200 mm
Depth: 65/85 mm
Weight: 0,7 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	



3W
410 Lm
=
40W
incandescent

SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

EXTRALETI 200

SURFACE LAMP












MADE IN ITALY

EXTRALETI 200

3W 4S1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

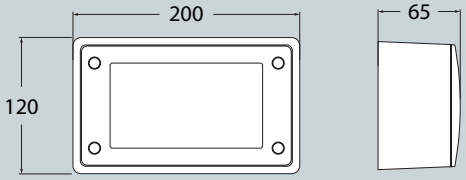


Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-GL

3W 4S2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

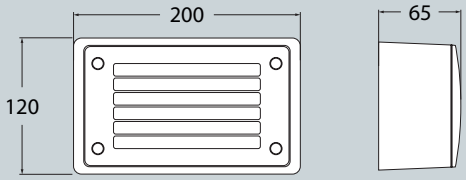


Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-RS

3W 4S3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

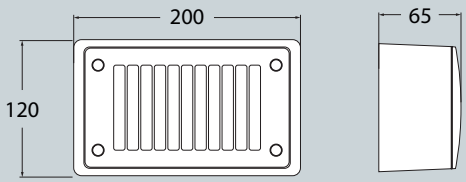


Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-HS

3W 4S4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

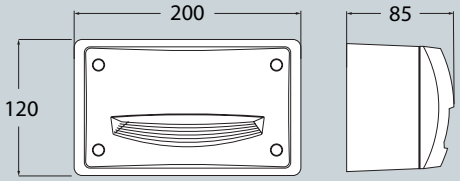


Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-VP

3W 4S5.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

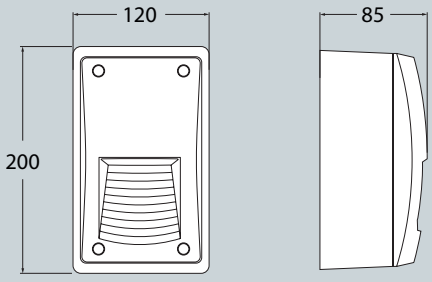

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 300

SURFACE LAMP

Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with 2 x TÜV-CB certified long-life, efficient and **Kelvin settable GX53 LED lamps included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con incluse **2 lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*


EXTRALETI 300
5S1.000


EXTRALETI 300-GL
5S2.000



EXTRALETI 300-RS
5S3.000



EXTRALETI 300-HS
5S4.000


EXTRALETI 300-VP
5S5.000



5S1.000.G2K

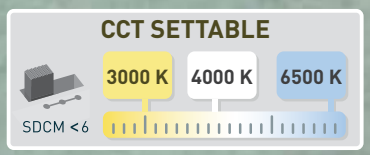

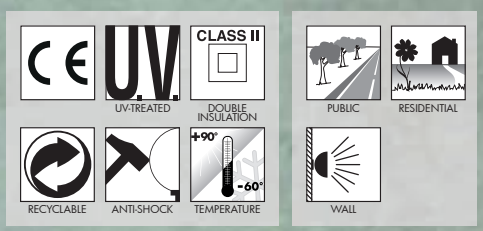



EXTRALETI 300 - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE *in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **2x GX53 led lamps**.

CORPO *realizzato in resina antiurto, stabilizzato ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di* ***2 lampadine led GX53***.

EXTRALETI 300



Dimensions and weight
Height: 120 mm
Width: 300 mm
Depth: 65mm
Weight: 1 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Surface lamp supplied complete with 2 x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	2x 3W **6W**	**820 lm**	6500 K	.G2K
			4000 K	
			3000 K	



2x 3W 820 Lm = **60W** incandescent

SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

EXTRALETI 300

SURFACE LAMP












MADE IN ITALY

EXTRALETI 300

6W 5S1.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

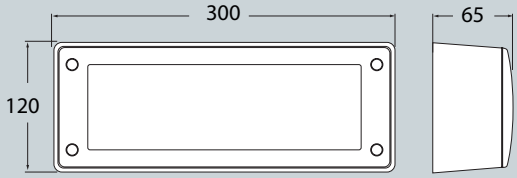


Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-GL

6W 5S2.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

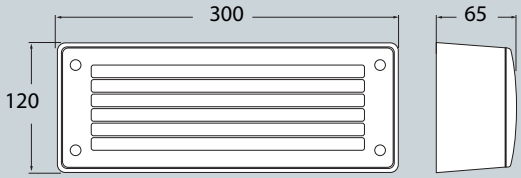


Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-RS

6W 5S3.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

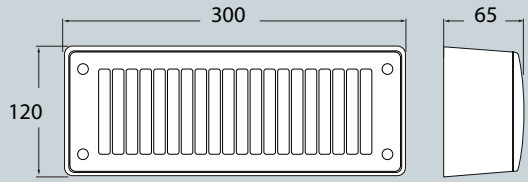


Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-HS

6W 5S4.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

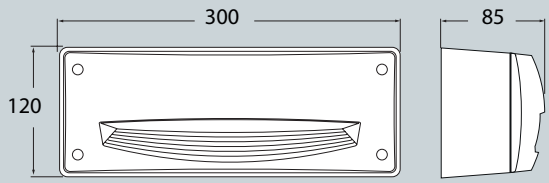


Pcs 20
Kg 11
mc 0,14

EXTRALETI 300-VP

6W 5S5.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

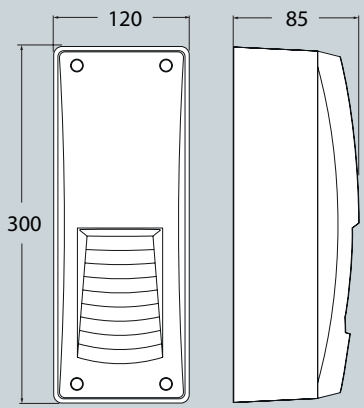

Pcs 20
Kg 11
mc 0,14





FLOODLIGHT

MINITOMMY

FLOODLIGHT

LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

*Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover ad anello o a palpebra senza viti a vista. Fornito nella versione standard con **inclusa lampadina a LED GU10 con Kelvin impostabile** certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.*



MINITOMMY
1M1.000



MINITOMMY-EL
1M2.000



MINITOMMY 2L
3M1.000



MINITOMMY-EL 2L
3M2.000

1M1.001.U1K

CCT SETTABLE

2700 K 4000 K

SDCM <3

CE CB IECEE CB SCHEME U.V. UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE

PUBLIC RESIDENTIAL INDOOR OUTDOOR

WALL CEILING SPIKE

MADE IN ITALY

MINITOMMY - COMPONENTS

IP66




ROTATION DISK | SPIKE | CONNECTION FITTING


COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

COVER *senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

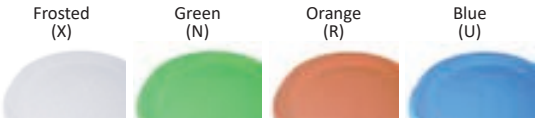



Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

CORPO *in resina predisposto per il fissaggio degli accessori elettrici e* ***FORCELLA*** *di supporto per permettere l'orientamento del proiettore.*

INSTALLATION ELEMENTS:
- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:
- DISCO DI ROTAZIONE per l'istallazione a parete.
- PICCHETTO per l'istallazione nel terreno.
- SUPPORTO per la versione a luce doppia.

MINITOMMY



Dimensions and weight
Height: 127 mm
Width: 122 mm
Weight: 0,45 Kg

Moulded Colours:
Black | Grey | White

Diffuser PC:
Frosted | Blue | Green | Orange

LED LAMPS

TÜV SÜD | CE | CB | LVD | EMC | ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	2,9W	390 Lm	4000 K	.U1K
			2700 K	
GU10 LED	4,8W	625 Lm	4000 K	.L1K
			2700 K	

Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.



2.9W
390 lm
=
35W
HALOGEN


SAVE 92%



4.8W
625 lm
=
50W
HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

MINITOMMY


FLOODLIGHT







MADE IN ITALY




MINITOMMY

FLOODLIGHT

MINITOMMY

2,9W	1M1.000.U1K
4,8W	1M1.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 30
Kg 12,6
mc 0,092

MINITOMMY SPIKE

2,9W	1M1.001.U1K
4,8W	1M1.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 30
Kg 13,8
mc 0,092

MINITOMMY 2L

2x2,9W	3M1.000.U2K
2x4,8W	3M1.000.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

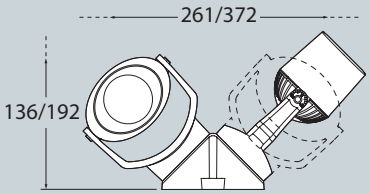


Pcs 18
Kg 16,2
mc 0,092

MINITOMMY 2L SPIKE

2x2,9W	3M1.001.U2K
2x4,8W	3M1.001.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

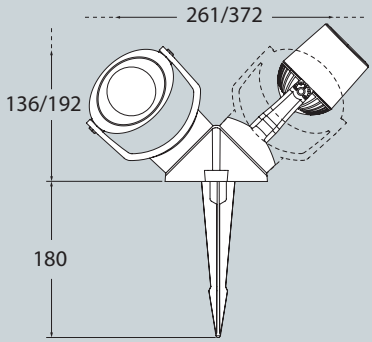

Pcs 18
Kg 17
mc 0,092


MINITOMMY-EL

FLOODLIGHT





MADE IN ITALY




MINITOMMY-EL

FLOODLIGHT

MINITOMMY-EL

2,9W	1M2.000.U1K
4,8W	1M2.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K




Pcs 30
Kg 12,6
mc 0,092

MINITOMMY-EL SPIKE

2,9W	1M2.001.U1K
4,8W	1M2.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
273000K/4000K




Pcs 30
Kg 13,8
mc 0,092

MINITOMMY-EL 2L

2x2,9W	3M2.000.U2K
2x4,8W	3M2.000.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

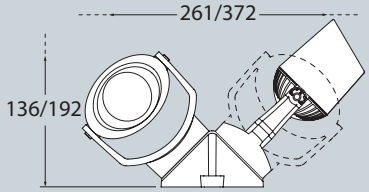


Pcs 18
Kg 16,2
mc 0,092

MINITOMMY-EL 2L SPIKE

2x2,9W	3M2.001.U2K
2x4,8W	3M2.001.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

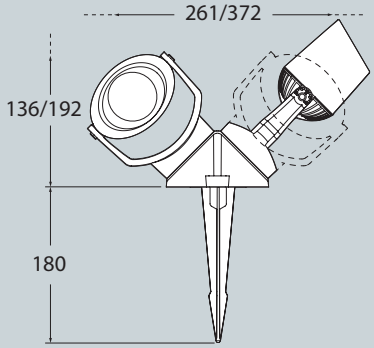

Pcs 18
Kg 17
mc 0,092

TOMMY

FLOODLIGHT

LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Square, ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

*Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover quadrata, ad anello o a palpebra senza viti a vista. Fornito con **inclusa lampadina a LED GX53 con Kelvin impostabile** certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.*


TOMMY
2M1.000


TOMMY-EL
2M2.000


TOMMY-SQ
5M1.000



TOMMY 2L
4M1.000



TOMMY-EL 2L
4M2.000


TOMMY-SQ 2L
6M1.000

2M1.001.D1K



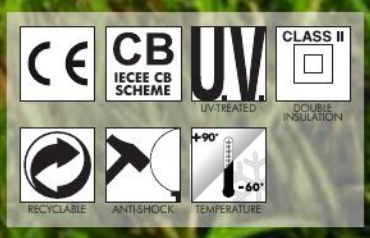



TOMMY - COMPONENTS

IP66



ROTATION DISK | SPIKE | CONNECTION FITTING



COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.


COVER *senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X) | Green (N) | Orange (R) | Blue (U)





Resin **BODY** suitable for the electrical devices fixation and resin ***SUPPORT FORK*** to allow a fully adjustable floodlight position.

CORPO *in resina predisposto per il fissaggio degli accessori elettrici e* ***FORCELLA*** *di supporto per permettere l'oriaentamento del proiettore.*

INSTALLATION ELEMENTS:
- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:
- DISCO DI ROTAZIONE per l'istallazione a parete.
- PICCHETTO per l'istallazione nel terreno.
- SUPPORTO per la versione a luce doppia.

TOMMY



Dimensions and weight
Height:165 mm
Width: 152 mm
Weight: 0,8 Kg

Moulded Colours:
Black | Grey | White

Diffuser PC:
Frosted
Blue | Green | Orange

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Floodlight supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources
- **BUILT-IN DRIVER**: quick and easy lamp replacement
- **GREAT FLEXIBILITY**: GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K 4000 K 3000 K	.G1K
GX53 LED	10 W	1290 Lm	6500 K 4000 K 3000 K	.D1K



3W 410 Lm = 40W incandescent


SAVE 93%



10W 1290 Lm = 100W incandescent

SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

TOMMY

FLOODLIGHT








TOMMY
FLOODLIGHT

TOMMY

3W	2M1.000.G1K
10W	2M1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K




Pcs 18
Kg 15,3
mc 0,092

TOMMY SPIKE

3W	2M1.001.G1K
10W	2M1.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

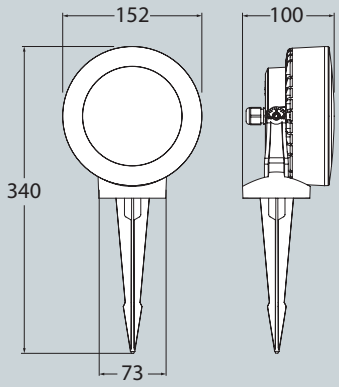


Pcs 18
Kg 16
mc 0,092

TOMMY 2L

2x3W	4M1.000.G2K
2x10W	4M1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

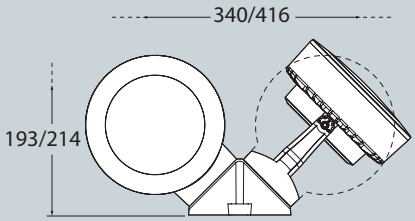


Pcs 8
Kg 13,9
mc 0,092

TOMMY 2L SPIKE

2x3W	4M1.001.G2K
2x10W	4M1.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

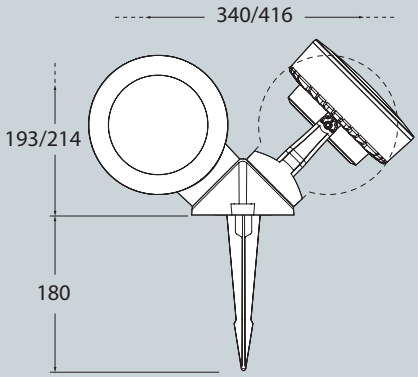

Pcs 8
Kg 14,2
mc 0,092


TOMMY-EL

FLOODLIGHT





MADE IN ITALY




TOMMY-EL

FLOODLIGHT

TOMMY-EL

3W	2M2.000.G1K
10W	2M2.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

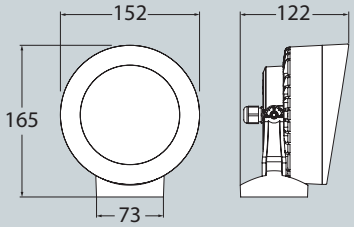


Pcs 18
Kg 15,3
mc 0,092

TOMMY-EL SPIKE

3W	2M2.001.G1K
10W	2M2.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

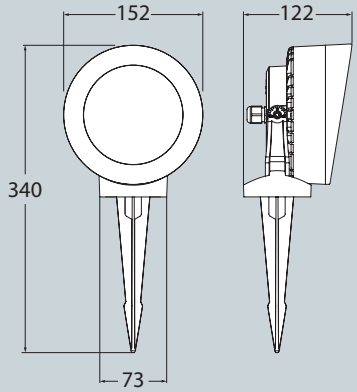


Pcs 18
Kg 16
mc 0,092

TOMMY-EL 2L

2x3W	4M2.000.G2K
2x10W	4M2.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

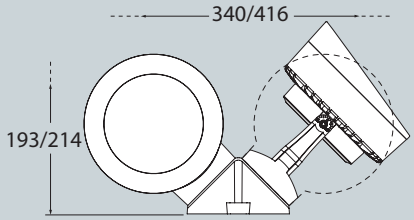


Pcs 8
Kg 13,9
mc 0,092

TOMMY-EL 2L SPIKE

2x3W	4M2.001.G2K
2x10W	4M2.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

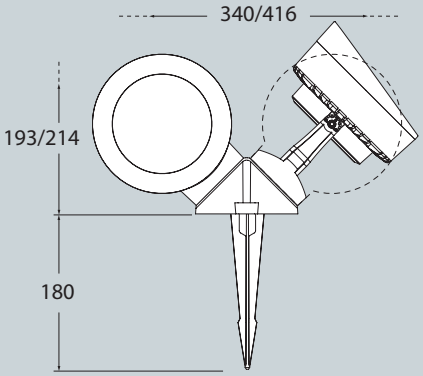

Pcs 8
Kg 14,2
mc 0,092


TOMMY-SQ

FLOODLIGHT





MADE IN ITALY




TOMMY-SQ

FLOODLIGHT

TOMMY-SQ	
3W	5M1.000.G1K
10W	5M1.000.D1K


CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K



Pcs 18
Kg 15,3
mc 0,092

TOMMY-SQ SPIKE	
3W	5M1.001.G1K
10W	5M1.001.D1K


CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

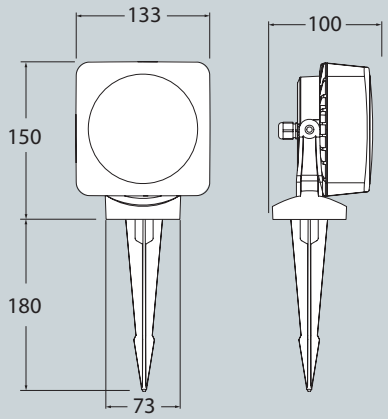

Pcs 18
Kg 16
mc 0,092

TOMMY-SQ 2L	
2x3W	6M1.000.G2K
2x10W	6M1.000.D2K


2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

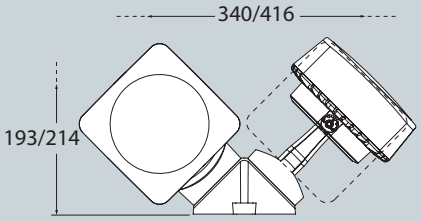

Pcs 8
Kg 13,9
mc 0,092

TOMMY-SQ 2L SPIKE	
2x3W	6M1.001.G2K
2x10W	6M1.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

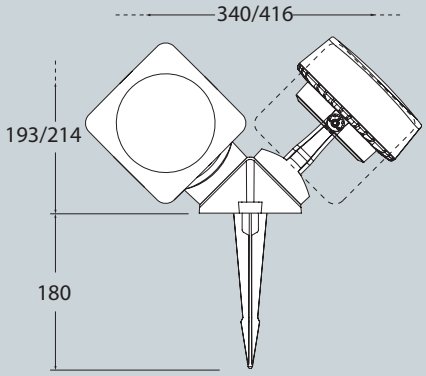

Pcs 8
Kg 14,2
mc 0,092


GIOVA/GERMANA


FLOODLIGHT


Rectangular floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ground installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with E27 lampholder. Motion sensor version available. Insulation class II, Protection rating IP66.

*Proiettore rettangolare senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete e al suolo. Fornito completo di braccio che permette l'orientamento del proiettore in qualsiasi posizione. Provvisto di **lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*



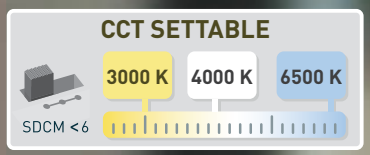

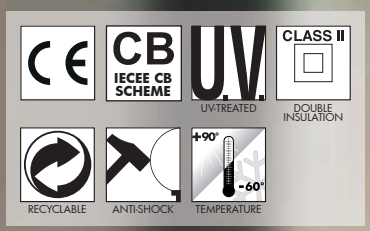



2N1.702.D2K

GIOVA/GERMANA - COMPONENTS

IP66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER *senza viti a vista in resina antiurto stabilizzata ai raggi UV.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.*

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BRACKET made of shockproof resin material, UV-rays stabilized, to allow a fully adjustable position of the floodlight.

BRACCIO *realizzato in resina antiurto, stabilizzato ai raggi UV, che permette l'orientamento in qualsiasi posizione del proiettore.*

GIOVA/GERMANA



Dimensions and weight
Height: 280 mm
Width: 180 mm
Weight: 1,6 Kg

Moulded Colours:
Black *Grey* *White*

Diffuser PMMA:
Opal

2x GX53 LED



Floodlight supplied **fully pre-wired** complete with 2x TÜV-CB certified, long-life , efficient and **Kelvin settable GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	2x 3W **6W**	**820 lm**	6500 K 4000 K 3000 K	.G2K
GX53 LED	2x 10W **20W**	**2580 lm**	6500 K 4000 K 3000 K	.D2K



2x 10W = **50W**
2.580 Lm SON-HQI

SAVE 60%

E27




Floodlight supplied **fully pre-wired** with white resin reflective ceiling designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.P27
E27 + Sensor (CFL -LED)	max 160 mm	.PS7

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GIOVA/GERMANA

FLOODLIGHT










GIOVA/GERMANA GX53	
6W	2N1.702.G2K
20W	2N1.702.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K







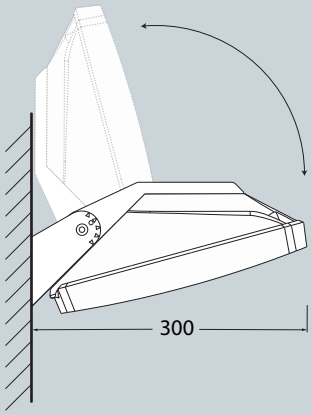


Pcs 18
Kg 29,8
mc 0,198

GIOVA/GERMANA E27	
E27 lampholder	2N1.702.P27
E27 with sensor	2N1.702.PS7





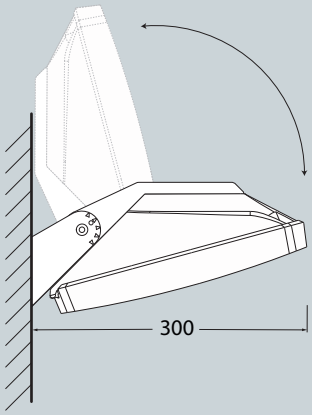


Pcs 18
Kg 21,7
mc 0,198

GERMANA

FLOODLIGHT

Rectangular floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and post installation. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with E27 lampholder. Motion sensor version available. Insulation class II, Protection rating IP66.


*Proiettore rettangolare senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete e a palo. Provvisto di **lampadine a LED GX53 con kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o fornito nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*





GERMANA
2N1.000



2N1.000.D2K

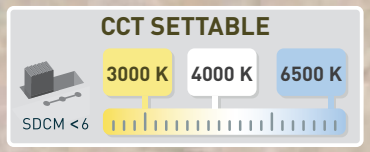

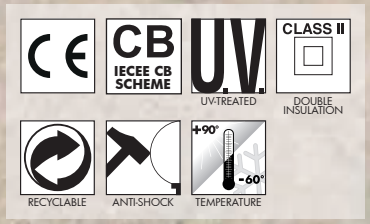



GERMANA - COMPONENTS

IP66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER *senza viti a vista in resina antiurto stabilizzata ai raggi UV.*

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.*

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

GERMANA



Dimensions and weight
Height: 250 mm
Width: 180 mm
Weight: 1,4 Kg

Moulded Colours:
Black Grey White

Diffuser PMMA:
Opal

2x GX53 LED



Floodlight supplied **fully pre-wired** complete with 2x TÜV-CB certified, long-life , efficient and **Kelvin settable GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	2x 3W **6W**	**820 lm**	6500 K 4000 K 3000 K	.G2K
GX53 LED	2x 10W **20W**	**2580 lm**	6500 K 4000 K 3000 K	.D2K



2x 10W = **50W**
2.580 Lm SON-HQI

SAVE 60%

E27



Floodlight supplied **fully pre-wired** with white resin reflective ceiling designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm ⟷	.P27
E27 + Sensor (CFL -LED)	max 160 mm ⟷	.PS7

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


GERMANA

FLOODLIGHT










GERMANA
FLOODLIGHT


GERMANA GX53	
6W	2N1.000.G2K
20W	2N1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

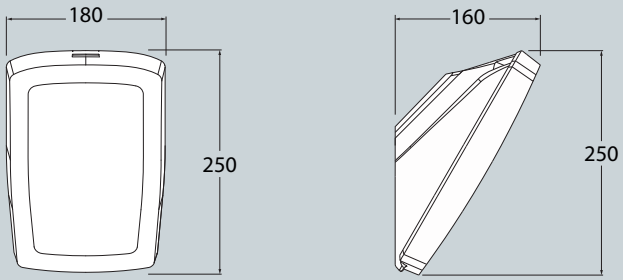

Pcs 18
Kg 26,2
mc 0,198

GERMANA E27	
E27 lampholder	2N1.000.P27
E27 with sensor	2N1.000.PS7

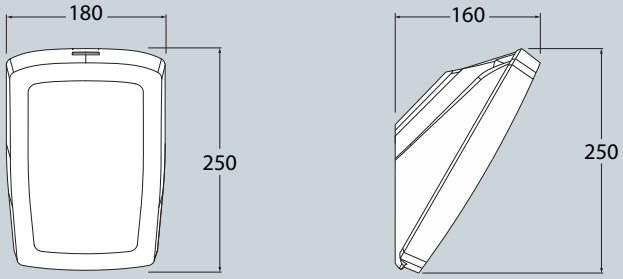

Pcs 18
Kg 18,1
mc 0,198

BOLLARD VERSION



Detailed information on page 192.

GIOVA/GIUSEPPE

FLOODLIGHT


Square floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall, ground and post installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin & Power settable GX53 LED lamps included** or provided with 2x E27 lampholders. Motion sensor version available. Insulation class II, Protection rating IP66.


*Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a suolo e a palo. Provvisto completo di braccio che permette l'orientamento del proiettore in qualsiasi posizione. Fornito con **incluse lampadine a LED GX53 con GX53 LED con Kelvin e Potenza impostabili** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione 2x E27, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*





GIOVA/GIUSEPPE
4P1.702
4P2.702

4P1.702.E1P

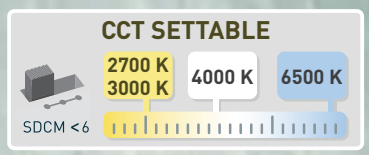

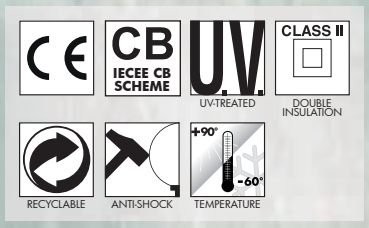





GIOVA/GIUSEPPE
FLOODLIGHT

GIOVA/GIUSEPPE - COMPONENTS

IP66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.


COVER *senza viti a vista in resina antiurto stabilizzata ai raggi UV.*

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.*

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*



BRACKET made of shockproof resin material, UV-rays stabilized, to allow a fully adjustable position of the floodlight.

BRACCIO *realizzato in resina antiurto, stabilizzato ai raggi UV, che permette l'orientamento in qualsiasi posizione del proiettore.*

GIUSEPPE



Dimensions and weight
Height: 150 mm
Width: 300 mm
Weight: 2,8 Kg

Moulded Colours:
Black Grey White

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020

Technical details on page 668.


4x GX53 LED



4P2.702


Floodlight supplied **with white resin reflective ceiling fully pre-wired** and complete with 4 x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Quick and easy lamp replacement for a very simple maintenance after installation.

	100 - 240 V			
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	4x 10W **40W**	**5160 lm**	6500 K	.D4K
			4000 K	
			3000 K	



4x 10W = **100W**
5160 Lm SON-HQI

SAVE 60%



GX53 LED



4P1.702


Floodlight supplied **fully pre-wired** and complete with TÜV approved, long-life, efficient, **Kelvin and Power settable GX53 LED lamp** in different wattages.


	100 - 240 V			
LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	**15 W**	**1940 lm**	4000 K	.E1P
			2700 K	
	9 W eco mode	1300 lm	4000 K	
			2700 K	
GX53 LED	**15 W** + SENSOR	**1940 lm**	4000 K	.ESP
			2700 K	
	9W eco mode + SENSOR	1300 lm	4000 K	
			2700 K	



15W-9W = 150W-100W
incandescent

SAVE 90%





2x E27



4P2.702

Floodlight supplied **fully pre-wired** with white resin reflective ceiling and complete with **2x E27 lampholders**.
Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

		*ADD. SUFFIX
2x E27 (CFL -LED)	max 160 mm ⟷	.E28
2x E27 + SENSOR	max 160 mm ⟷	.ES8


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GIOVA/GIUSEPPE

FLOODLIGHT








GIOVA/GIUSEPPE GX53

15W/9W	4P1.702.E1P
40W	4P2.702.D4K


CCT SETTABLE GX53 LED LAMPS INCLUDED

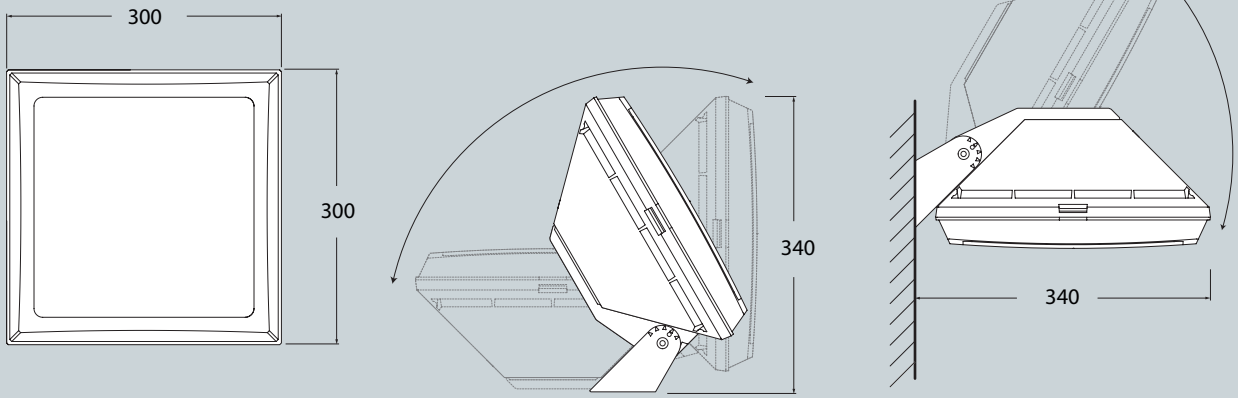

Pcs 10
Kg 31
mc 0,195

GIOVA/GIUSEPPE 2xE27

2xE27 lampholder	4P2.702.E28
2xE27 with sensor	4P2.702.ES8

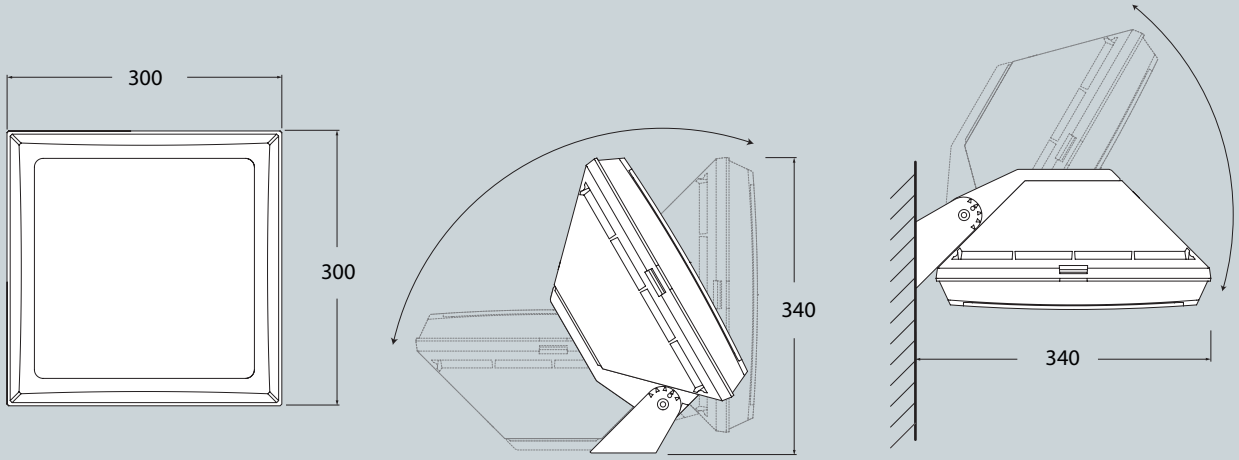

Pcs 10
Kg 21
mc 0,195

POST SYSTEM VERSION



Detailed information on page 542.

GIUSEPPE


FLOODLIGHT

Square floodlight with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation. Supplied with TÜV-CB certified, long-life, efficient **Kelvin & Power settable GX53 LED lamps included** or provided with 2x E27 lampholders. Motion sensor version available. Insulation class II, Protection rating IP66.


*Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto e a palo. Fornito con **incluse lampadine a LED GX53 con Kelvin e Potenza impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione 2x E27, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*




GIUSEPPE
4P1.000
4P2.000

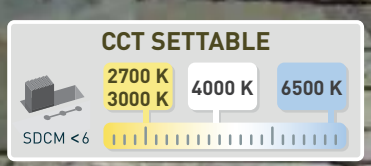

4P2.000.D4K

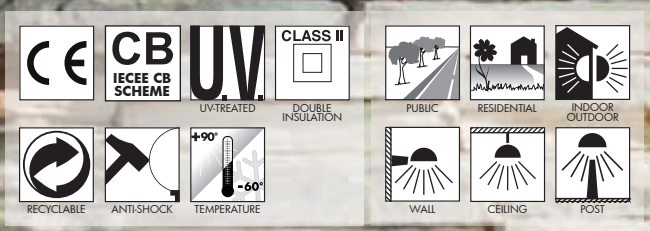



GIUSEPPE
FLOODLIGHT

GIUSEPPE - COMPONENTS

IP66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER *senza viti a vista in resina antiurto stabilizzata ai raggi UV.*

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.*

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO *realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

GIUSEPPE



Dimensions and weight
Height:150 mm
Width: 300 mm
Weight: 2,8 Kg

Moulded Colours:
Black Grey White

Diffuser PMMA:
Opal

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

4x GX53 LED




4P2.000


Floodlight supplied **with white resin reflective ceiling fully pre-wired** and complete with 4 x TÜV-CB certified long-life efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	4x 10W **40W**	**5160 lm**	6500 K 4000 K 3000 K	.D4K


4x 10W
5160 Lm
=
100W
SON-HQI

SAVE 60%



GX53 LED




4P1.000


Floodlight supplied **fully pre-wired** and complete with TÜV approved, long-life, efficient, **Kelvin and Power settable GX53 LED lamp** in different wattages.


100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	**15 W**	**1940 lm**	4000 K 2700 K	.E1P
	9 W eco mode	**1300 lm**	4000 K 2700 K	
GX53 LED	**15 W** + SENSOR	**1940 lm**	4000 K 2700 K	.ESP
	9W eco mode + SENSOR	**1300 lm**	4000 K 2700 K	


15W-9W = 150W-100W
incandescent

SAVE 90%





2x E27



4P2.000


Floodlight supplied **fully pre-wired** with white resin reflective ceiling and complete with **2x E27 lampholders**.
Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

		*ADD. SUFFIX
2x E27 (CFL -LED)	max 160 mm	.E28
2x E27 + SENSOR	max 160 mm	.ES8

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GIUSEPPE

FLOODLIGHT

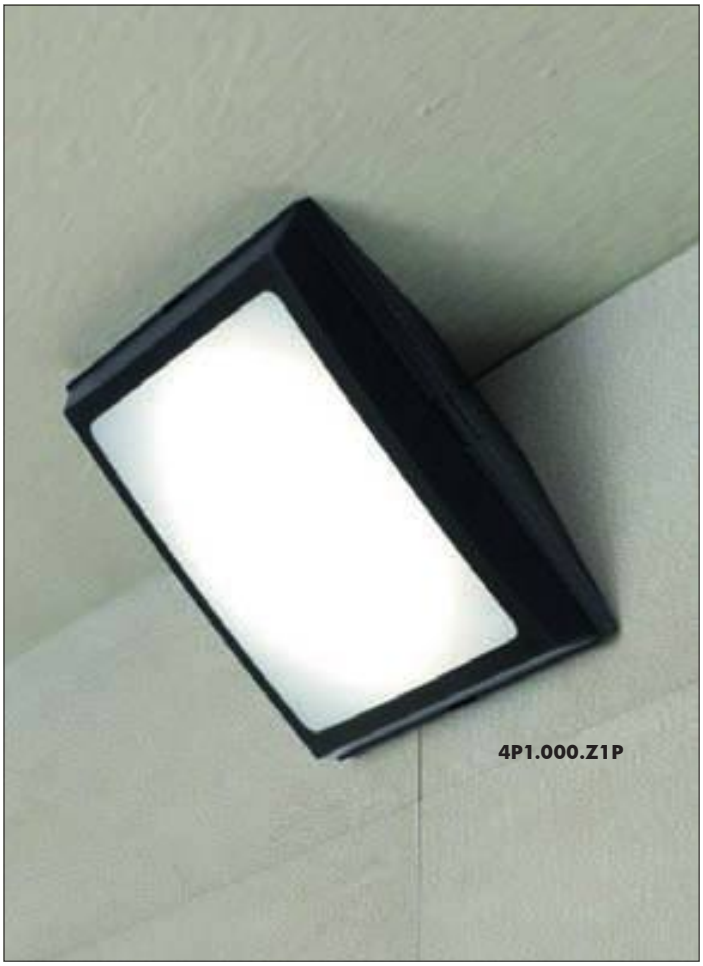

4P1.000.Z1P




4P2.000.D4K




4P1.000.E1K

MADE IN ITALY




GIUSEPPE GX53	
15W/9W	4P1.000.E1P
40W	4P2.000.D4K

CCT SETTABLE GX53 LED LAMPS INCLUDED

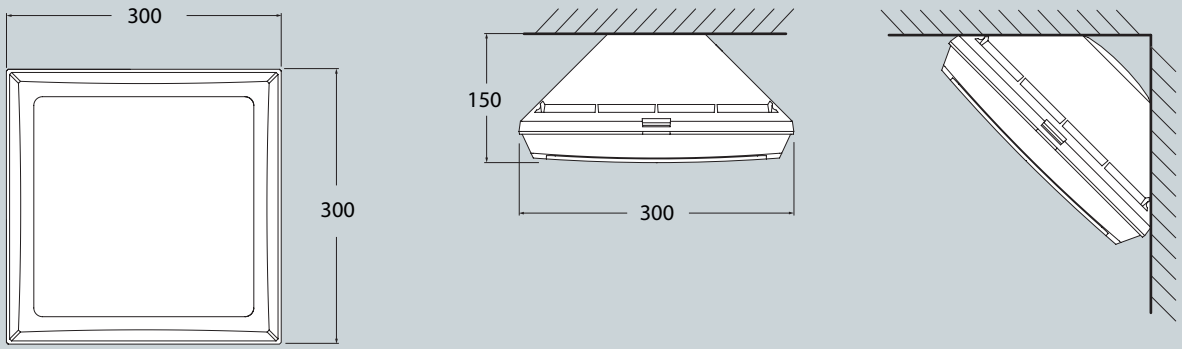

Pcs 10
Kg 29
mc 0,195

GIUSEPPE 2xE27	
2xE27 lampholder	4P2.000.E28
2xE27 with sensor	4P2.000.ES8

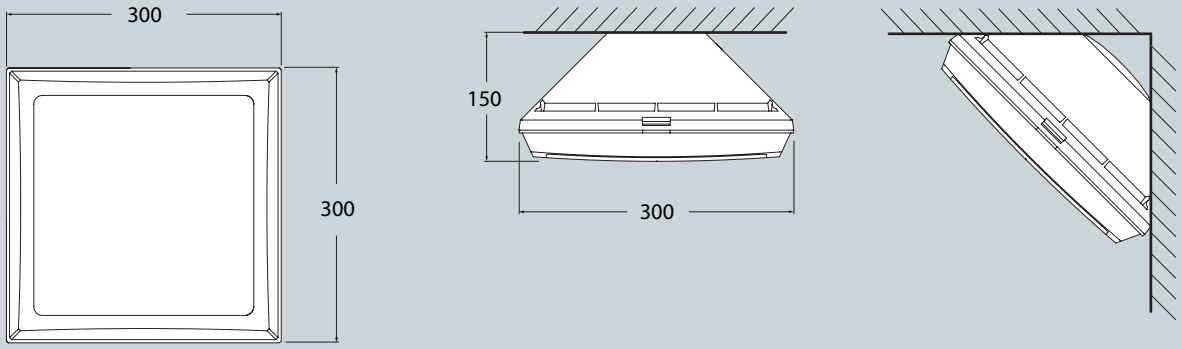

Pcs 10
Kg 19
mc 0,195

BOLLARD VERSION



Detailed information on page 192.






BULKHEAD

FRANCY-OP

RECTANGULAR

Bulkhead lamp with no visible screws and front light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with E27 lampholder. Version with motion sensor available. Insulation class II, Protection rating IP66.

*Plafoniera senza viti a vista con emissione della luce frontale. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Completa di **lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o fornita nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*





FRANCY-OP
2A1.000

S *2A2.000*
SMART PACK




2A1.000

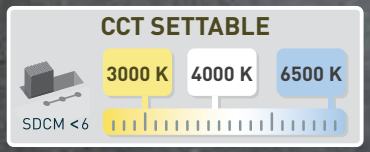

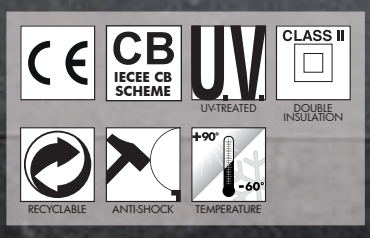







FRANCY-OP
RECTANGULAR

FRANCY-0P - COMPONENTS

IP66



COVER with no visible screws made of shockproof resin material UV-rays stabilized. Designed for getting front light emission.

COVER *senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV. Disegnata per ottenere un'emissione frontale della luce.*



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.*



BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with E27 or with 2x GX53 lampholders and complete with silicone rubber gasket to ensure high protection against external agents.

BASE *realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampada E27 o di 2 portalampada GX53. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

FRANCY-OP



Dimensions and weight
Width: 130 mm
Height: 300 mm
Depth: 85 mm
Weight: 0,6 Kg

Moulded Colours:
Black Grey White

Diffuser PMMA:
Opal

LED LAMPS

TÜV 900 CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Bulkhead supplied complete with 2 x TÜV-CB certified long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	2x 3W **6 W**	**820 lm**	6500 K 4000 K 3000 K	.G2K



2x 3W 820 Lm = **60W** incandescent

SAVE 93%

E27



Bulkhead supplied complete with E27 lampholder. Provided as an option with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use.

			*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm		.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5 W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 3000 K	.V1K

E27 with sensor





Bulkhead supplied complete with **E27** lampholder and **E27 LED** lamps as an option. Complete with microwave daylight and motion **sensor**. Sensor operating voltage: 220-240V. (120V version available on demand).

			*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm		.ES7

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5 W**	**800 lm**	2700 K	.S1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 3000 K	.VSK

CCT SETTABLE LED LAMP

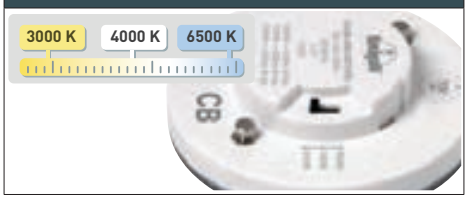

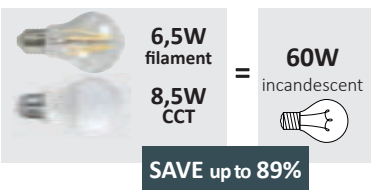

6,5W filament **8,5W CCT** = **60W** incandescent

SAVE up to 89%

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

FRANCY-OP


RECTANGULAR



2A1.000



2A1.000




FRANCY-OP

RECTANGULAR


FRANCY-OP GX53	
6W	2A1.000.G2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

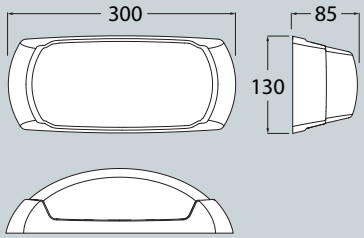

Pcs 24
Kg 17,2
mc 0,12

FRANCY-OP E27	
6,5W filament	2A1.000.F1R
8,5W CCT set	2A1.000.V1K

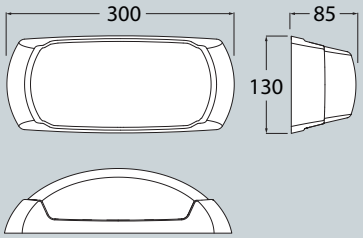

Pcs 24
Kg 15,7
mc 0,12

E27 lampholder	2A1.000.E27
E27 with sensor	2A1.000.ES7

BERTINA

SMALL ROUND

LED bulkhead lamp with round shape and **no visible screws.** Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, Protection rating IP66.


Plafoniera circolare a LED senza viti a vista. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Fornita con **incluse lampadine a *LED GX53 con Kelvin impostabile*** *certificate TÜV-CB, di lunga durata ed elevata efficienza, disponibili in diverse potenze. Classe di isolamento II, grado di protezione IP66.*




BERTINA
1B1.000



1B1.000.D1K

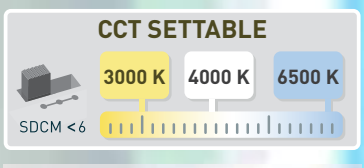

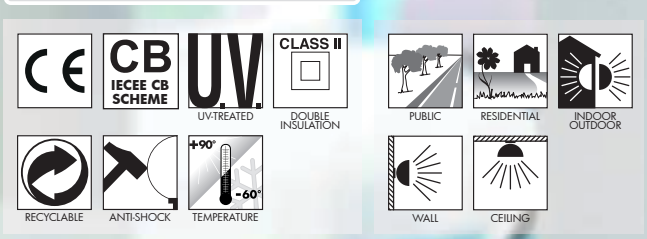



BERTINA - COMPONENTS

IP66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER *senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.*



Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.*



BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with GX53 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE *realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampade GX53 e di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BERTINA



Dimensions and weight
Diameter: ø 200 mm
Depth: 70 mm
Weight: 0,6 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	



3W
410 Lm
=
40W
incandescent

SAVE 93%




10W
1290 Lm
=
100W
incandescent

SAVE 90%

Bulkhead supplied **fully pre-wired** complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

BERTINA

SMALL ROUND








BERTINA

SMALL ROUND

BERTINA	
3W	1B1.000.G1K
10W	1B1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

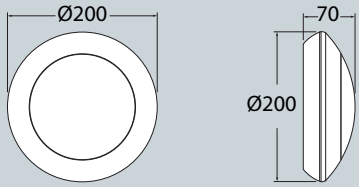

Pcs 45
Kg 30
mc 0,194


BERTA


MEDIUM ROUND


Round bulkhead lamp with **no visible screws**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

Plafoniera circolare **senza viti a vista**, *realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione* ***GX53 LED con Kelvin e Potenza impostabili*** *o* ***E27****. Classe di isolamento II, grado di protezione IP66.*




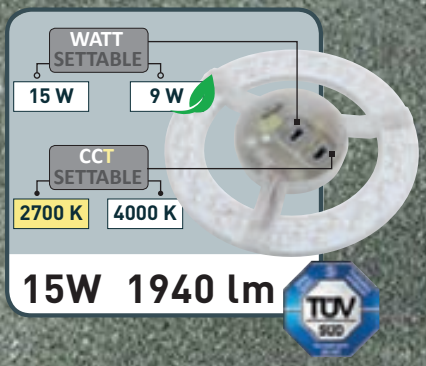


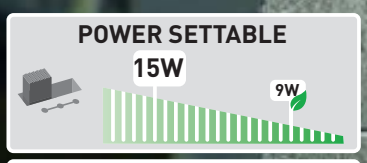

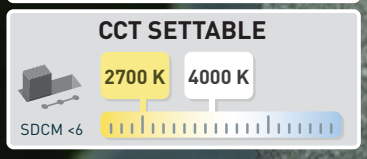

1B2.000

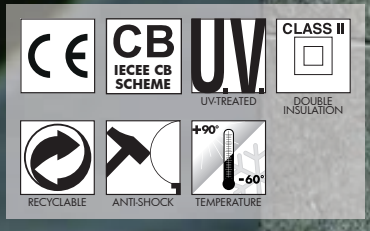



BERTA - COMPONENTS

IP66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER *senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.*

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder. Complete with silicone rubber gasket to ensure high protection against external agents.

BASE *realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampada GX53 o di piatto riflettente in resina bianca e portalampada E27. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BERTA



Dimensions and weight
Diameter: ø 275 mm
Depth: 80 mm
Weight: 1 Kg

Moulded colours:
Black White Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V				
LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%


E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.P27
E27 + SENSOR (CFL -LED)		.PS7

SETTABLE LED LAMP






POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

BERTA

MEDIUM ROUND








BERTA

MEDIUM ROUND


BERTA GX53	
15W/9W	1B2.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

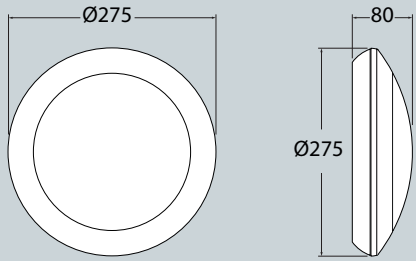

Pcs 16
Kg 20
mc 0,194

BERTA E27	
E27 lampholder	1B2.000.P27
E27 with sensor	1B2.000.PS7

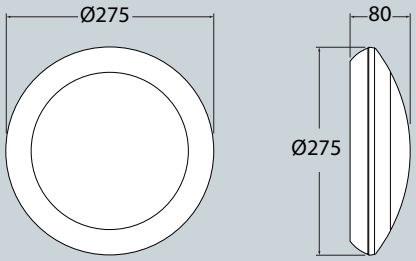


Pcs 16
Kg 16,8
mc 0,194


UMBERTA

LARGE ROUND

Round bulkhead lamp with **no visible screws.** Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin & Power settable GX53 LED** or **E27** version available.. Provided as option with motion sensor or emergency kit. Insulation class II, Protection rating IP66.


*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **GX53 LED con Kelvin e Potenza impostabili** o **2xE27**. Fornita anche con sensore o kit d'emergenza. Classe di isolamento II, grado di protezione IP66.*




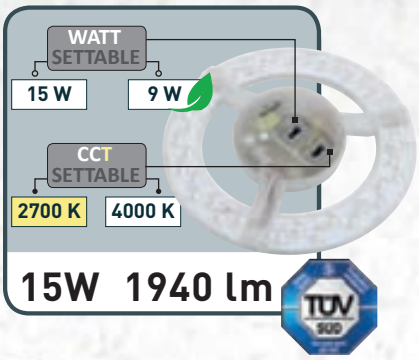





1B3.000

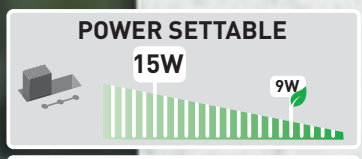

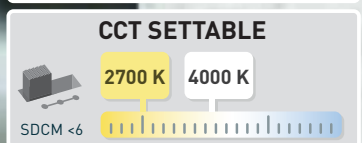

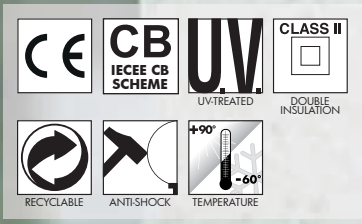





UMBERTA - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free.

COVER *in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.*

BASE complete with highly heat resistant **REFLECTIVE PLATE**, suitable for the electrical devices fixation. Provided with GX53 or E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE *completa di* ***PIATTO RIFLETTENTE*** *ad alta resistenza al calore, adatto ad alloggiare gli accessori elettrici. Fornita completa di portalampada GX53 o E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

UMBERTA



Dimensions and weight

Diameter: ø 350 mm
Depth: 94 mm
Weight: 1,3 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS

TÜV SÜD CE CB

LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included.** Quick and easy lamp replacement.
Daylight and motion sensor available as option.

- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	4000 K	.E1P
			2700 K	
	9 W eco mode	1300 lm	4000 K	.E1P
			2700 K	
GX53 LED	15 W + SENSOR	1940 lm	4000 K	.ESP
			2700 K	
	9 W eco mode + SENSOR	1300 lm	4000 K	.ESP
			2700 K	



15W-9W = 150W-100W
incandescent

SAVE 90%

E27



Bulkhead supplied **fully pre-wired** with single or double **E27 lampholder.**
Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

	*ADD. SUFFIX
E27 (CFL -LED)	.E27
2x E27 (CFL -LED)	.E28
E27 + SENSOR (CFL -LED)	.ES7
2x E27 + SENSOR (CFL -LED)	.ES8


EMERGENCY VERSION



Detailed information on page 356


1B3.000.EM1

WATT SETTABLE LED LAMP





CCT SETTABLE LED LAMP



WATT settable in two different positions to select desired power, in full (15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

UMBERTA


LARGE ROUND



1B3.000



1B3.000




UMBERTA

LARGE ROUND


UMBERTA GX53	
15W/9W	1B3.000.E1P
15W/9W with sensor	1B3.000.ESP

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

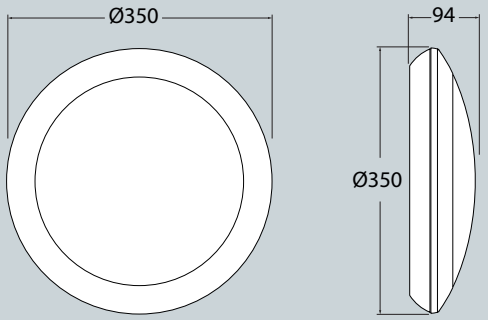

Pcs 12
Kg 22
mc 0,198

UMBERTA E27	
1xE27 lampholder	1B3.000.E27
2xE27 lampholder	1B3.000.E28
1xE27 with sensor	1B3.000.ES7
2xE27 with sensor	1B3.000.ES8

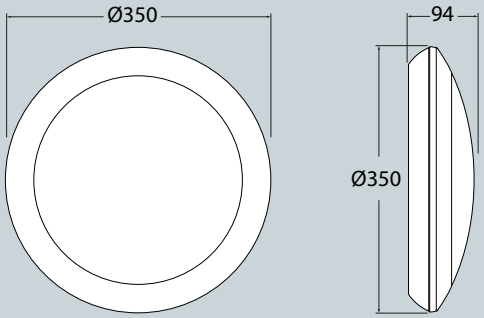


Pcs 12
Kg 19,6
mc 0,198

UMBERTA EMERGENCY


LARGE ROUND

LED MAINTAINED EMERGENCY bulkhead lamp with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. In case of blackout, the bulkhead switches from Normal mode to Emergency mode and keeps on working. Minimum 3 hours battery operating time. Insulation class II, Protection rating IP66.


Plafoniera a LED, RETE PIU' EMERGENZA, senza viti a vista. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" alla modalità "Emergenza" e rimane accesa. Autonomia minima 3 ore. Classe di isolamento II, grado di protezione IP66.



UMBERTA
EMERGENCY
1B3.000.EM1

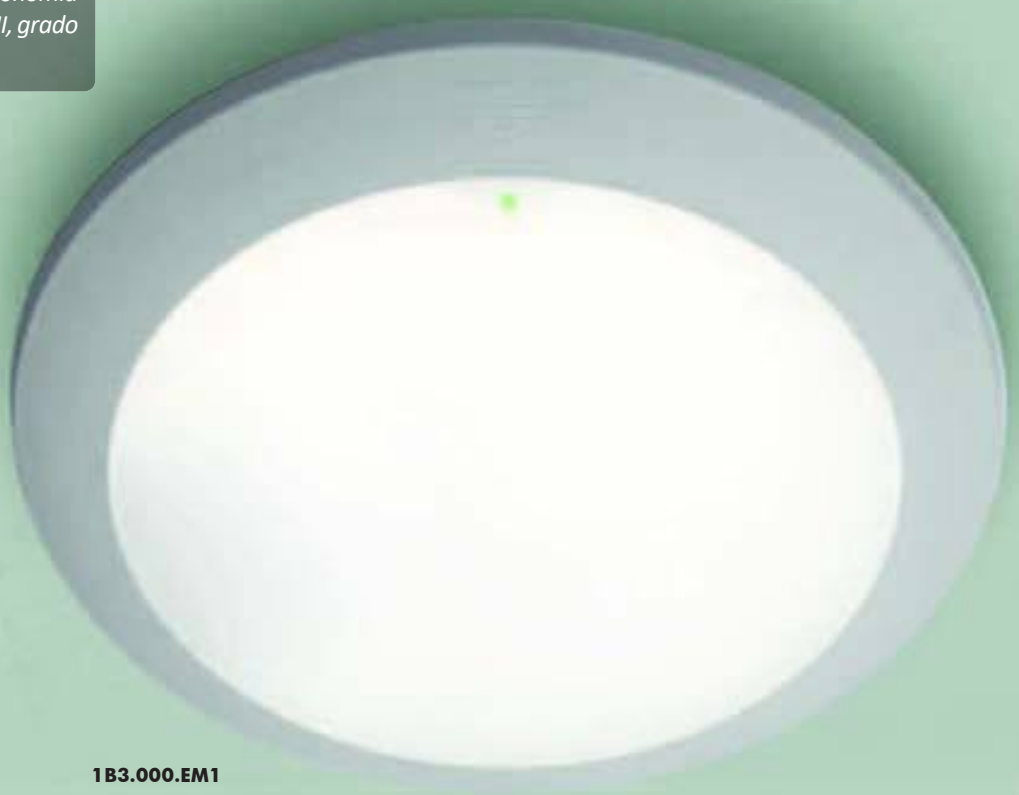

1B3.000.EM1

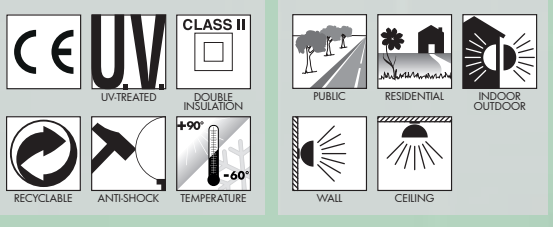



UMBERTA EMERGENCY - COMPONENTS

IP66



LED Printed Circuit Board provided with a fully-prewired **Emergency Kit**. In case of blackout the bulkhead automatically switches from Normal mode (15W - 2000 lm) to Emergency mode (2,4W - 250 lm) and keeps on working for the next 3 hours.

Circuito stampato a LED *fornito completo di* ***kit d'emergenza*** *pre-cablato. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" (15W - 2000 lm) alla modalità "Emergenza" (2,4W - 250lm) e rimane accesa per 3 ore.*



UMBERTA




Dimensions and weight
Diameter: ø 350 mm
Depth: 94 mm
Weight: 2,3 Kg


Moulded Colours:
Black *Grey* *White*

Diffuser PMMA:
Opal

UMBERTA MAINTAINED EMERGENCY

15W/9W 1B3.000.EM1

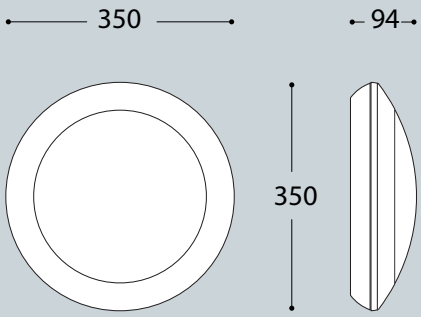

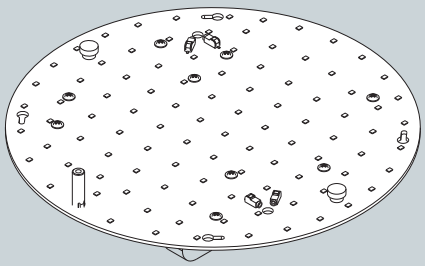

Pcs 12
Kg 25
mc 0,198

PRODUCT TYPE	Wall and Ceiling bulkhead with Emegency kit
OPERATING VOLTAGE	220~240 vAC
LUMINOUS FLUX & POWER	**2000 lumen (Normal mode), 15W 250 lumen (Emergency mode), 2.4W**
LED TYPE	Edison SMD 2835, 4000 K
CRI	>80Ra
PF (POWER FACTOR)	>0.95
BEAM ANGLE	120°
OPERATING TEMPERATURE	0~50°C
BATTERY	Ni-MH, BK370Ah3.6V,Panasonic (3.5Ah,3.6V)
BATTERY OPERATING TIME	**min 3 hours (250 lumen)**
BATTERY CHARGING TIME	24 hours
Drivers Standards	EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62384, EN 60598-2-22 EN 55015, EN61547, EN 61000 -3-2, EN 61000-3-3
Battery Standards	EN 5501-1, EN 61000, EN 55014-2





Emergency details



SAVE 90%



GREEN LED
Identifies the emergency light and shows that the system is operating correctly.



TEST BUTTON
Bulkhead provided with built-in test button to check battery status.



MAINTAINED EMERGENCY
Normal mode: 15W - 2000 lm
Emergency mode: 2.4W - 250 lm

GELMI RANGE

ROUND


Round bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera circolare con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27**. Classe di isolamento II, grado di protezione IP66.*



GELMI
1G3.000



GELMI-EL
2G3.000



GELMI-GR
3G3.000

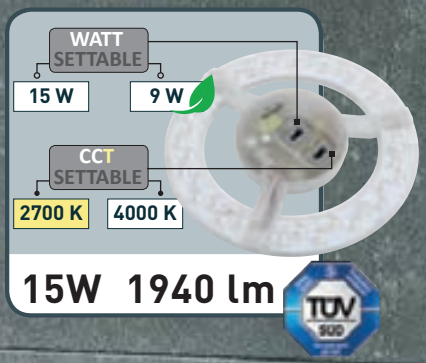




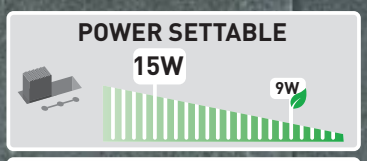

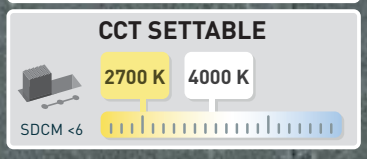

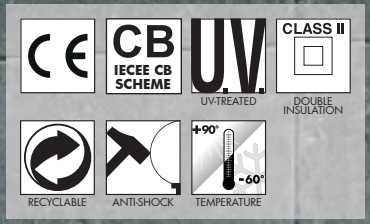





GELMI - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

***COVER** in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

***BASE** realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampada GX53 o di piatto riflettente in resina bianca e portalampada E27.*

GELMI



Dimensions and weight
Diameter: ø 313 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:
Black White Grey

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%


E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

SETTABLE LED LAMP





POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GELMI RANGE

ROUND







MADE IN ITALY




GELMI RANGE

ROUND

GELMI GX53

15W/9W 1G3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

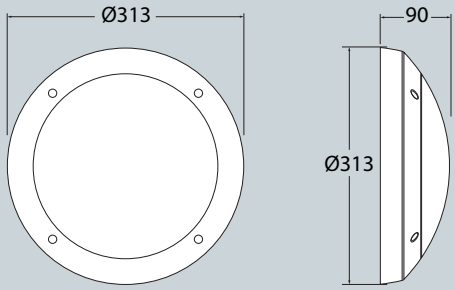


Pcs 16
Kg 20
mc 0,194

GELMI E27

E27 lampholder 1G3.000.E27

E27 with sensor 1G3.000.ES7

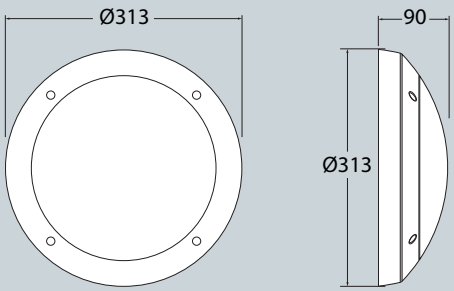


Pcs 16
Kg 16,8
mc 0,194

GELMI-EL GX53

15W/9W 2G3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

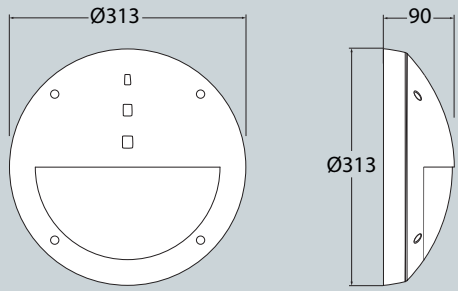


Pcs 16
Kg 20
mc 0,194

GELMI-EL E27

E27 lampholder 2G3.000.E27

E27 with sensor 2G3.000.ES7

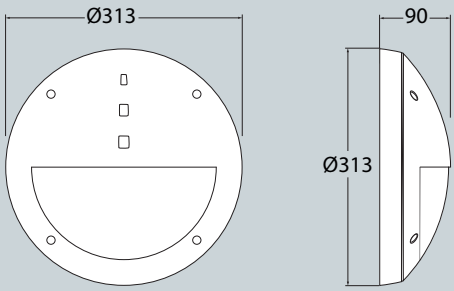


Pcs 16
Kg 16,8
mc 0,194

GELMI-GR GX53

15W/9W 3G3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

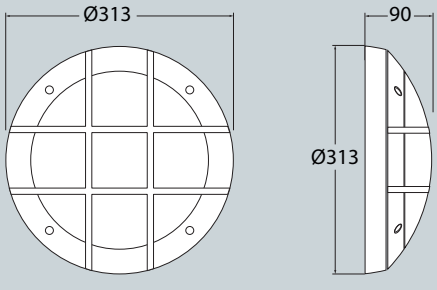


Pcs 16
Kg 20
mc 0,194

GELMI-GR E27

E27 lampholder 3G3.000.E27

E27 with sensor 3G3.000.ES7

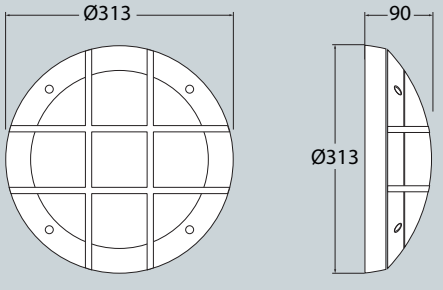

Pcs 16
Kg 16,8
mc 0,194


DANZI RANGE

OVAL


Oval bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.


*Plafoniera ovale con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27.** Classe di isolamento II, grado di protezione IP66.*



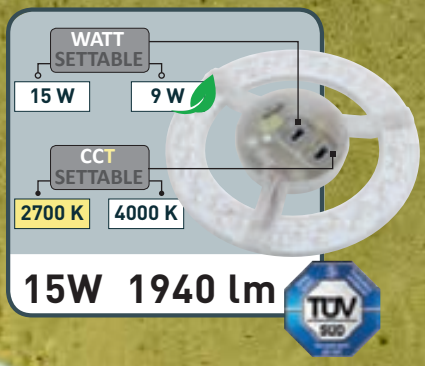





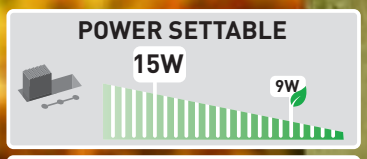

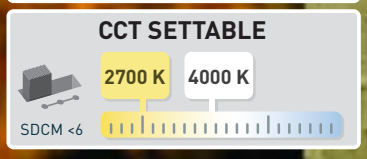

1D3.000

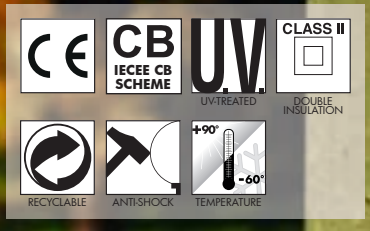





DANZI - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

COVER *in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.*


Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE *realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampada GX53 o di piatto riflettente in resina bianca e portalampada E27.*

DANZI



Dimensions and weight
Width: 245 mm
Height: 338 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%


E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

SETTABLE LED LAMP





POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

DANZI RANGE

OVAL










DANZI RANGE

OVAL

DANZI GX53

15W/9W 1D3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

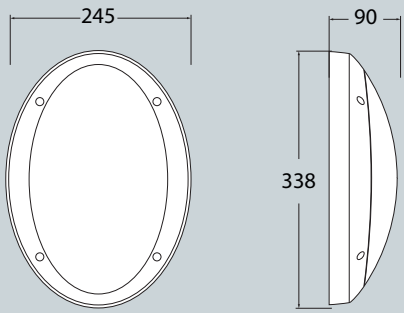


Pcs 16
Kg 18,7
mc 0,194

DANZI E27

E27 lampholder 1D3.000.E27

E27 with sensor 1D3.000.ES7

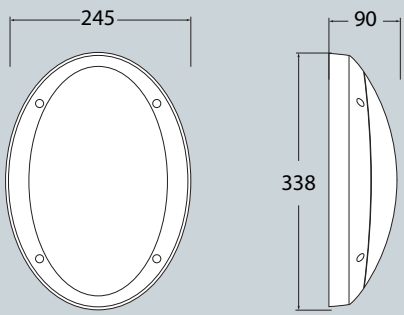


Pcs 16
Kg 15,5
mc 0,194

DANZI-VE GX53

15W/9W 2D3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

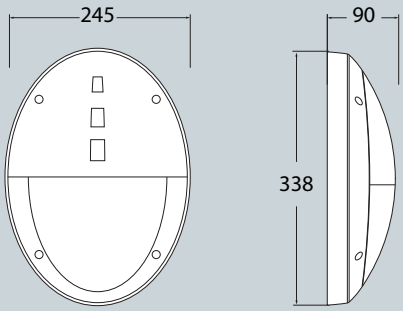


Pcs 16
Kg 18,7
mc 0,194

DANZI-VE E27

E27 lampholder 2D3.000.E27

E27 with sensor 2D3.000.ES7

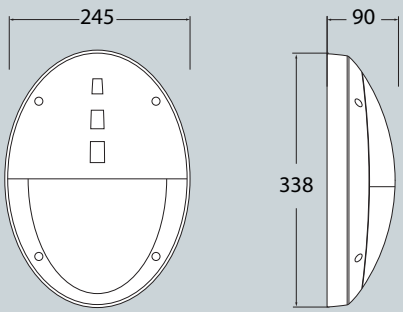


Pcs 16
Kg 15,5
mc 0,194

DANZI-GR GX53

15W/9W 3D3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

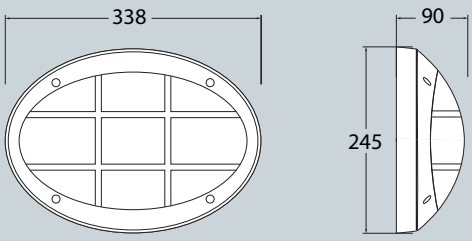


Pcs 16
Kg 18,7
mc 0,194

DANZI-GR E27

E27 lampholder 3D3.000.E27

E27 with sensor 3D3.000.ES7

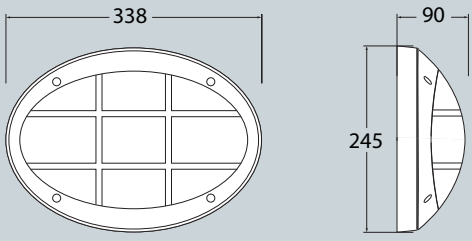

Pcs 16
Kg 15,5
mc 0,194

STUCCHI


SQUARE

Square bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied as option with colored backlit base. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.


*Plafoniera quadra realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27.** Classe di isolamento II, grado di protezione IP66.*





STUCCHI
1U3.000

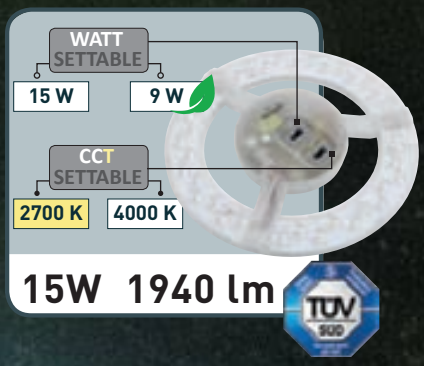


1U3.000.E1P

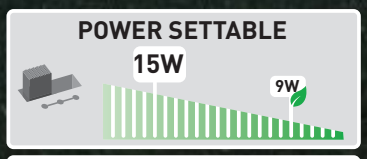

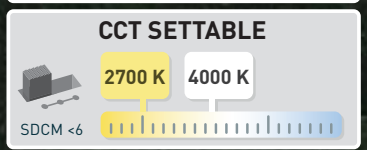

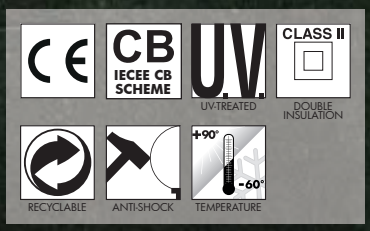



STUCCHI - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized.

***COVER** in resina antiurto stabilizzata ai raggi UV.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.


***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

***BASE** realizzata in resina antiurto. Fornita completa di portalampada E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.*



STUCCHI



Dimensions and weight
Height: 310 mm
Width: 310 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020

Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%


E27




Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

SETTABLE LED LAMP







POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

STUCCHI

SQUARE








STUCCHI GX53

15W/9W 1U3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

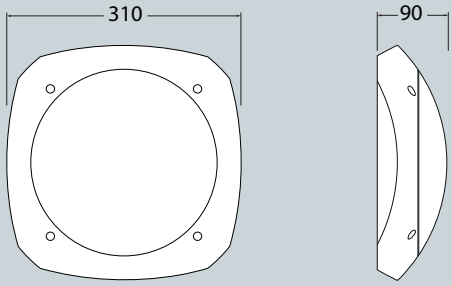


Pcs 16
Kg 20
mc 0,194

STUCCHI E27

E27 lampholder 1U3.000.E27

E27 with sensor 1U3.000.ES7

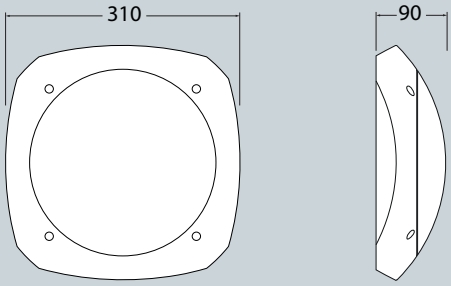

Pcs 16
Kg 16.8
mc 0,194


CECCHI

RECTANGULAR


Rectangular bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied as option with coloured backlit base. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.


*Plafoniera rettangolare realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27.** Classe di isolamento II, grado di protezione IP66.*




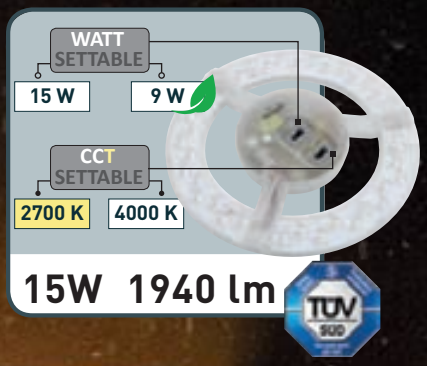


1H3.000.E1P

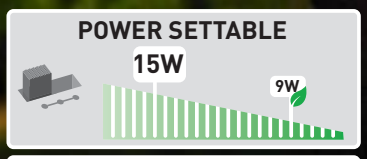



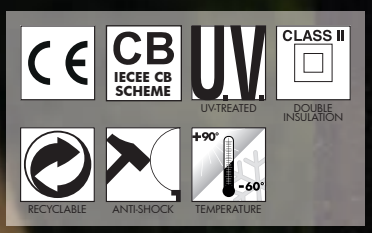



CECCHI COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized.

COVER *in resina antiurto stabilizzata ai raggi UV.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE *realizzata in resina antiurto. Fornita completa di portalampada E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.*



CECCHI



Dimensions and weight
Width: 338 mm
Height: 245 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%


E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder.** White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

SETTABLE LED LAMP





POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

CECCHI


RECTANGULAR






CECCHI GX53	
15W/9W	1H3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

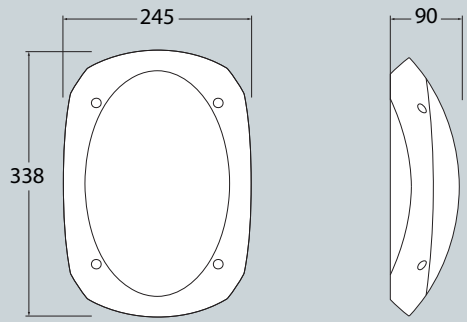

Pcs 16
Kg 18,7
mc 0,194

CECCHI E27	
E27 lampholder	1H3.000.E27
E27 with sensor	1H3.000.ES7

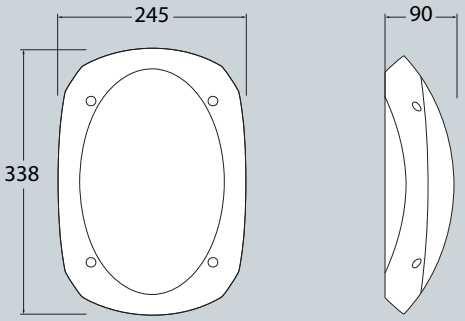

Pcs 16
Kg 15,5
mc 0,194

RITA


CLASSIC ROUND

Round bulkhead lamp in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera circolare in stile classico, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27.** Classe di isolamento II, grado di protezione IP66.*





RITA
1T3.000

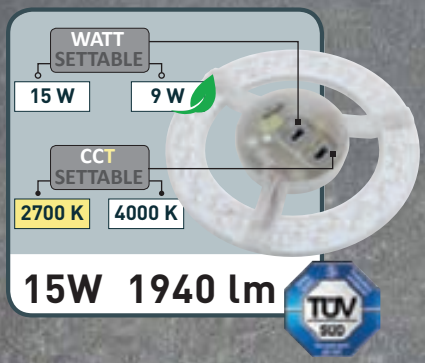





1T3.000.E1P

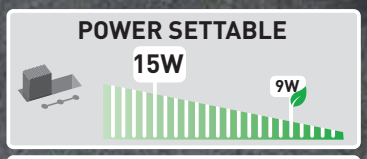



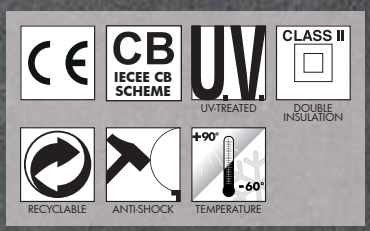





RITA COMPONENTS

IP66



COVER with classic design made of shockproof resin material, UV-rays stabilized.

COVER *in stile classico realizzata in resina antiurto stabilizzata ai raggi UV.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE *realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampada GX53 o di piatto riflettente in resina bianca e portalampada E27.*

RITA



Dimensions and weight

Diameter: ø 355 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Opal

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%

E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7


LED LAMPS

CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

SETTABLE LED LAMP







POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


RITA

CLASSIC ROUND




RITA GX53	
15W/9W	1T3.000.E1P

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

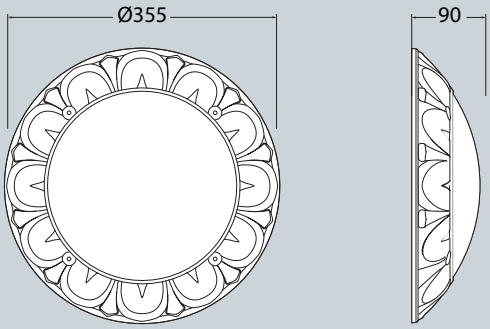

Pcs 12
Kg 17,8
mc 0,198

RITA E27	
E27 lampholder	1T3.000.E27
E27 with sensor	1T3.000.ES7

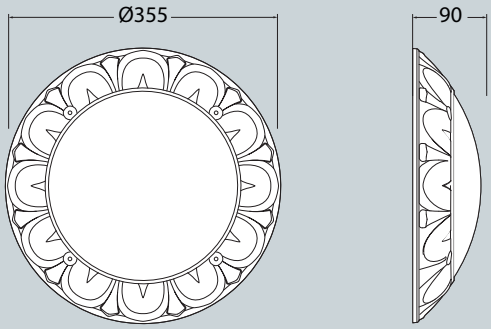


Pcs 12
Kg 15,4
mc 0,198

LUCIA RANGE

ROUND


Round bulkhead lamp with ring, eyelid or guard cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for ceiling, wall and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera circolare con cover ad anello, a palpebra o a manubrio. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete, a soffitto e a palo anche con braccio angolato a 35°. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27.** Classe di isolamento II, grado di protezione IP66.*




LUCIA
1R3.000

S *1R4.000 SMART PACK*



LUCIA-EL
2R3.000

S *2R4.000 SMART PACK*



LUCIA-GD
3R3.000

S *3R4.000 SMART PACK*




REMI/LUCIA
1R3.602



REMI/LUCIA-EL
2R3.602





REMI/LUCIA-GD
3R3.602

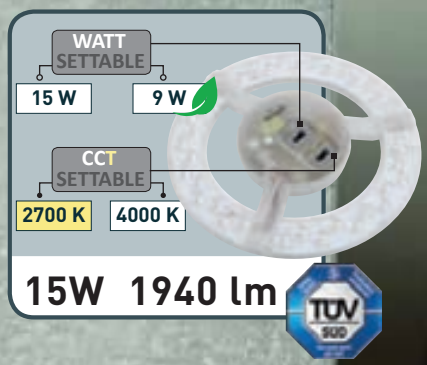





1R3.000.E1P

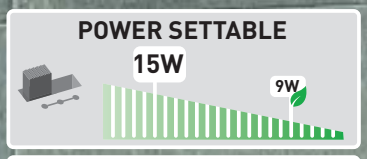



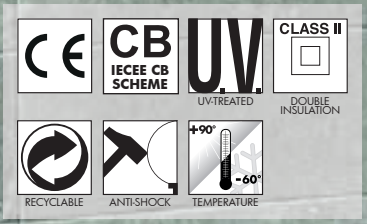



LUCIA COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

COVER *in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*


BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE *realizzata in resina antiurto. Fornita completa di portalampada E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.*

Clear .CL1	Blue .BU1	Pink .PK1	Green .GN1	Orange .OR1



LUCIA



Dimensions and weight

Diameter: ø 300 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS

Comply with: EU2019/2015
EU2019/2020

Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%


E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

SETTABLE LED LAMP





POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

BOLLARD VERSION



Lucia bulkhead range can be mounted on a pole with or without an angled bracket. More detailed information at page 182.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LUCIA RANGE

ROUND












MADE IN ITALY




LUCIA RANGE

ROUND

LUCIA E27	
E27 lampholder	1R3.000.E27
E27 with sensor	1R3.000.ES7

Pcs 16
Kg 16,8
mc 0,194

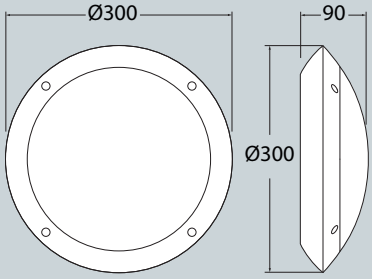


CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

LUCIA GX53	
15W/9W	1R3.000.E1P

REMI/LUCIA E27	
E27 lampholder	1R3.602.E27
E27 with sensor	1R3.602.ES7

Pcs 16
Kg 20
mc 0,194




CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

REMI/LUCIA GX53	
15W/9W	1R3.602.E1P

LUCIA-EL E27	
E27 lampholder	2R3.000.E27
E27 with sensor	2R3.000.ES7

Pcs 16
Kg 16,8
mc 0,194

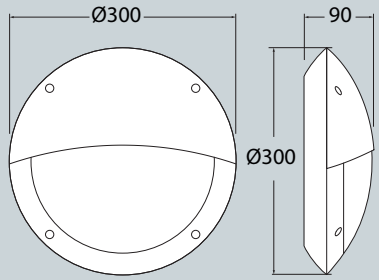


CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

LUCIA-EL GX53	
15W/9W	2R3.000.E1P

REMI/LUCIA-EL E27	
E27 lampholder	2R3.602.E27
E27 with sensor	2R3.602.ES7

Pcs 16
Kg 20
mc 0,194




CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

REMI/LUCIA-EL GX53	
15W/9W	2R3.602.E1P

LUCIA-GD E27	
E27 lampholder	3R3.000.E27
E27 with sensor	3R3.000.ES7

Pcs 16
Kg 16,8
mc 0,194

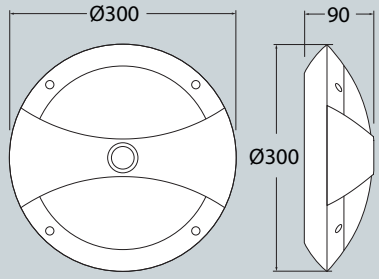


CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

LUCIA-GD GX53	
15W/9W	3R3.000.E1P

REMI/LUCIA-GD E27	
E27 lampholder	3R3.602.E27
E27 with sensor	3R3.602.ES7

Pcs 16
Kg 20
mc 0,194



CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

REMI/LUCIA-GD GX53	
15W/9W	3R3.602.E1P

MADDI RANGE


OVAL

Oval bulkhead lamp with ring, vertical eyelid or horizontal eyelid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera ovale con cover ad anello o a palpebra (orizzontale o verticale). Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete, a soffitto e a palo anche con braccio angolato a 35°. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27.** Classe di isolamento II, grado di protezione IP66.*



MADDI
1V3.000
S *1V4.000 SMART PACK*



MADDI-VE
2V3.000
S *2V4.000 SMART PACK*



MADDI-HL
3V3.000
S *3V4.000 SMART PACK*




REMI/MADDI
1V3.602




REMI/MADDI-VE
2V3.602





REMI/MADDI-HL
3V3.602

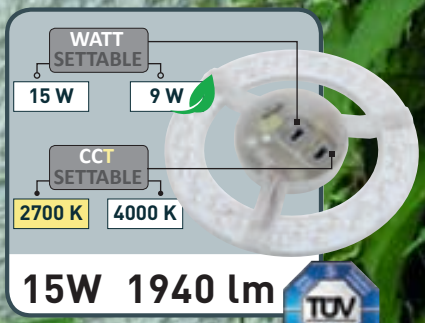



1V3.000.E1P

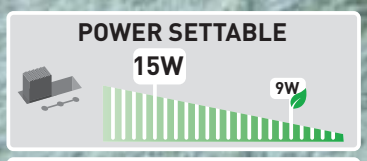

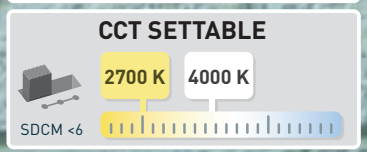

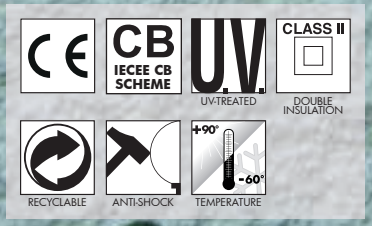





MADDI RANGE

OVAL

MADDI COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

***COVER** in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

***BASE** realizzata in resina antiurto. Fornita completa di portalampada E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.*



MADDI



Dimensions and weight
Width: 230 mm
Height: 330 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Opal

LED LAMPS

TÜV CE CB
LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included**.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: Quick and easy lamp replacement.
- **UNIFORM LIGHT**: No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%


E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

SETTABLE LED LAMP





POWER switch settable in two different positions to select full power mode(15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

BOLLARD VERSION



Maddi bulkhead range can be mounted on a pole with or without an angled bracket. More detailed information at page 182.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


MADDI RANGE

OVAL








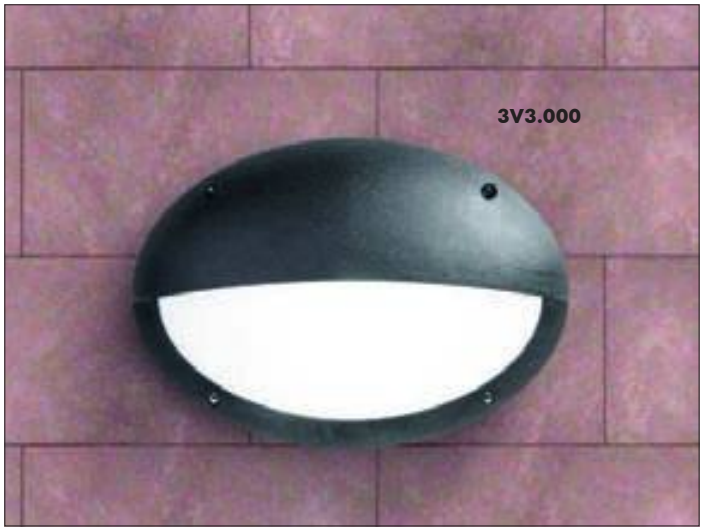



MADE IN ITALY




MADDI RANGE

OVAL

MADDI E27

E27 lampholder	1V3.000.E27
E27 with sensor	1V3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

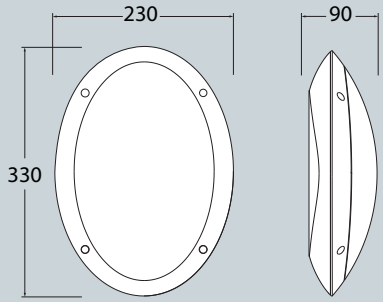

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K


MADDI GX53

15W/9W	1V3.000.E1P

REMI/MADDI E27

E27 lampholder	1V3.602.E27
E27 with sensor	1V3.602.ES7

Pcs 16
Kg 18,7
mc 0,194



CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K


REMI/MADDI GX53

15W/9W	1V3.602.E1P

MADDI-VE E27

E27 lampholder	2V3.000.E27
E27 with sensor	2V3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

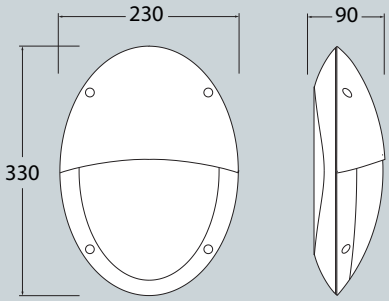

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K


MADDI-VE GX53

15W/9W	2V3.000.E1P

REMI/MADDI-VE E27

E27 lampholder	2V3.602.E27
E27 with sensor	2V3.602.ES7

Pcs 16
Kg 18,7
mc 0,194



CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K


REMI/MADDI-VE GX53

15W/9W	2V3.602.E1P

MADDI-HL E27

E27 lampholder	3V3.000.E27
E27 with sensor	3V3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

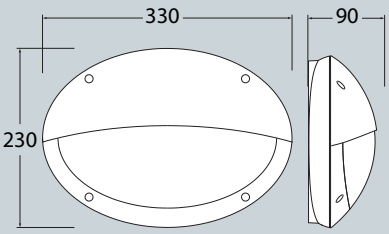

CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K


MADDI-HL GX53

15W/9W	3V3.000.E1P

REMI/MADDI-HL E27

E27 lampholder	3V3.602.E27
E27 with sensor	3V3.602.ES7

Pcs 16
Kg 18,7
mc 0,194



CCT & POWER SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K

REMI/MADDI-HL GX53

15W/9W	3V3.602.E1P





SOLAR

ROSETTA

CLASSIC SOLAR LED

SOLAR lantern in classic style with **motion sensor and replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top and wall installation. Provided with TÜV-CB certified **LED solar module**, self-adjusting in "energy saving" or "full power" mode. Insulation class III, protection rating IP55

*Lanterna **SOLARE** in stile classico, con **sensore di movimento e batteria sostituibile**. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo o a parete. Fornita completa di **modulo solare a LED**, certificata TÜV-CB. Impostazione automatica della modalità "energy saving" o "full power". Classe di isolamento III, grado di protezione IP55.*

SOLAR

R22.151.S3L

BUTTON ON-OFF
WIRELESS INSTALLATION
120° 5mt. PIR SENSOR

CE
CB IECEE CB SCHEME
INSULATION CLASS III
RESIDENTIAL
RECYCLABLE
ANTI-SHOCK
U.V. UV-TREATED
WALL
POST

MADE IN ITALY

ROSETTA- COMPONENTS

IP55



LED SOLAR MODULE *with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.*

MODULO SOLARE A LED *provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.*

Lantern ***ROOF,*** *made of shockproof resin material, provided with silicone rubber gasket to ensure a proper protection against external agent.*

TETTO *realizzato in resina in resina antiurto, provvisto di guarnizione in gomma siliconica per garantire un'adeguata protezione contro gli agenti esterni.*

DIFFUSER *with frosted finishing, one piece only, made of UV stabilized polymethylmethacrylate (PMMA).*

DIFFUSORE *satinato, in un unico pezzo, fabbricato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

CAGE *made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.*

GABBIA *realizzata in resina in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ROSETTA

R22.000 *



Dimensions and weight
Height: 240 mm
Width: 240 mm
Depth: 210 mm
Weight: 2,15 Kg

Moulded colours:
Black

Diffuser:
Frosted

SOLAR MODULE

TUV SÜD CE CB
LVD EMC ERP

Technical details on page *668*.

SOLAR MODULE




	POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
SOLAR LED MODULE	**5V/2W**	**max 280 lm**	4000 K	.S3L

BATTERY ACTIVATION BOTTON



ON/OFF

SELF-ADJUSTING WORKING MODE

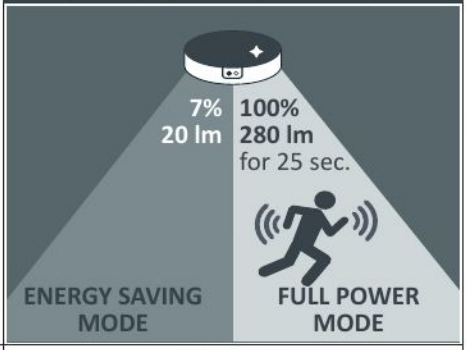

OFF MODE TO PRESERVE THE BATTERY	AUTONOMY **46h** *(at fully charged battery)*
	CHARGING TIME 6h *at 60.000 Lux (full sunny day)*

REPLACEABLE BATTERY

- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

MOTION SENSOR

- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

SOLAR PANEL

- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

ROSETTA

CLASSIC SOLAR LED










MADE IN ITALY

BISSO/ROSETTA

R22.131.S3L




Pcs 12
Kg 24,14
mc 0.216

ROSETTA


R22.000.S3L

Pcs 1
Kg 1,3
mc 0,018



MINILOT/ROSETTA


R22.111.S3L

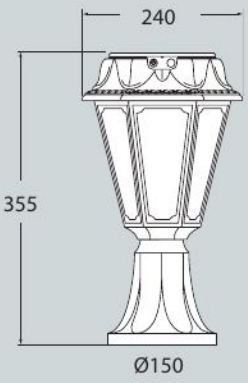

Pcs 12
Kg 23,49
mc 0,216

MIZAR/ROSETTA


R22.151.S3L

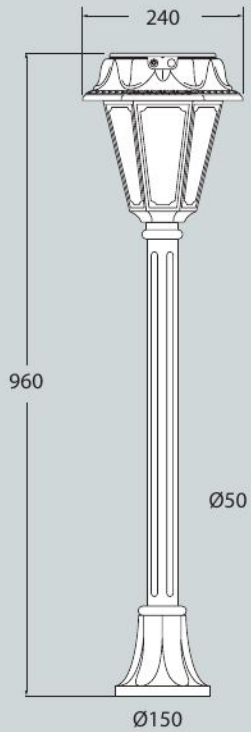

Pcs 1
Kg 3,2
mc 0,070

IAFET/ROSETTA

R22.162.S3L

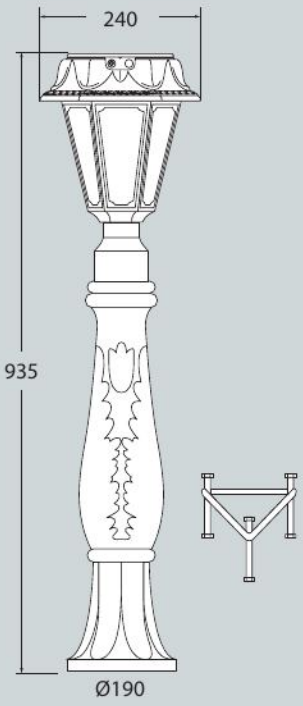

Pcs 1
Kg 4,8
mc 0,070

FIORINA - FORTUNATO

MODERN SOLAR LED

SOLAR lamp with **motion sensor** and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Post or wall version available. Provided with TÜV-CB certified **LED solar module**, self-adjusting in "energy saving" or "full power" mode. Insulation class III, protection rating IP55.

*Lampada **SOLARE**, con **sensore di movimento** e **batteria sostituibile**. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione a palo o a muro. Fornita completa di **modulo solare a LED** certificato TÜV-CB. Impostazione automatica della modalità "energy saving" o "full power". Classe di isolamento III, grado di protezione IP55.*

FI1.542.S3L

BUTTON ON-OFF · WIRELESS INSTALLATION · PIR SENSOR 120° 5mt.

IECEE CB SCHEME · INSULATION CLASS III · RECYCLABLE · ANTI-SHOCK · UV-TREATED

RESIDENTIAL · WALL · POST · SPIKE

Discover the collection

MADE IN ITALY

FIORINA / FORTUNATO - COMPONENTS

IP55



FIORINA

DUAL USE

LED SOLAR MODULE *with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.*

MODULO SOLARE A LED *provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.*

POLE *in one piece only complete with spike. Made in shockproof resin material, UV rays stabilized, rust and corrosion free. Dual use: you can fix the spike outside the pole for in-ground installation, or inside the pole for surface installation with screws.*

PALO *in un unico pezzo completo di picchetto. Fabbricato in resina antiurto stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Duplice utilizzo: il picchetto può essere montato all'esterno del palo per installazione diretta nel terreno o al suo interno per istallazione al suolo mediante tasselli di fissaggio.*



FORTUNATO

WALL BRACKET suitable to host the solar module. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

BRACCIO A MURO *atto ad accogliere il modulo solare, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.*

FIORINA



Dimensions and weight
Diameter: Ø160 mm
Height: 560mm
Weight: 1,3 Kg

FORTUNATO



Dimensions and weight
Width: 160 mm
Depth: 180 mm
Height: 40mm
Weight: 0,76 Kg

Moulded colours:
Black | White | Grey

SOLAR MODULE



	POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
SOLAR LED MODULE	5V/2W	max 280 lm	4000 K	.S3L

SOLAR MODULE

TÜV SÜD CE CB
LVD EMC ERP


Technical details on page *668*.

BATTERY ACTIVATION BOTTON



ON/OFF

SELF-ADJUSTING WORKING MODE

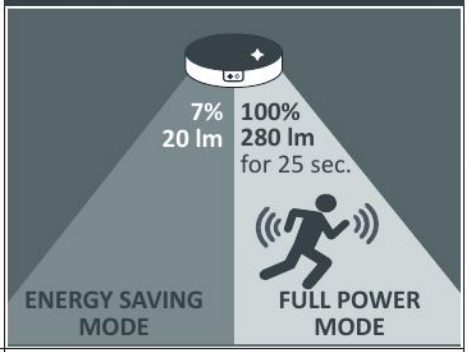

OFF MODE TO PRESERVE THE BATTERY	AUTONOMY **46h** *(at fully charged battery)*
	CHARGING TIME 6h *at 60.000 Lux (full sunny day)*

REPLACEABLE BATTERY

- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

MOTION SENSOR

- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

SOLAR PANEL

- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

FIORINA - FORTUNATO

MODERN SOLAR LED








MADE IN ITALY

FIORINA - FORTUNATO

MODERN SOLAR LED

FIORINA


FI1.542.S3L

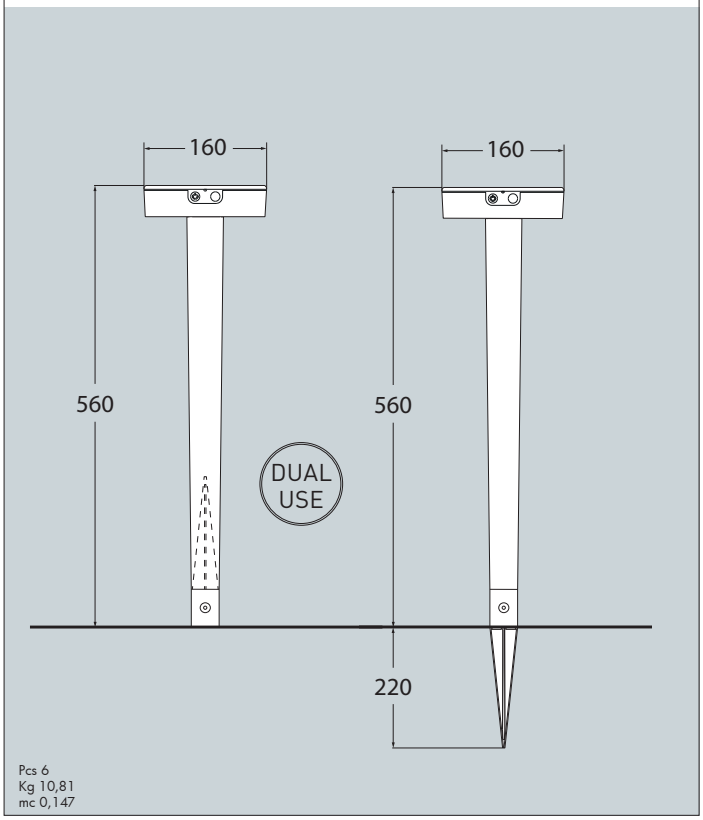

Pcs 6
Kg 10,81
mc 0,147

FORTUNATO

FO1.000.S3L



Pcs 12
Kg 10,53
mc 0,057

JOSEPHA

MODERN SOLAR LED

SOLAR lamp with **motion sensor** and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with TÜV-CB certified **LED solar module**, self-adjusting in "energy saving" or "full power" mode. Insulation class III, protection rating IP55.

*Lampada **SOLARE**, con **sensore di movimento** e **batteria sostituibile**. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita completa di **modulo solare a LED** certificato TÜV-CB. Impostazione automatica della modalità "energy saving" o "full power". Classe di isolamento III, grado di protezione IP55.*



JOSEPHA - COMPONENTS

IP55



LED SOLAR MODULE *with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.*

MODULO SOLARE A LED *provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.*



REFLECTOR designed to gather the lighting output and get its uniform spread. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Opal, clear or colored version available.

RIFLETTORE *disegnato per raccogliere il fascio di luce e garantirne un'uniforme distribuzione. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione opale, trasparente o colorata.*

Opal (standard) .OP2 | Clear .CL2 | Green .GN2 | Blue .BU2





CONNECTOR made of shockproof resin material, to fix the solar module to the pole (Ø 60mm).

RACCORDO *realizzato in resina antiurto atto ad agganciare il modulo solare al palo (Ø 60mm).*



INSTALLATION ELEMENTS: Square section resin **POLE** or **BASE** for ground fixation.

ELEMENTI DI FISSAGGIO: ***PALO*** *o* ***BASE*** *in resina a sezione quadrata per il fissaggio a terra.*

JOSEPHA



Dimensions and weight
Diameter: Ø220 mm
Height: 160/810 mm
Weight: 1,05/2,1/Kg

Moulded colours:
Black | White | Grey

Diffuser :
Opal | Clear | Blue | Green

SOLAR MODULE

TÜV SÜD CE CB
LVD EMC ERP

Technical details on page *668*.

SOLAR MODULE






POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	**max 280 lm**	4000 K	.S3L

BATTERY ACTIVATION BOTTON



ON/OFF

SELF-ADJUSTING WORKING MODE

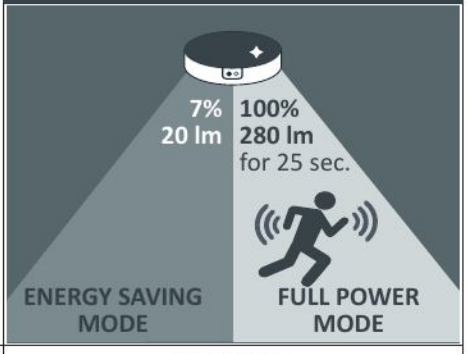

OFF MODE TO PRESERVE THE BATTERY	AUTONOMY **46h** *(at fully charged battery)*
	CHARGING TIME 6h *at 60.000 Lux (full sunny day)*

REPLACEABLE BATTERY



- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

MOTION SENSOR



- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

SOLAR PANEL



- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

JOSEPHA

MODERN SOLAR LED








MADE IN ITALY

JOSEPHA 160

JS1.114.S3L


Pcs 18
Kg 19,06
mc 0,207



JOSEPHA 800

JS1.242.S3L

Pcs 1
Kg 2,14
mc 0,057

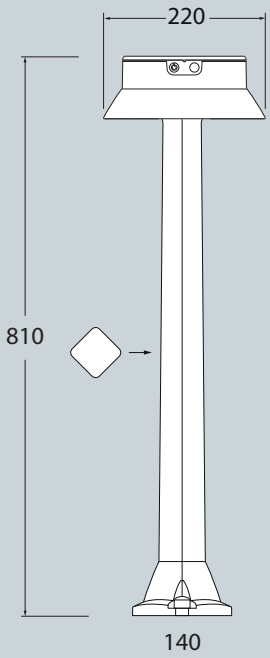

FELICE


MODERN SOLAR LED

SOLAR bollard with **motion sensor** and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with TÜV-CB certified **LED solar module**, self-adjusting in "energy saving" or "full power" mode. Insulation class III, protection rating IP55.


*Bollard **SOLARE**, con sensore di movimento e **batteria sostituibile**. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di **modulo solare a LED**, certificato TÜV-CB. Impostazione automatica della modalità "energy saving" o "full power". Classe di isolamento III, grado di protezione IP55.*



FE1.573.S3LOP2

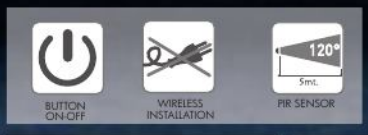





Discover the collection

MADE IN ITALY

FELICE - COMPONENTS

IP55



LED SOLAR MODULE *with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.*

MODULO SOLARE A LED *provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.*



REFLECTOR designed to gather the lighting output and get its uniform spread. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Opal, clear or colored version available.

RIFLETTORE *disegnato per raccogliere il fascio di luce e garantirne un'uniforme distribuzione. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione opale, trasparente o colorata.*

Opal (standard) .OP2 | Clear .CL2 | Green .GN2 | Blue .BU2



CONNECTOR made of shockproof resin material, to fix the solar module to the bollard pole (Ø 95mm).

RACCORDO *realizzato in resina antiurto atto ad agganciare il modulo solare allo stelo del bollard (Ø 95mm).*



INSTALLATION ELEMENTS:
-POLES for bollard versions
-SPIKE for in ground installation

ELEMENTI DI FISSAGGIO*:*
-STELI per versione bollard
-PICCHETTO per istallazione nel terreno

FELICE



Dimensions and weight
Diameter: Ø220 mm
Height: 180/330/730 mm
Weight: 1,2/1,4/2,1 Kg

Moulded colours:
Black *White* *Grey*

Diffuser :
Opal *Clear* *Blue* *Green*

SOLAR MODULE

TÜV SÜD CE CB
LVD EMC ERP

Technical details on page *668*.

SOLAR MODULE






POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	**max 280 lm**	4000 K	.S3L

BATTERY ACTIVATION BOTTON



ON/OFF

SELF-ADJUSTING WORKING MODE

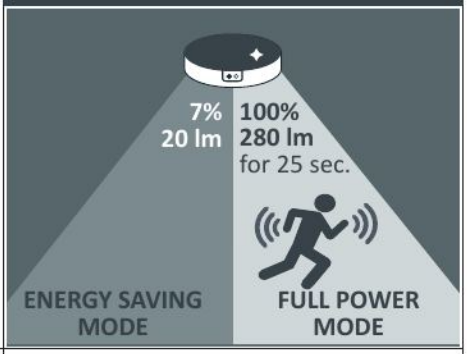

OFF MODE TO PRESERVE THE BATTERY	AUTONOMY **46h** *(at fully charged battery)*
	CHARGING TIME 6h *at 60.000 Lux (full sunny day)*

REPLACEABLE BATTERY



- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

MOTION SENSOR



- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

SOLAR PANEL



- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

FELICE

MODERN SOLAR LED


FE1.572.S3LOP2


FE1.572.S3LBU2



FE1.575.S3LOP2


FE1.574.S3LGN2

MADE IN ITALY

FELICE 800


FE1.575.S3L

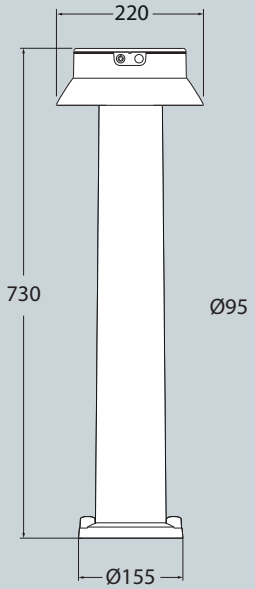

Pcs 4
Kg 11,13
mc 0,147

FELICE 400


FE1.574.S3L



Pcs 12
Kg 17,61
mc 0,216

FELICE 200


FE1.573.S3L



Pcs 18
Kg 23,20
mc 0,207

FELICE 200 SPIKE

FE1.572.S3L



Pcs 18
Kg 29,99
mc 0,207


SANTINA

MODERN SOLAR LED

SOLAR bollard with **motion sensor** and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with spike post in different sizes or with base for ground fixation. Provided with TÜV-CB certified, LED solar module, self-adjustable in "energy saving" or "full power" mode. Insulation class III, protection rating IP55.

*Gamma di bollard **SOLARI**, con **sensore di movimento** e **batteria sostituibile**. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con palo a picchetto in diverse altezze o con base per istallazione al suolo con tasselli. Fornito completo di **modulo solare a LED** certificato TÜV-CB. Impostazione automatica della modalità "energy saving" o "full power". Classe di isolamento III, grado di protezione IP55.*



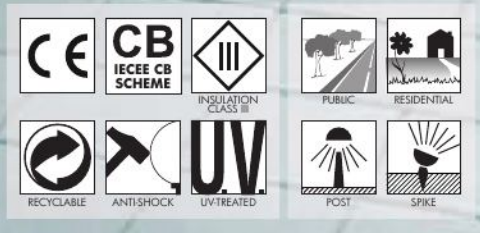

SL1.257.S3LOP2

SANTINA - COMPONENTS

IP55



LED SOLAR MODULE *with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.*

MODULO SOLARE A LED *provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.*



REFLECTOR designed to gather the lighting output and get its uniform spread. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Opal, clear or colored version available.

RIFLETTORE *disegnato per raccogliere il fascio di luce e garantirne un'uniforme distribuzione. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione opale, trasparente o colorata.*





CONNECTOR made of shockproof resin material, to fix the solar module to the bollard pole (Ø 60mm).

RACCORDO *realizzato in resina antiurto atto ad agganciare il modulo solare allo stelo del bollard (Ø 60mm).*



INSTALLATION ELEMENTS:
-POLES with base for ground fixation
-SPIKE poles for in-ground fixation

ELEMENTI DI FISSAGGIO:
-STELI con base per fissaggio al suolo mediante tasselli
-STELI a picchetto per fissaggio nel terreno

SANTINA



Dimensions and weight
Diameter: Ø220 mm
Height: 300/500/800 mm
Weight: 1,8/2,1/2,6 Kg

Moulded colours:
Black

Diffuser :
Opal *Clear*
Blue *Green*

SOLAR MODULE

CE CB
LVD EMC ERP

Technical details on page *668*.

SOLAR MODULE






POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	**max 280 lm**	4000 K	.S3L

BATTERY ACTIVATION BOTTON



ON/OFF

SELF-ADJUSTING WORKING MODE

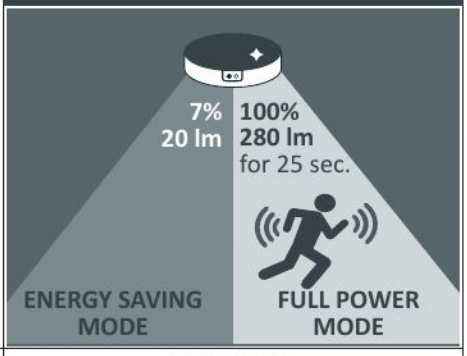

OFF MODE TO PRESERVE THE BATTERY	AUTONOMY **46h** *(at fully charged battery)*
	CHARGING TIME 6h *at 60.000 Lux (full sunny day)*

REPLACEABLE BATTERY



- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

MOTION SENSOR



- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

SOLAR PANEL




- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

SANTINA

MODERN SOLAR LED






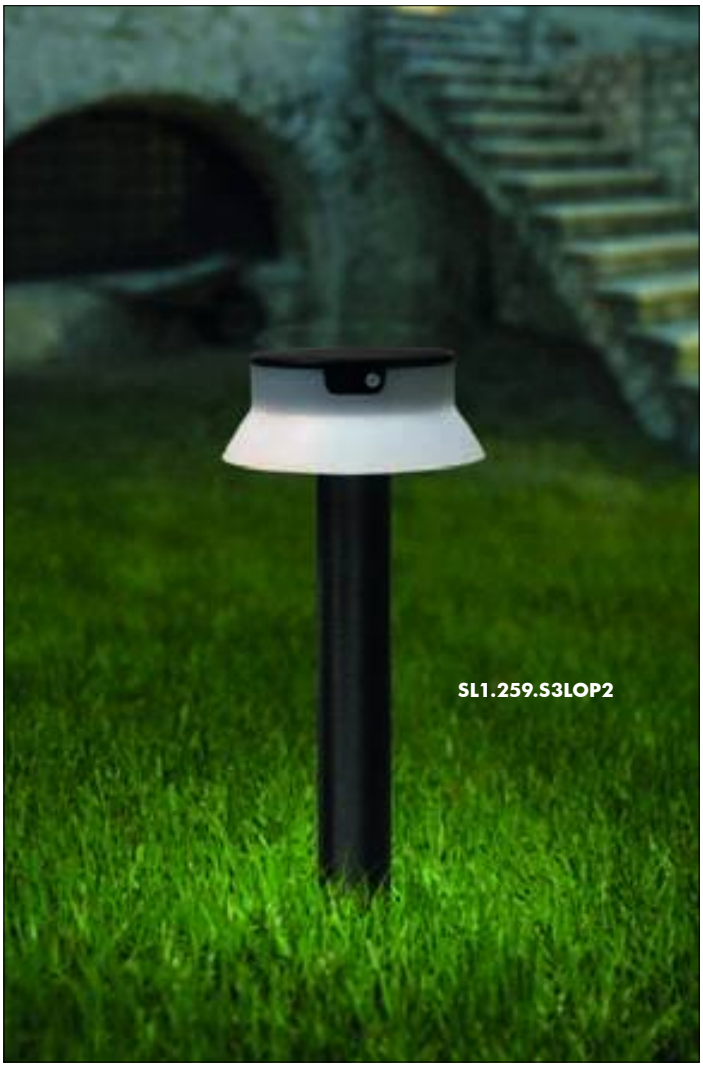



SANTINA 800


SL1.257.S3L

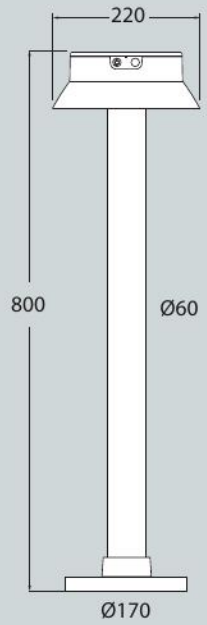

Pcs 1
Kg 3,46
mc 0,057

SANTINA 500


SL1.256.S3L

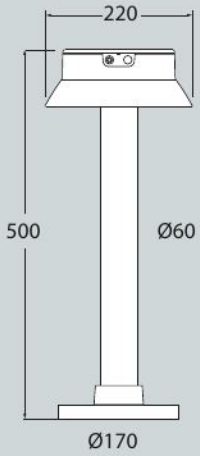

Pcs 1
Kg 2,77
mc 0,035

SANTINA 300


SL1.255.S3L



Pcs 1
Kg 2,19
mc 0,025

SANTINA 800 SPIKE


SL1.260.S3L

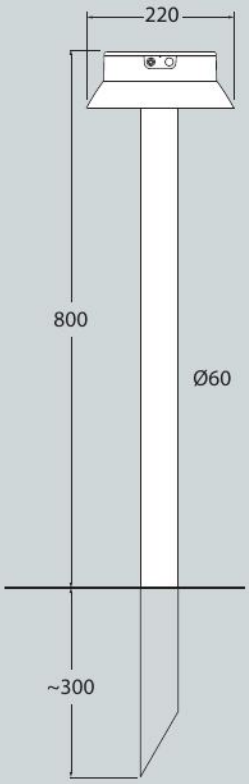

Pcs 1
Kg 3,73
mc 0,077

SANTINA 500 SPIKE


SL1.259.S3L

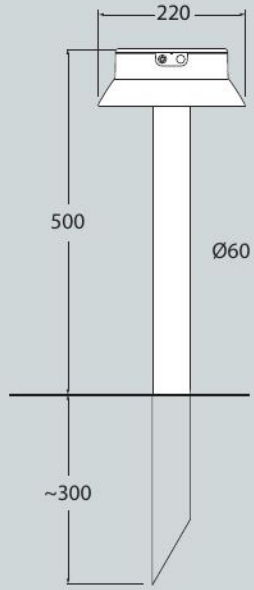

Pcs 1
Kg 2,87
mc 0,057

SANTINA 300 SPIKE

SL1.258.S3L

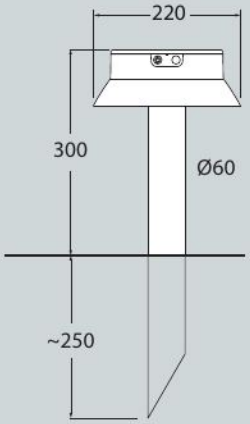

Pcs 1
Kg 2,62
mc 0,035





URBAN CLASSIC

NOEMI HIGH POWER LED

LARGE SIZE

Hexagonal lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Lanterna esagonale realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita ***completa di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E35.121.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



CCT SETTABLE

3000 K 4000 K

SDCM < 6

CE CB IECEE CB SCHEME U.V. UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE

PUBLIC RESIDENTIAL

WALL POST HANGING

MADE IN ITALY

NOEMI HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a* ***LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

NOEMI HIGH POWER LED

E35.000 *




Dimensions and weight
Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,9 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,110

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED

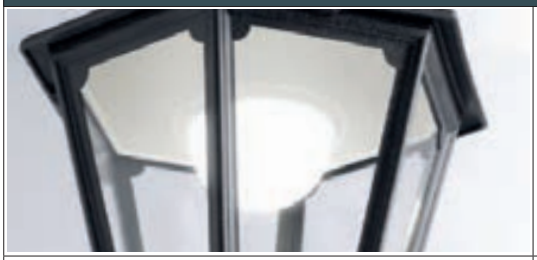

- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K	.R1K
			3000 K	
	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(15W and 30W only)

PHOTOMETRIC DATA SAMPLE





NOEMI E27 LED *HIGH POWER 30W*

POST height 3mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

NOEMI E27

LARGE SIZE

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



E35.000.F1R

CE · CB IECEE CB SCHEME · UV-TREATED · CLASS II DOUBLE INSULATION · RECYCLABLE · ANTI-SHOCK · +90° -60° TEMPERATURE

PUBLIC · RESIDENTIAL · WALL · POST · HANGING

MADE IN ITALY

NOEMI E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA *resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

NOEMI E27

E35.000 *




Dimensions and weight
Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,110

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

E27 VERSION

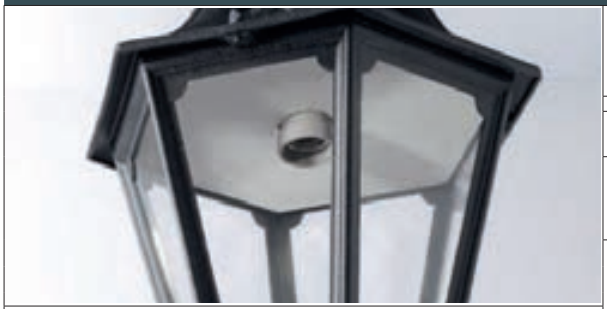

E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient LED **lamps suitable for outdoor use**.


100 - 240 V				*ADD. SUFFIX
Suitable lamps: CFL-LED-SON-HQI MAX 70W		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

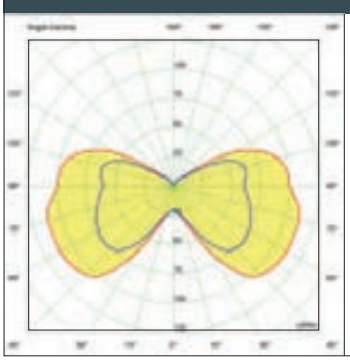



NOEMI E27 *clear SON 70W.*


POST height 3mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

NOEMI

LARGE SIZE

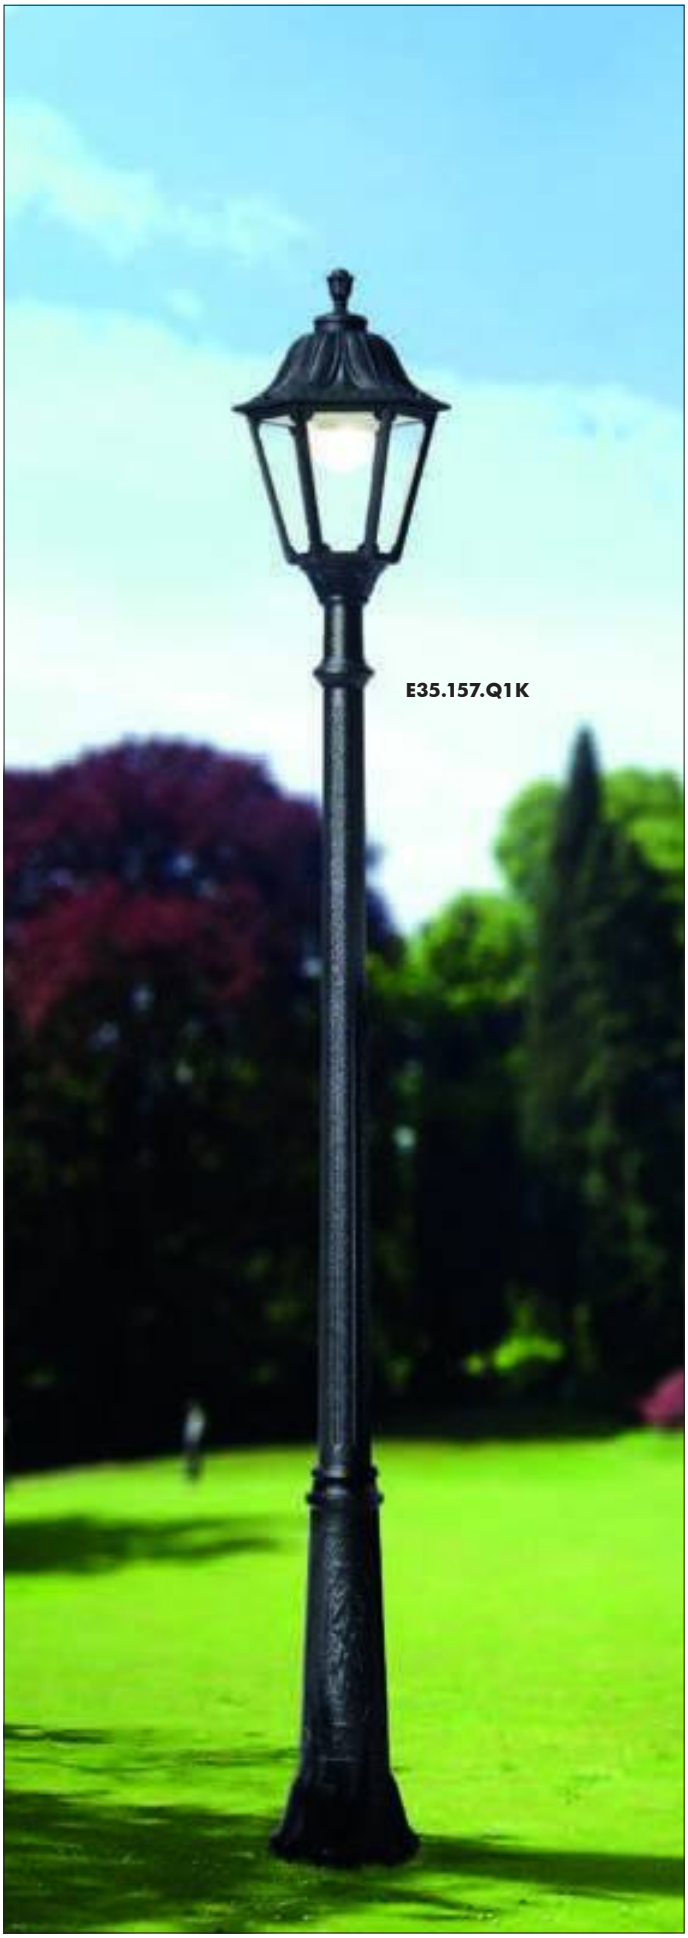













OFIR/NOEMI
E35.132

Pcs 1
Kg 4,6
mc 0,048




EVA/NOEMI
E35.181

Pcs 1
Kg 10,9
mc 0,168

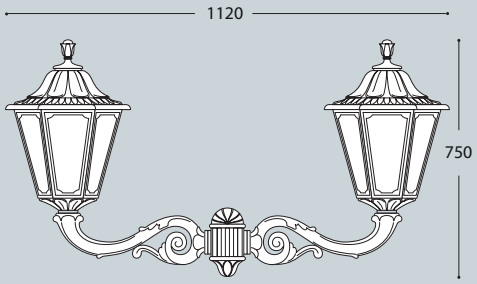


NOEMI
E35.000

Pcs 1
Kg 3,9
mc 0,043




LOT/NOEMI
E35.113

Pcs 1
Kg 4,8
mc 0,061




MIRRA/NOEMI
E35.142

Pcs 1
Kg 9,5
mc 0,083




SICHEM/NOEMI
E35.121

Pcs 1
Kg 4,4
mc 0,048

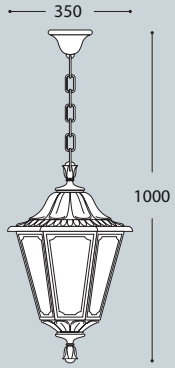


RICU/NOEMI
E35.157

Pcs 2
Kg 27,8
mc 0,310

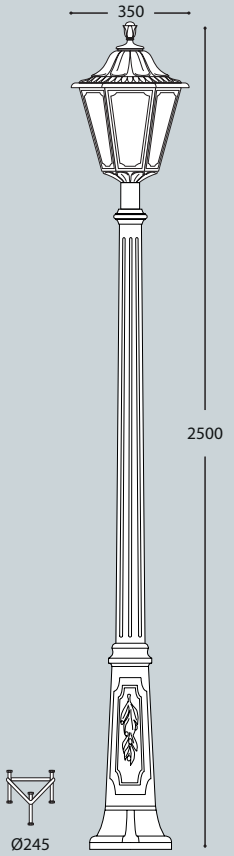


GIGI/NOEMI
E35.156

Pcs 2
Kg 26,3
mc 0,278

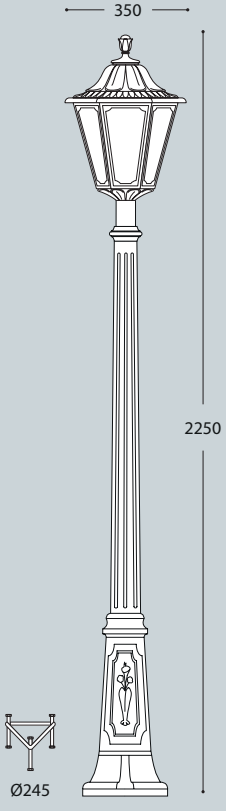


ARTU'/NOEMI
E35.158

Pcs 2
Kg 23,3
mc 0,247

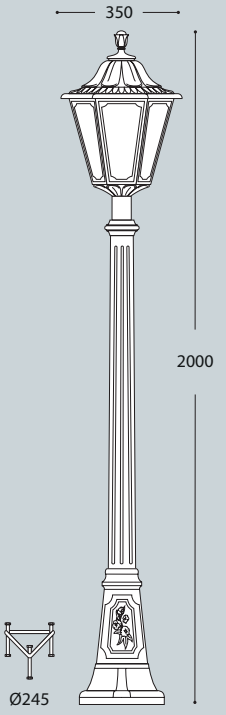


ALOE'.R/NOEMI resin
E35.163

Pcs 2
Kg 12,8
mc 0,182

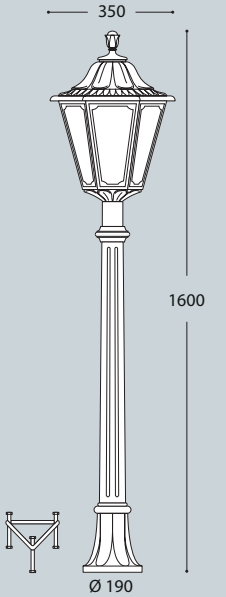

IAFET.R/NOEMI resin
E35.162

Pcs 2
Kg 13,1
mc 0,153

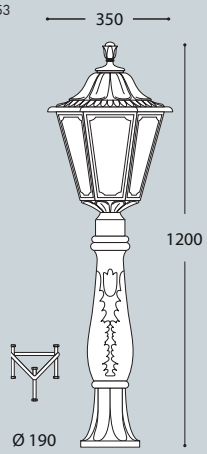

NEBO/NOEMI

LARGE SIZE








MADE IN ITALY

NEBO OFIR/NOEMI 2L

E35.201.R20


Pcs 1
Kg 31,9
mc 0,268

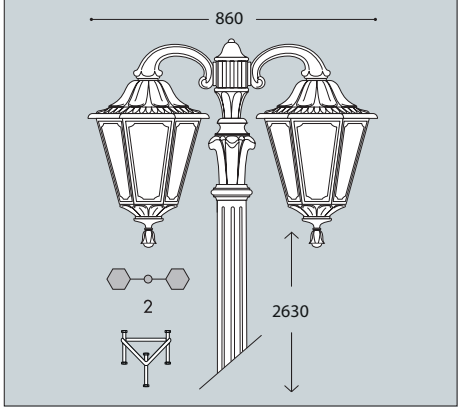

NEBO OFIR/NOEMI 3L

E35.201.R30


Pcs 1
Kg 35,8
mc 0,342

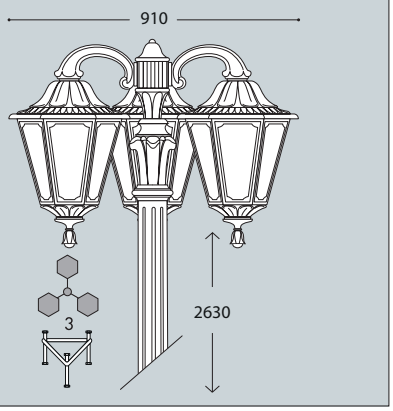

NEBO/NOEMI

E35.201


Pcs 1
Kg 24,9
mc 0,196

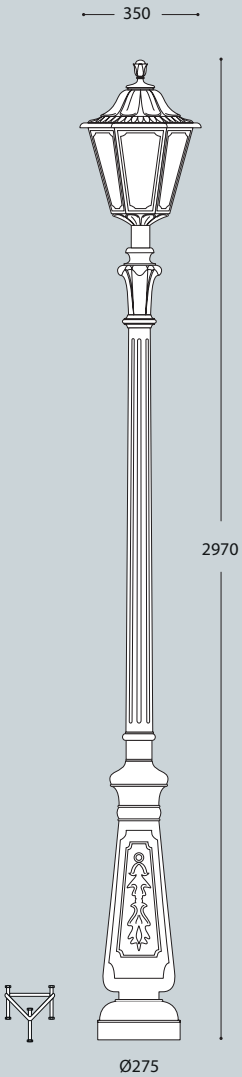

NEBO OFIR/NOEMI 2L

E35.201.R20


Pcs 1
Kg 31,9
mc 0,268

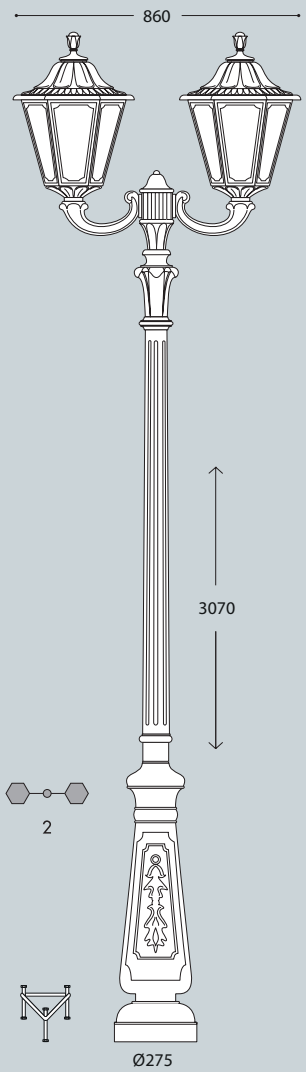

NEBO OFIR/NOEMI 3L

E35.201.R30

Pcs 1
Kg 35,8
mc 0,342

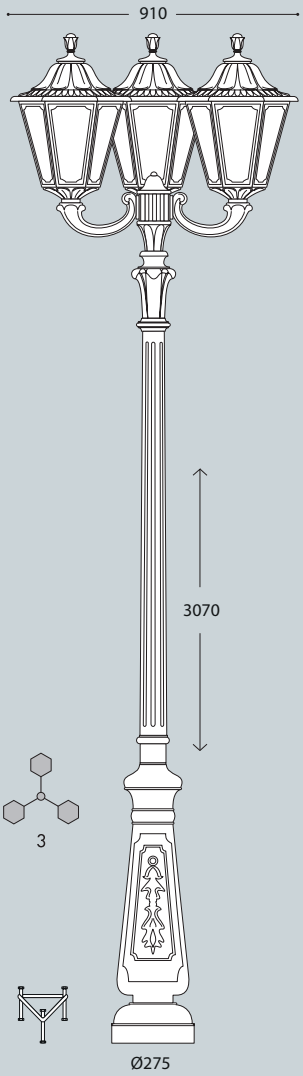

TABOR/NOEMI

LARGE SIZE








MADE IN ITALY

TABOR OFIR/NOEMI 2L

E35.204.R20


Pcs 1
Kg 36,4
mc 0,295

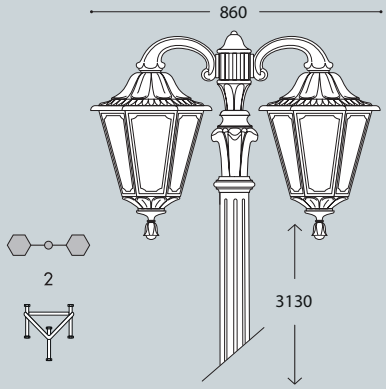

TABOR OFIR/NOEMI 3L

E35.204.R30


Pcs 1
Kg 39,5
mc 0,369

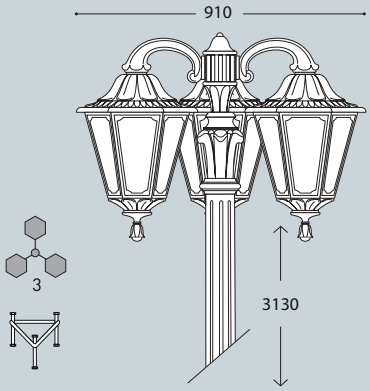

TABOR/NOEMI

E35.204


Pcs 1
Kg 29,4
mc 0,223

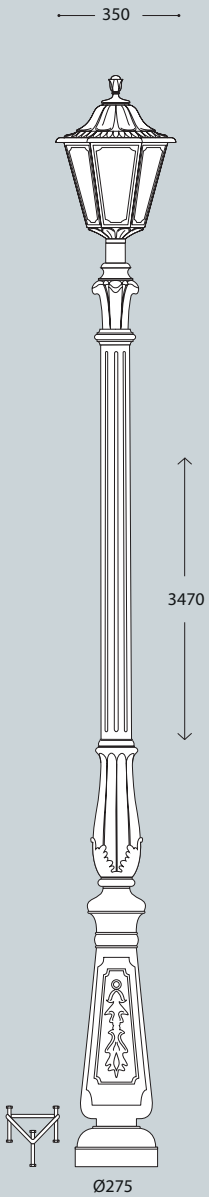

TABOR OFIR/NOEMI 2L

E35.204.R20


Pcs 1
Kg 36,4
mc 0,295

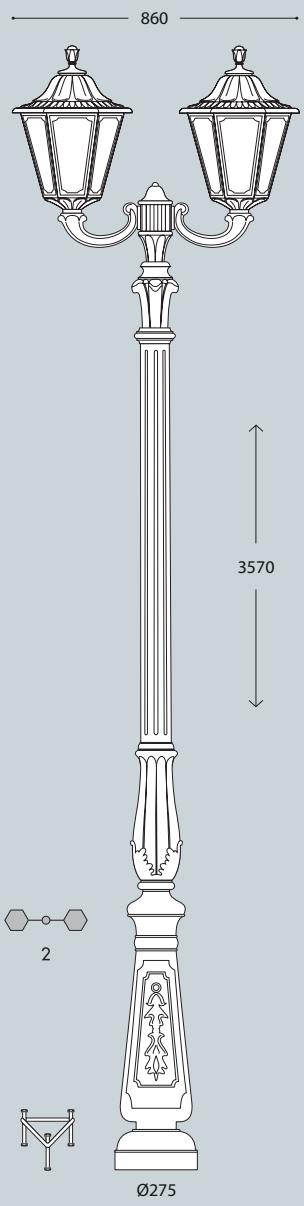

TABOR OFIR/NOEMI 3L


E35.204.R30

Pcs 1
Kg 39,5
mc 0,369

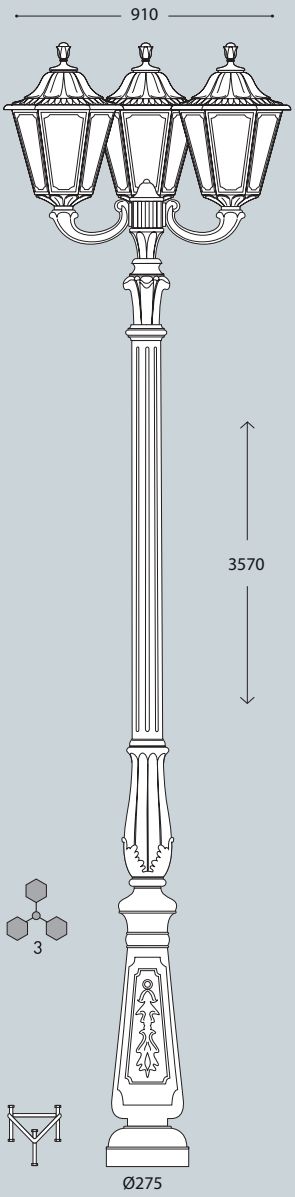

HOREB/NOEMI

LARGE SIZE

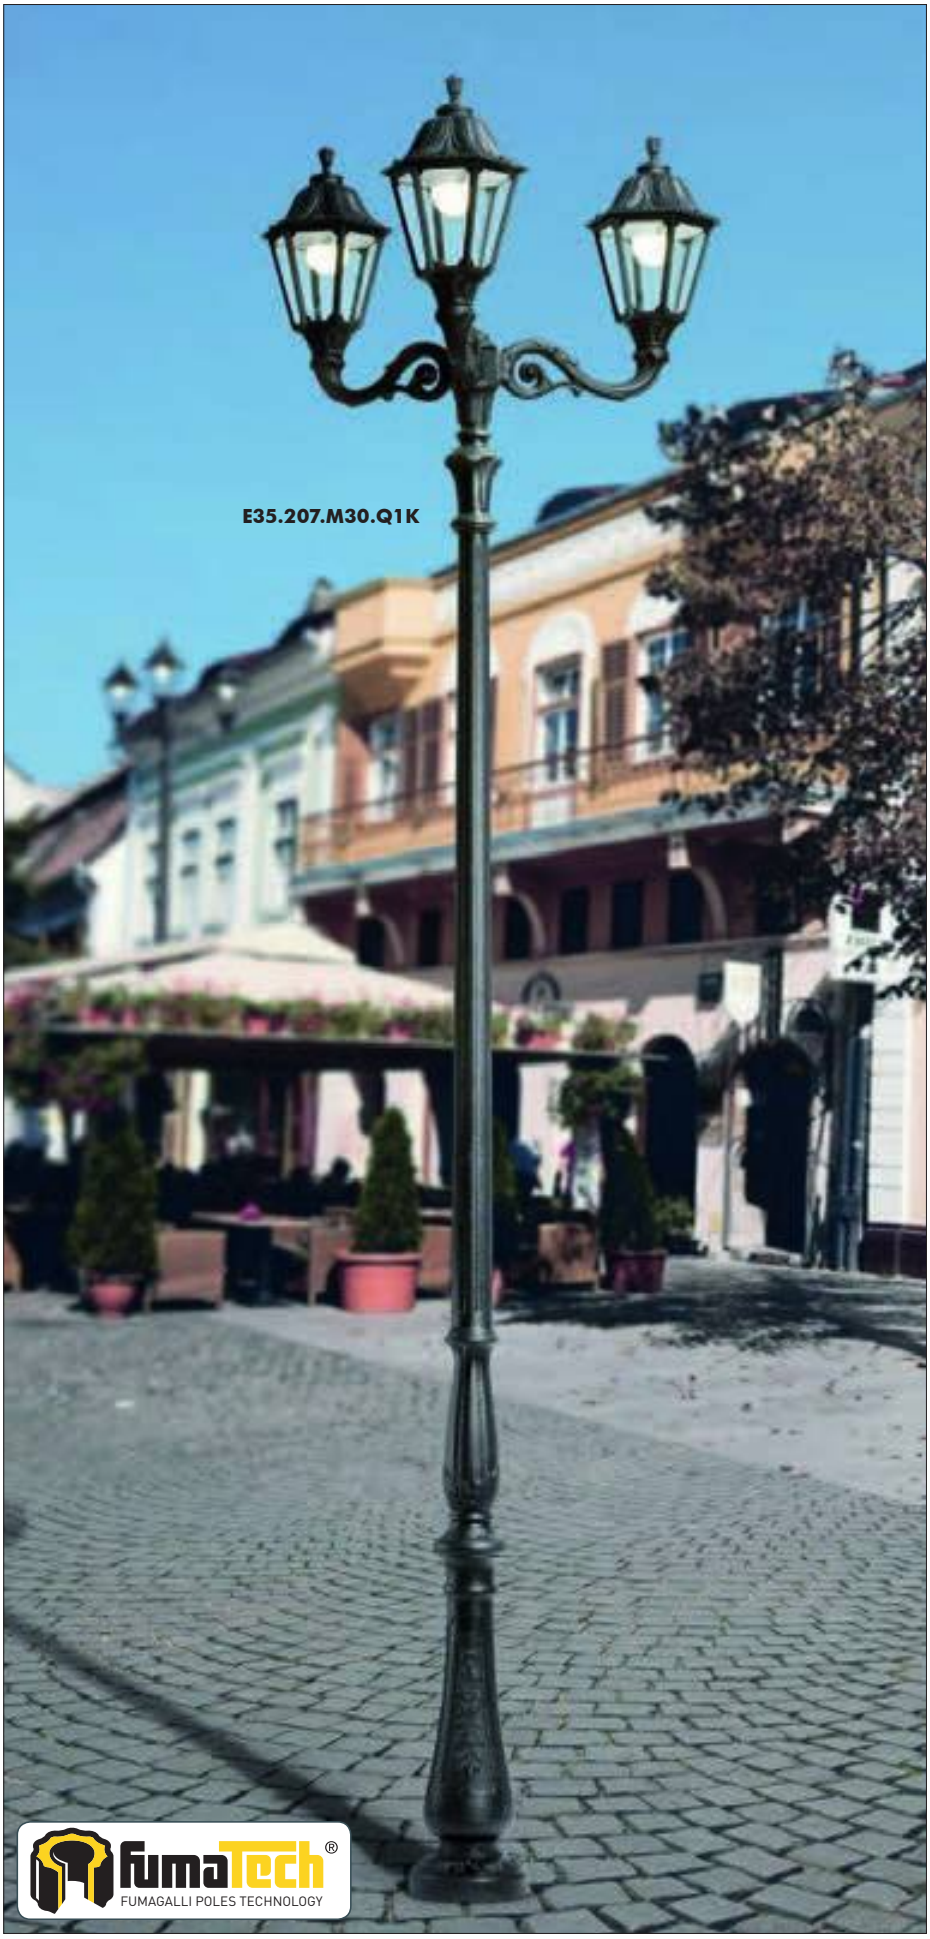






MADE IN ITALY

ADAM/NOEMI

E35.171


Pcs 1
Kg 5,3
mc 0,083

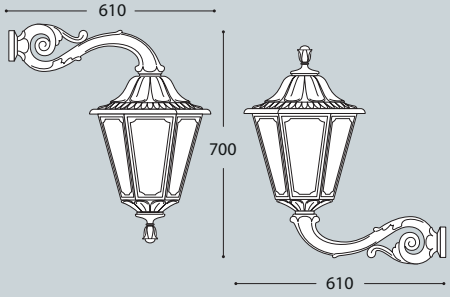

HOREB ADAM/NOEMI 3+1

E35.207.M31


Pcs 1
Kg 48
mc 0,476

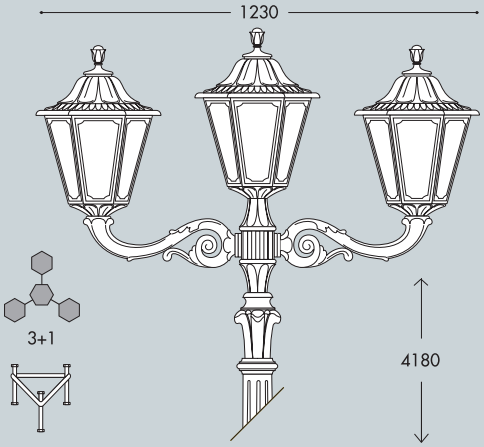

HOREB/NOEMI

E35.207


Pcs 1
Kg 31,9
mc 0,249

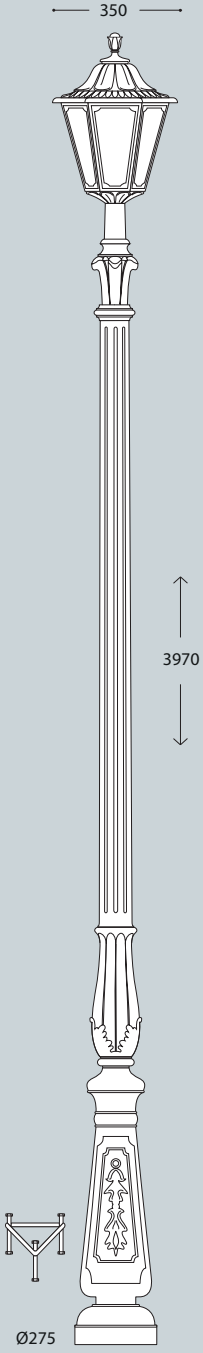

HOREB ADAM/NOEMI 2+1

E35.207.M21


Pcs 1
Kg 43
mc 0,404

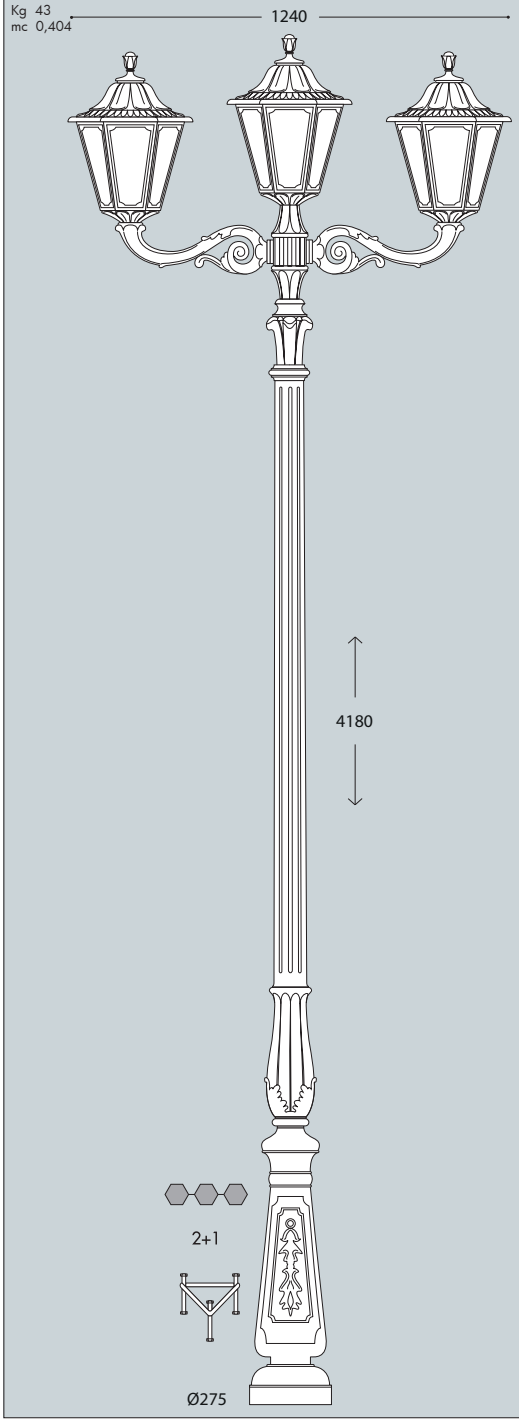

HOREB ADAM/NOEMI 3L

E35.207.M30


Pcs 1
Kg 44,1
mc 0,414

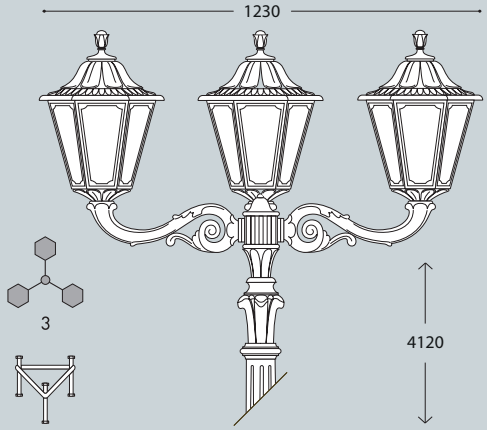

HOREB ADAM/NOEMI 2L


E35.207.M20

Pcs 1
Kg 38,8
mc 0,342

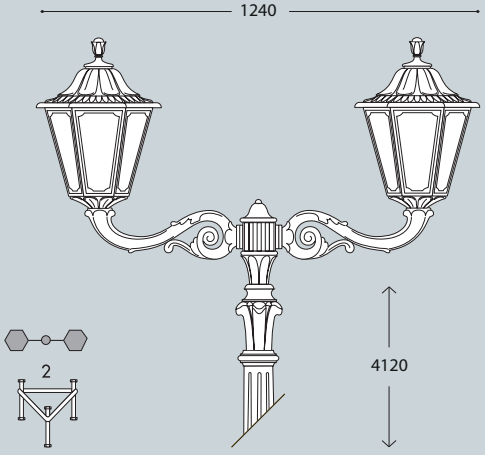

KARMEL 3000/NOEMI

LARGE SIZE

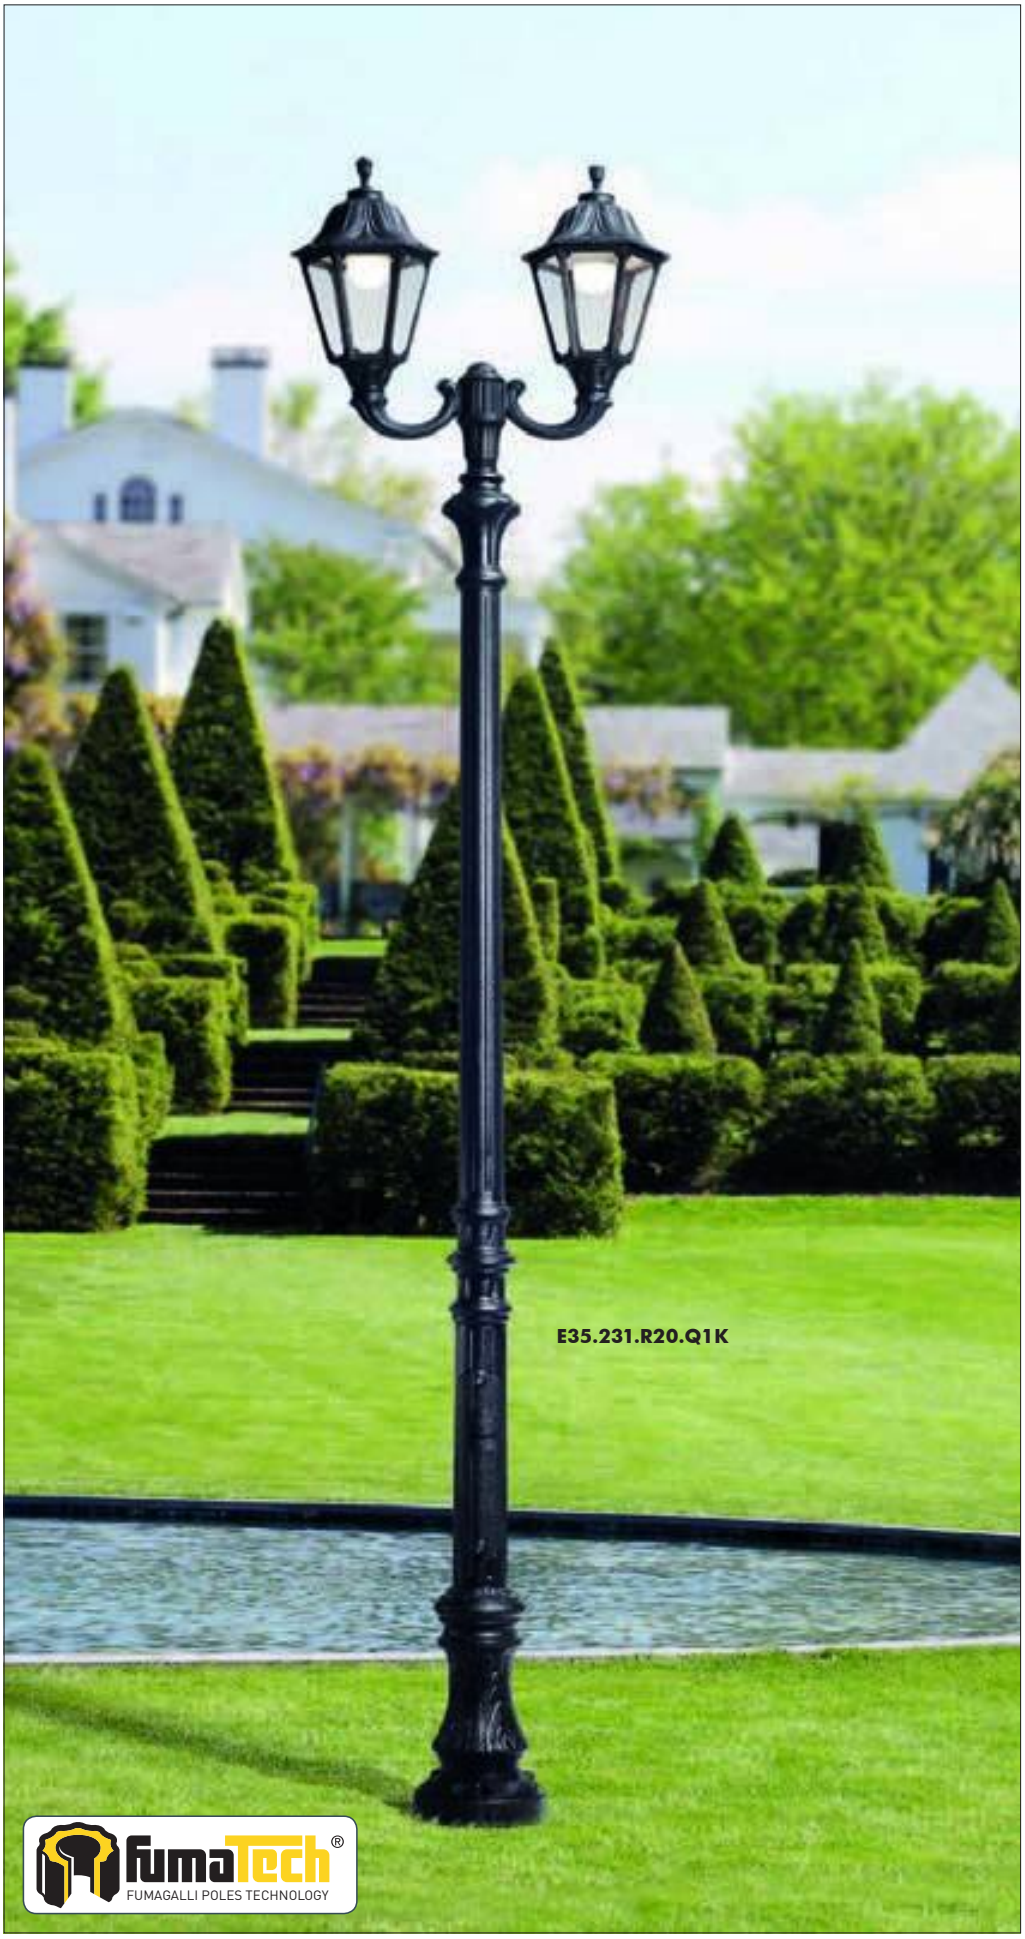






MADE IN ITALY

KARMEL 3000 OFIR/NOEMI 2L

E35.231.R20


Pcs 1
Kg 36,4
mc 0,295

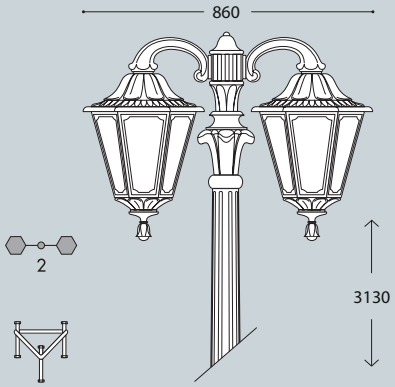

KARMEL 3000 OFIR/NOEMI 3L

E35.231.R30


Pcs 1
Kg 39,5
mc 0,369

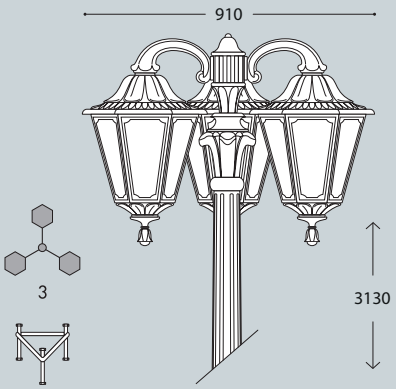

KARMEL 3000/NOEMI

E35.231


Pcs 1
Kg 29,4
mc 0,223

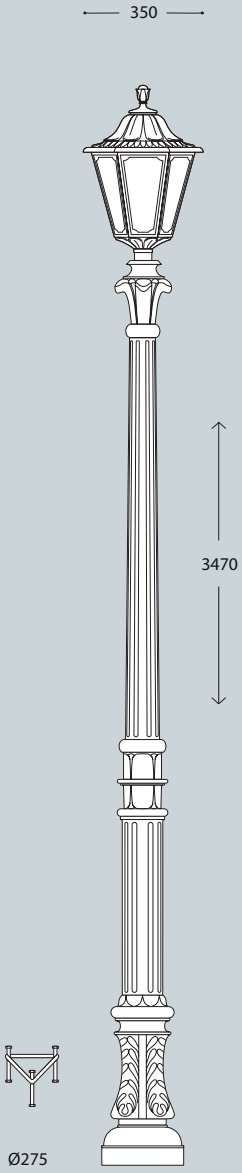

KARMEL 3000 OFIR/NOEMI 2L

E35.231.R20


Pcs 1
Kg 36,4
mc 0,295

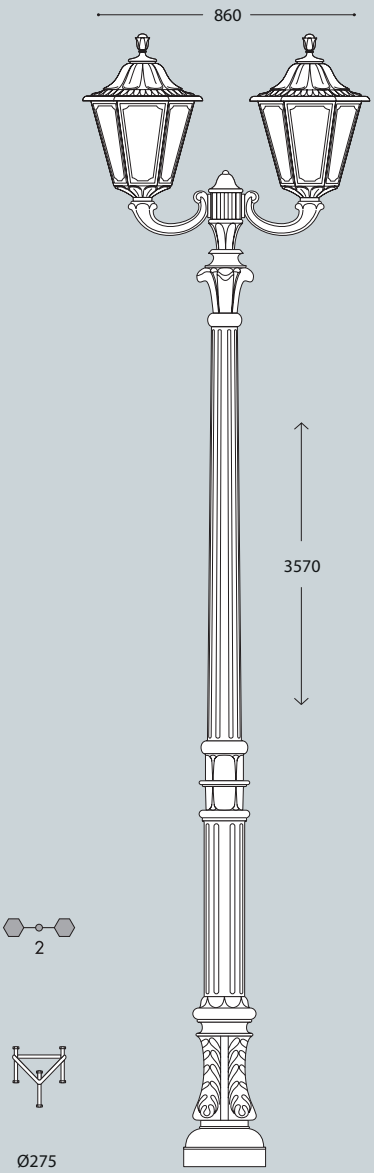

KARMEL 3000 OFIR/NOEMI 3L

E35.231.R30

Pcs 1
Kg 39,5
mc 0,369

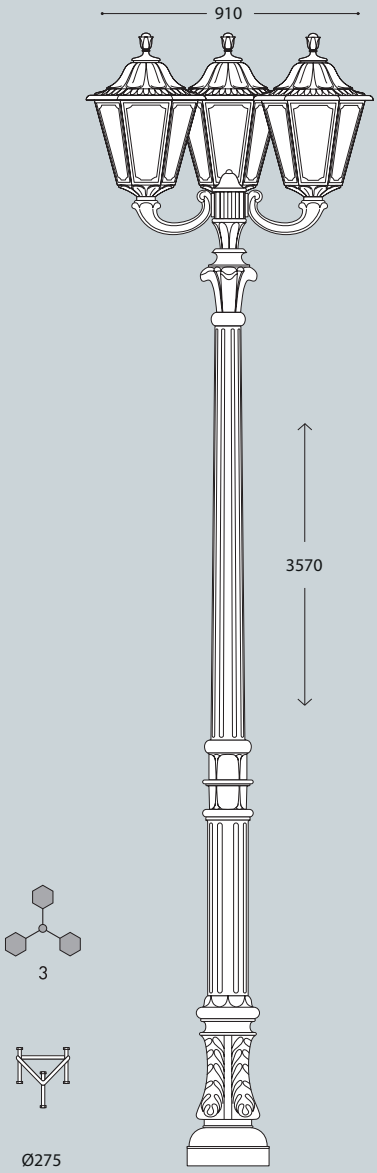

KARMEL 3500-4000/NOEMI


LARGE SIZE







MADE IN ITALY

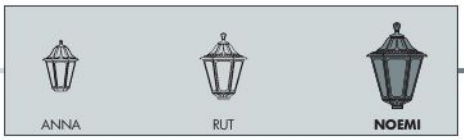


KARMEL 3500-4000/NOEMI

LARGE SIZE


KARMEL 3500/NOEMI

E35.234


Pcs 1
Kg 31,9
mc 0,249

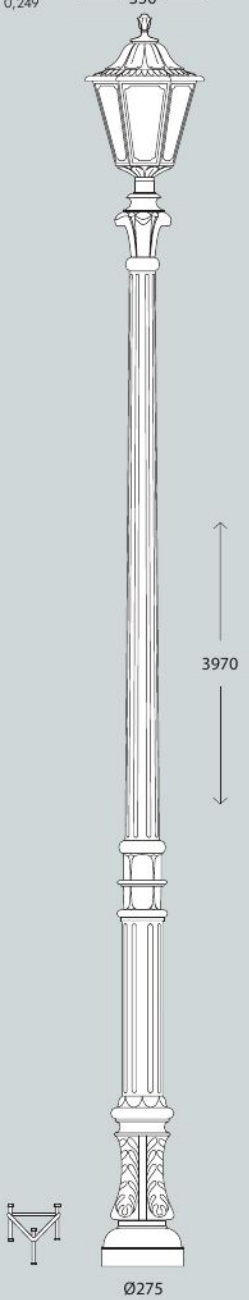


KARMEL 3500 ADAM/NOEMI 2+1	KARMEL 4000 ADAM/NOEMI 2+1
E35.234.M21	E35.237.M21
Pcs 1 Kg 43 mc 0,404	Pcs 1 Kg 45,5 mc 0,431

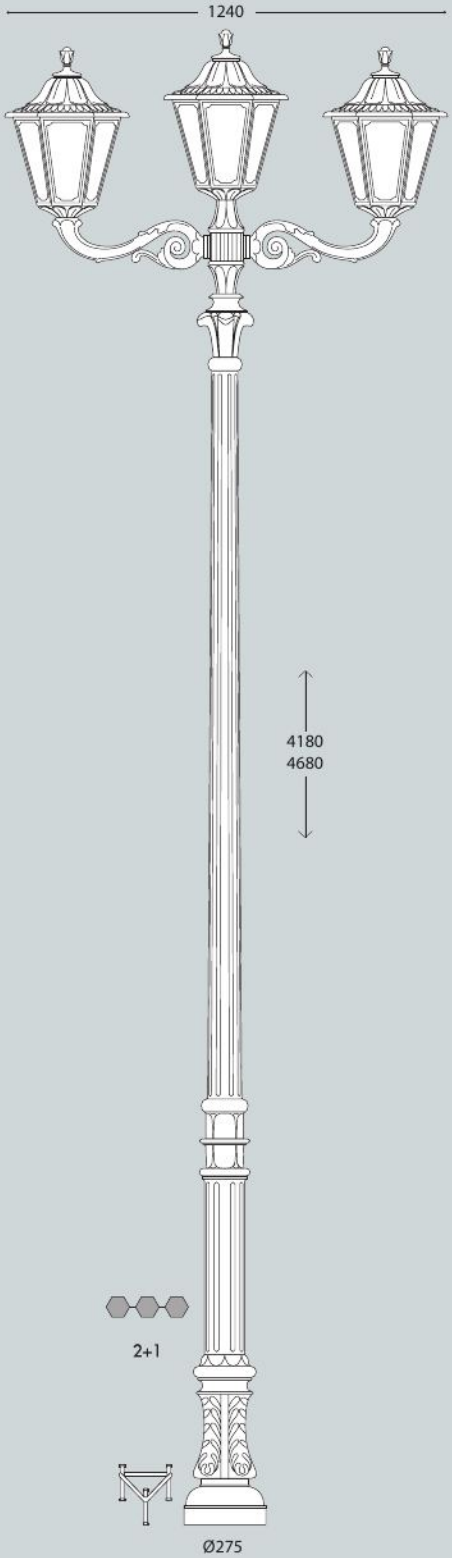


KARMEL 3500 ADAM/NOEMI 3L	KARMEL 4000 ADAM/NOEMI 3L
E35.234.M30	E35.237.M30
Pcs 1 Kg 44,1 mc 0,414	Pcs 1 Kg 46,6 mc 0,441

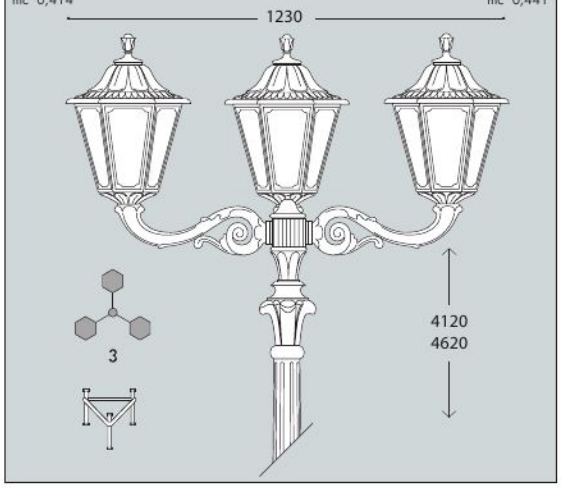

KARMEL 3500 ADAM/NOEMI 3+1	KARMEL 4000 ADAM/NOEMI 3+1
E35.234.M31	E35.237.M31
Pcs 1 Kg 48 mc 0,476	Pcs 1 Kg 50,5 mc 0,503

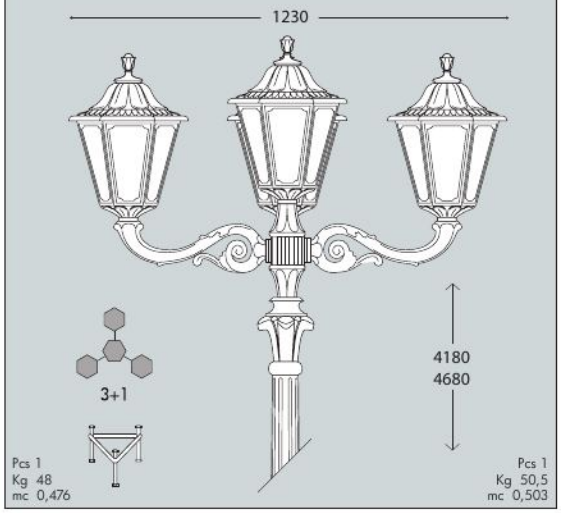

KARMEL 3500 ADAM/NOEMI 2L	KARMEL 4000 ADAM/NOEMI 2L
E35.234.M20	E35.237.M20
Pcs 1 Kg 38,8 mc 0,342	Pcs 1 Kg 41,3 mc 0,369

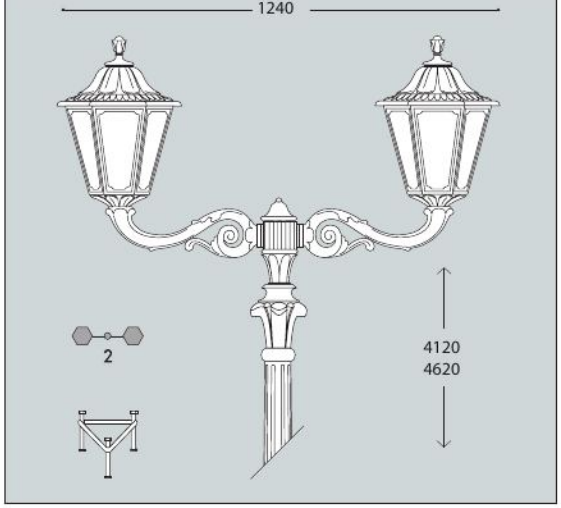

SILOE HIGH POWER LED

LARGE SIZE

Hexagonal lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Lanterna esagonale realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita ***completa di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

K35.132.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



CCT SETTABLE

3000 K 4000 K

SDCM < 6

CE CB IECEE CB SCHEME U.V. UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE

PUBLIC RESIDENTIAL

WALL POST HANGING



SILOE HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada* ***E27 e provvisto di lampada a LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SILOE HIGH POWER LED

K35.000 *




Dimensions and weight
Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,9 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,113

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

HIGH POWER LED

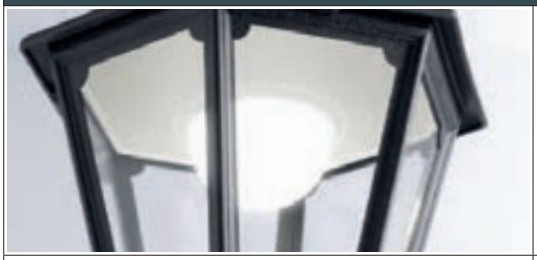

- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K	.R1K
			3000 K	
	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(15W and 30W only)

PHOTOMETRIC DATA SAMPLE

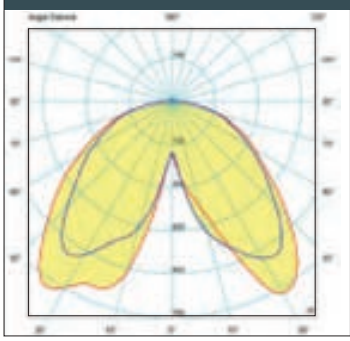



SILOE E27 LED *HIGH POWER 30W*

POST height 3mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SILOE E27

LARGE SIZE

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



K35.000.F1R

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II
DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60°
TEMPERATURE
PUBLIC
RESIDENTIAL
WALL
POST
HANGING

MADE IN ITALY

SILOE E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SILOE E27

K35.000 *



Dimensions and weight
Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,113

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

E27 VERSION



E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient **LED lamps suitable for outdoor use**.


100 - 240 V			*ADD. SUFFIX
Suitable lamps: CFL-LED-SON-HQI MAX 70W		**E27** lampholder only	.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

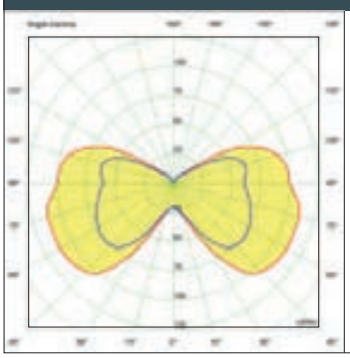



SILOE E27 *clear SON 70W.*

POST height 3mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SILOE

LARGE SIZE













OFIR/SILOE
K35.132

Pcs 1
Kg 4,6
mc 0,048




EVA/SILOE
K35.181

Pcs 1
Kg 10,9
mc 0,168

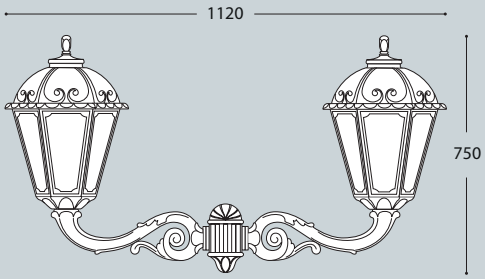


SILOE
K35.000

Pcs 1
Kg 3,9
mc 0,043




LOT/SILOE
K35.113

Pcs 1
Kg 4,8
mc 0,061




MIRRA/SILOE
K35.142

Pcs 1
Kg 9,5
mc 0,083




SICHEM/SILOE
K35.121

Pcs 1
Kg 4,4
mc 0,048

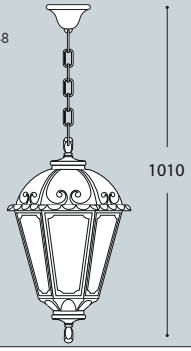


RICU/SILOE
K35.157

Pcs 2
Kg 27,8
mc 0,310

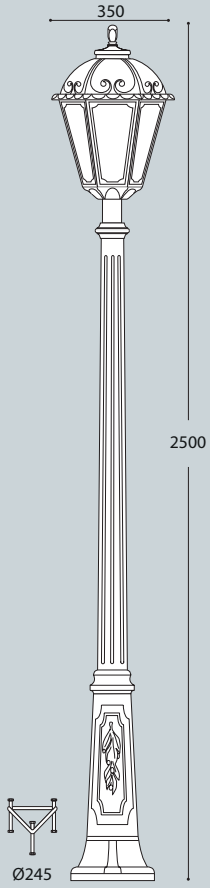


GIGI/SILOE
K35.156

Pcs 2
Kg 26,3
mc 0,278

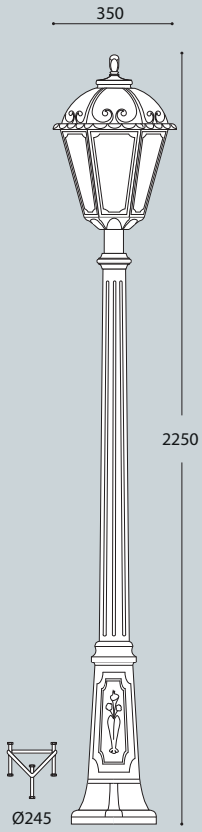


ARTU'/SILOE
K35.158

Pcs 2
Kg 23,3
mc 0,247

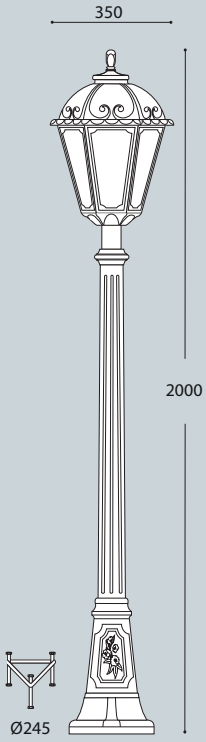


ALOE'.R/SILOE resin
K35.163

Pcs 2
Kg 12,8
mc 0,182

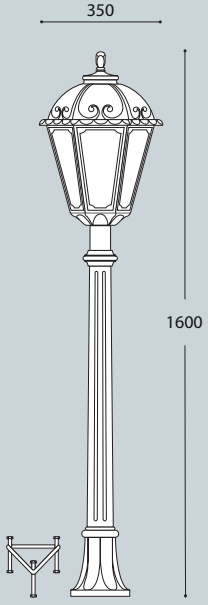

IAFET.R/SILOE resin
K35.162

Pcs 2
Kg 13,1
mc 0,153

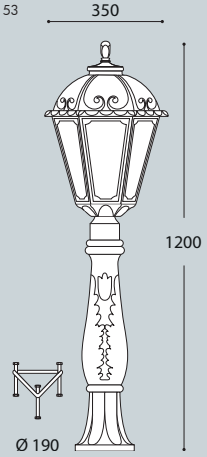

NEBO/SILOE

LARGE SIZE






MADE IN ITALY

NEBO OFIR/SILOE 2L

K35.201.R20


Pcs 1
Kg 31,9
mc 0,268

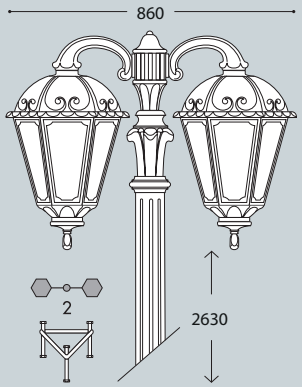

NEBO OFIR/SILOE 3L

K35.201.R30


Pcs 1
Kg 35,8
mc 0,342

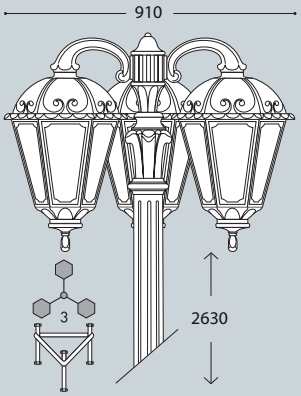

NEBO/SILOE

K35.201


Pcs 1
Kg 24,9
mc 0,196

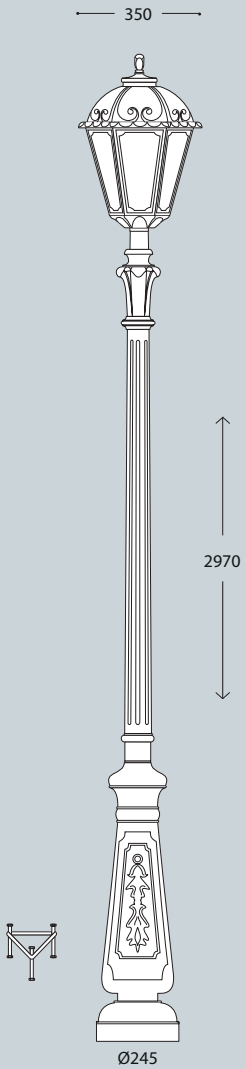

NEBO OFIR/SILOE 2L

K35.201.R20


Pcs 1
Kg 31,9
mc 0,268

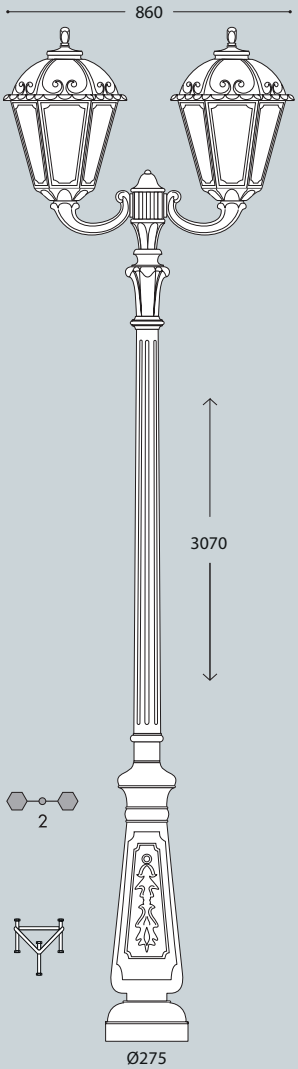

NEBO OFIR/SILOE 3L

K35.201.R30

Pcs 1
Kg 35,8
mc 0,342

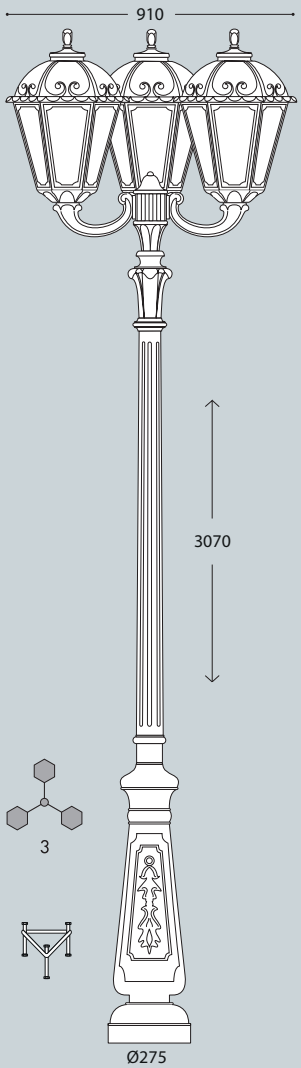

TABOR/SILOE

LARGE SIZE








MADE IN ITALY

TABOR OFIR/SILOE 2L

K35.204.R20


Pcs 1
Kg 36,4
mc 0,295

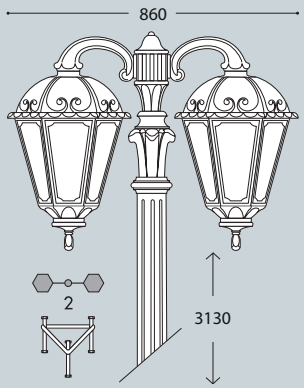

TABOR OFIR/SILOE 3L

K35.204.R30


Pcs 1
Kg 39,5
mc 0,369

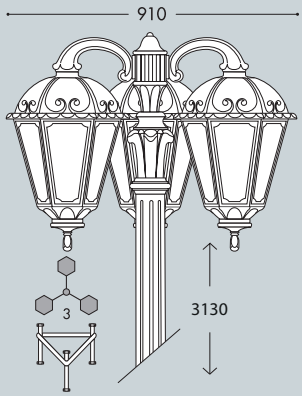

TABOR/SILOE

K35.204


Pcs 1
Kg 29,4
mc 0,223

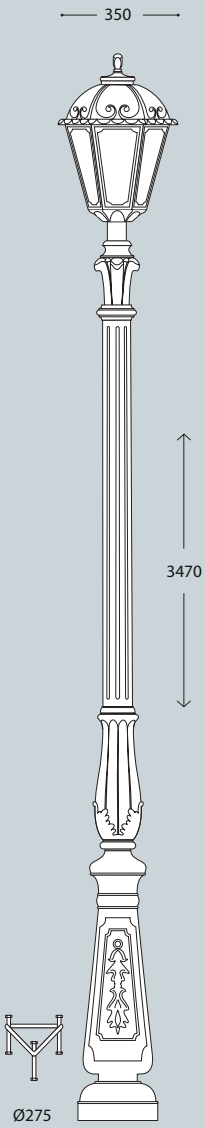

TABOR OFIR/SILOE 2L

K35.204.R20


Pcs 1
Kg 36,4
mc 0,295

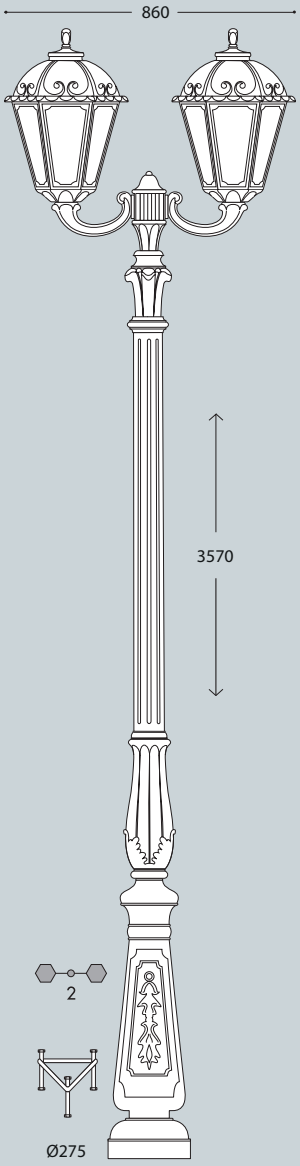

TABOR OFIR/SILOE 3L


K35.204.R30

Pcs 1
Kg 39,5
mc 0,369

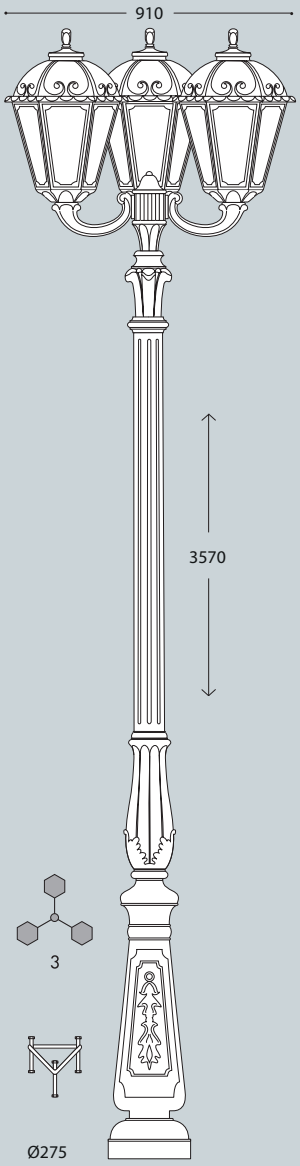

HOREB/SILOE

LARGE SIZE

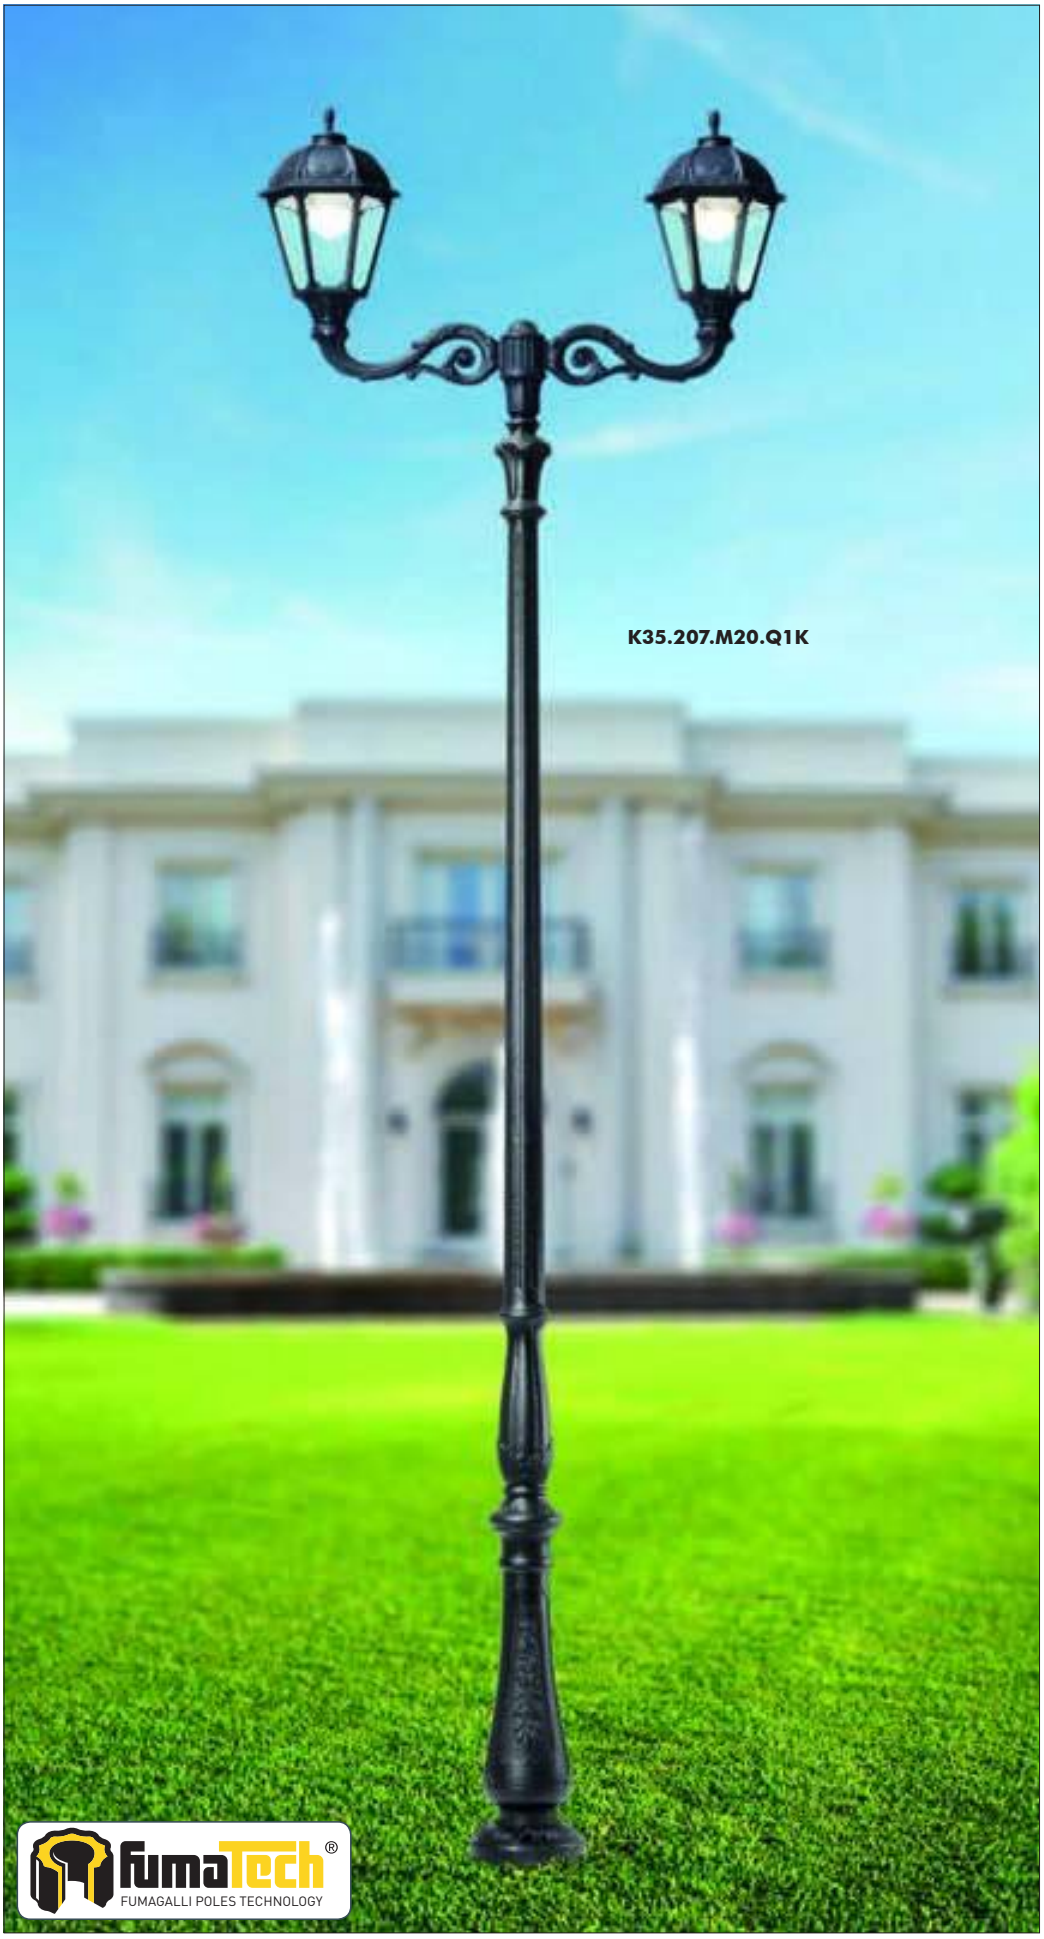





MADE IN ITALY

ADAM/SILOE

K35.171


Pcs 1
Kg 5,3
mc 0,083



HOREB/SILOE

K35.207


Pcs 1
Kg 31,9
mc 0,249

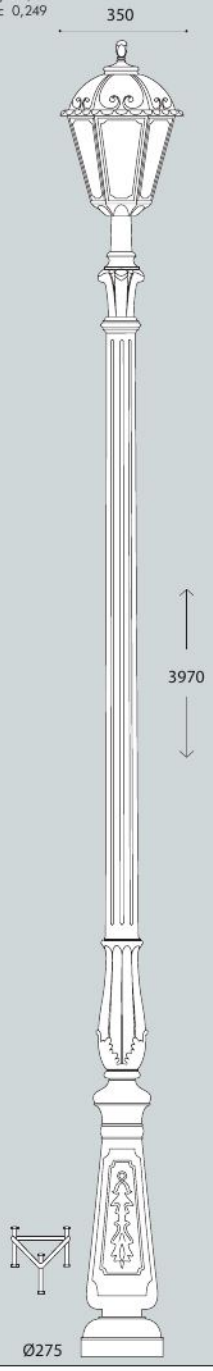

HOREB ADAM/SILOE 3L

K35.207.M30


Pcs 1
Kg 43
mc 0,414

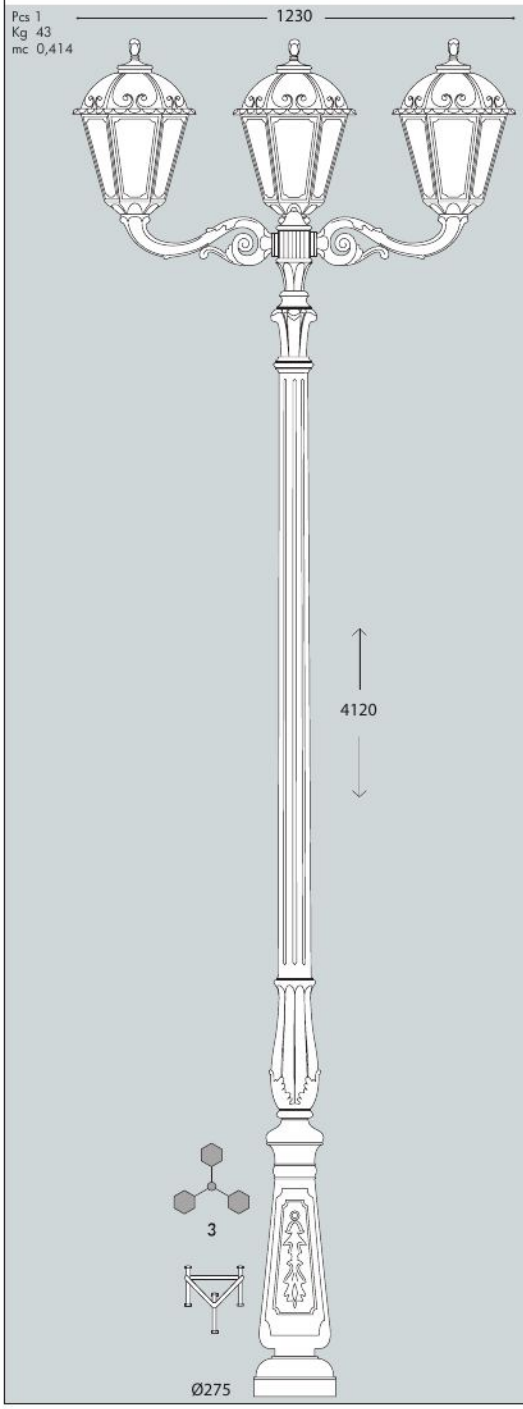

HOREB ADAM/SILOE 3+1

K35.207.M31


Pcs 1
Kg 48
mc 0,476

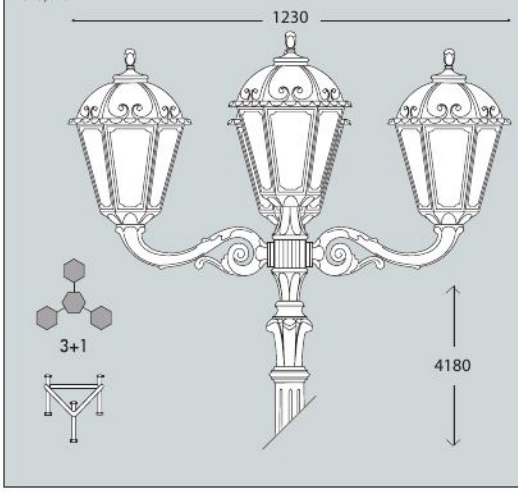

HOREB ADAM/SILOE 2+1

K35.207.M21


Pcs 1
Kg 44,1
mc 0,404

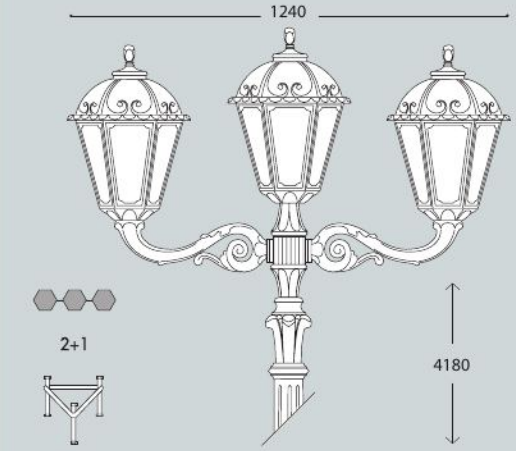

HOREB ADAM/SILOE 2L

K35.207.M20

Pcs 1
Kg 38,8
mc 0,342

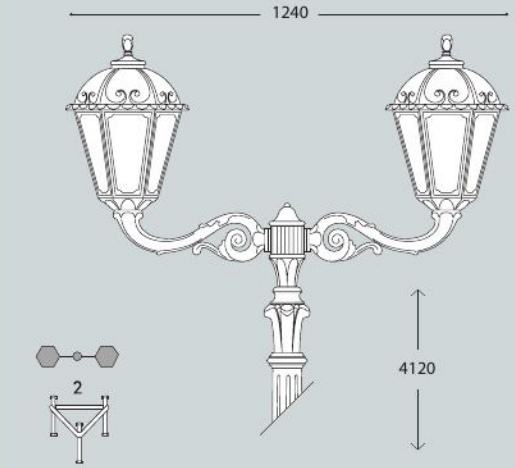


KARMEL 3000/SILOE

LARGE SIZE





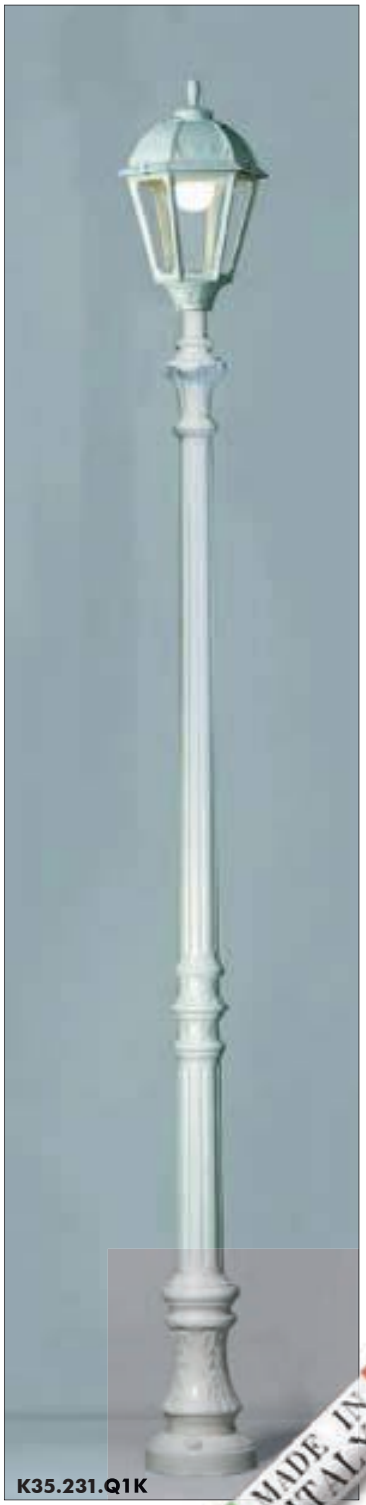


MADE IN ITALY

KARMEL 3000 OFIR/SILOE 2L

K35.231.R20


Pcs 1
Kg 36,4
mc 0,295

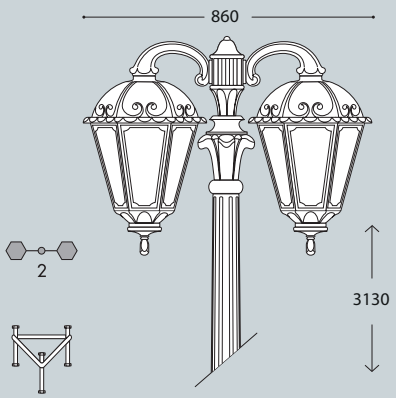

KARMEL 3000 OFIR/SILOE 3L

K35.231.R30


Pcs 1
Kg 39,5
mc 0,369

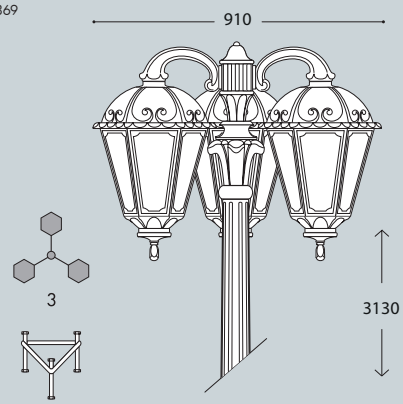

KARMEL 3000/SILOE

K35.231


Pcs 1
Kg 29,4
mc 0,223

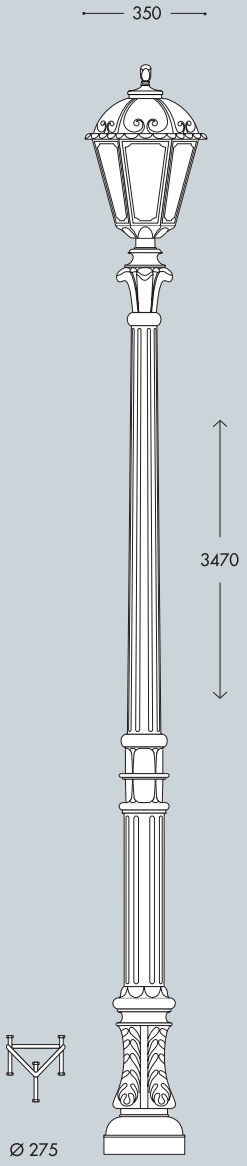

KARMEL 3000 OFIR/SILOE 2L

K35.231.R20


Pcs 1
Kg 36,4
mc 0,295

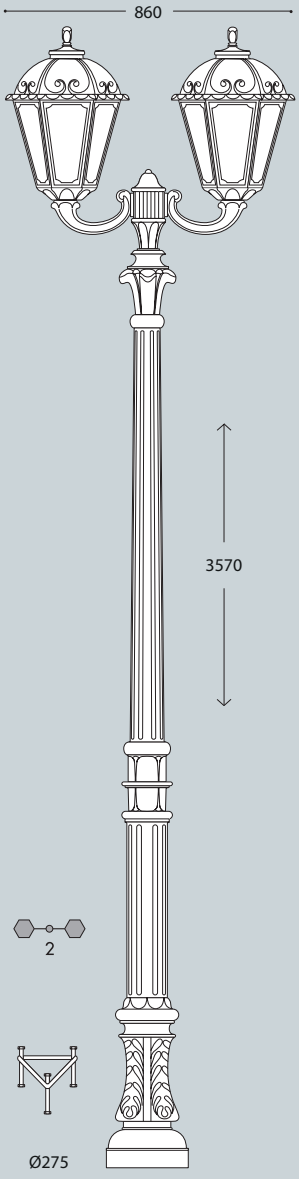

KARMEL 3000 OFIR/SILOE 3L

K35.231.R30

Pcs 1
Kg 39,5
mc 0,369

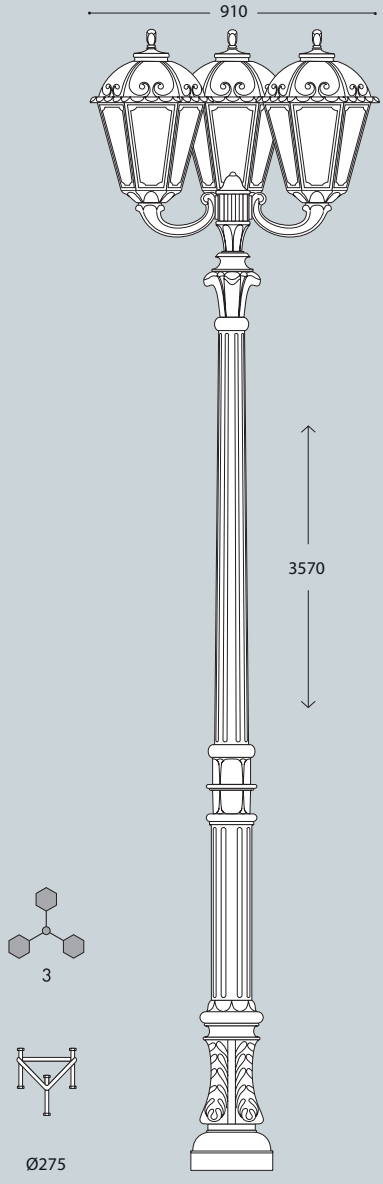

KARMEL 3500-4000/SILOE

LARGE SIZE








MADE IN ITALY


KARMEL 3500/SILOE

K35.234


Pcs 1
Kg 31,9
mc 0,249

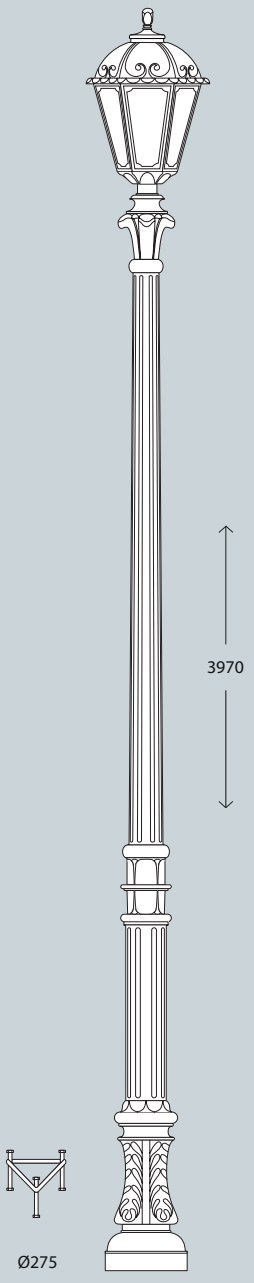


KARMEL 3500 ADAM/SILOE 2+1	KARMEL 4000 ADAM/SILOE 2+1
K35.234.M21	K35.237.M21
Pcs 1 Kg 43 mc 0,404	Pcs 1 Kg 45,5 mc 0,431

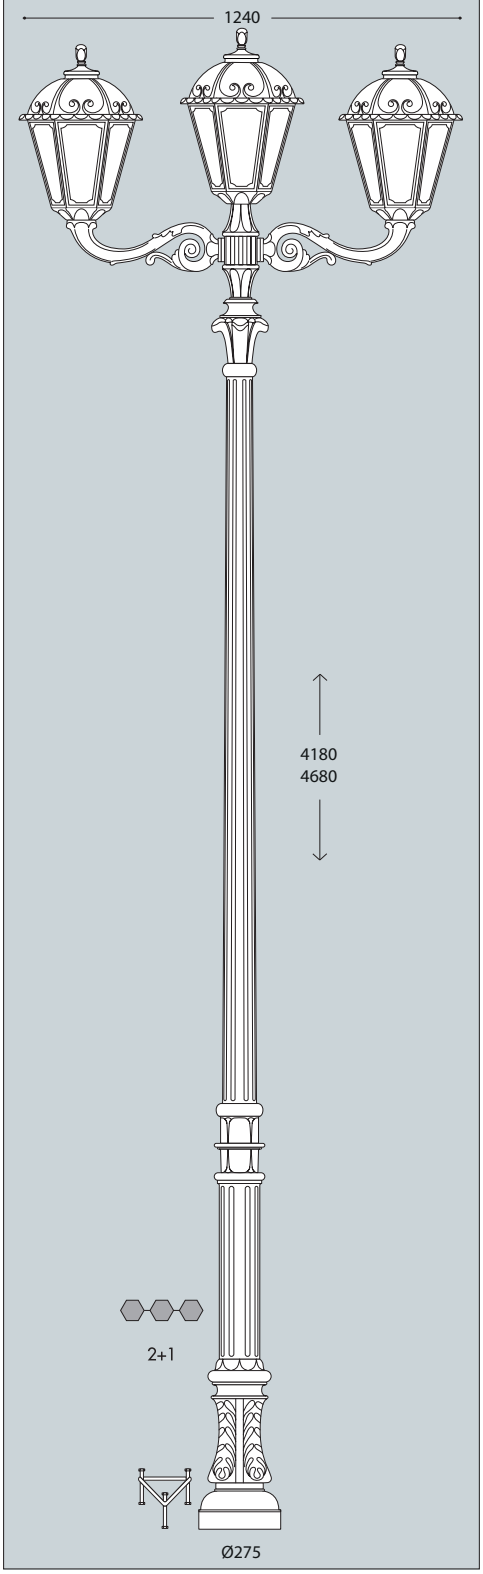


KARMEL 3500 ADAM/SILOE 3L	KARMEL 4000 ADAM/SILOE 3L
K35.234.M30	K35.237.M30
Pcs 1 Kg 44,1 mc 0,414	Pcs 1 Kg 46,6 mc 0,441

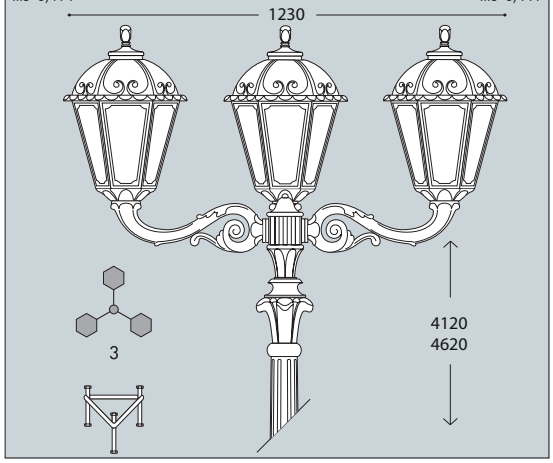

KARMEL 3500 ADAM/SILOE 3+1	KARMEL 4000 ADAM/SILOE 3+1
K35.234.M31	K35.237.M31
Pcs 1 Kg 48 mc 0,476	Pcs 1 Kg 50,5 mc 0,503

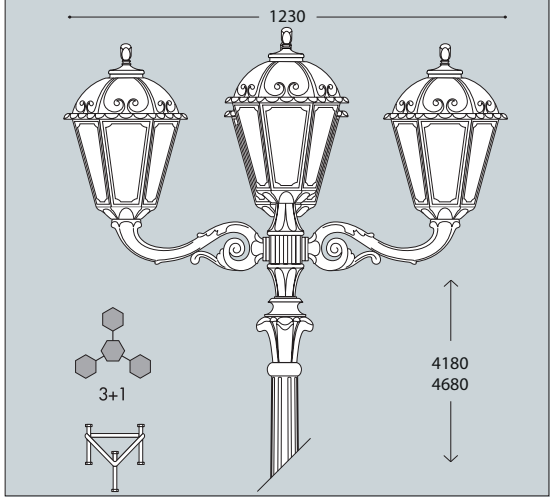

KARMEL 3500 ADAM/SILOE 2L	KARMEL 4000 ADAM/SILOE 2L
K35.234.M20	K35.237.M20
Pcs 1 Kg 38,8 mc 0,342	Pcs 1 Kg 41,3 mc 0,369

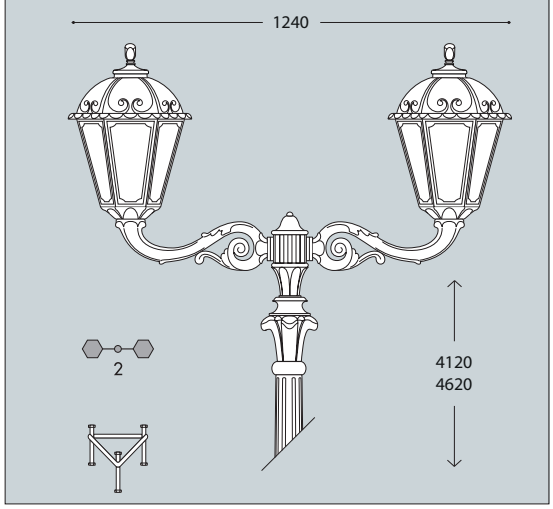

TOBIA HIGH POWER LED

LARGE SIZE

Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



Q33.000.Q1K

CCT SETTABLE

3000 K 4000 K

SDCM < 6

CE CB IECEE CB SCHEME U.V. UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE

PUBLIC RESIDENTIAL

WALL POST HANGING

MADE IN ITALY

TOBIA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a* ***LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

TOBIA HIGH POWER LED

Q33.000 *



Dimensions and weight
Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,089

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K	.R1K
			3000 K	
	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP




CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(15W and 30W only)

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

PHOTOMETRIC DATA SAMPLE





TOBIA E27 LED *HIGH POWER 30W*

POST height 3,5mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

TOBIA E27

LARGE SIZE

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



Q33.000.F1R

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
PUBLIC
RESIDENTIAL
WALL
POST
HANGING

MADE IN ITALY

TOBIA E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*



High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.*



DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

TOBIA E27

Q33.000 *



Dimensions and weight
Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 3,8 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


E27 VERSION



E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient **LED lamps suitable for outdoor use**.


100 - 240 V				*ADD. SUFFIX
Suitable lamps: CFL-LED-SON-HQI MAX 70W		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

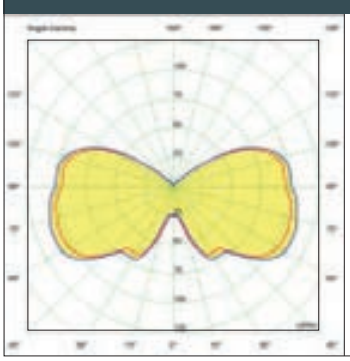



TOBIA E27 *clear SON 70W.*

POST height 3.5mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

TOBIA GX53 LED - FLAT DIFFUSER

LARGE SIZE

Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion- free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with FLAT diffuser and equipped with TÜV-CB certified long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con diffusore piatto ed equipaggiata con **h** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*



TOBIA GX53 LED - FLAT DIFFUSER

LARGE SIZE

TOBIA GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE *in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

TOBIA GX53 LED

Q35.000 *



Dimensions and weight
Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,089


Moulded colours:
Black *White*
Painted colours:
Antique green *Antique bronze*
Diffuser PMMA:
Clear *Opal*

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

GX53 LED




- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.


Lantern supplied with white resin CEILING provided with 4x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	4x 10 W **40 W**	**5160 lm**	6500 K	.D4K
			4000 K	
			3000 K	

PHOTOMETRIC DATA SAMPLE

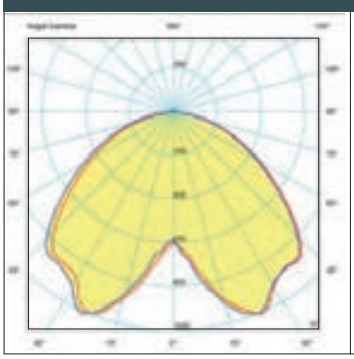



TOBIA GX53 LED
4X10W

POST height 4mt
10x10mt area: average 22 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

TOBIA

LARGE SIZE














OFIR/TOBIA

Q33.132

GX53 Q35.132

Pcs 1
Kg 5,6
mc 0,061




EVA/TOBIA

Q33.181

GX53 Q35.181

Pcs 1
Kg 12,3
mc 0,168

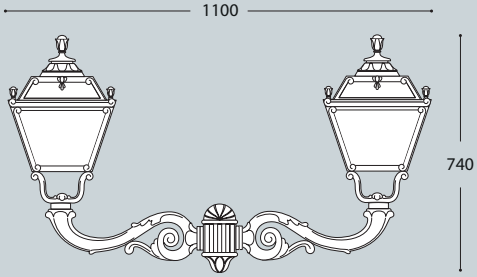


TOBIA

Q33.000

GX53 Q35.000

Pcs 1
Kg 4,6
mc 0,043




LOT/TOBIA

Q33.113

GX53 Q35.113

Pcs 1
Kg 5,8
mc 0,061




MIRRA/TOBIA

Q33.142

GX53 Q35.142

Pcs 1
Kg 10,9
mc 0,083




SICHEM/TOBIA

Q33.121

GX53 Q35.121

Pcs 1
Kg 5,4
mc 0,061

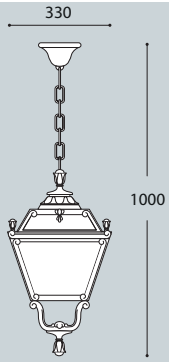


RICU/TOBIA

Q33.157

GX53 Q35.157

Pcs 2
Kg 29,2
mc 0,334

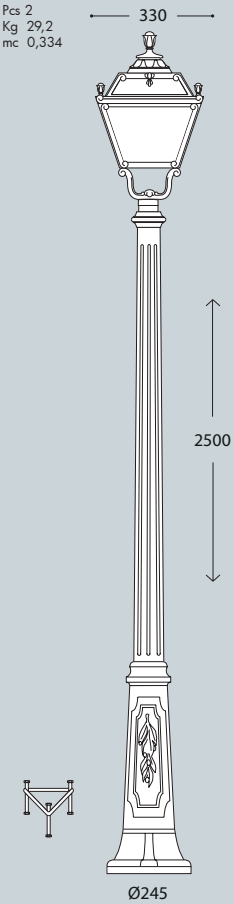


GIGI/TOBIA

Q33.156

GX53 Q35.156

Pcs 2
Kg 27,7
mc 0,304

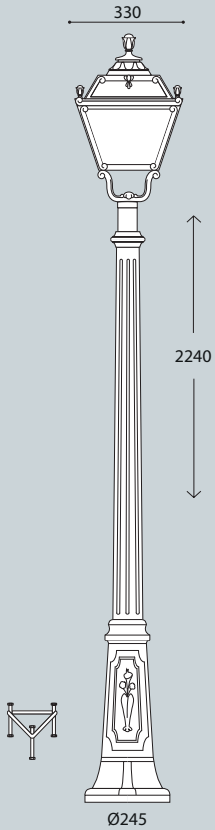


ARTU'/TOBIA

Q33.158

GX53 Q35.158

Pcs 2
Kg 24,7
mc 0,273

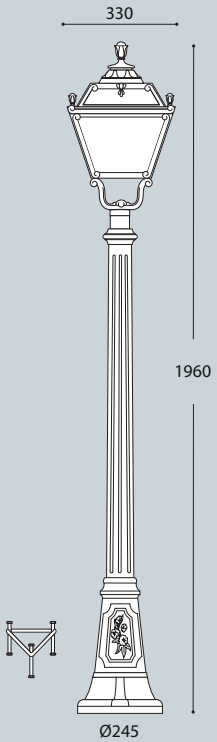


ALOE'.R/TOBIA resin

Q33.163

GX53 Q35.163

Pcs 2
Kg 15,2
mc 0,208

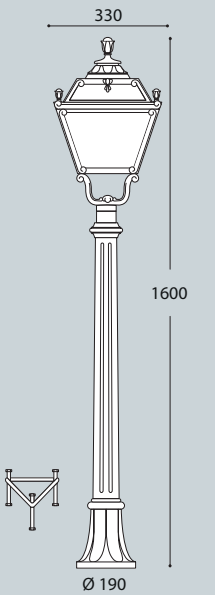


IAFET.R/TOBIA resin

Q33.162

GX53 Q35.162

Pcs 2
Kg 14,5
mc 0,179

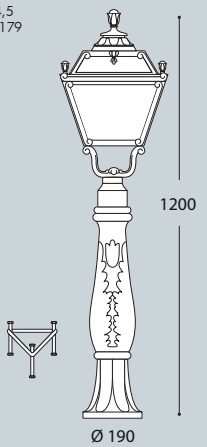

NEBO/TOBIA

LARGE SIZE










MADE IN ITALY

NEBO OFIR/TOBIA 2L

	Q33.201.R20
GX53	Q35.201.R20


Pcs 1
Kg 31,8
mc 0,268

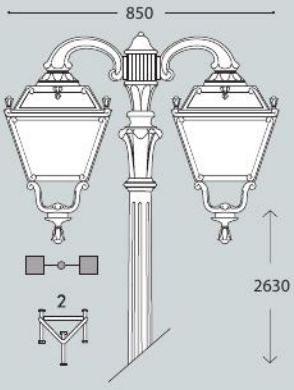

NEBO OFIR/TOBIA 3L

	Q33.201.R30
GX53	Q35.201.R30


Pcs 1
Kg 36,5
mc 0,342

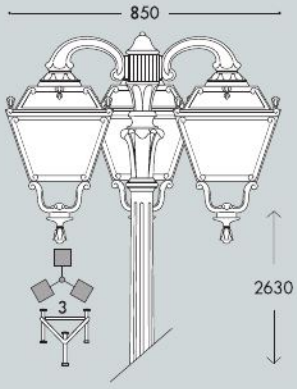

NEBO/TOBIA

	Q33.201
GX53	Q35.201


Pcs 1
Kg 25,6
mc 0,196

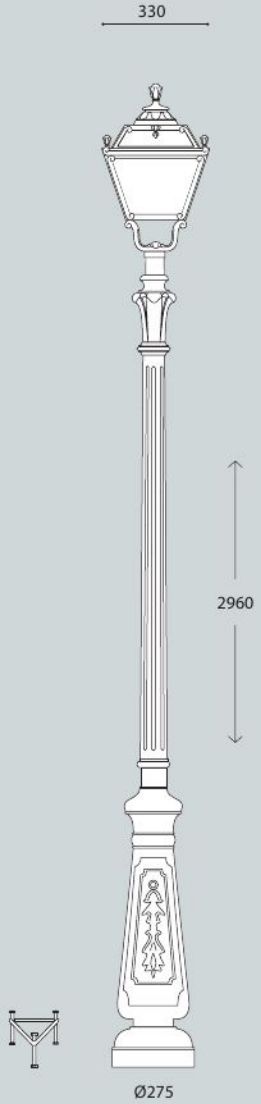

NEBO OFIR/TOBIA 2L

	Q33.201.R20
GX53	Q35.201.R20


Pcs 1
Kg 31,9
mc 0,268

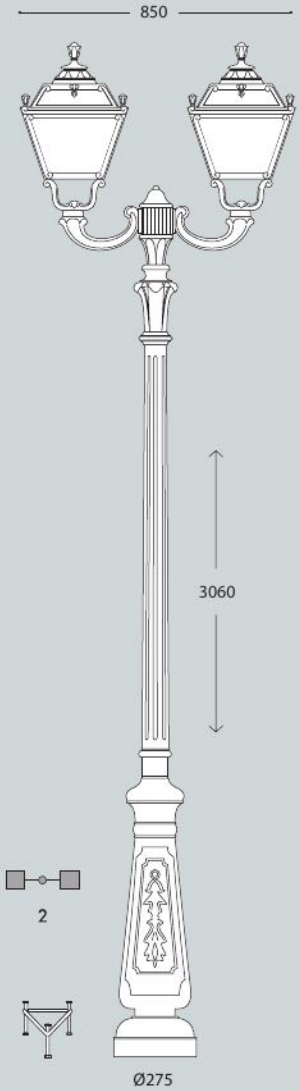

NEBO OFIR/TOBIA 3L

	Q33.201.R30
GX53	Q35.201.R30

Pcs 1
Kg 36,5
mc 0,342

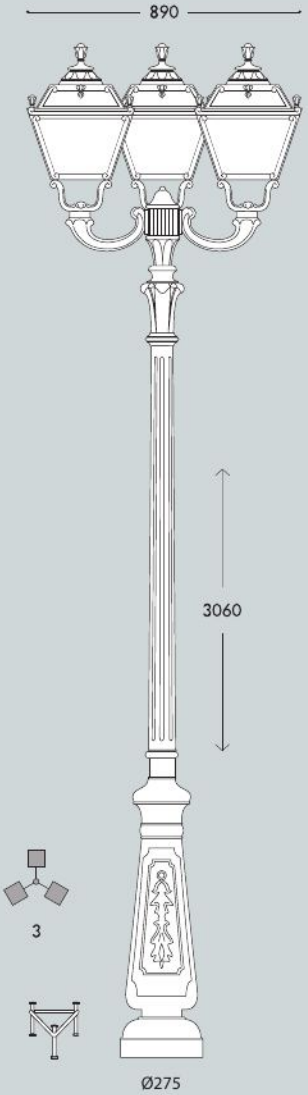

TABOR/TOBIA

LARGE SIZE








MADE IN ITALY

TABOR OFIR/TOBIA 2L

Q33.204.R20

GX53 Q35.204.R20

Pcs 1
Kg 36,5
mc 0,295

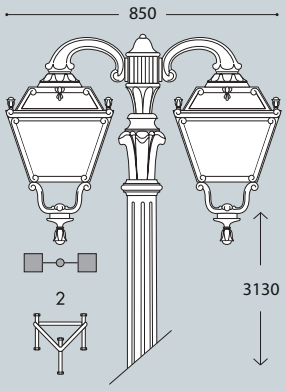


TABOR OFIR/TOBIA 3L

Q33.204.R30

GX53 Q35.204.R30

Pcs 1
Kg 41,1
mc 0,369

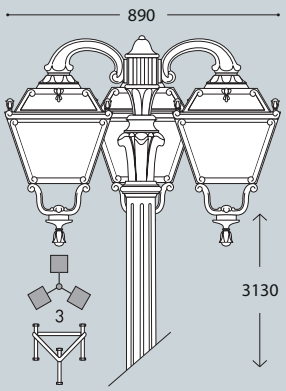


TABOR/TOBIA

Q33.204

GX53 Q35.204

Pcs 1
Kg 30,1
mc 0,223

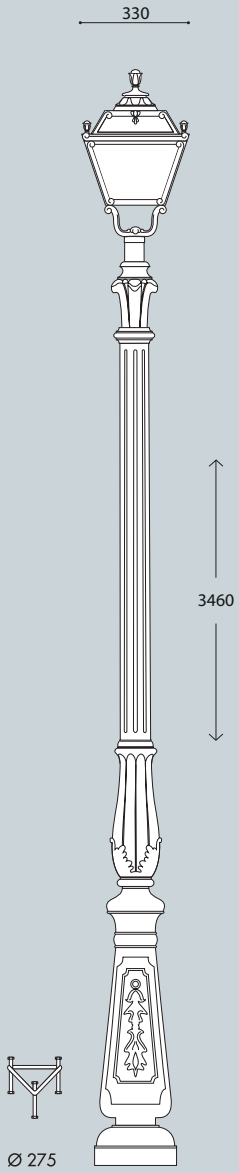


TABOR OFIR/TOBIA 2L

Q33.204.R20

GX53 Q35.204.R20

Pcs 1
Kg 36,5
mc 0,295

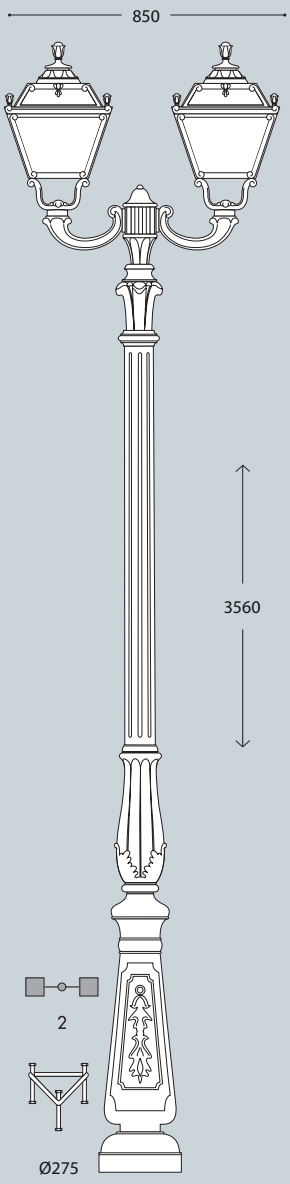


TABOR OFIR/TOBIA 3L

Q33.204.R30


GX53 Q35.204.R30

Pcs 1
Kg 41,1
mc 0,369

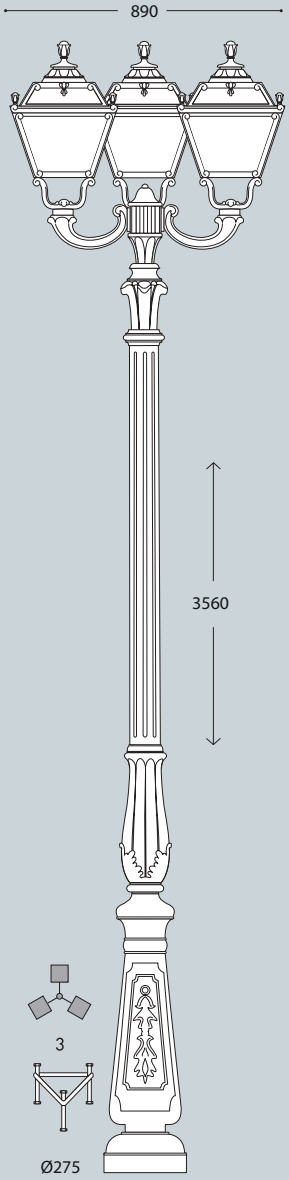

HOREB/TOBIA

LARGE SIZE

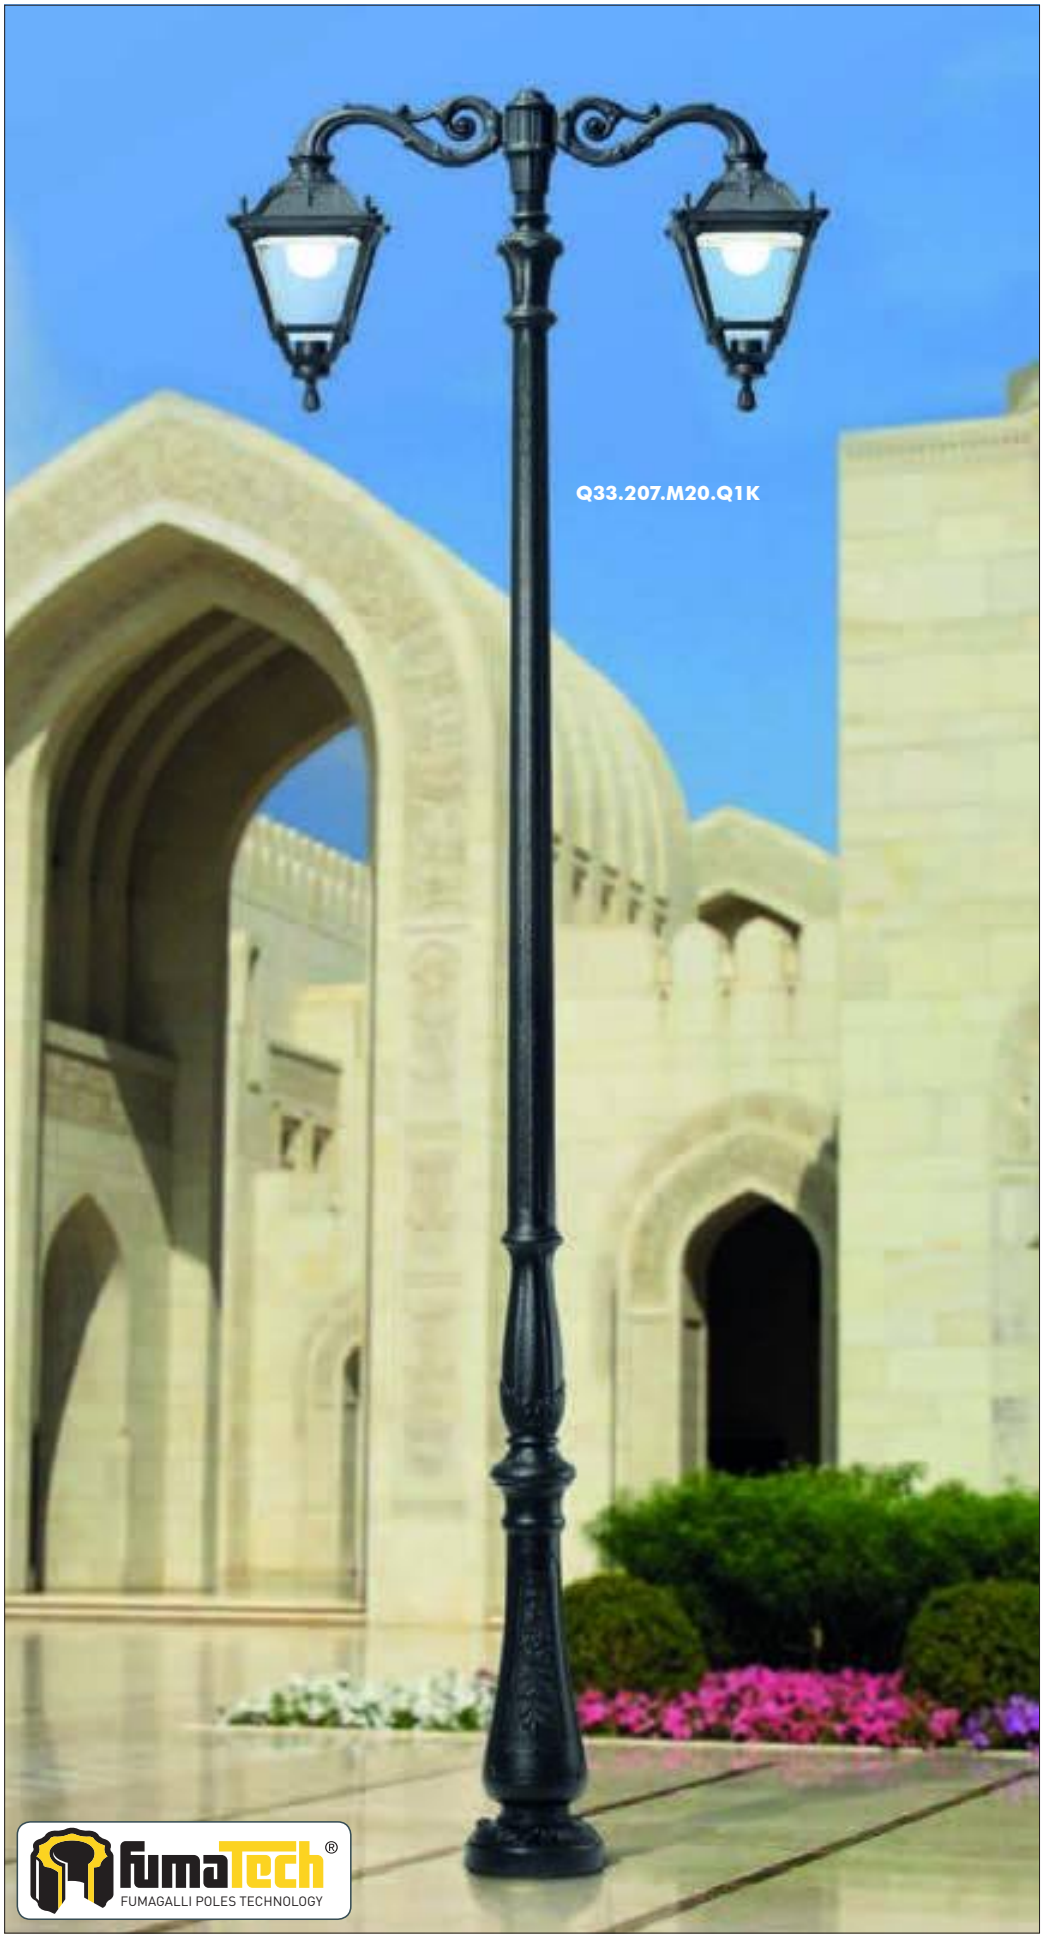


Q33.171.Q1K


Q35.207.D4K


MADE IN ITALY

ADAM/TOBIA

Q33.171

GX53 Q35.171

Pcs 1
Kg 6,1
mc 0,083

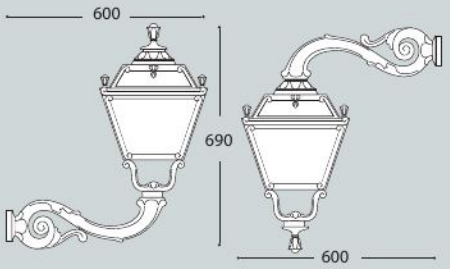


HOREB ADAM/TOBIA 2+1

Q33.207.M21

GX53 Q35.207.M21

Pcs 1
Kg 46,4
mc 0,404

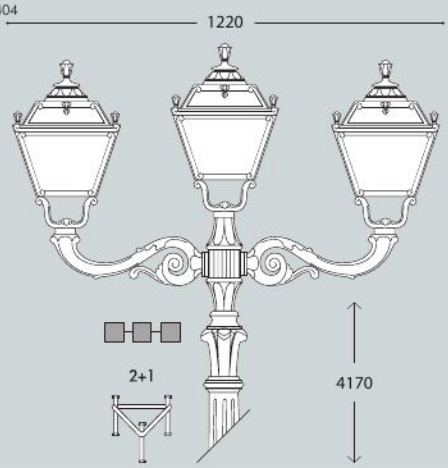


HOREB/TOBIA

Q33.207

GX53 Q35.207

Pcs 1
Kg 32,6
mc 0,249

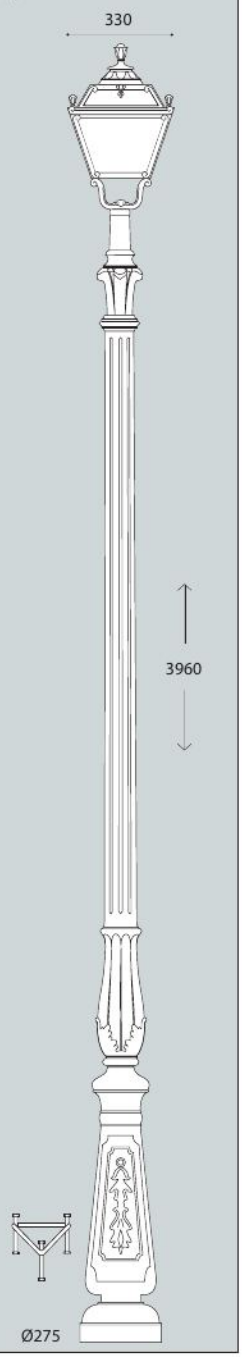


HOREB ADAM/TOBIA 3+1

Q33.207.M31

GX53 Q35.207.M31

Pcs 1
Kg 52,4
mc 0,476

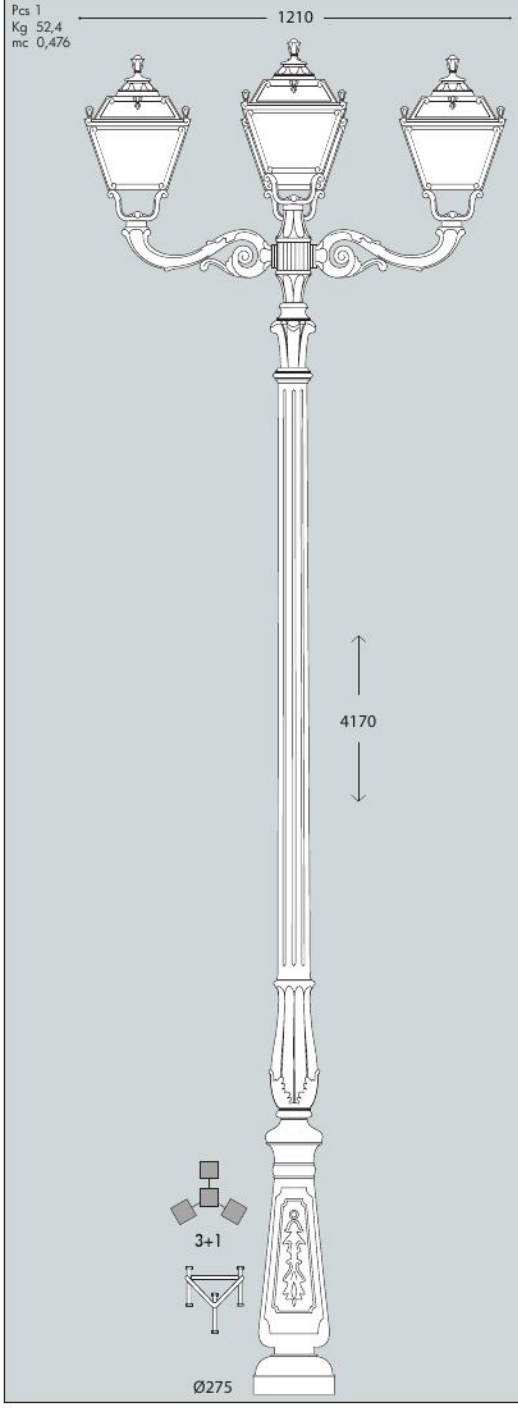


HOREB ADAM/TOBIA 3L

Q33.207.M30

GX53 Q35.207.M30

Pcs 1
Kg 47,8
mc 0,414

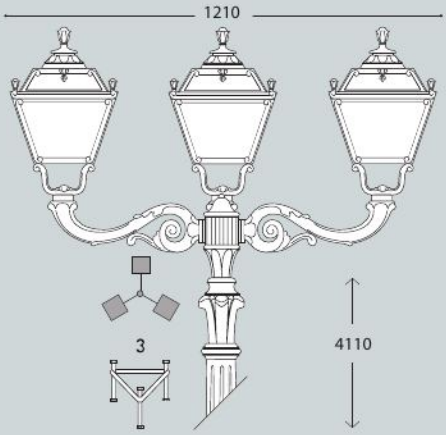


HOREB ADAM/TOBIA 2L

Q33.207.M20


GX53 Q35.207.M20

Pcs 1
Kg 41,8
mc 0,342

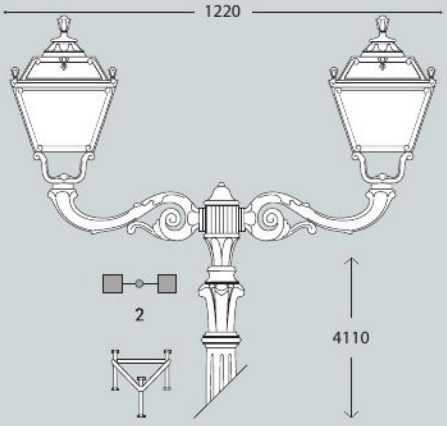

KARMEL 3000/TOBIA

LARGE SIZE

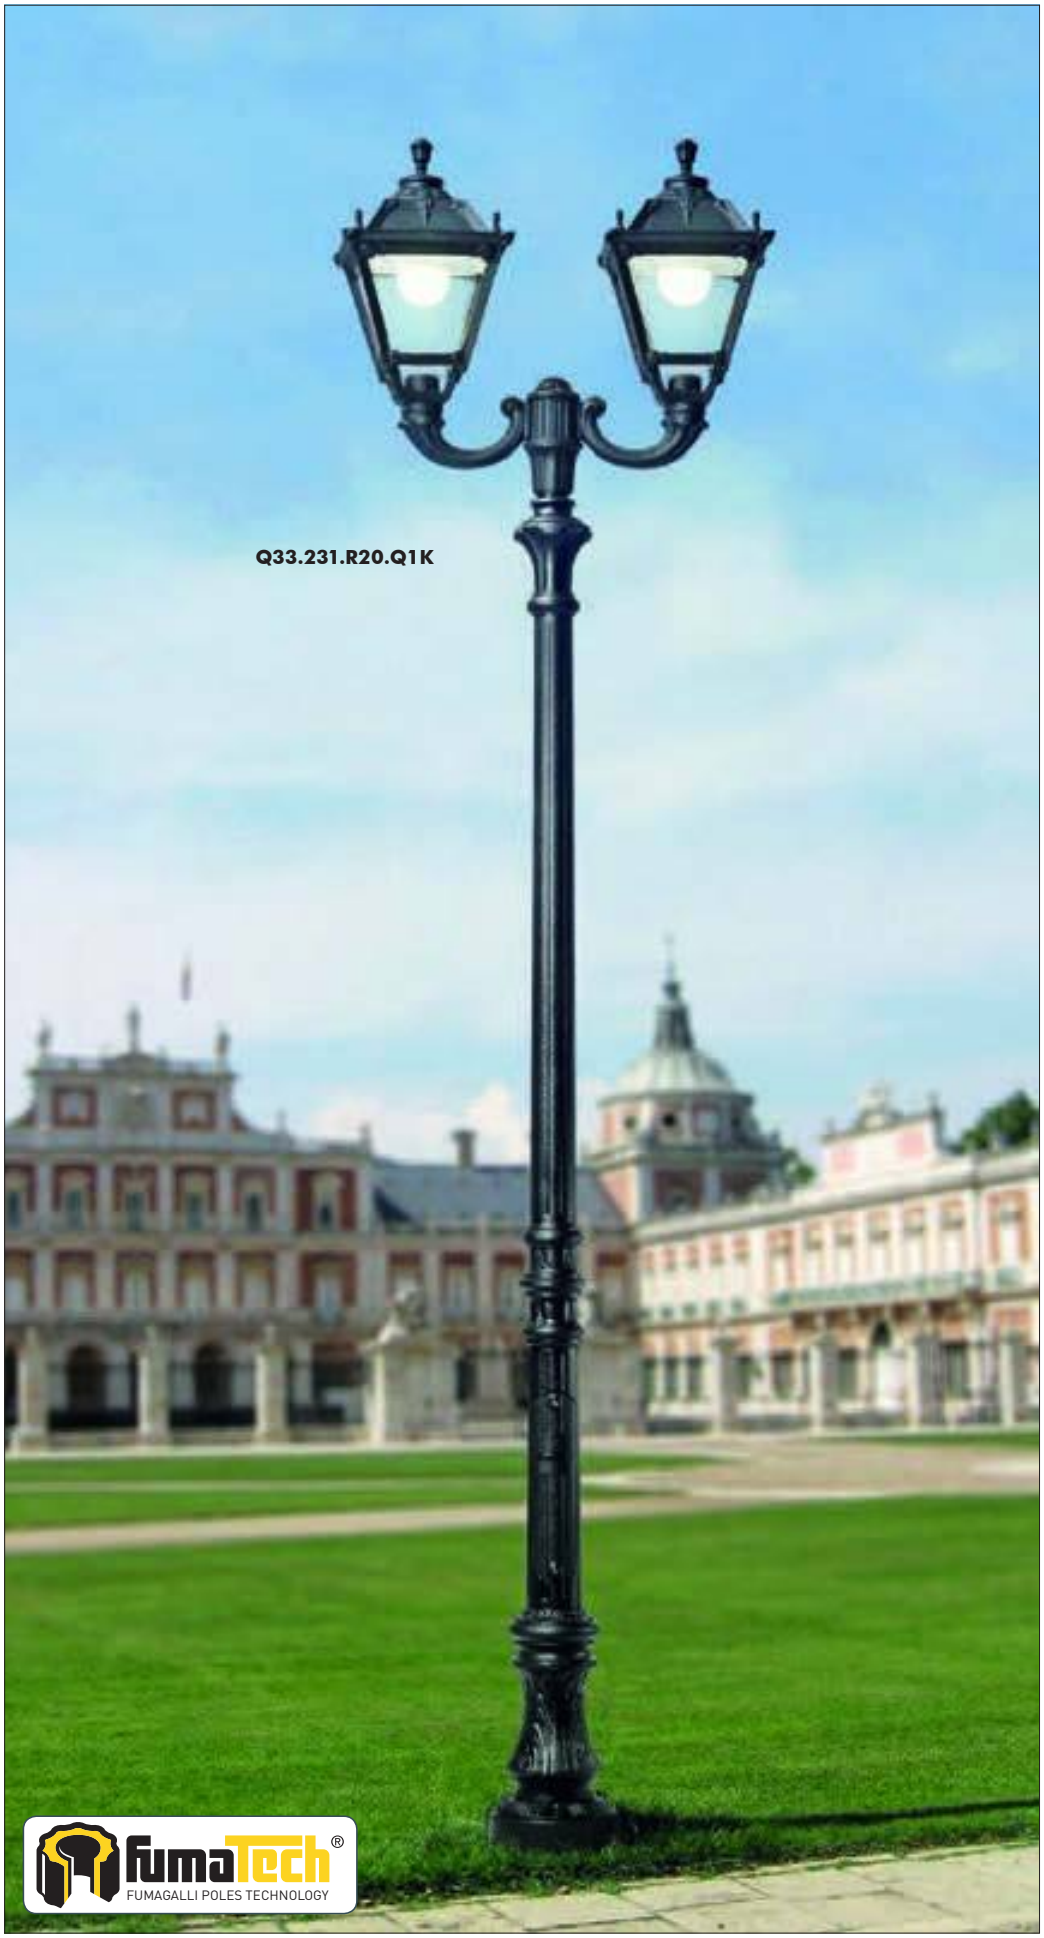






MADE IN ITALY

KARMEL 3000 OFIR/TOBIA 2L

Q33.231.R20

GX53 Q35.231.R20

Pcs 1
Kg 36,5
mc 0,295

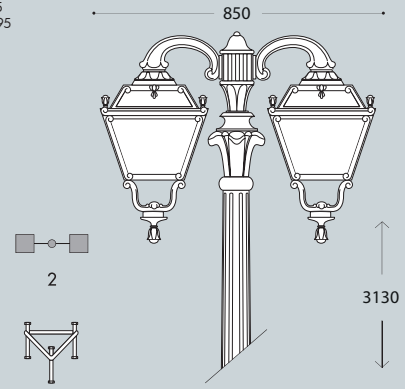


KARMEL 3000 OFIR/TOBIA 3L

Q33.231.R30

GX53 Q35.231.R30

Pcs 1
Kg 41,1
mc 0,369

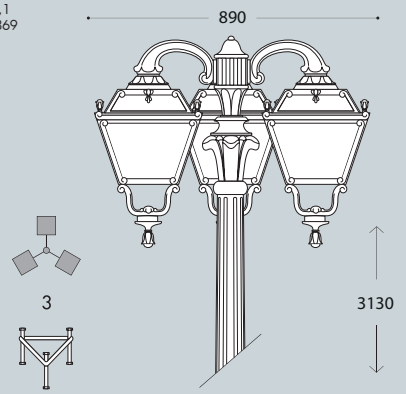


KARMEL 3000/TOBIA

Q33.231

GX53 Q35.231

Pcs 1
Kg 30,1
mc 0,223

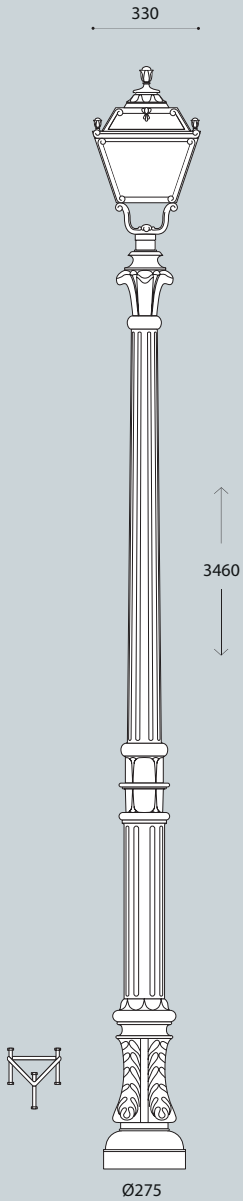


KARMEL 3000 OFIR/TOBIA 2L

Q33.231.R20

GX53 Q35.231.R20

Pcs 1
Kg 36,5
mc 0,295

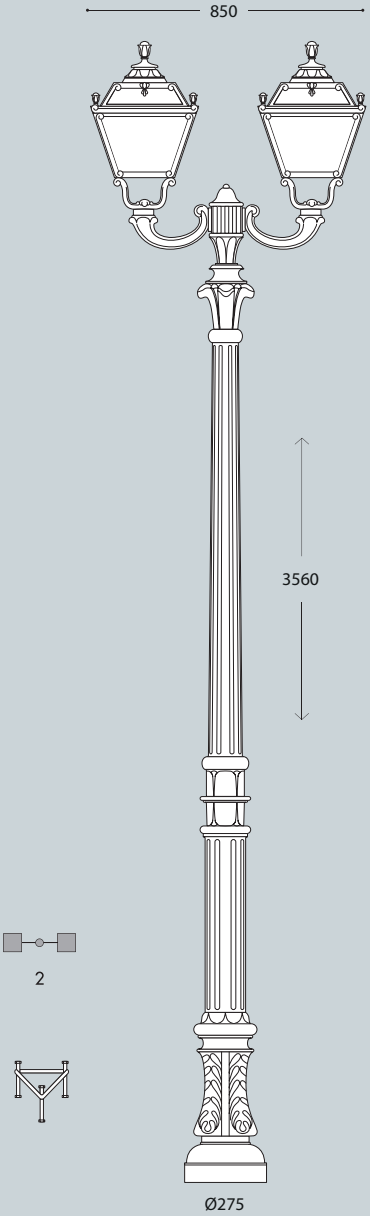


KARMEL 3000 OFIR/TOBIA 3L

Q33.231.R30

GX53 Q35.231.R30

Pcs 1
Kg 41,1
mc 0,369

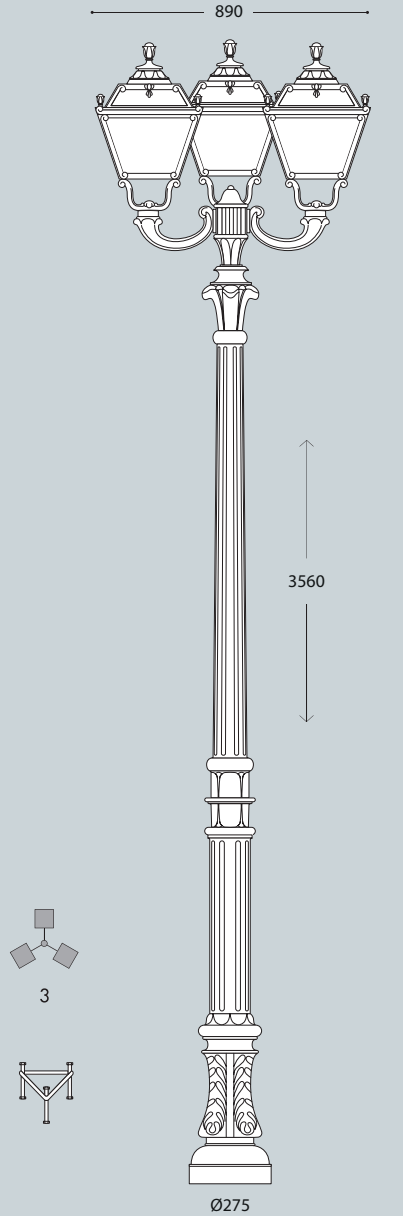

KARMEL 3500-4000/TOBIA

LARGE SIZE








KARMEL 3500/TOBIA	
	Q33.234
GX53	Q35.234


Pcs 1
Kg 32,6
mc 0,249

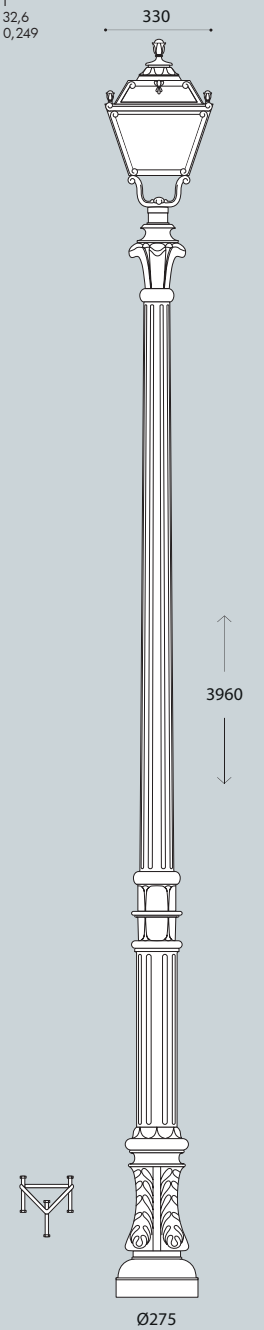

KARMEL 3500 ADAM/TOBIA 2+1	KARMEL 4000 ADAM/TOBIA 2+1
Q33.234.M21	Q33.237.M21
GX53 Q35.234.M21	Q35.237.M21

Pcs 1
Kg 46,4
mc 0,404


Pcs 1
Kg 48,9
mc 0,431

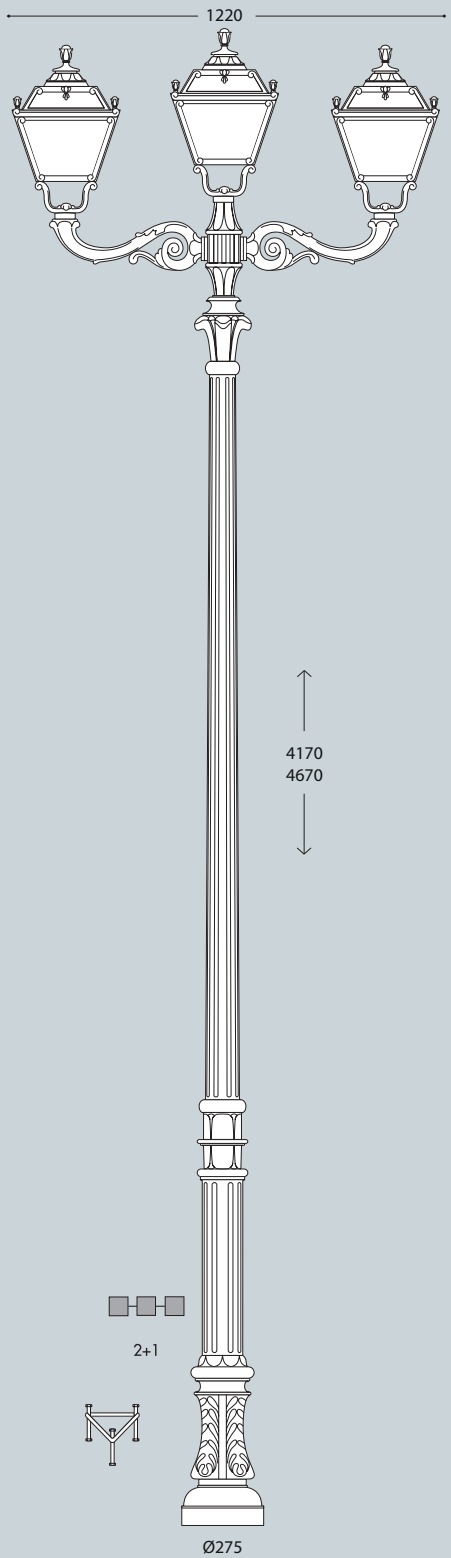

KARMEL 3500 ADAM/TOBIA 3L	KARMEL 4000 ADAM/TOBIA 3L
Q33.234.M30	Q33.237.M30
GX53 Q35.234.M30	Q35.237.M30

Pcs 1
Kg 47,8
mc 0,414


Pcs 1
Kg 50,3
mc 0,441

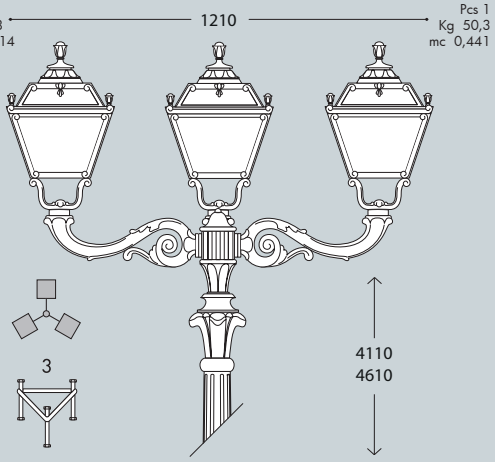

KARMEL 3500 ADAM/TOBIA 3+1	KARMEL 4000 ADAM/TOBIA 3+1
Q33.234.M31	Q33.237.M31
GX53 Q35.234.M31	Q35.237.M31

Pcs 1
Kg 52,4
mc 0,476


Pcs 1
Kg 54,9
mc 0,503

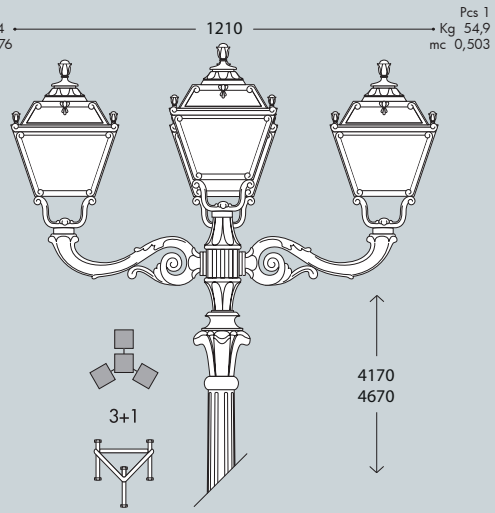

KARMEL 3500 ADAM/TOBIA 2L	KARMEL 4000 ADAM/TOBIA 2L
Q33.234.M20	Q33.237.M20
GX53 Q35.234.M20	Q35.237.M20

Pcs 1
Kg 41,8
mc 0,342

Pcs 1
Kg 44,3
mc 0,369

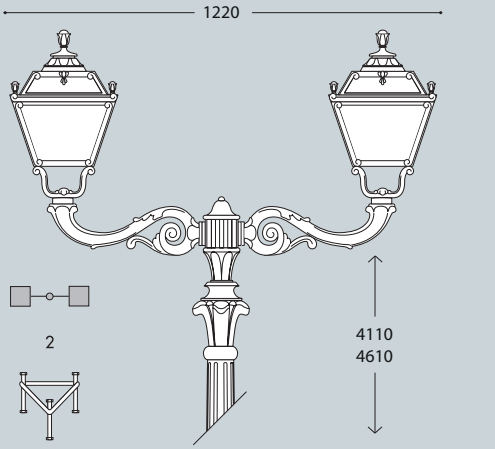


SIMON HIGH POWER LED

LARGE SIZE


fumagalli since 1973


Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita ***completa di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

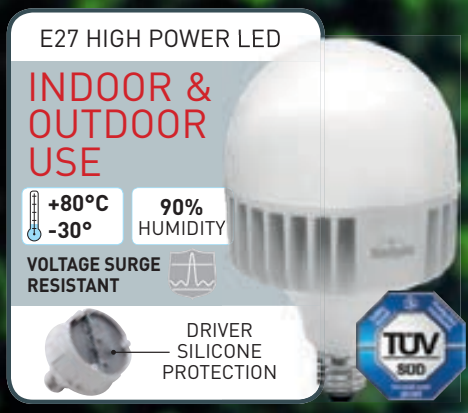

U33.132.Q1K

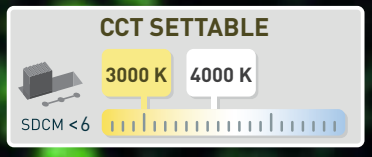

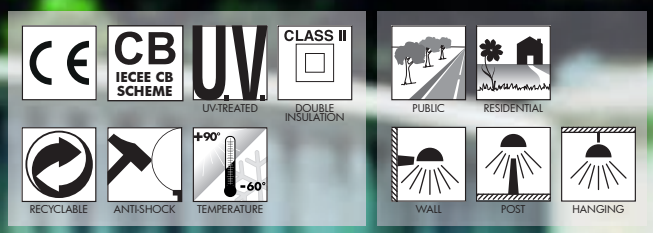



SIMON HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a* ***LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SIMON HIGH POWER LED

U33.000 *



Dimensions and weight
Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,102

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K	.R1K
			3000 K	
	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP




CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(15W and 30W only)

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

PHOTOMETRIC DATA SAMPLE





SIMON E27 LED *HIGH POWER 30W*

POST height 3,5mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

SIMON E27

LARGE SIZE

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



U33.000.T1K

CE · CB IECEE CB SCHEME · U.V. UV-TREATED · CLASS II DOUBLE INSULATION · RECYCLABLE · ANTI-SHOCK · +90° -60° TEMPERATURE

PUBLIC · RESIDENTIAL · WALL · POST · HANGING

MADE IN ITALY

SIMON E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*



High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.*



DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agent.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in un unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SIMON E27

U33.000 *



Dimensions and weight
Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 3,8 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,102

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


E27 VERSION



E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient **LED lamps suitable for outdoor use**.


100 - 240 V				*ADD. SUFFIX
Suitable lamps: CFL-LED-SON-HQI MAX 70W		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

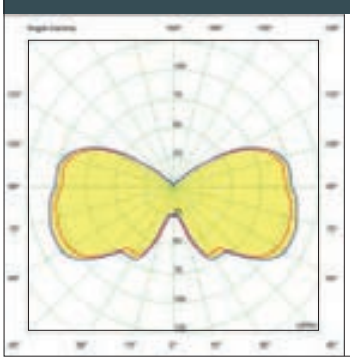



SIMON E27 *clear SON 70W.*

POST height 3.5mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.


** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


SIMON GX53 LED - FLAT DIFFUSER

LARGE SIZE

Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion- free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** *ed equipaggiata con* ***sistema modulare a LED GX53 con Kelvin impostabile****, certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

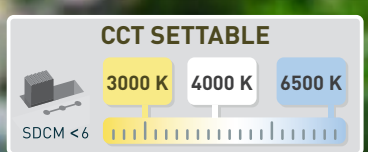

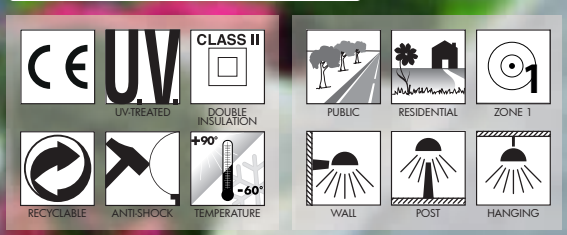

U35.132.D4K



SIMON GX53 LED - FLAT DIFFUSER

LARGE SIZE

SIMON GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.


DIFFUSORE *in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SIMON GX53 LED

U35.000 *



Dimensions and weight
Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,102

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 4x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	4x 10 W **40 W**	**5160 lm**	6500 K	.D4K
			4000 K	
			3000 K	

LED LAMPS


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

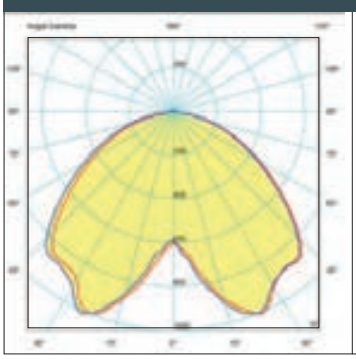

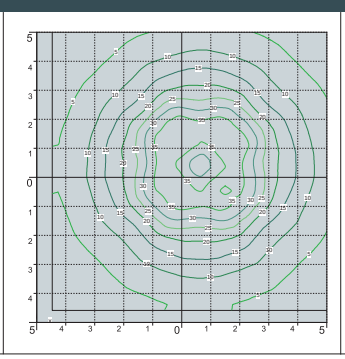

SIMON GX53 LED
4X10W

POST height 4mt
10x10mt area: average 22 lux

The photometric data for all the versions are available upon request or on our website.

SIMON

LARGE SIZE












OFIR/SIMON

U33.132

GX53 U35.132

Pcs 1
Kg 5,6
mc 0,061




EVA/SIMON

U33.181

GX53 U35.181

Pcs 1
Kg 12,3
mc 0,168

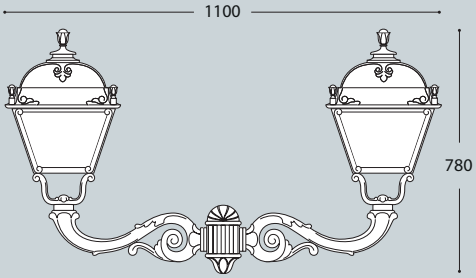


SIMON

U33.000

GX53 U35.000

Pcs 1
Kg 4,6
mc 0,043




LOT/SIMON

U33.113

GX53 U35.113

Pcs 1
Kg 5,8
mc 0,061




MIRRA/SIMON

U33.142

GX53 U35.142

Pcs 1
Kg 10,9
mc 0,083




SICHEM/SIMON

U33.121

GX53 U35.121

Pcs 1
Kg 5,4
mc 0,061

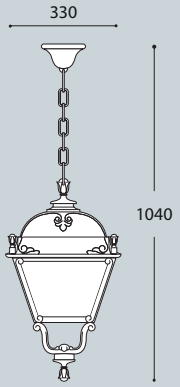

RICU/SIMON

U33.157

GX53 U35.157

Pcs 2
Kg 29,2
mc 0,334




GIGI/SIMON

U33.156

GX53 U35.156

Pcs 2
Kg 27,7
mc 0,304

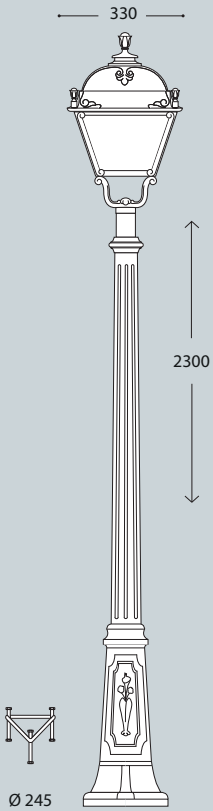


ARTU'/SIMON

U33.158

GX53 U35.158

Pcs 2
Kg 24,7
mc 0,273

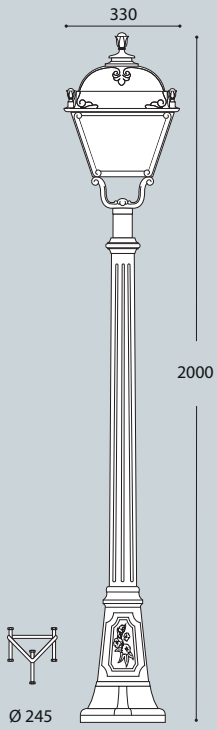


ALOE'.R/SIMON resin

U33.163

GX53 U35.163

Pcs 2
Kg 15,2
mc 0,208

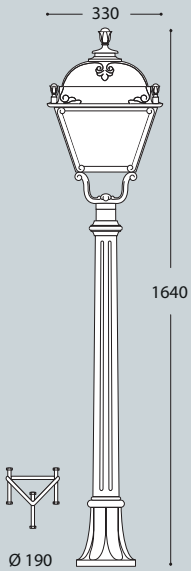


IAFET.R/SIMON resin

U33.162


GX53 U35.162

Pcs 2
Kg 14,5
mc 0,179

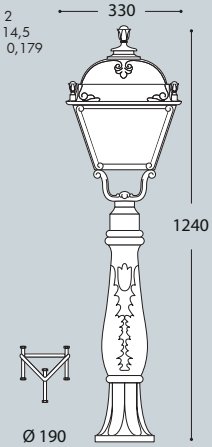

NEBO/SIMON

LARGE SIZE

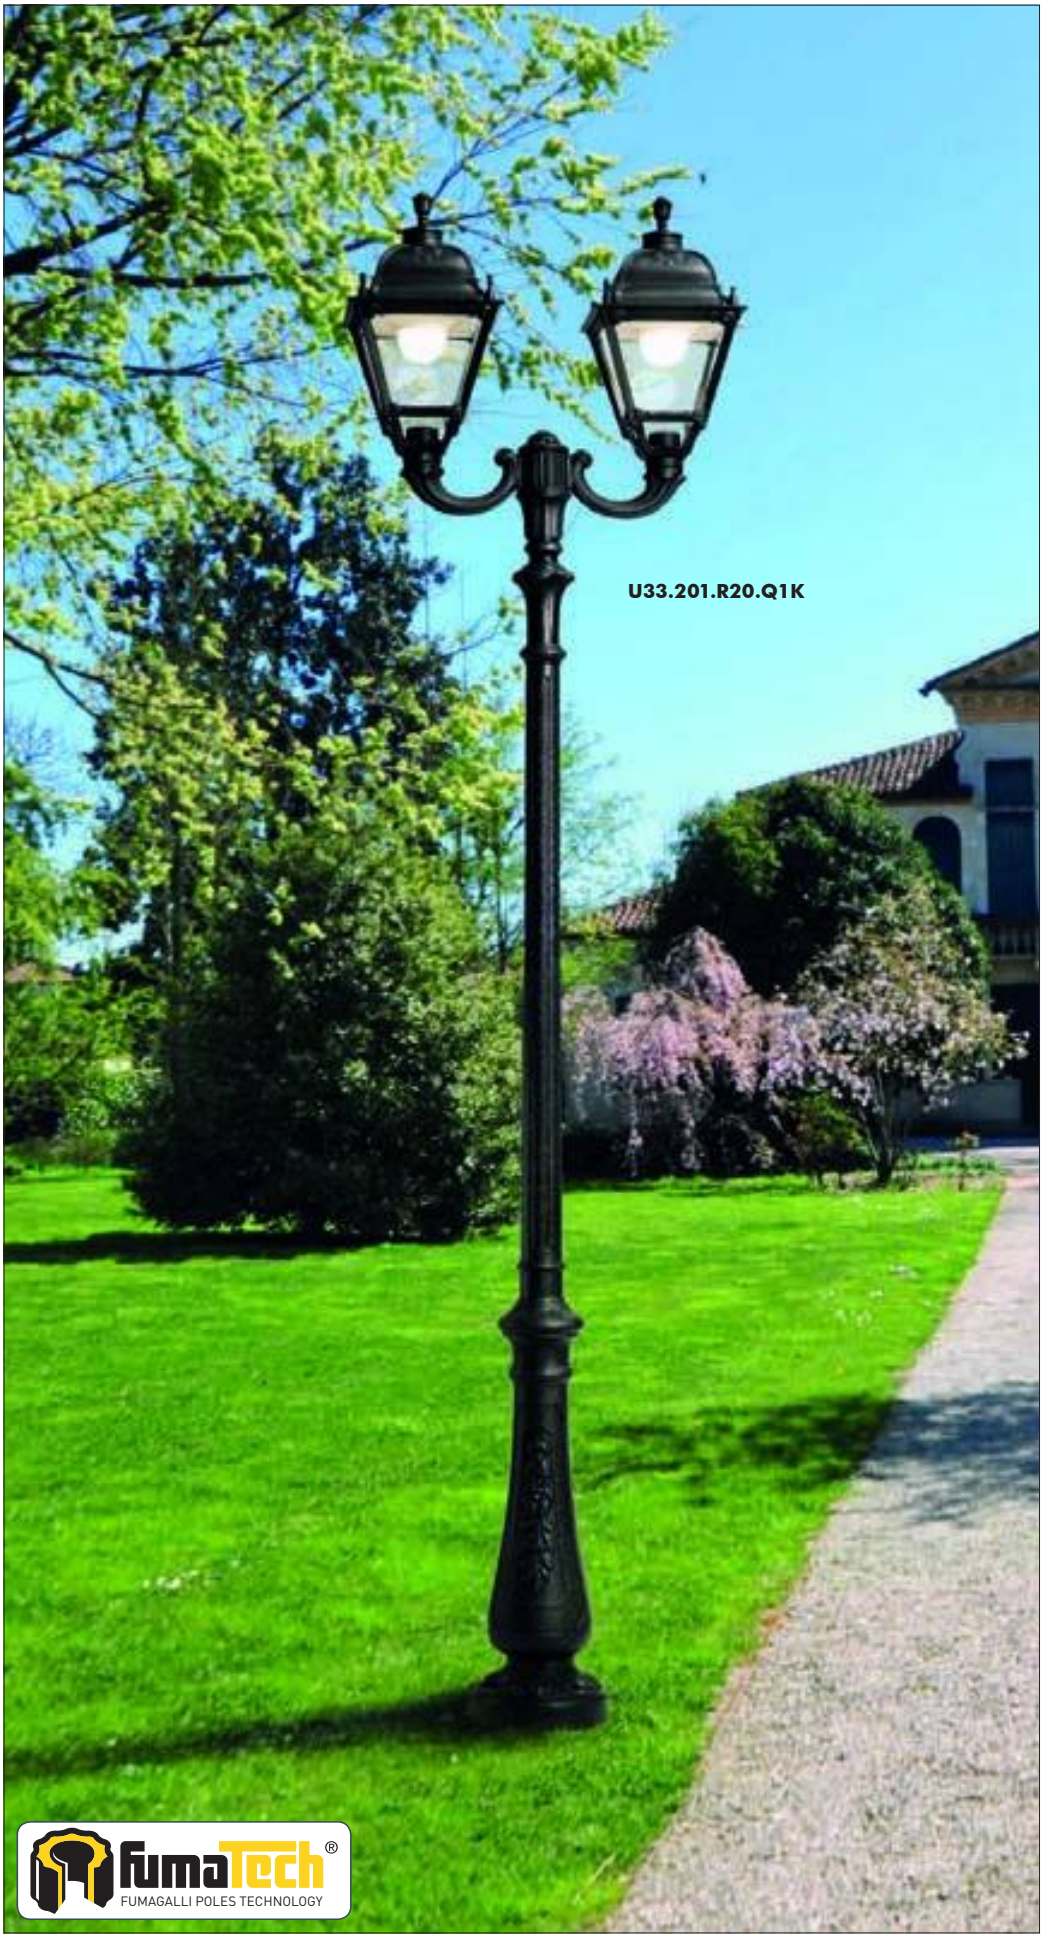






MADE IN ITALY

NEBO OFIR/SIMON 2L

U33.201.R20

GX53 U35.201.R20

Pcs 1
Kg 31,9
mc 0,268

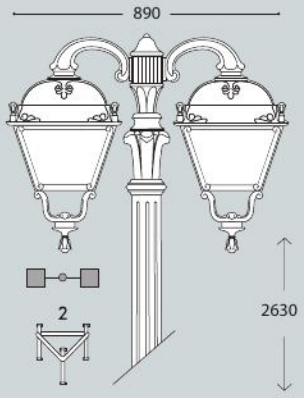


NEBO OFIR/SIMON 3L

U33.201.R30

GX53 U35.201.R30

Pcs 1
Kg 36,5
mc 0,342

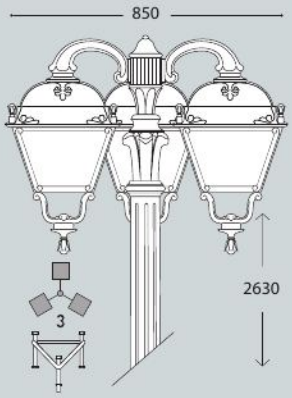


NEBO/SIMON

U33.201

GX53 U35.201

Pcs 1
Kg 25,6
mc 0,196

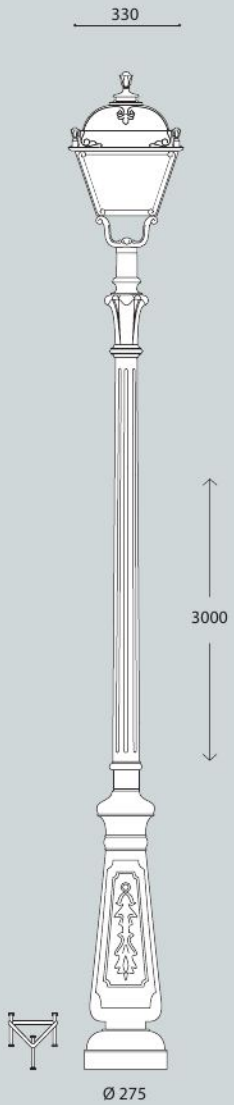


NEBO OFIR/SIMON 2L

U33.201.R20

GX53 U35.201.R20

Pcs 1
Kg 31,9
mc 0,268

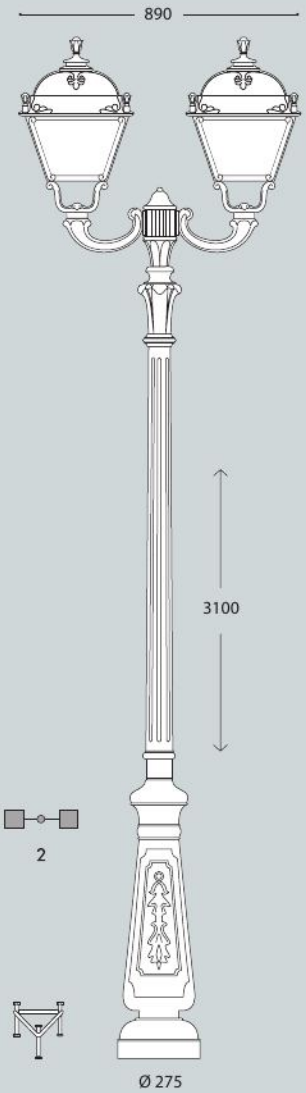


NEBO OFIR/SIMON 3L

U33.201.R30

GX53 U35.201.R30

Pcs 1
Kg 36,5
mc 0,342

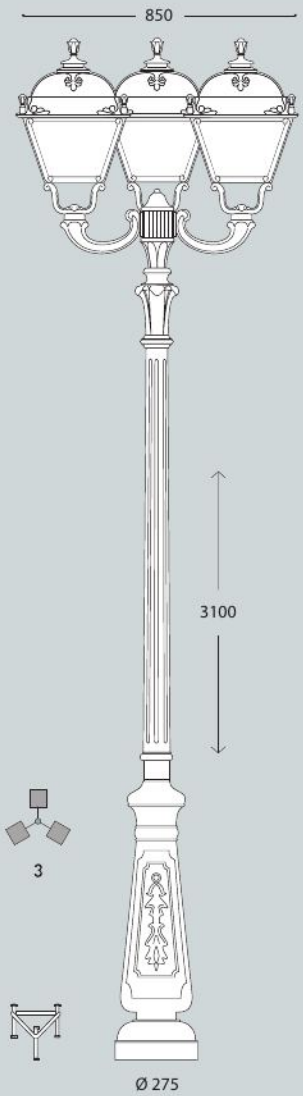

TABOR/SIMON

LARGE SIZE








TABOR OFIR/SIMON 2L

U33.204.R20

GX53 U35.204.R20

Pcs 1
Kg 36,5
mc 0,268

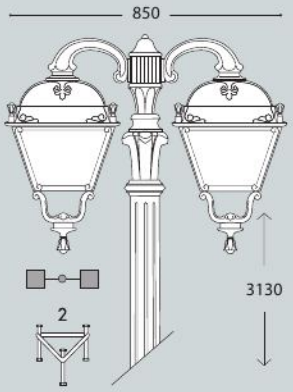


TABOR OFIR/SIMON 3L

U33.204.R30

GX53 U35.204.R30

Pcs 1
Kg 41,1
mc 0,342

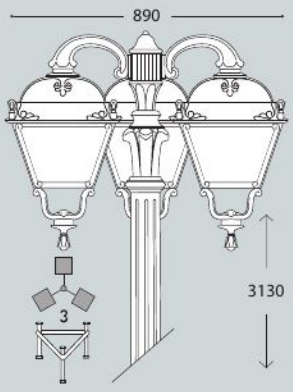


TABOR/SIMON

U33.204

GX53 U35.204

Pcs 1
Kg 30,1
mc 0,196

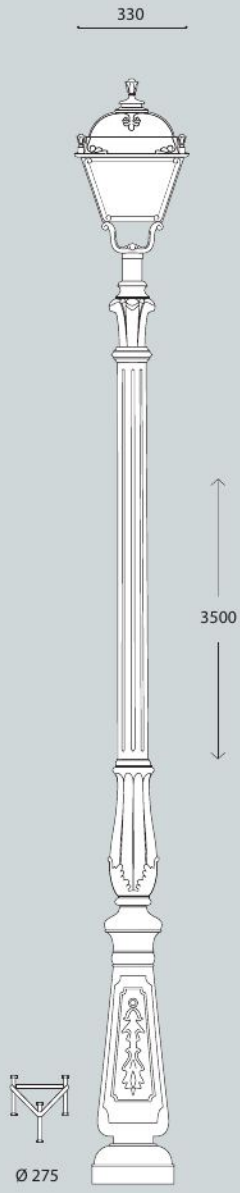


TABOR OFIR/SIMON 2L

U33.204.R20

GX53 U35.204.R20

Pcs 1
Kg 36,5
mc 0,268

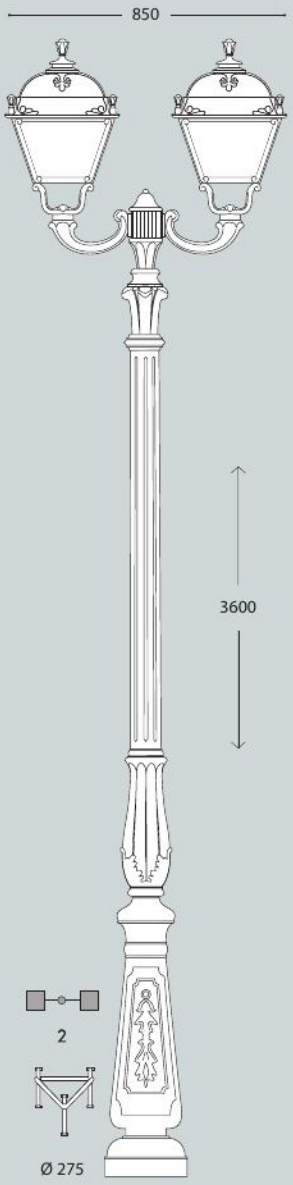


TABOR OFIR/SIMON 3L

U33.204.R30

GX53 U35.204.R30

Pcs 1
Kg 41,1
mc 0,342

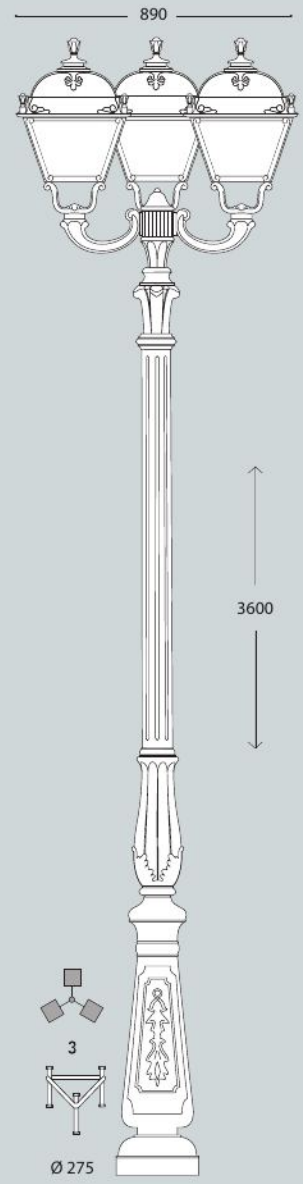

HOREB/SIMON

LARGE SIZE







MADE IN ITALY



HOREB/SIMON


LARGE SIZE

ADAM/SIMON

U33.171

GX53 U35.171

Pcs 1
Kg 6,1
mc 0,083

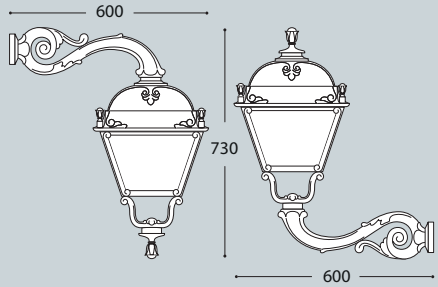


HOREB ADAM/SIMON 2+1

U33.207.M21

GX53 U35.207.M21

Pcs 1
Kg 46,4
mc 0,404

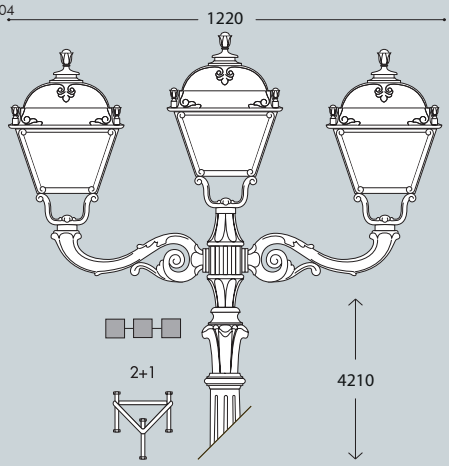


HOREB/SIMON

U33.207

GX53 U35.207

Pcs 1
Kg 32,6
mc 0,249

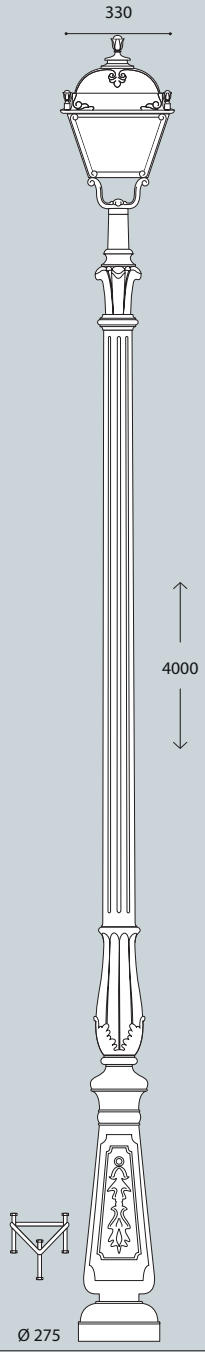


HOREB ADAM/SIMON 3+1

U33.207.M31

GX53 U35.207.M31

Pcs 1
Kg 52,4
mc 0,476

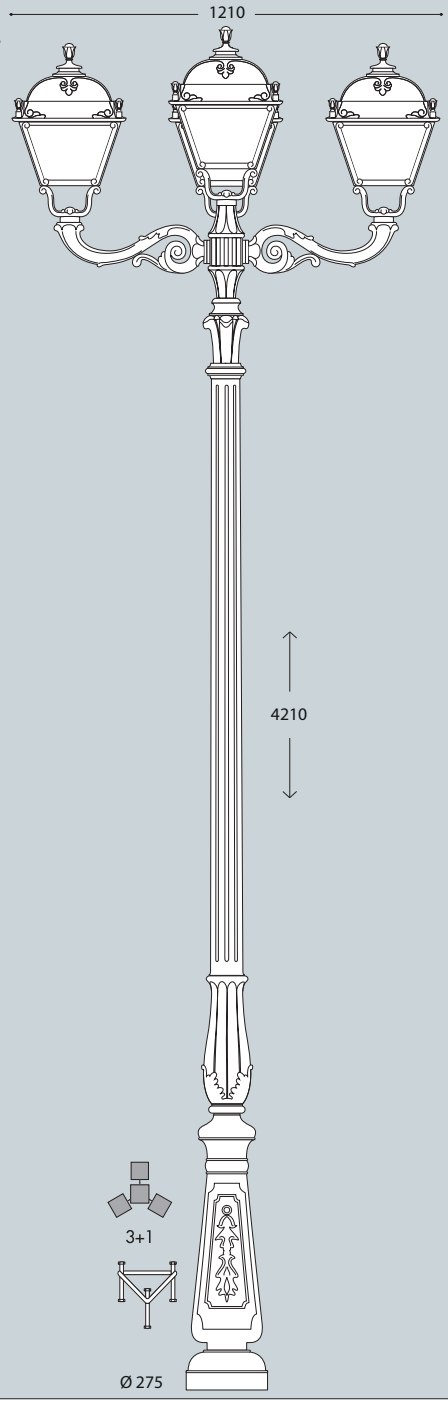


HOREB ADAM/SIMON 3L

U33.207.M30

GX53 U35.207.M30

Pcs 1
Kg 47,8
mc 0,414

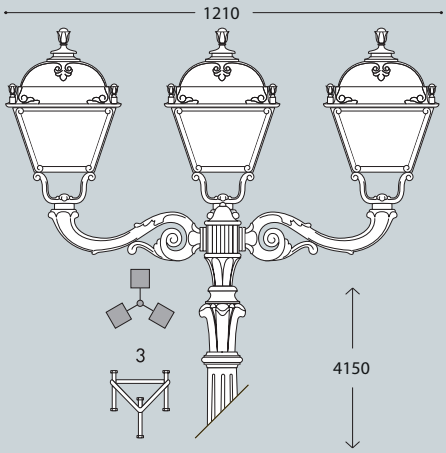


HOREB ADAM/SIMON 2L

U33.207.M20

GX53 U35.207.M20

Pcs 1
Kg 41,8
mc 0,342

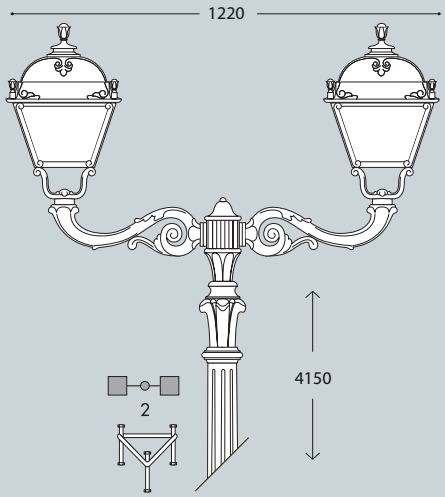

KARMEL 3000/SIMON

LARGE SIZE







MADE IN ITALY



KARMEL 3000/SIMON


LARGE SIZE

KARMEL 3000 OFIR/SIMON 2L

U33.231.R20

GX53 U35.231.R20

Pcs 1
Kg 36,5
mc 0,295

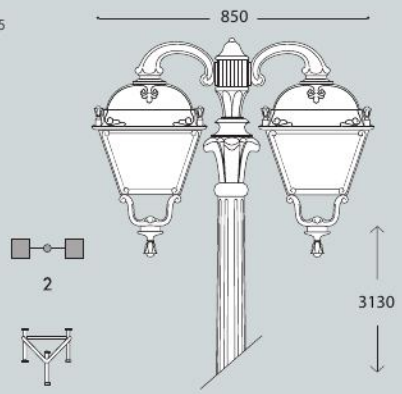


KARMEL 3000 OFIR/SIMON 3L

U33.231.R30

GX53 U35.231.R30

Pcs 1
Kg 41,1
mc 0,369

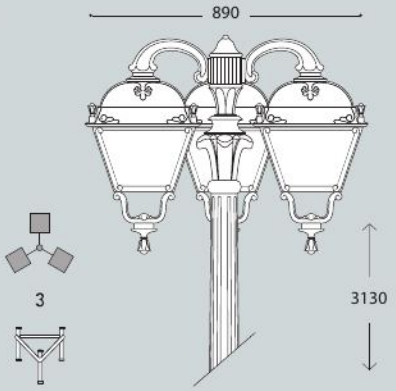


KARMEL 3000/SIMON

U33.231

GX53 U35.231

Pcs 1
Kg 30,1
mc 0,223

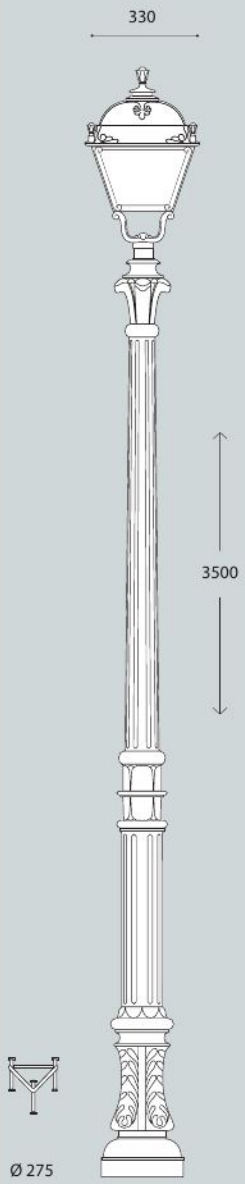


KARMEL 3000 OFIR/SIMON 2L

U33.231.R20

GX53 U35.231.R20

Pcs 1
Kg 36,5
mc 0,295

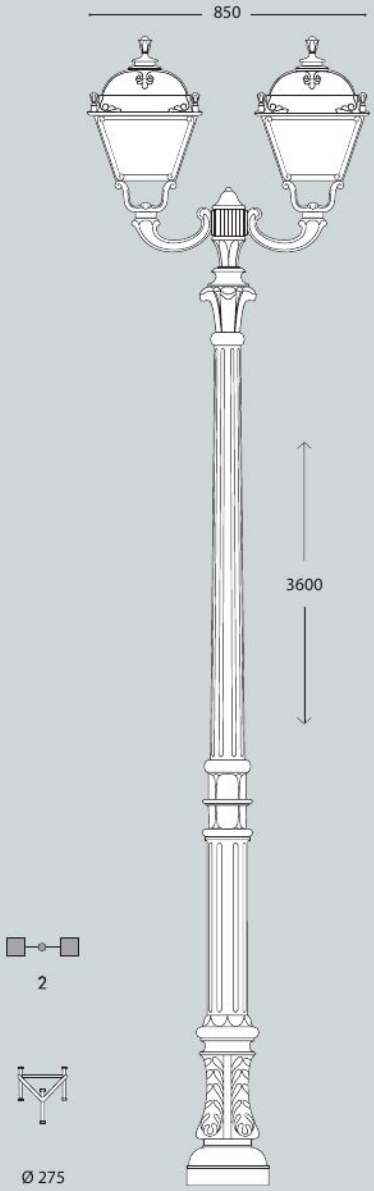


KARMEL 3000 OFIR/SIMON 3L

U33.231.R30

GX53 U35.231.R30

Pcs 1
Kg 41,1
mc 0,369

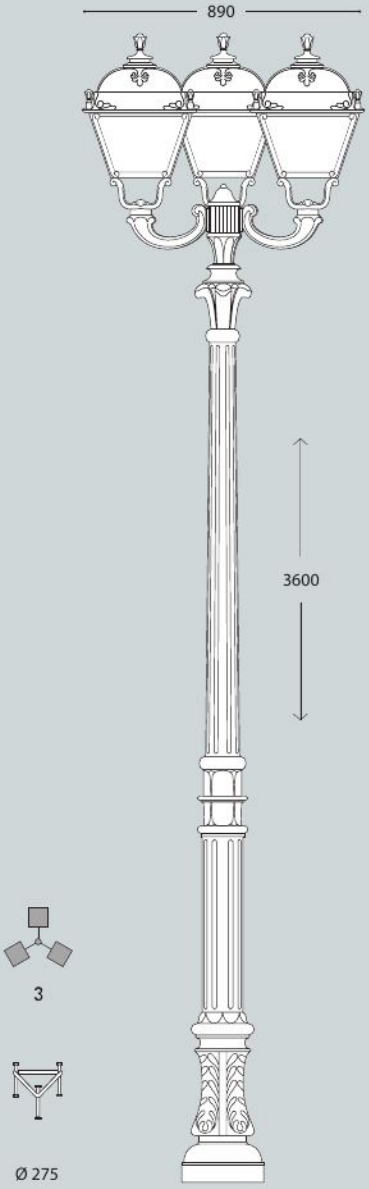


KARMEL 3500-4000/SIMON

LARGE SIZE





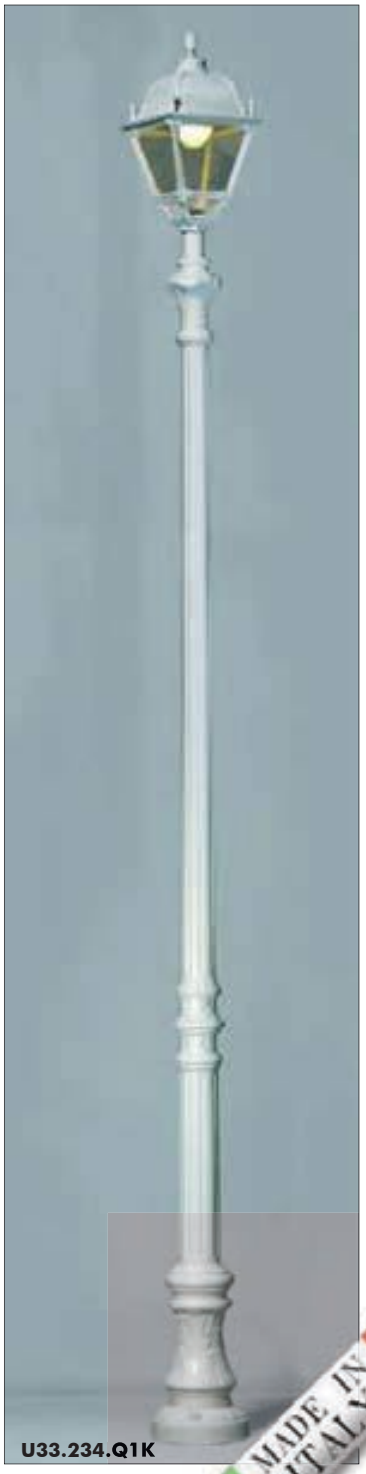




KARMEL 3500-4000/SIMON

LARGE SIZE

KARMEL 3500/SIMON	
	U33.234
GX53	U35.234


Pcs 1
Kg 32,6
mc 0,249

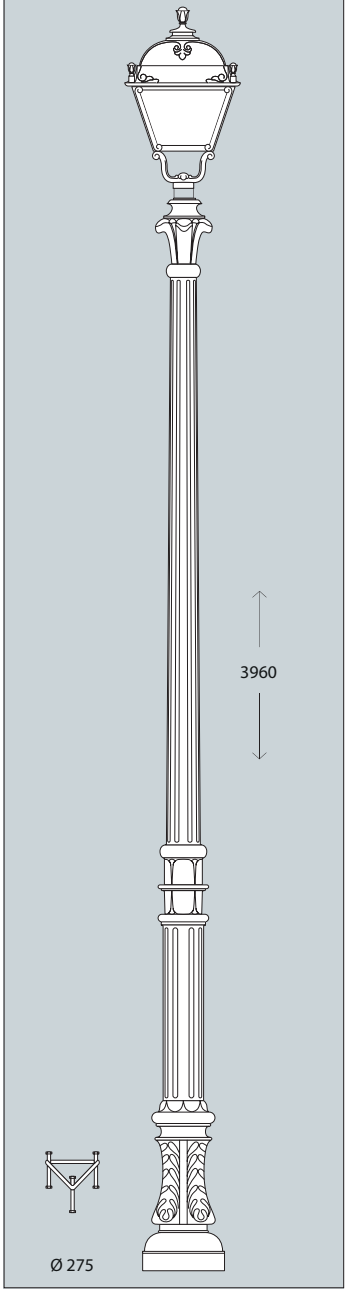

KARMEL 3500 ADAM/SIMON 2+1	KARMEL 4000 ADAM/SIMON 2+1
U33.234.M21	U33.237.M21
GX53 U35.234.M21	U35.237.M21

Pcs 1
Kg 46,4
mc 0,404


Pcs 1
Kg 48,8
mc 0,431

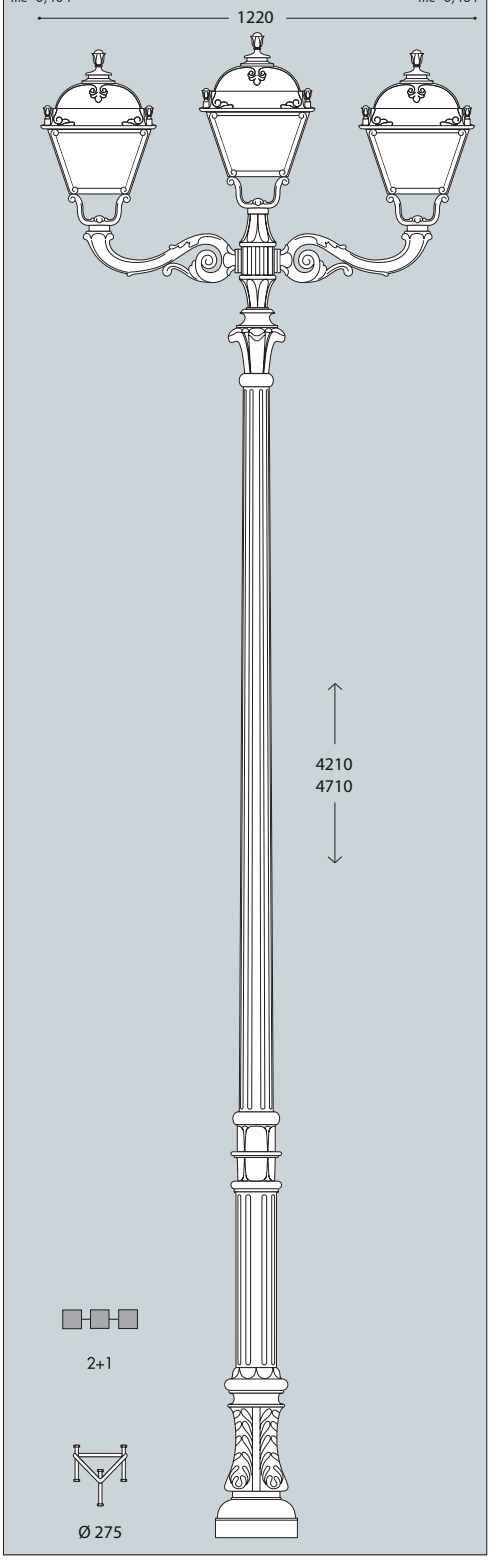

KARMEL 3500 ADAM/SIMON 3L	KARMEL 4000 ADAM/SIMON 3L
U33.234.M30	U33.237.M30
GX53 U35.234.M30	U35.237.M30

Pcs 1
Kg 47,8
mc 0,414


Pcs 1
Kg 50,3
mc 0,441

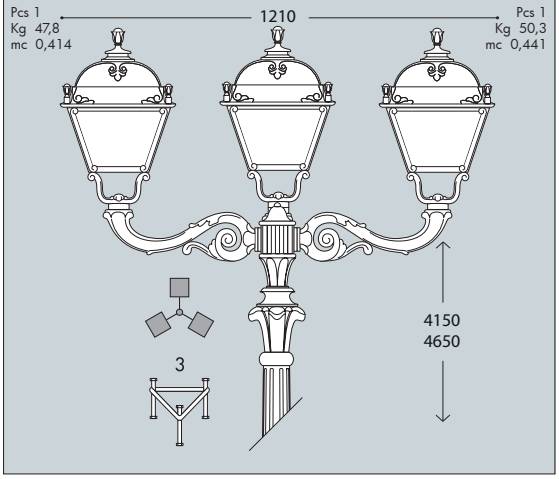

KARMEL 3500 ADAM/SIMON 3+1	KARMEL 4000 ADAM/SIMON 3+1
U33.234.M31	U33.237.M31
GX53 U35.234.M31	U35.237.M31

Pcs 1
Kg 52,4
mc 0,476


Pcs 1
Kg 54,8
mc 0,503

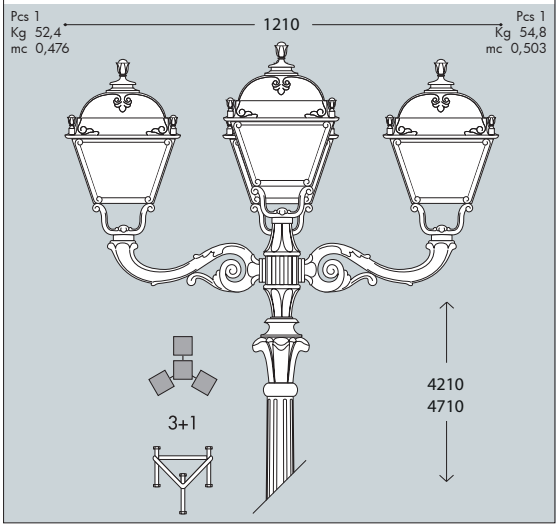

KARMEL 3500 ADAM/SIMON 2L	KARMEL 4000 ADAM/SIMON 2L
U33.234.M20	U33.237.M20
GX53 U35.234.M20	U35.237.M20

Pcs 1
Kg 41,8
mc 0,342

Pcs 1
Kg 44,3
mc 0,369

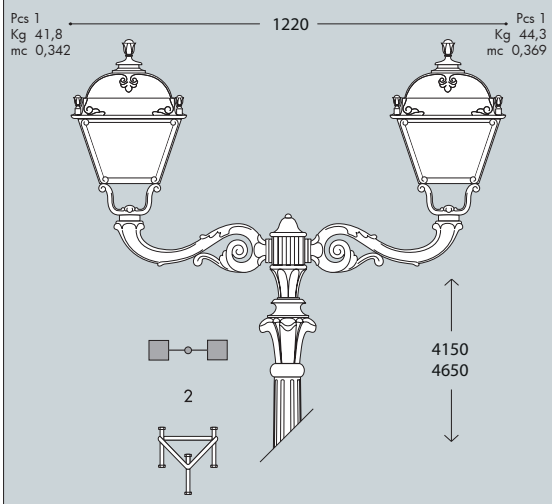

ELIA HIGH POWER LED


GRAND SIZE

Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita ***completa di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



Q43.000.W1R

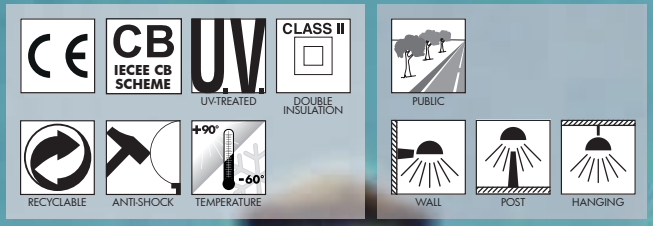



ELIA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-rays stabilized.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a* ***LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ELIA HIGH POWER LED

Q43.000 *



Dimensions and weight
Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life, and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 LED	**50 W**	**6550 Lm**	4000 K	.H1L
			3000 K	.H1R
E27 LED	**60 W**	**7600 Lm**	4000 K	.W1L
			3000 K	.W1R


LED LAMPS


TÜV SÜD CE CB

LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

PHOTOMETRIC DATA SAMPLE





ELIA E27 LED *HIGH POWER 50W*

POST height 4,5mt
10x10mt area: average 21 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ELIA E27

GRAND SIZE

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

Q43.000.E27

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE

PUBLIC
WALL
POST
HANGING

MADE IN ITALY

ELIA E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and access to control-gear.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ELIA E27

Q43.000 *



Dimensions and weight
Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

CHROME ALUMINIUM LOUVRE


H.FC6 open
Downward position




E27-E40 VERSION	100 - 240 V		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 100W	**E27** Lampholder only	.E27
		E40 Lampholder only	.E40

Lantern supplied complete with **E27 or E40 lampholder**.

PHOTOMETRIC DATA SAMPLE

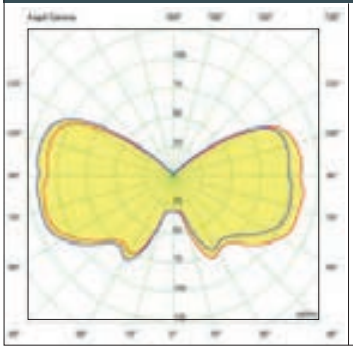

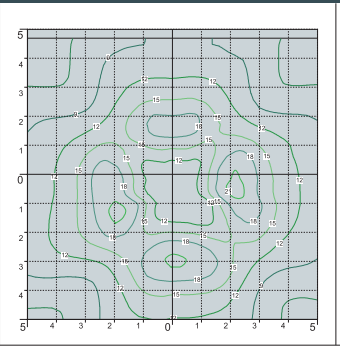

ELIA E27 *clear SON 100W.*

POST height 4,5mt
10 x 10mt area: average 12 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


ELIA GX53 LED - FLAT DIFFUSER


GRAND SIZE


Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion- free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

Q45.000.D8K

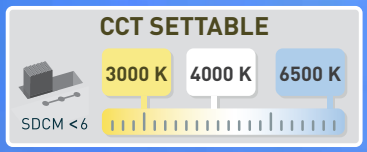





ELIA GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER with **FLAT** shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE *in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ELIA GX53 LED

Q45.000 *



Dimensions and weight
Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 9,1 Kg

Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:
Black White

Painted colours:
Antique green Antique bronze

Diffuser PMMA:
Clear Opal

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 8x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	8x 10 W **80 W**	**10320 lm**	6500 K	.D8K
			4000 K	
			3000 K	

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

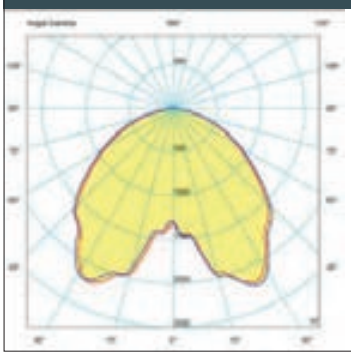



ELIA GX53 LED
8X10W

POST height 4,5mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

ELIA

GRAND SIZE




GIONA 5000/ELIA


Q43.227

GX53 Q45.227


Pcs 1
Kg 67,5
mc 1,112

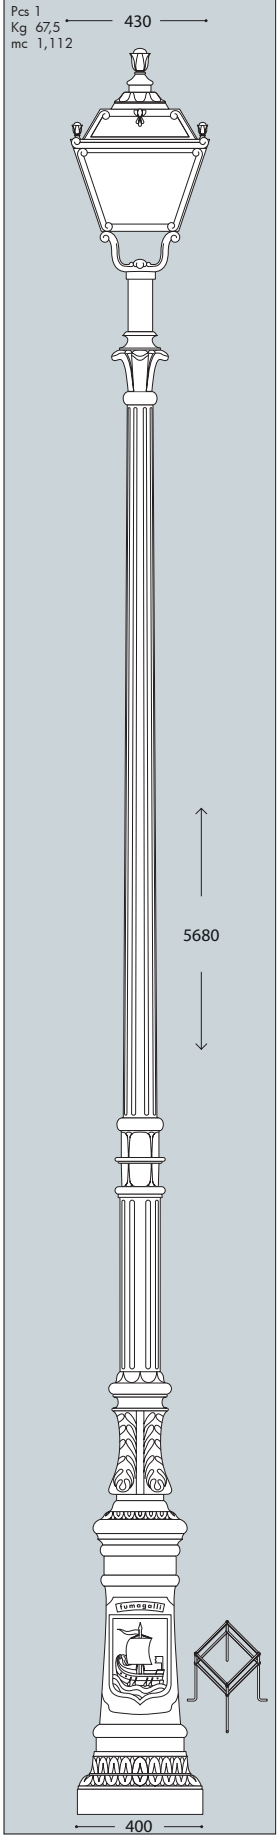

GIONA 4000/ELIA	GIONA 4500/ELIA
Q43.221	Q43.224
GX53 Q45.221	Q45.224
Pcs 1 Kg 62,5 mc 0,862	Pcs 1 Kg 65,5 mc 0,982

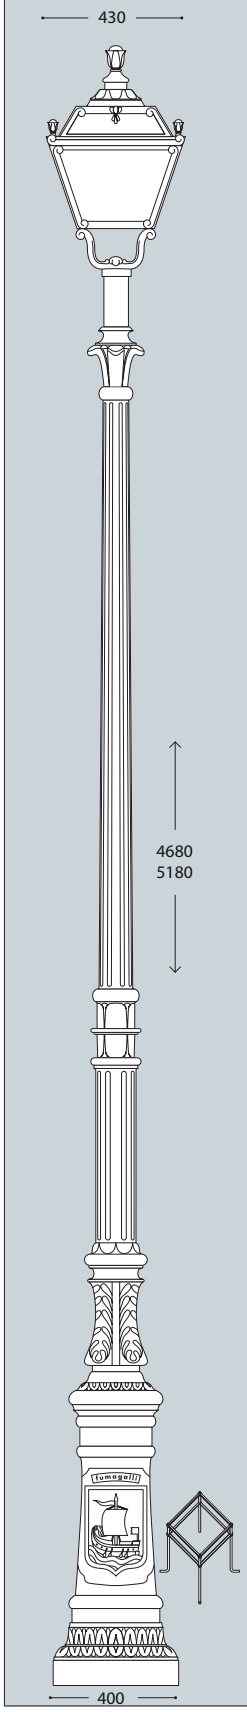

KARMEL 3500/ELIA	KARMEL 4000/ELIA
Q43.234	Q43.237
GX53 Q45.234	Q45.237
Pcs 1 Kg 38,6 mc 0,402	Pcs 1 Kg 42 mc 0,453

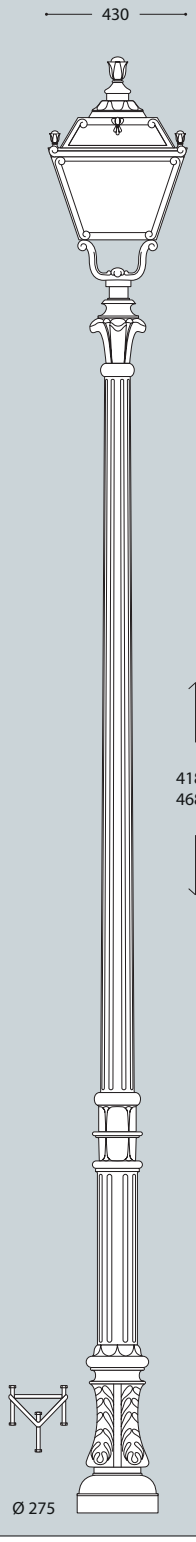


LOT/ELIA

Q43.113

GX53 Q45.113

Pcs 1
Kg 8,4
mc 0,182

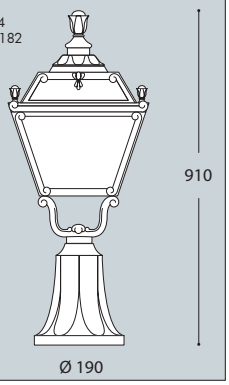


KARMEL 3000/ELIA

Q43.231

GX53 Q45.231

Pcs 1
Kg 33
mc 0,362

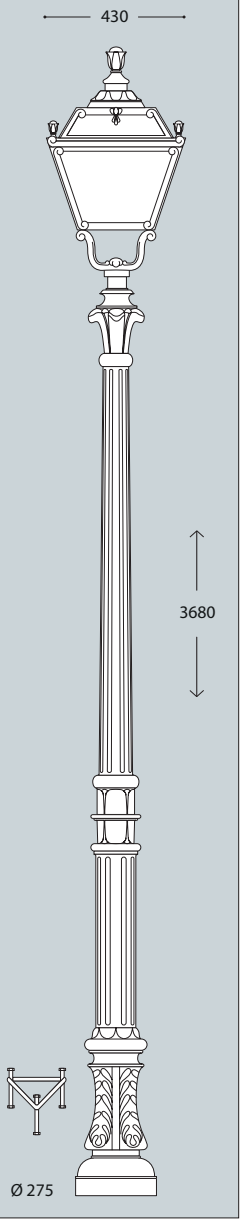


ELIA


Q43.000

GX53 Q45.000

Pcs 1
Kg 7,5
mc 0,182



TABOR/ ELIA	HOREB/ ELIA
Q43.204	Q43.207
GX53 Q45.204	Q45.207
Pcs 1 Kg 33 mc 0,362	Pcs 1 Kg 35,5 mc 0,402

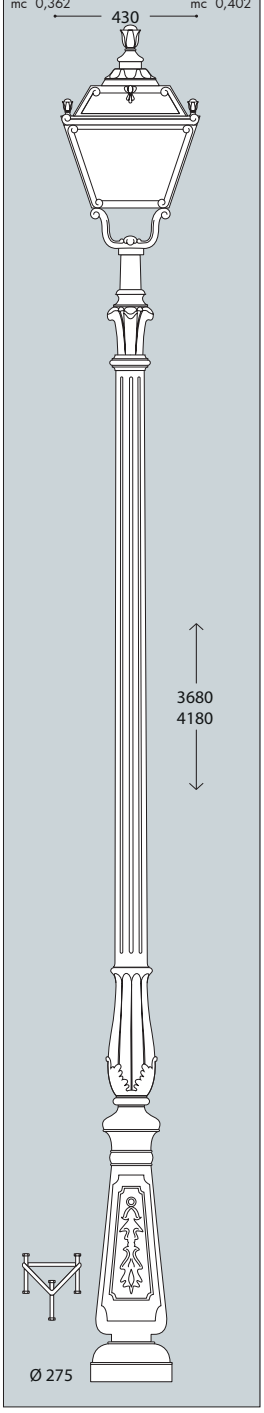

GIONA 4000/ELIA

GRAND SIZE









GIONA 4000 ARON/ELIA 4L

	Q43.221.N40
GX53	Q45.221.N40

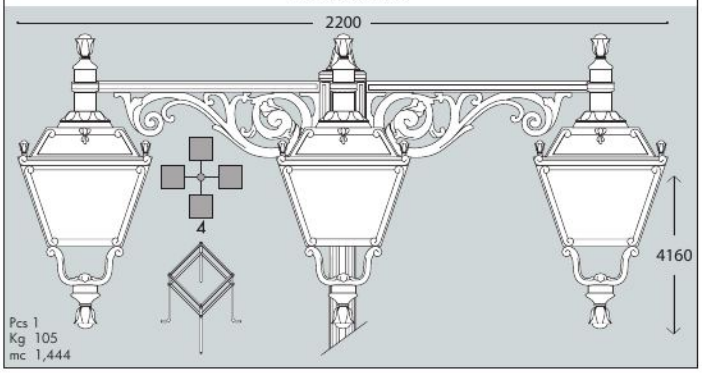


GIONA 4000 ARON/ELIA 1L

	Q43.221.N10
GX53	Q45.221.N10

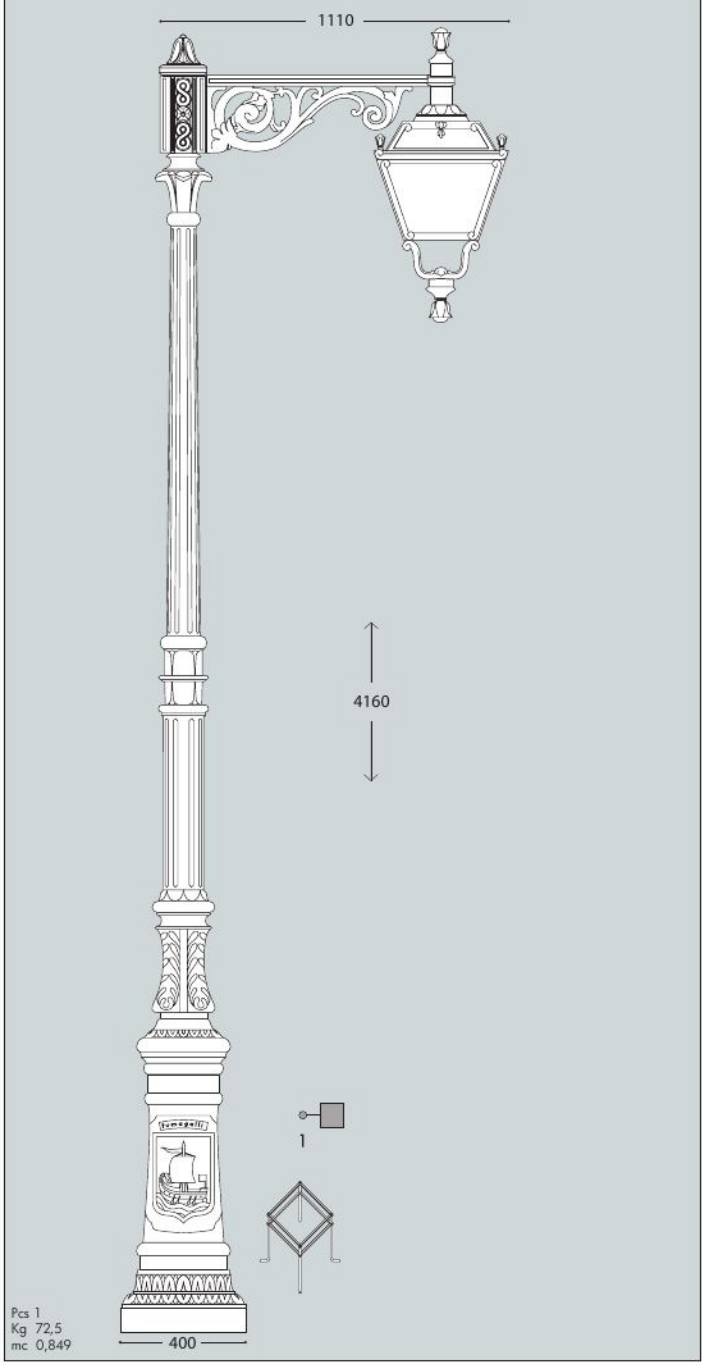

GIONA 4000 ARON/ELIA 2L

	Q43.221.N20
GX53	Q45.221.N20

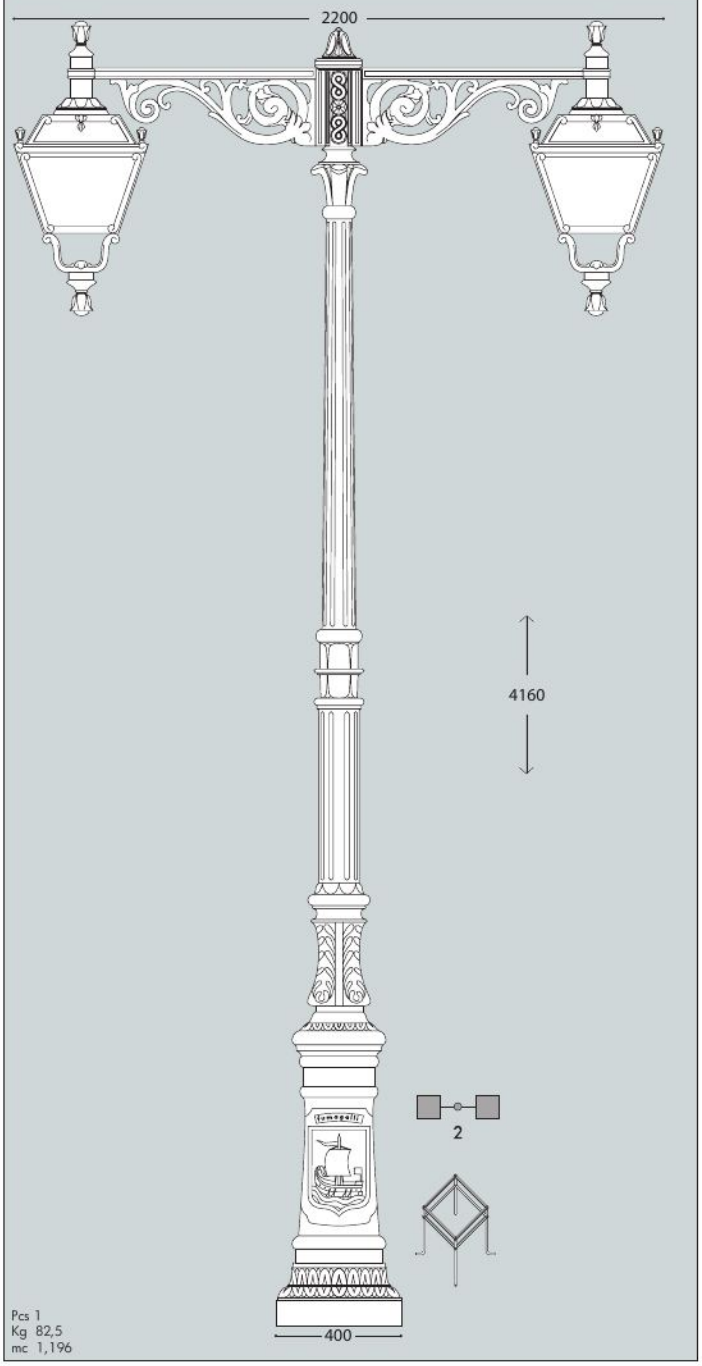

GIONA 4500-5000/ELIA

GRAND SIZE









MADE IN ITALY

GIONA 4500 ARON/ELIA 1L	GIONA 5000 ARON/ELIA 1L
Q43.224.N10	Q43.227.N10
GX53 Q45.224.N10	**GX53** Q45.227.N10
Pcs 1 Kg 71,5 mc 0,949	Pcs 1 Kg 73,5 mc 1,191

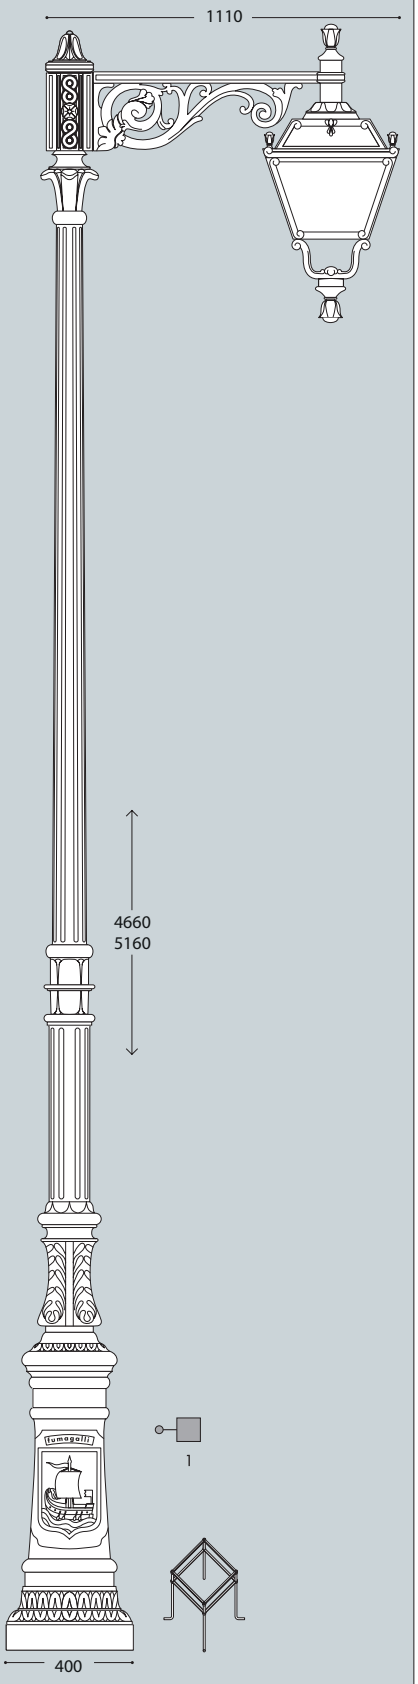


ARON/ELIA	
Q43.172	
GX53	Q45.172


Pcs 1
Kg 13
mc 0,223

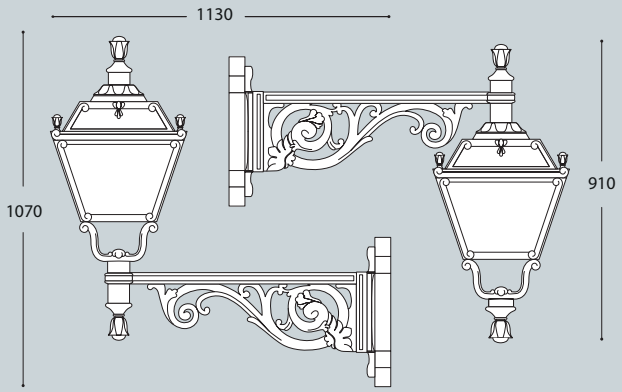

GIONA 4500 ARON/ELIA 2L	GIONA 5000 ARON/ELIA 2L
Q43.224.N20	Q43.227.N20
GX53 Q45.224.N20	**GX53** Q45.227.N20
Pcs 1 Kg 82,5 mc 1,196	Pcs 1 Kg 84,5 mc 1,329

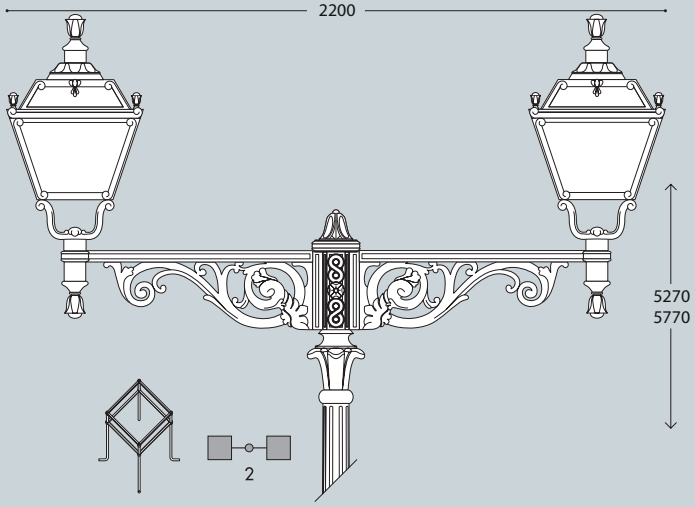


GIONA 4500 ARON/ELIA 4L	GIONA 5000 ARON/ELIA 4L
Q43.224.N40	Q43.227.N40
GX53 Q45.224.N40	**GX53** Q45.227.N40
Pcs 1 Kg 105 mc 1,444	Pcs 1 Kg 107 mc 1,605

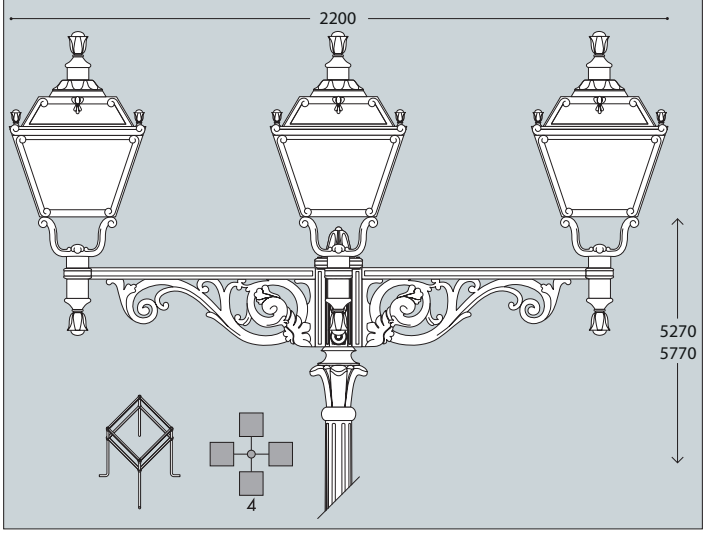

ERMON.R/ELIA resin
Q43.195
GX53 Q45.195

Pcs 1
Kg 13,5
mc 0,250

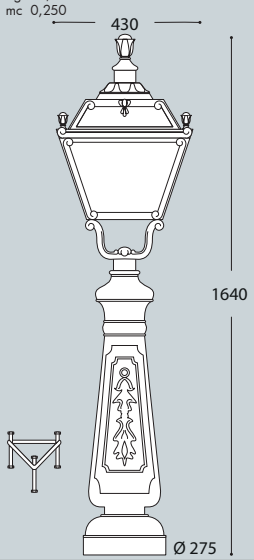

PIETRO HIGH POWER LED


GRAND SIZE

Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita ***completa di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



U43.000.H1L

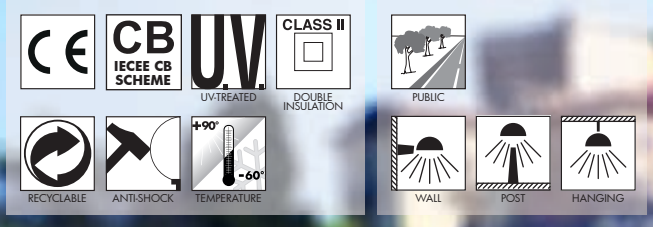



PIETRO HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. UV-rays stabilized.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a* ***LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

PIETRO HIGH POWER LED

U43.000 *



Dimensions and weight
Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life, and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 LED	**50 W**	**6550 Lm**	4000 K	.H1L
			3000 K	.H1R
E27 LED	**60 W**	**7600 Lm**	4000 K	.W1L
			3000 K	.W1R


LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

PHOTOMETRIC DATA SAMPLE





PIETRO E27 LED *HIGH POWER 50W*

POST height 4,5mt
10x10mt area: average 21 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

PIETRO E27

GRAND SIZE

fumagalli since 1973

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

U43.000.E27

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
PUBLIC
WALL
POST
HANGING

MADE IN ITALY

PIETRO E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

ROOF made of shockproof resin material, UV-rays stabilized.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.


DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

PIETRO E27

U43.000 *

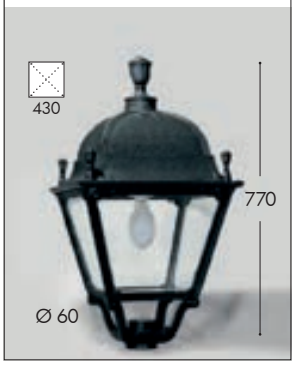

Dimensions and weight
Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

CHROME ALUMINIUM LOUVRE


H.FC6 open
Downward position




E27-E40	100 - 240 V		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 100W	**E27** Lampholder only	.E27
		E40 Lampholder only	.E40

Lantern supplied complete with **E27 or E40 lampholder**.

PHOTOMETRIC DATA SAMPLE

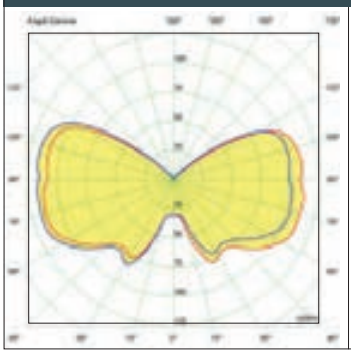



PIETRO E27 *clear SON 100W.*

POST height 4,5mt
10 x 10mt area: average 12 lux

The photometric data for all the versions are available upon request or on our website.


PIETRO GX53 LED - FLAT DIFFUSER


GRAND SIZE

Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion- free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

U45.000.D8K

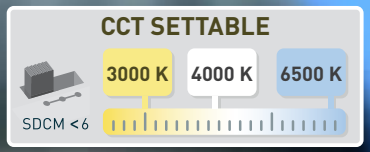

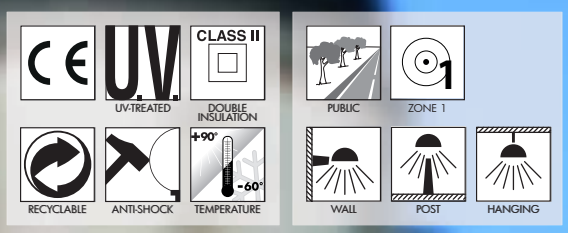



PIETRO GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

LANTERN ROOF made of shockproof resin material, UV-rays stabilized.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV.*

DIFFUSER with FLAT shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.


DIFFUSORE *in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

PIETRO GX53 LED

U45.000 *



Dimensions and weight
Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 9,1 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal*

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 8x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	8x 10 W **80 W**	**10320 Lm**	6500 K	.D8K
			4000 K	
			3000 K	


LED LAMPS

CE CB

LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

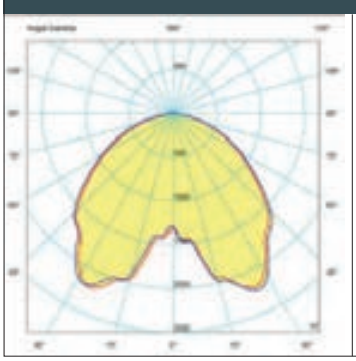



PIETRO GX53 LED
8X10W

POST height 4,5mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


PIETRO

GRAND SIZE





MADE IN ITALY




PIETRO
GRAND SIZE

GIONA 5000/PIETRO

U43.227


GX53 U45.227

Pcs 1
Kg 67,5
mc 1,112

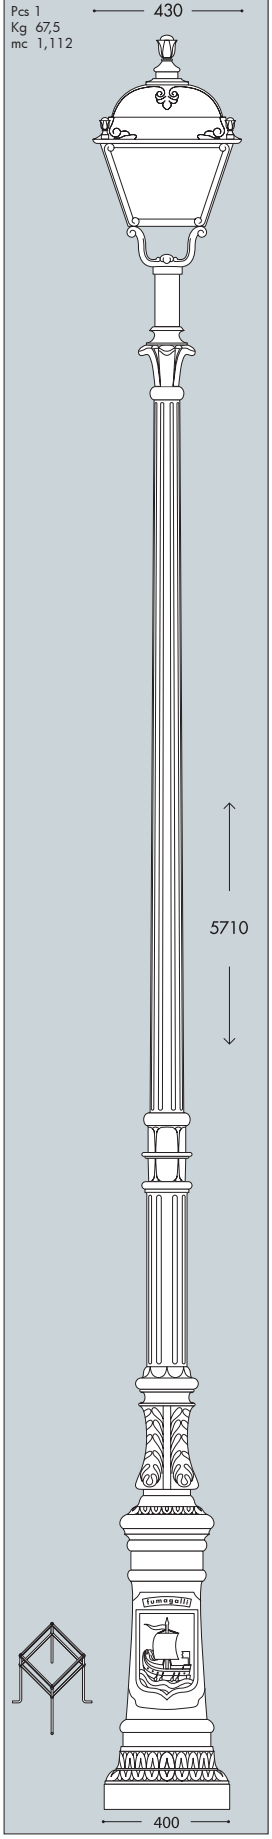


GIONA 4000/PIETRO | GIONA 4500/PIETRO

	GIONA 4000/PIETRO	GIONA 4500/PIETRO
	U43.221	U43.224
GX53	U45.221	U45.224
Pcs 1	Kg 62,5 mc 0,862	Kg 65,5 mc 0,982

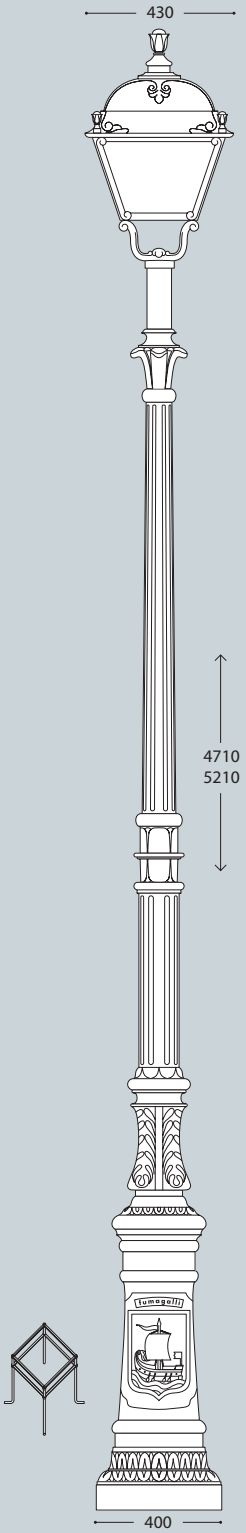

KARMEL 3500/PIETRO | KARMEL 4000/PIETRO

	KARMEL 3500/PIETRO	KARMEL 4000/PIETRO
	U43.234	U43.237
GX53	U45.234	U45.237
Pcs 1	Kg 38,6 mc 0,402	Kg 42 mc 0,453

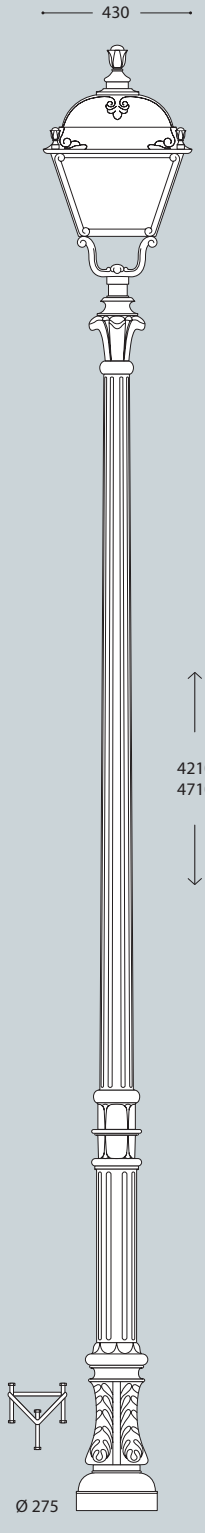


LOT/PIETRO

U43.113

GX53 U45.113

Pcs 1
Kg 8,4
mc 0,182

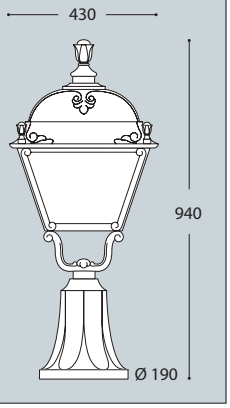


KARMEL 3000/PIETRO

U43.231

GX53 U45.231

Pcs 1
Kg 33
mc 0,362

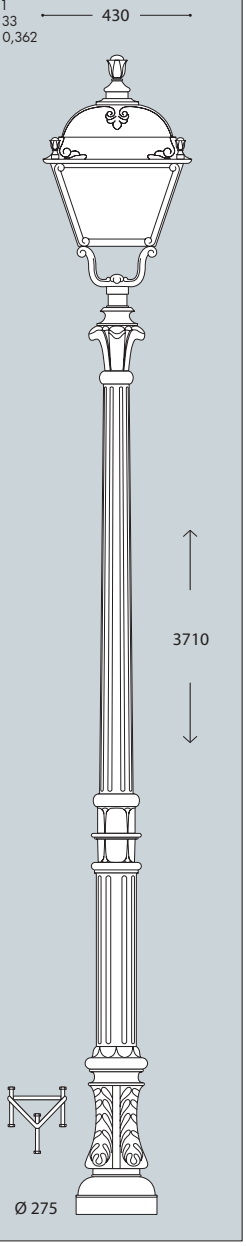


PIETRO

U43.000


GX53 U45.000

Pcs 1
Kg 7,5
mc 0,182



TABOR/PIETRO | HOREB/PIETRO

	TABOR/PIETRO	HOREB/PIETRO
	U43.204	U43.207
GX53	U45.204	U45.207
Pcs 1	Kg 33 mc 0,362	Kg 35,5 mc 0,402

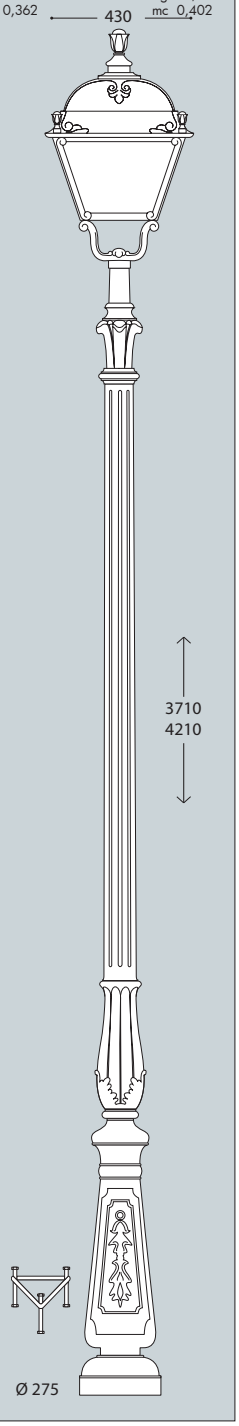

GIONA 4000/PIETRO

GRAND SIZE






GIONA 4000 ARON/PIETRO 4L

U43.221.N40

GX53 U45.221.N40

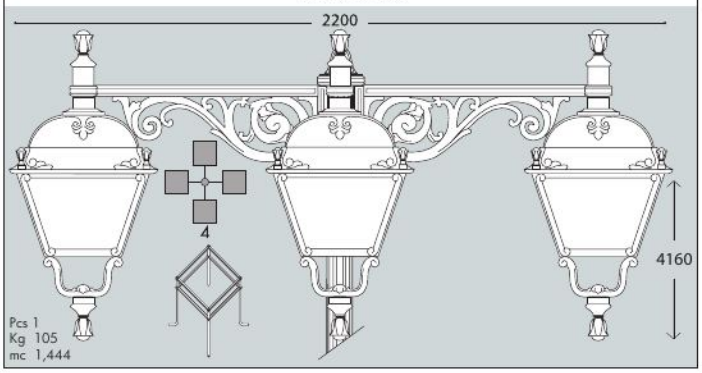


Pcs 1
Kg 105
mc 1,444

GIONA 4000 ARON/PIETRO 1L

U43.221.N10

GX53 U45.221.N10

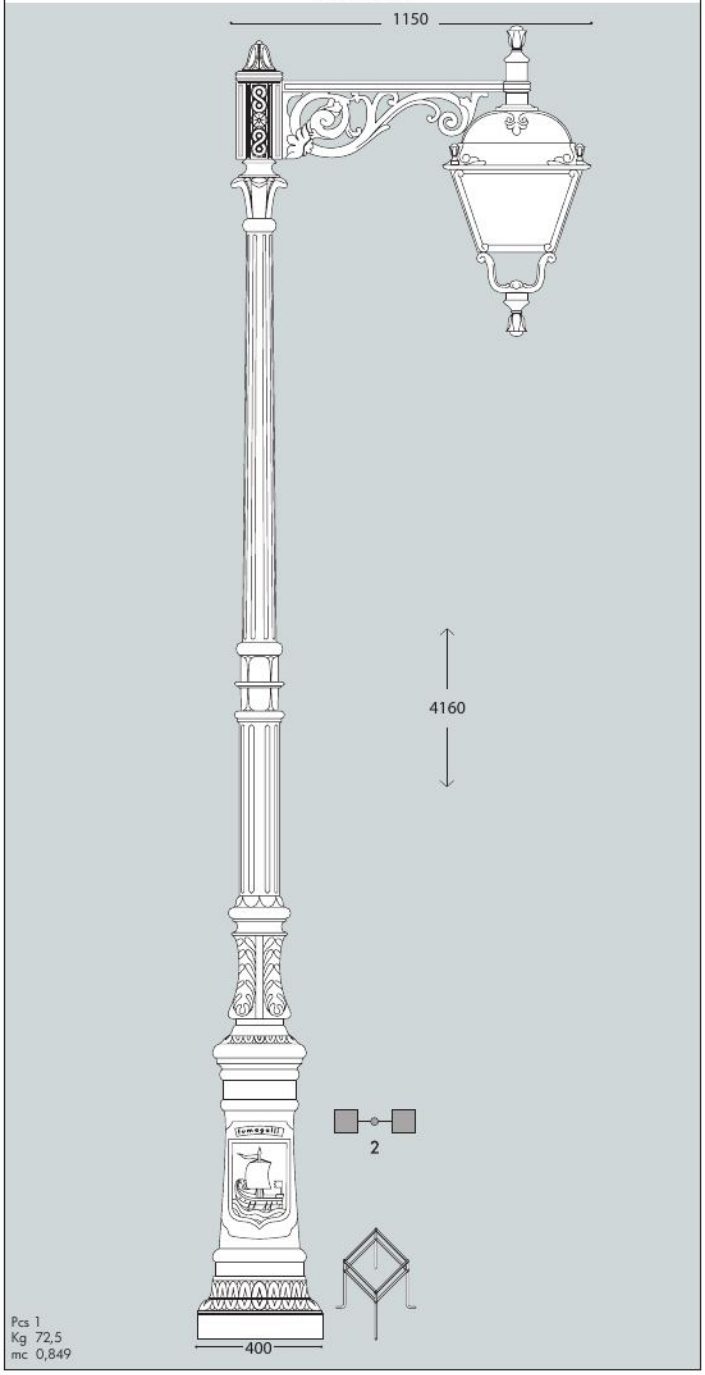


Pcs 1
Kg 72,5
mc 0,849

GIONA 4000 ARON/PIETRO 2L

U43.221.N20

GX53 U45.221.N20

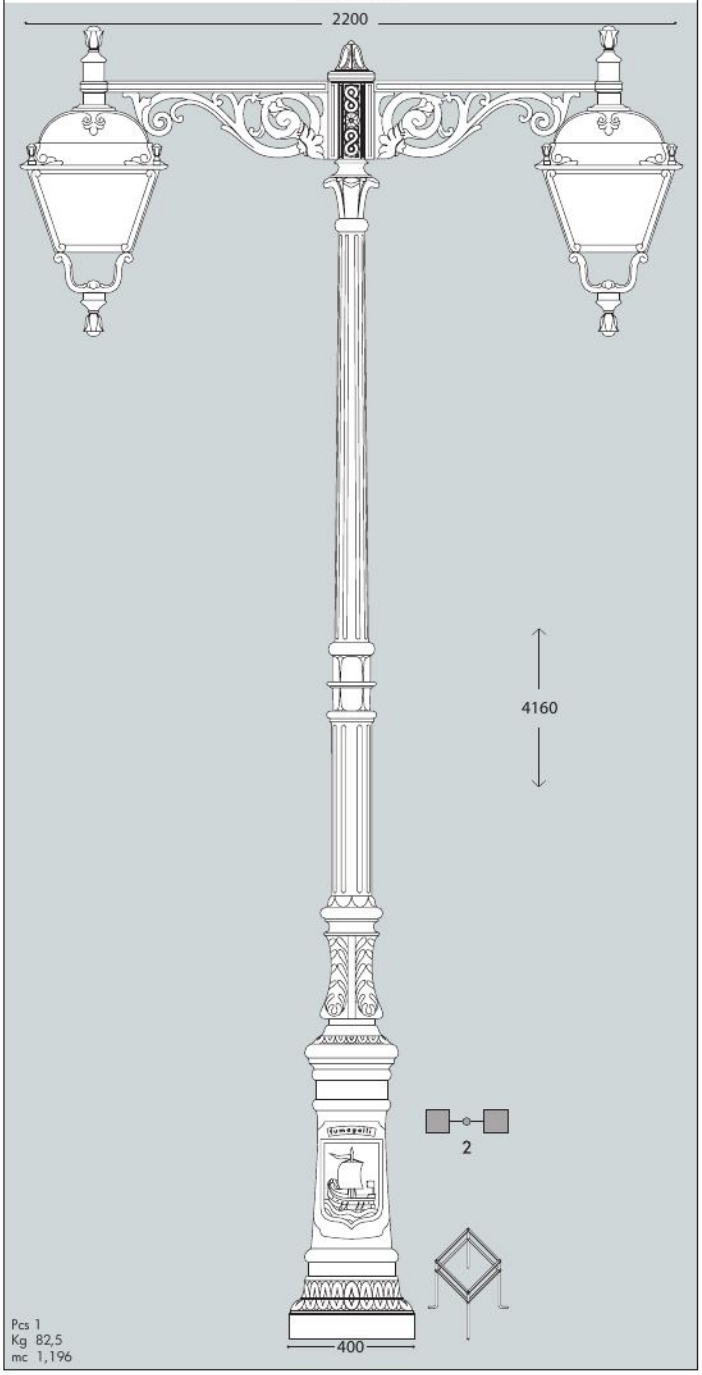

Pcs 1
Kg 82,5
mc 1,196

GIONA 4500-5000/PIETRO

GRAND SIZE








MADE IN ITALY



GIONA 4500-5000/PIETRO


GRAND SIZE

GIONA 4500 ARON/ PIETRO 1L	GIONA 5000 ARON/ PIETRO 1L
U43.224.N10	U43.227.N10
GX53 U45.224.N10	U45.227.N10
Pcs 1 Kg 71,5 mc 0,949	Pcs 1 Kg 73,5 mc 1,191

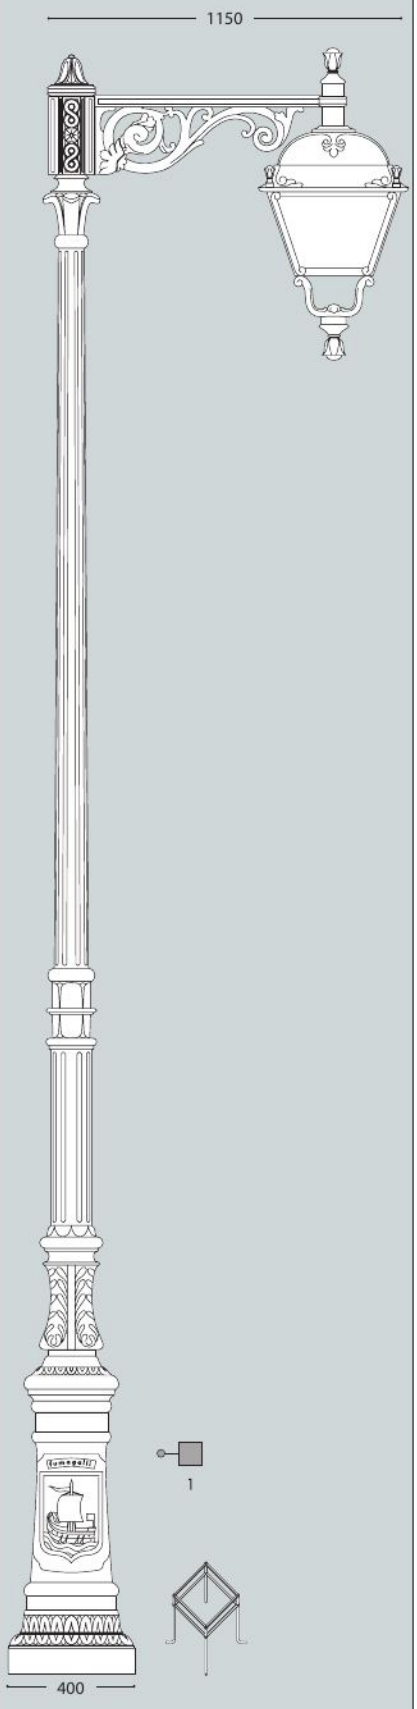


ARON/PIETRO
U43.172
GX53 U45.172


Pcs 1
Kg 13
mc 0,223

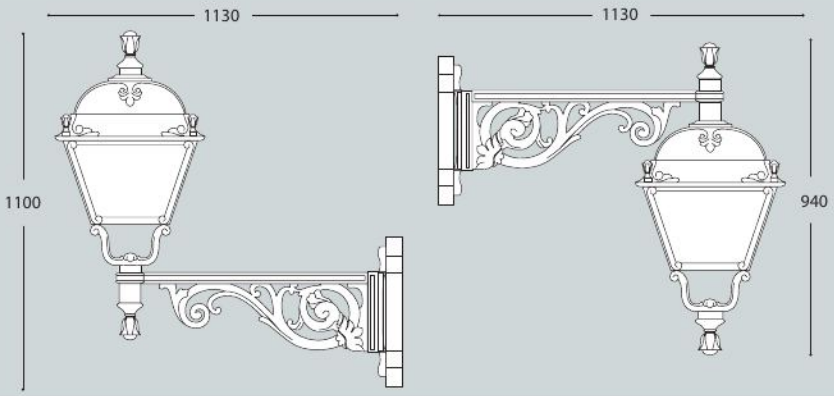

GIONA 4500 ARON/PIETRO 2L	GIONA 5000 ARON/PIETRO 2L
U43.224.N20	U43.227.N20
GX53 U45.224.N20	**GX53** U45.227.N20
Pcs 1 Kg 82,5 mc 1,196	Pcs 1 Kg 84,5 mc 1,329

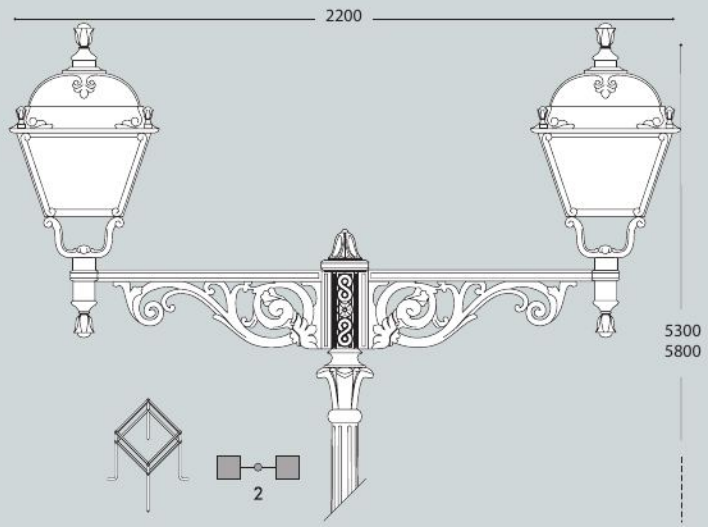


GIONA 4500 ARON/PIETRO 4L	GIONA 5000 ARON/PIETRO 4L
U43.224.N40	U43.227.N40
GX53 U45.224.N40	**GX53** U45.227.N40
Pcs 1 Kg 105 mc 1,444	Pcs 1 Kg 107 mc 1,605

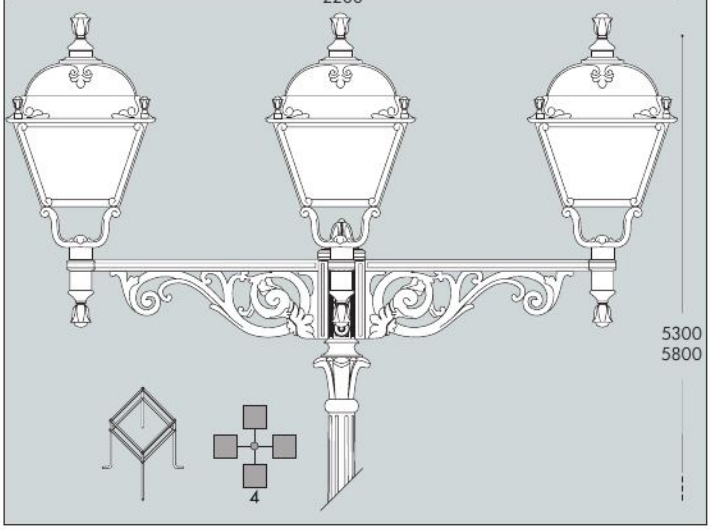

ERMON.R/PIETRO resin
U43.195
GX53 U45.195

Pcs 1
Kg 13,5
mc 0,250

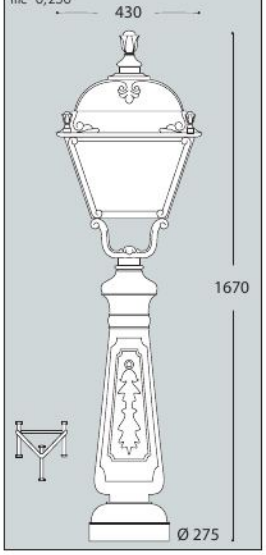

GLOBE 400 CLASSIC


LARGE SIZE

Ø 400 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 400 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.

G40.B40.E27FC1



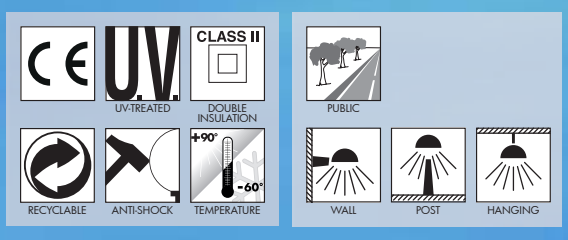

GLOBE 400 CLASSIC - COMPONENTS

IP55



400 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 400 mm *in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).


FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*


Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 lampholder.

BASE *del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampada E27 (incluso).*

E27			*ADD. SUFFIX
	suitable lamps: CFL-LED max 50W	**E27** Lampholder only	.E27
Globe complete with classic base and **E27** lampholder.			

PHOTOMETRIC DATA SAMPLE

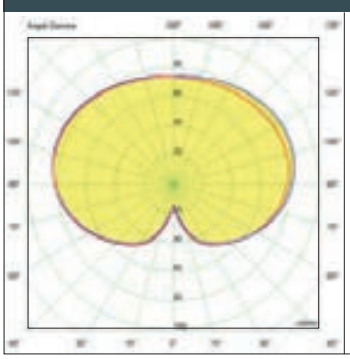



GLOBE 400 E27 *- opal*
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux

The photometric data for all the versions are available upon request or on our website.

GLOBE 400 CLASSIC

G40.B40 *



Dimensions and weight
Height: 410 mm
Diameter: 400 mm
Junction to support: diameter 60 mm
Weight: 2,3 Kg
Area exposed to wind pressure:
CxS = m² 0,122

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal* *Smoked*

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position




H.FC6 open
Downward position



** ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

KARMEL 3000/GLOBE 400 CLASSIC

LARGE SIZE

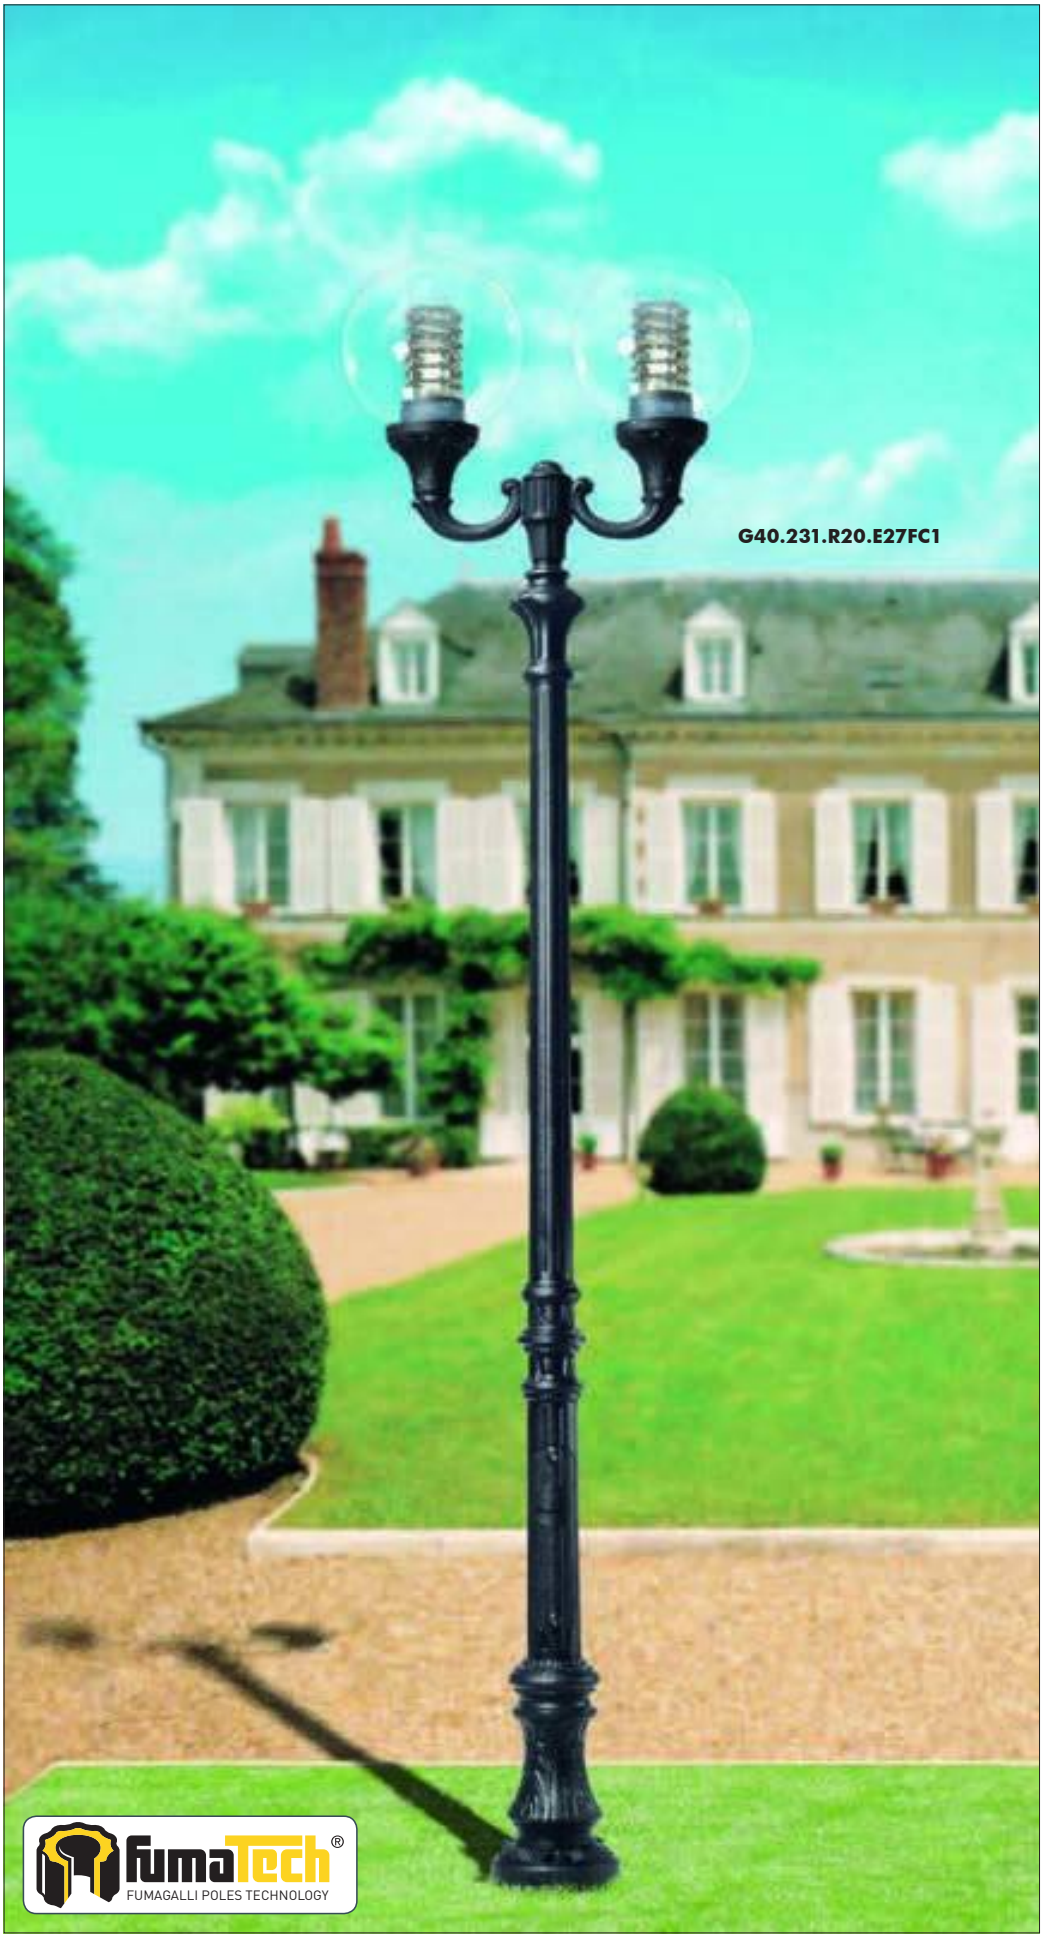






OFIR/G400

G40.132


Pcs 2
Kg 6,1
mc 0,133

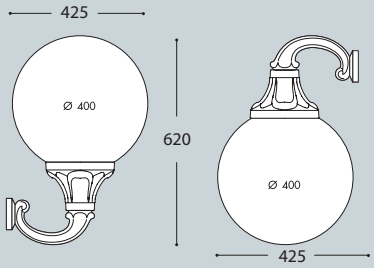

ADAM/G400

G40.171


Pcs 2
Kg 7,5
mc 0,192

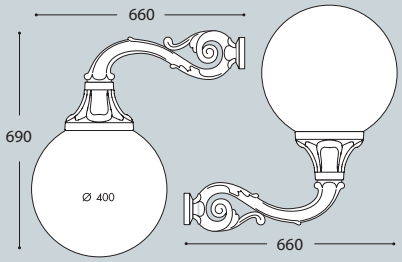

GLOBE 400 CLASSIC

G40.B40


Pcs 2
Kg 4,7
mc 0,133



KARMEL 3000/G400

G40.231


Pcs 1
Kg 27,9
mc 0,230

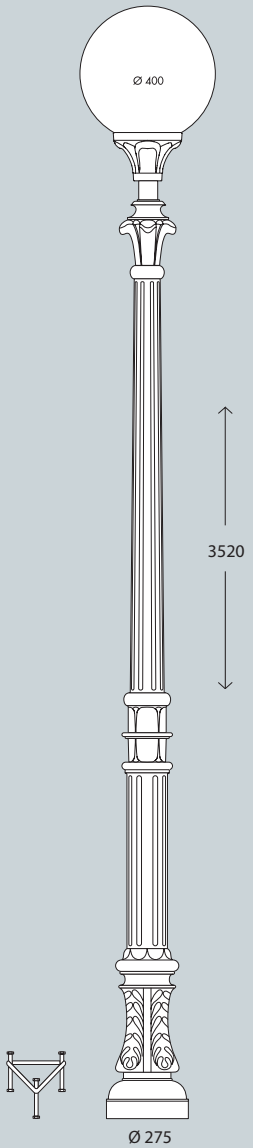

KARMEL 3000 OFIR/G400 2L

G40.231.R20


Pcs 1
Kg 33,2
mc 0,347

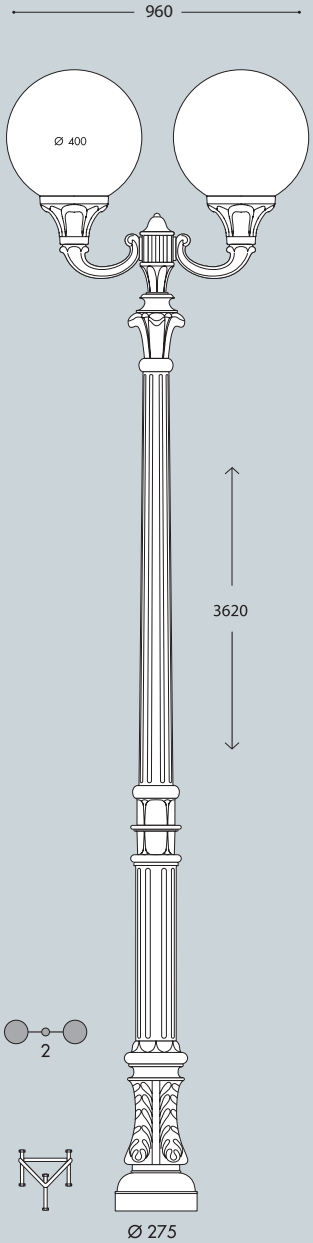

KARMEL 3000 OFIR/G400 3L

G40.231.R30

Pcs 1
Kg 36
mc 0,429

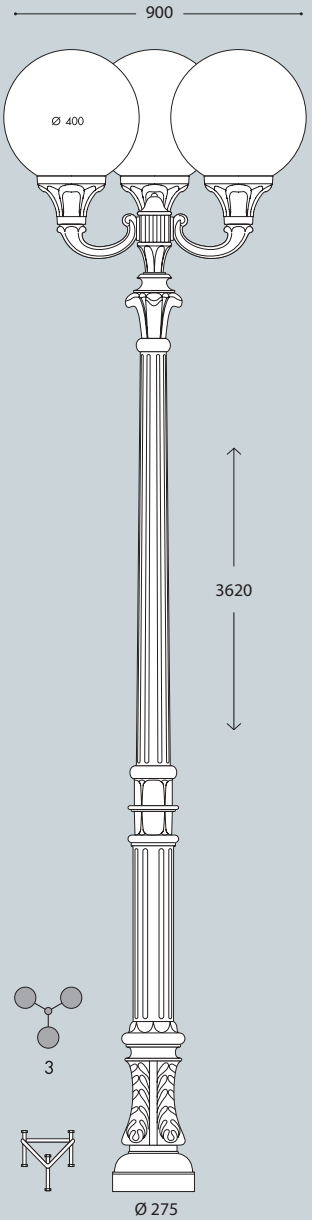


KARMEL 3500-4000/GLOBE 400 CLASSIC

LARGE SIZE










KARMEL 3500-4000/GLOBE 400

LARGE SIZE

LOT/G400

G40.113


Pcs 2
Kg 6,5
mc 0,152



SICHEM/G400

G40.121

Pcs 2
Kg 5,3
mc 0,133




KARMEL 3500/G400 | KARMEL 4000/G400

G40.234 | G40.237


Pcs 1
Kg 30,3
mc 0,256

Pcs 1
Kg 32,8
mc 0,283

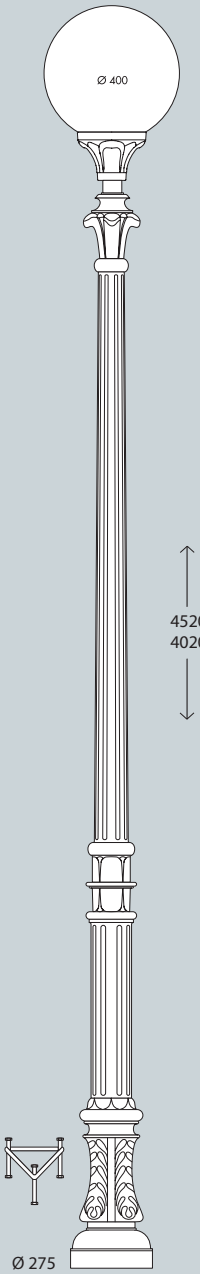


KARMEL 3500 ADAM/G400 2+1 | KARMEL 4000 ADAM/G400 2+1

G40.234.M21 | G40.237.M21

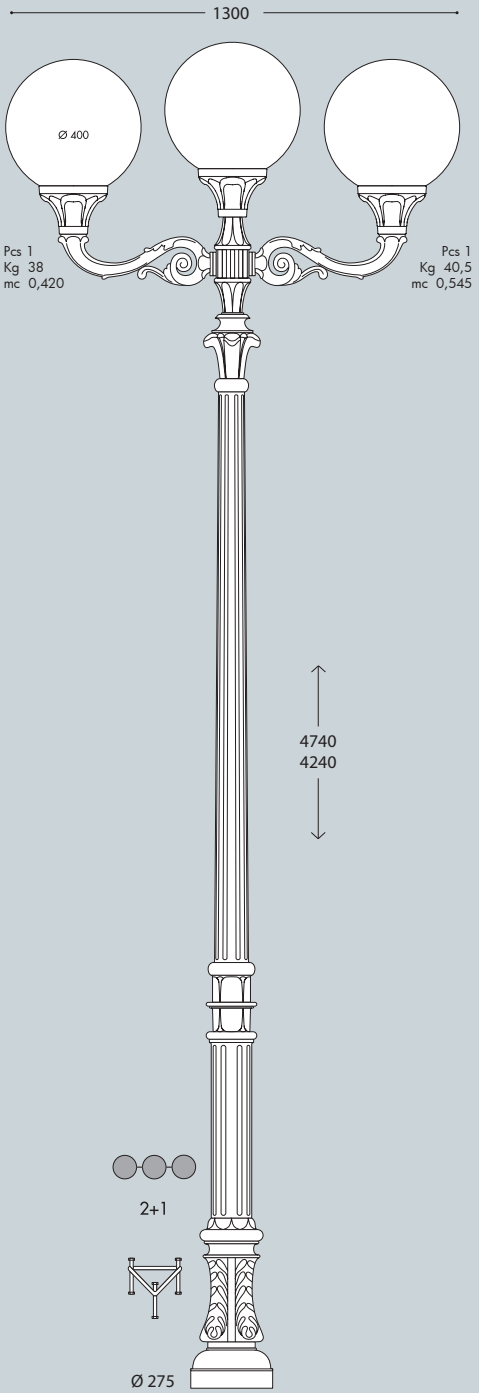


KARMEL 3500 ADAM/G400 3L | KARMEL 4000 ADAM/G400 3L

G40.234.M30 | G40.237.M30

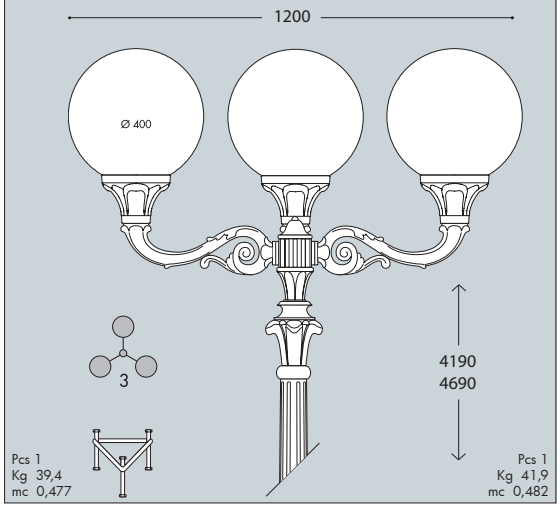

KARMEL 3500 ADAM/G400 3+1 | KARMEL 4000 ADAM/G400 3+1

G40.234.M31 | G40.237.M31

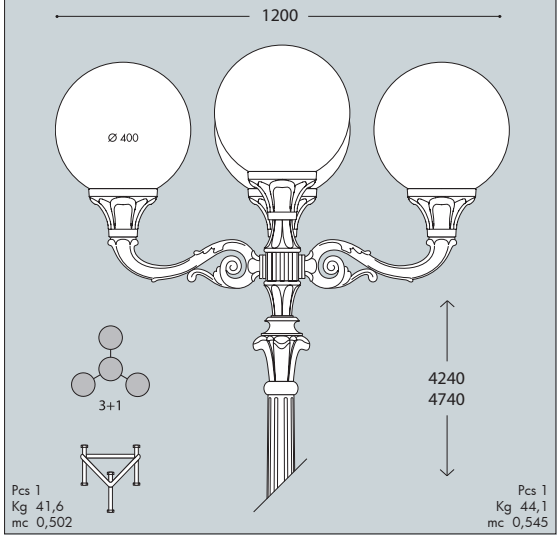


KARMEL 3500 ADAM/G400 2L | KARMEL 4000 ADAM/G400 2L

G40.234.M20 | G40.237.M20

Pcs 1
Kg 35,7
mc 0,378

Pcs 1
Kg 38,2
mc 0,400

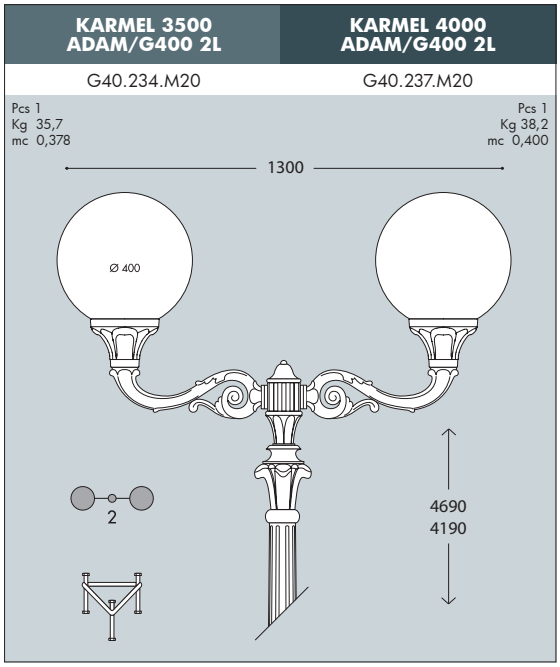


GLOBE 500 CLASSIC

GRAND SIZE

Ø 500 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.

G50.B50.E27FC1

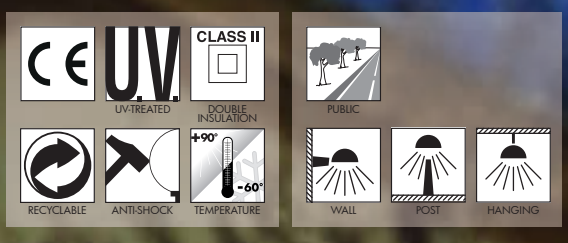

GLOBE 500 CLASSIC - COMPONENTS

IP55



500 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 500 mm *Ø 500 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)





Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*






Luminaries **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 - E40 lampholder.

BASE *del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampada E27 (incluso).*

GLOBE 500 CLASSIC

G50.B50 *



Dimensions and weight
Height: 630 mm
Diameter: 500 mm
Junction to support: diameter 60 mm
Weight: 3,6 Kg
Area exposed to wind pressure:
CxS = m² 0,181

Moulded colours:
Black *White*

Painted colours:
Antique green *Antique bronze*

Diffuser PMMA:
Clear *Opal* *Smoked*

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



** ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

E27-E40



Globe complete with classic base and **E27** or **E40** lampholder.


suitable lamps:


CFL-LED
SON-HQI

max 100W

	*ADD. SUFFIX
E27 Lampholder only	.E27
E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

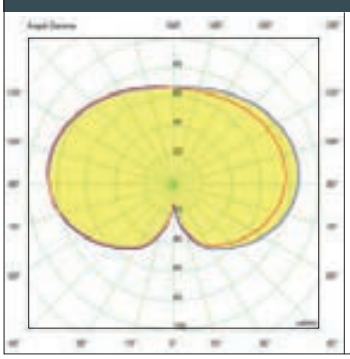



GLOBE 500 E27 *- opal*
HQI 100W

POST height 4,5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

GLOBE 500 CLASSIC

GRAND SIZE







MADE IN ITALY

GIONA 5000/G500
G50.227


Pcs 1
Kg 63,6
mc 1,157

GIONA 4500/G500
G50.224

Pcs 1
Kg 61,6
mc 1,027

GIONA 4000/G500
G50.221

Pcs 1
Kg 58,6
mc 0,907

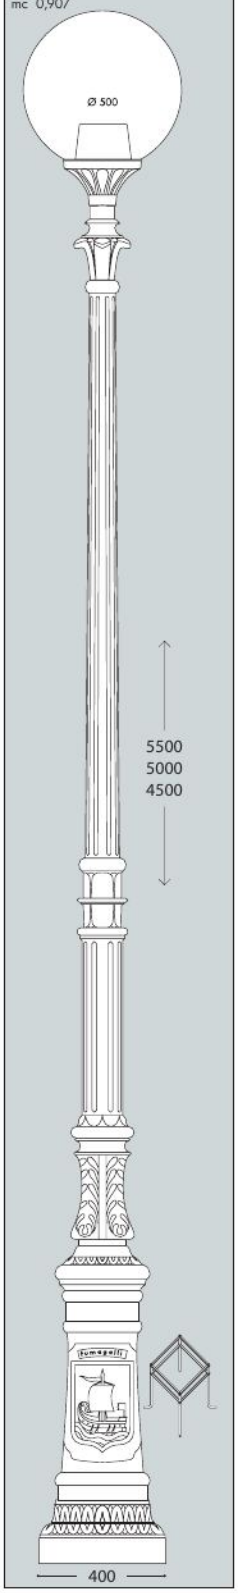


GIONA 5000 ARON/G500 1L
G50.227.N10

Pcs 1
Kg 69,4
mc 1,146


GIONA 4500 ARON/G500 1L
G50.224.N10

Pcs 1
Kg 67,4
mc 1,031

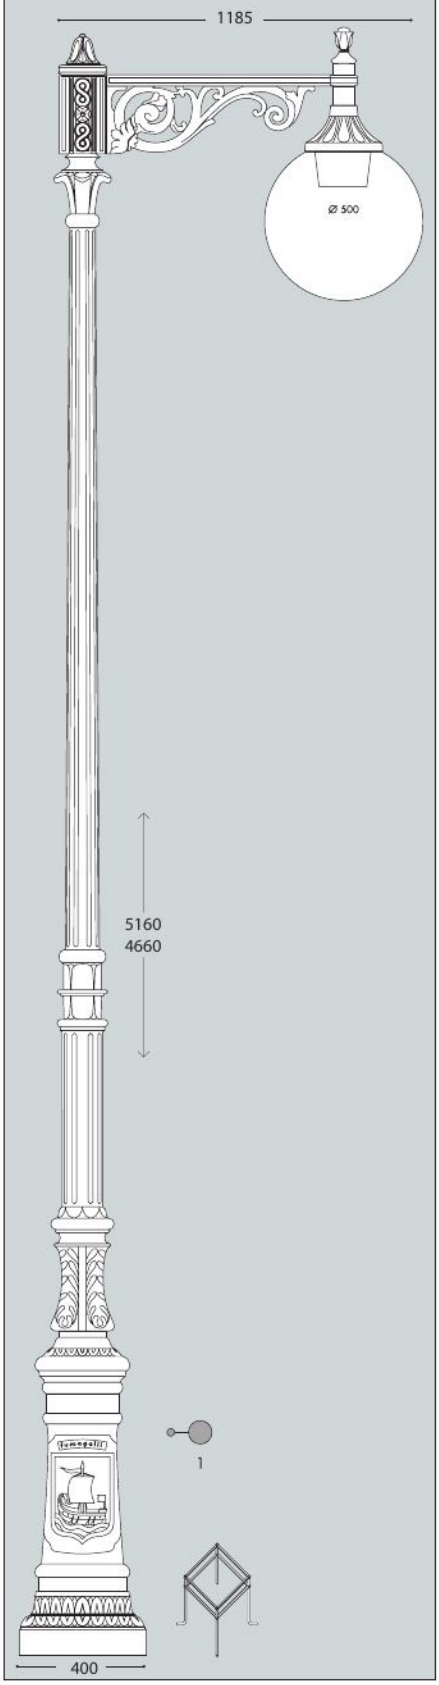


ARON/G500
G50.172

Pcs 1
Kg 8,9
mc 0,178

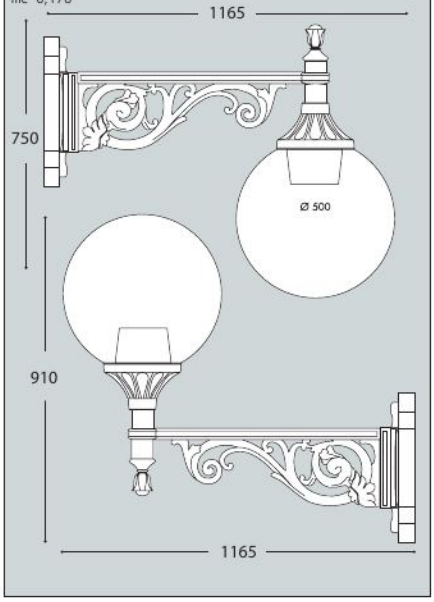


GLOBE 500 CLASSIC
G50.B50

Pcs 2
Kg 7,2
mc 0,275




LOT/G500
G50.113

Pcs 2
Kg 9
mc 0,275



SICHEM/G500
G50.121

Pcs 2
Kg 15,2
mc 0,275

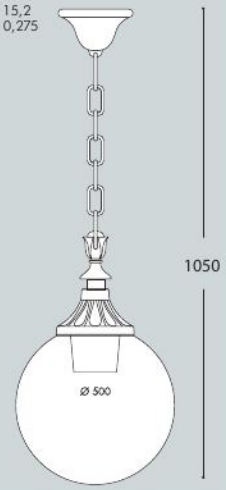


GIONA 4500 ARON/G500 2L
G50.224.N20

Pcs 1
Kg 74
mc 1,115

GIONA 5000 ARON/G500 2L
G50.227.N20

Pcs 1
Kg 76
mc 1,239

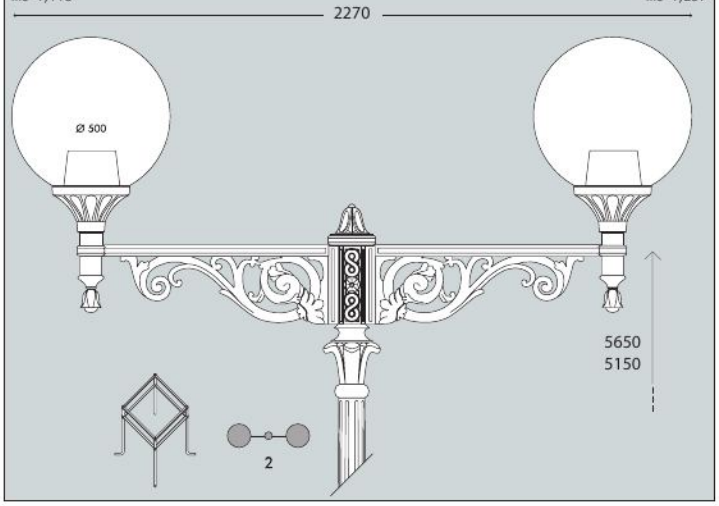



URBAN REVIVAL

LUCA HIGH POWER LED

LARGE SIZE

fumagalli since 1973

E27 hexagonal lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna esagonale E27 in stile revival moderno, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



H35.000.Q1K

CCT SETTABLE

3000 K 4000 K

SDCM < 6

CE CB IECEE CB SCHEME UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE

PUBLIC RESIDENTIAL

WALL POST HANGING

MADE IN ITALY

LUCA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

TETTO *realizzato in resina antiurto, stabilizzato ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a* ***LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

LUCA HIGH POWER LED

H35.000 *



Dimensions and weight
Height: 460 mm
Width: 350 mm
Depth: 305 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:
Black White
Grey

Diffuser PMMA:
Clear Opal

HIGH POWER LED



Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K	.R1K
			3000 K	
	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(15W and 30W only)

PHOTOMETRIC DATA SAMPLE





LUCA E27 LED *HIGH POWER 30W*

POST height 3mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LUCA E27

LARGE SIZE

E27 hexagonal lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling and E27 lampholder. Insulation class II, protection rating IP 55.

Lanterna esagonale E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore e portalampade E27. Classe di isolamento II, grado di protezione IP55.



H35.000.T1K

CE · CB IECEE CB SCHEME · U.V. UV-TREATED · CLASS II DOUBLE INSULATION · RECYCLABLE · ANTI-SHOCK · +90° -60° TEMPERATURE

PUBLIC · RESIDENTIAL · WALL · POST · HANGING

MADE IN ITALY

LUCA E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

TETTO *realizzato in resina antiurto, stabilizzato ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material, provided complete with E27 lampholder.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

LUCA E27

H35.000 *



Dimensions and weight
Height: 460 mm
Width: 350 mm
Depth: 305 mm
Weight: 3 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


E27 VERSION



E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient **LED lamps suitable for outdoor use**.


100 - 240 V				*ADD. SUFFIX
Suitable lamps: CFL-LED-SON-HQI MAX 70W		**E27** lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

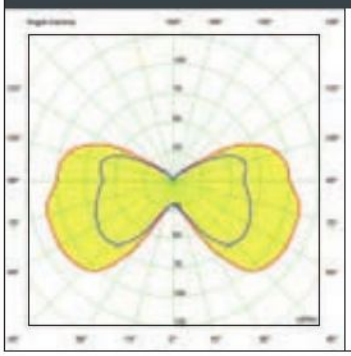



LUCA E27 *clear SON 70W.*

POST height 3mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

LUCA

LARGE SIZE








MADE IN ITALY

IOLE/LUCA

H35.243


Pcs 1
Kg 5,2
mc 0,048

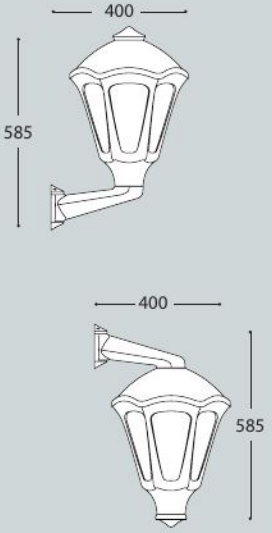

MIDIPILAR/LUCA

H35.254


Pcs 1
Kg 5,5
mc 0,83

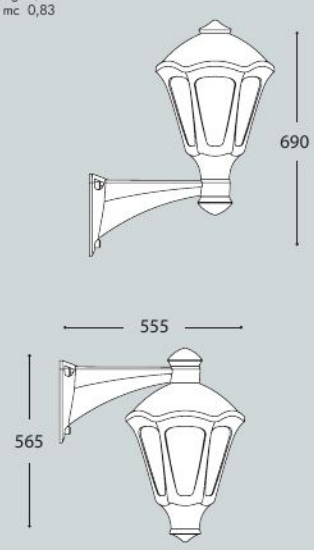

SICAR/LUCA

H35.126

Pcs 1
Kg 5
mc 0,048

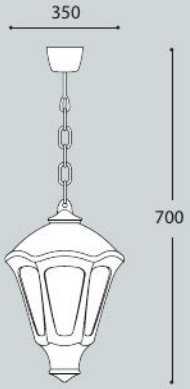

LUCA

H35.000


Pcs 1
Kg 4,2
mc 0,043



EMILIO/LUCA

H35.307

Pcs 2
Kg 28,2
mc 0,310

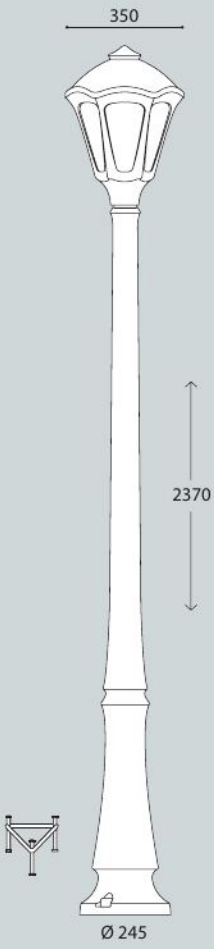

DINO/LUCA

H35.306


Pcs 2
Kg 26,7
mc 0,278



DANILO/LUCA

H35.305


Pcs 2
Kg 23,7
mc 0,247

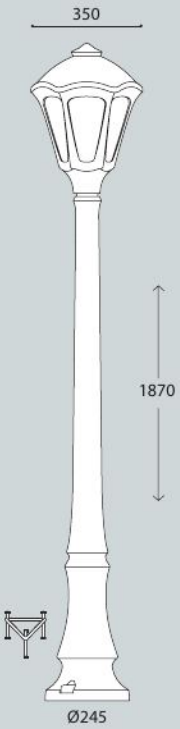

MAXIDISMA/LUCA

H35.117

Pcs 1
Kg 4,5
mc 0,061



LUCA

LARGE SIZE






VANNI 2500 IOLE/LUCA 2L

H35.310.E20


Pcs 1
Kg 30,8
mc 0,268

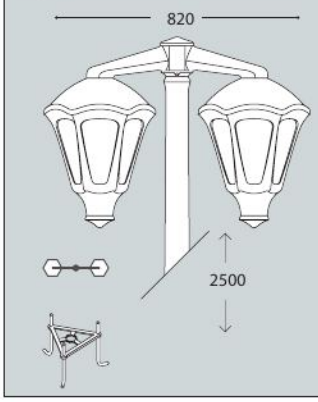

VANNI 2500 IOLE/LUCA 3L

H35.310.E30


Pcs 1
Kg 35
mc 0,342

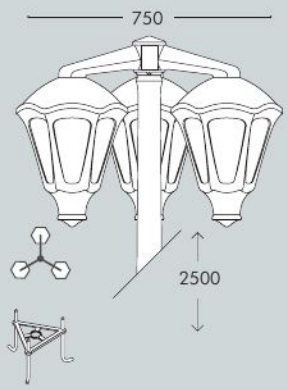

VANNI 2500/LUCA

H35.310


Pcs 1
Kg 25,2
mc 0,196

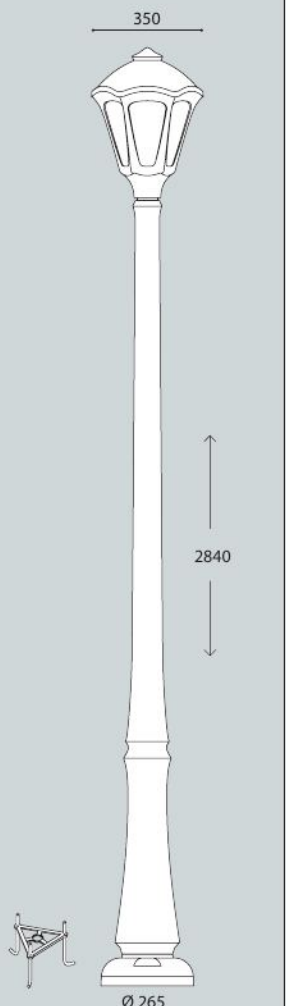

VANNI 2500 IOLE/LUCA 1L

H35.310.E10


Pcs 1
Kg 25,6
mc 0,233

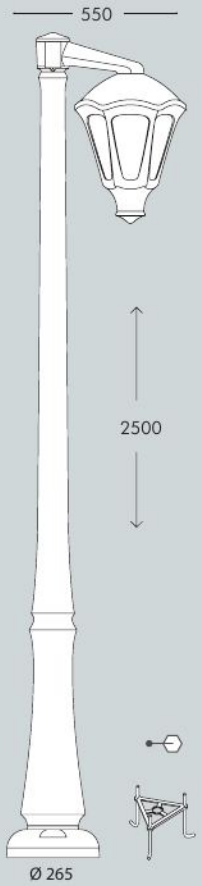

VANNI 2500 IOLE/LUCA 2L

H35.310.E20


Pcs 1
Kg 30,8
mc 0,268

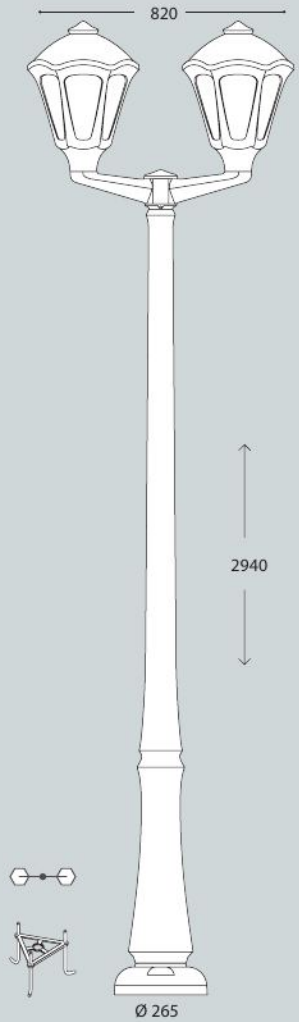

VANNI 2500 IOLE/LUCA 3L

H35.310.E30

Pcs 1
Kg 35
mc 0,342

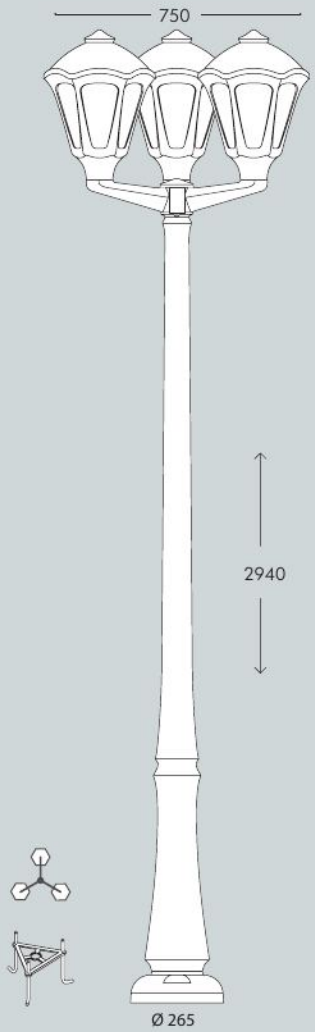

LUCA

LARGE SIZE








EKTOR 3000 IOLE/LUCA 2L

H35.364.E20


Pcs 1
Kg 40,7
mc 0,295

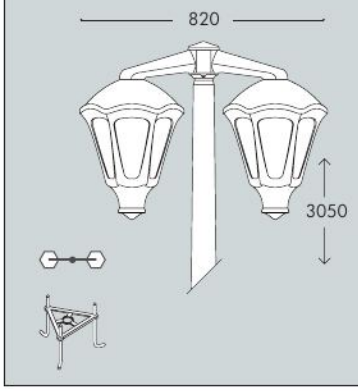

EKTOR 3000 IOLE/LUCA 3L

H35.364.E30

Pcs 1
Kg 45,3
mc 0,369

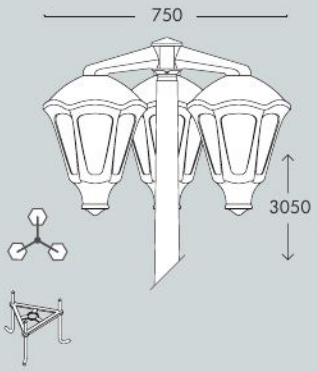

EKTOR 3000/LUCA

H35.364


Pcs 1
Kg 35,7
mc 0,223



EKTOR 3000 IOLE/LUCA 1L

H35.364.E10


Pcs 1
Kg 36,1
mc 0,282

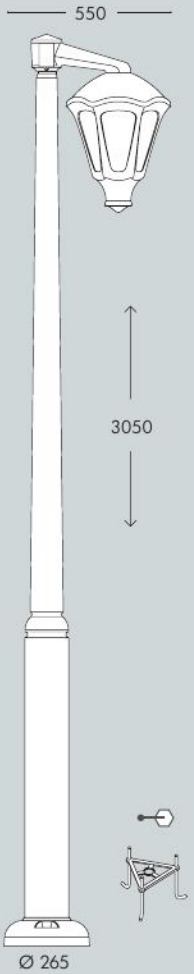

EKTOR 3000 IOLE/LUCA 2L

H35.364.E20


Pcs 1
Kg 40,7
mc 0,295

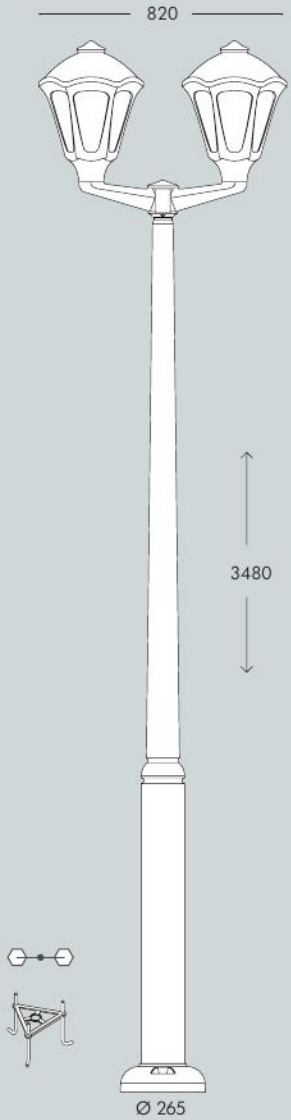

EKTOR 3000 IOLE/LUCA 3L

H35.364.E30

Pcs 1
Kg 45,3
mc 0,369

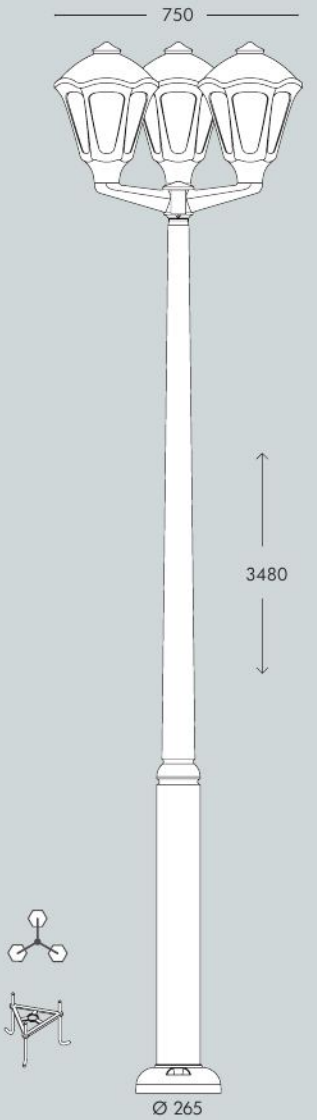

LUCA

LARGE SIZE








EKTOR 3500/LUCA

H35.367

Pcs 1
Kg 39,3
mc 0,249

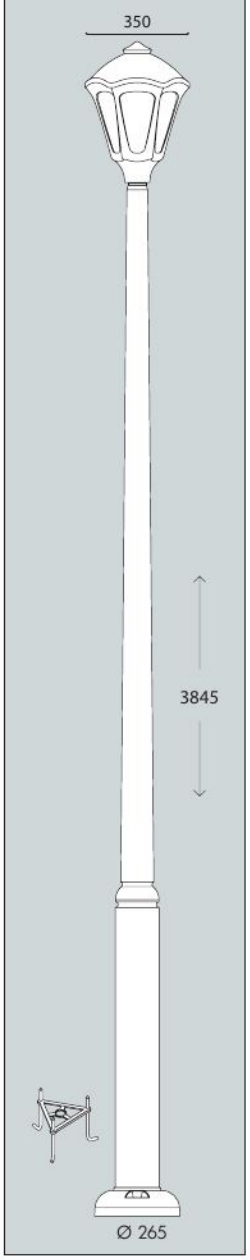

EKTOR 4000 MIDIPILAR/LUCA 1L


H35.371.A10

Pcs 1
Kg 45,1
mc 0,306

EKTOR 3500 MIDIPILAR/LUCA 1L

H35.367.A10

Pcs 1
Kg 40,3
mc 0,281

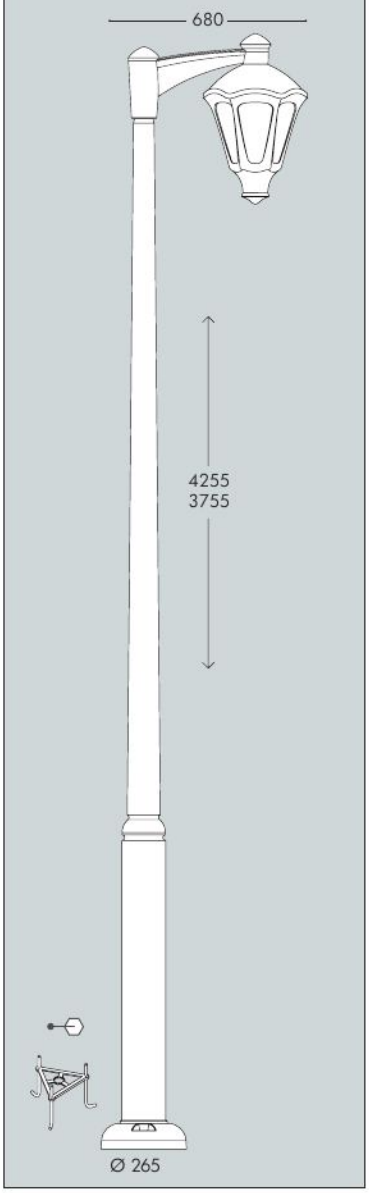

EKTOR 4000 MIDIPILAR/LUCA 2L


H35.371.A20

Pcs 1
Kg 50,3
mc 0,369

EKTOR 3500 MIDIPILAR/LUCA 2L

H35.367.A20

Pcs 1
Kg 43
mc 0,342

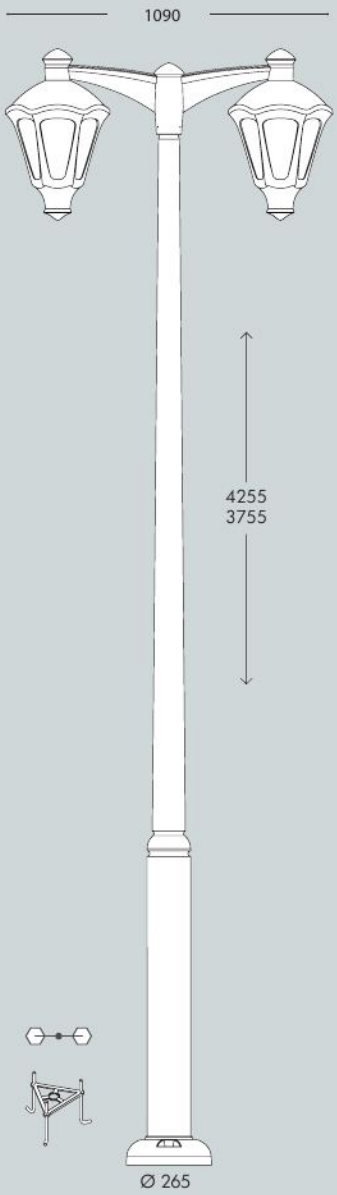

EKTOR 4000 MIDIPILAR/LUCA 3L


H35.371.A30

Pcs 1
Kg 50,3
mc 0,441

EKTOR 3500 MIDIPILAR/LUCA 3L

H35.367.A30

Pcs 1
Kg 55,5
mc 0,414

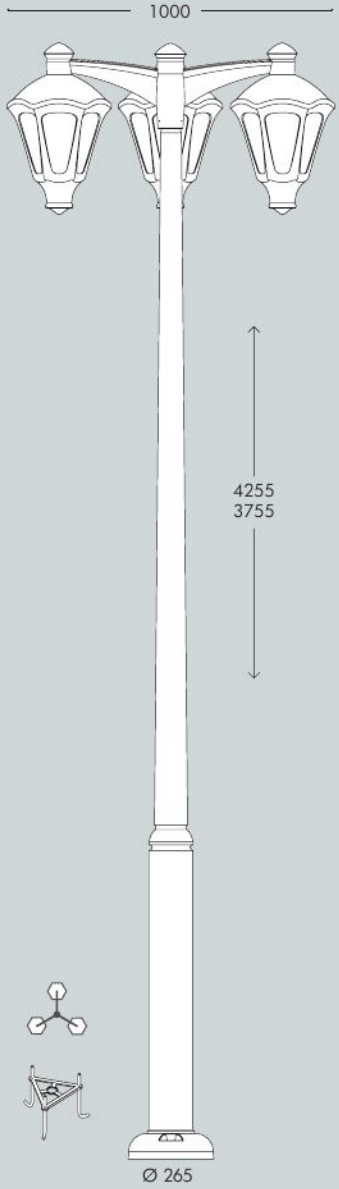

SERGIO HIGH POWER LED


LARGE SIZE


E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Lanterna quadra E27 in stile revival moderno, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita ***completa di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



T33.000.Q1K

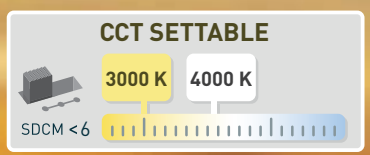

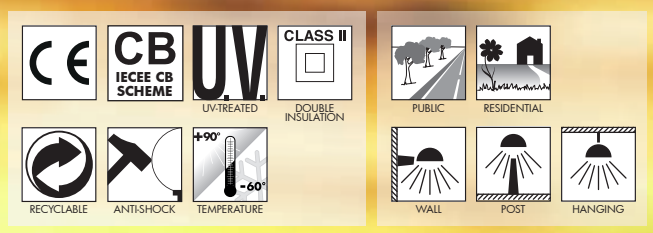



SERGIO HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

TETTO *realizzato in resina antiurto, stabilizzato ai raggi UV.*



High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a* ***LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SERGIO HIGH POWER LED

T33.000 *



Dimensions and weight
Height: 460 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,089

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K	.R1K
			3000 K	
	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(15W and 30W only)

PHOTOMETRIC DATA SAMPLE





SERGIO E27 LED *HIGH POWER 30W*

POST height 3,5mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SERGIO E27

LARGE SIZE

E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling and E27 lampholder. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore e portalampade E27. Classe di isolamento II, grado di protezione IP55.



T33.000.T1K

CE
CB IECEE CB SCHEME
UV-TREATED
CLASS II
DOUBLE INSULATION
RECYCLABLE
ANTI-SHOCK
+90° -60°
TEMPERATURE
PUBLIC
RESIDENTIAL
WALL
POST
HANGING

MADE IN ITALY

SERGIO E27

LARGE SIZE

SERGIO E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

TETTO *realizzato in resina antiurto, stabilizzato ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material, provided complete with E27 lampholder.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27.*



DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE *in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SERGIO E27

T33.000 *



Dimensions and weight
Height: 460 mm
Width: 330 mm
Depth: 330 mm
Weight: 3 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:
Black *White*
Grey

Diffuser PMMA:
Clear *Opal*

LED LAMPS

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


E27 VERSION



E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient **LED lamps suitable for outdoor use**.


100 - 240 V			*ADD. SUFFIX
Suitable lamps: CFL-LED-SON-HQI MAX 70W		**E27** lampholder only	.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	**6,5W**	**800 lm**	2700 K	.F1R
CCT SET LED E27	**8,5 W**	**920 lm**	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	**11 W**	**1200 lm**	6500 K 4000 K 2700 K	.T1K


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

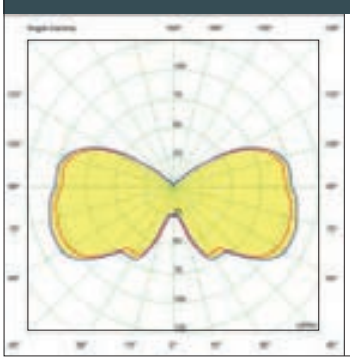



SERGIO E27 *clear SON 70W.*

POST height 3.5mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


SERGIO GX53 LED - FLAT DIFFUSER


LARGE SIZE


E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

T35.000.D4K

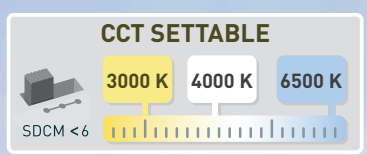

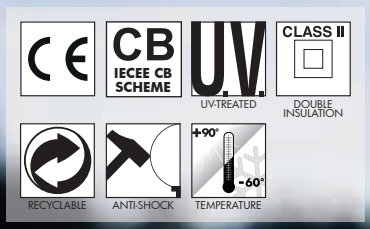



SERGIO GX53 LED - FLAT DIFFUSER

LARGE SIZE

SERGIO GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO *decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

TETTO *realizzato in resina antiurto, stabilizzato ai raggi UV.*

DIFFUSER with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE *in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA *realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

SERGIO GX53 LED

T35.000 *



Dimensions and weight
Height: 460 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m^2 0,089

Moulded colours:
Black *White* *Grey*


Diffuser PMMA:
Clear *Opal*

LED LAMPS

TÜV SÜD CE CB LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

GX53 LED




- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.


Lantern supplied with white resin CEILING provided with 4x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	4x 10 W **40 W**	**5160 lm**	6500 K	.D4K
			4000 K	
			3000 K	

PHOTOMETRIC DATA SAMPLE

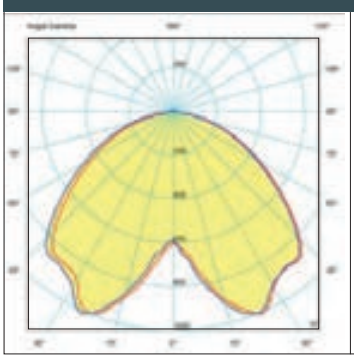



SERGIO GX53 LED
4X10W


POST height 4mt
10x10mt area: average 22 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

SERGIO

LARGE SIZE

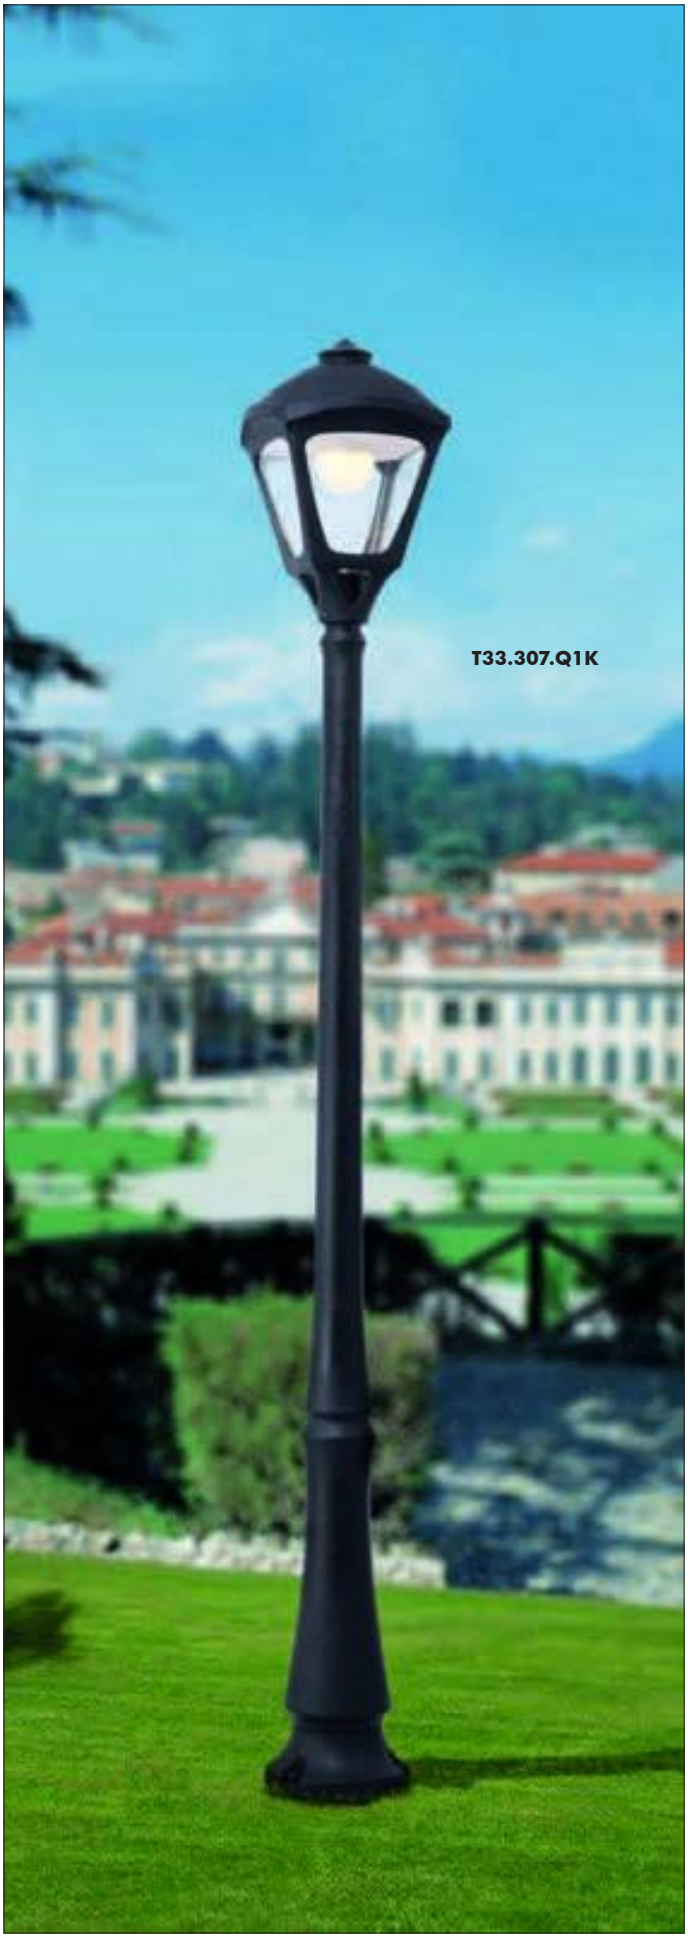






IOLE/SERGIO

T33.243

GX53 T35.243

Pcs 1
Kg 5,2
mc 0,061

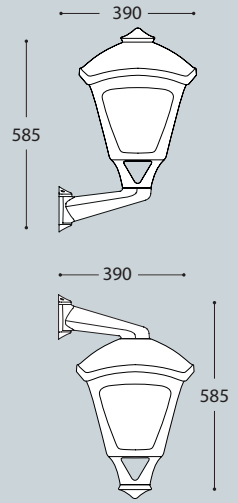


MIDIPILAR/SERGIO

T33.254

GX53 T35.254

Pcs 1
Kg 5,5
mc 0,83

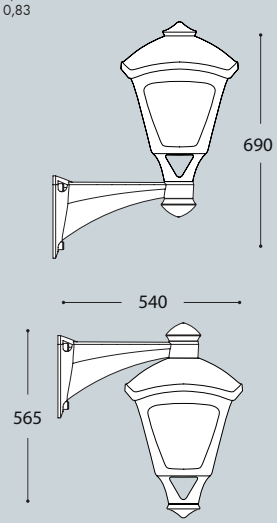


SICAR/SERGIO

T33.126

GX53 T35.126

Pcs 1
Kg 5
mc 0,061

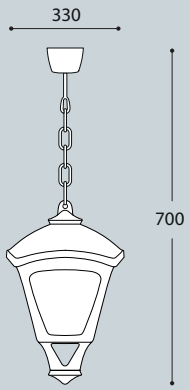


SERGIO

T33.000

GX53 T35.000

Pcs 1
Kg 4,2
mc 0,061




EMILIO/SERGIO

T33.307

GX53 T35.307

Pcs 2
Kg 28,2
mc 0,334

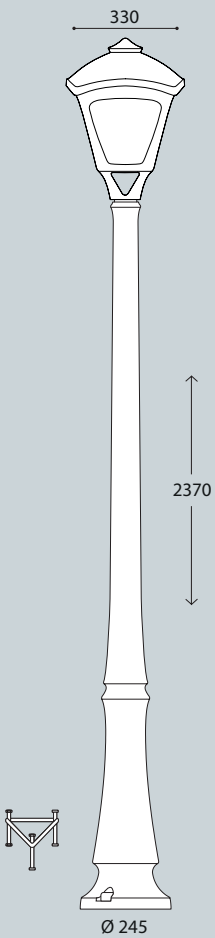


DINO/SERGIO

T33.306

GX53 T35.306

Pcs 2
Kg 26,7
mc 0,304

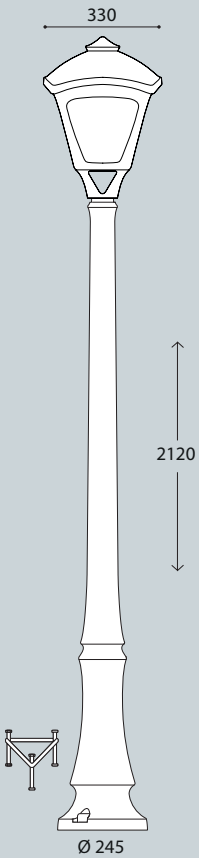


DANILO/SERGIO

T33.305

GX53 T35.305

Pcs 2
Kg 23,7
mc 0,273

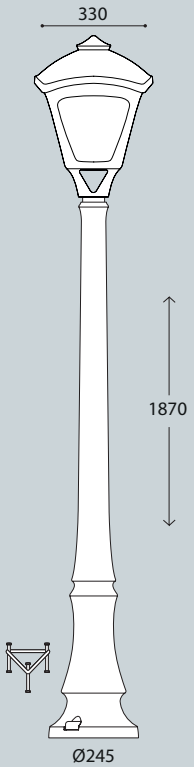


MAXIDISMA/SERGIO

T33.117

GX53 T35.117

Pcs 1
Kg 4,5
mc 0,061



SERGIO

LARGE SIZE








MADE IN ITALY

VANNI 2500 IOLE/SERGIO 2L

T33.310.E20

GX53 T35.310.E20

Pcs 1
Kg 30,8
mc 0,268

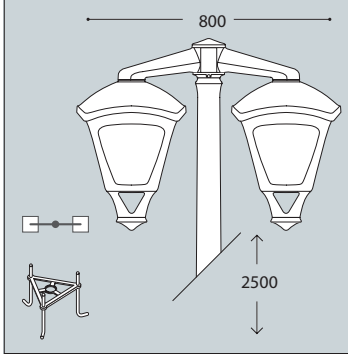


VANNI 2500 IOLE/SERGIO 3L

T33.310.E30

GX53 T35.310.E30

Pcs 1
Kg 35
mc 0,342

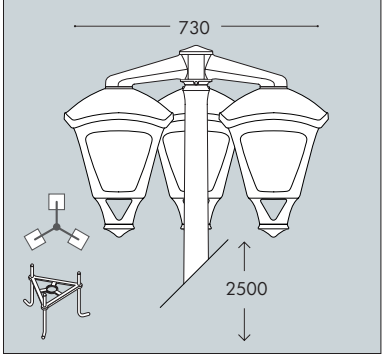


VANNI 2500/SERGIO

T33.310

GX53 T35.310

Pcs 1
Kg 25,2
mc 0,196

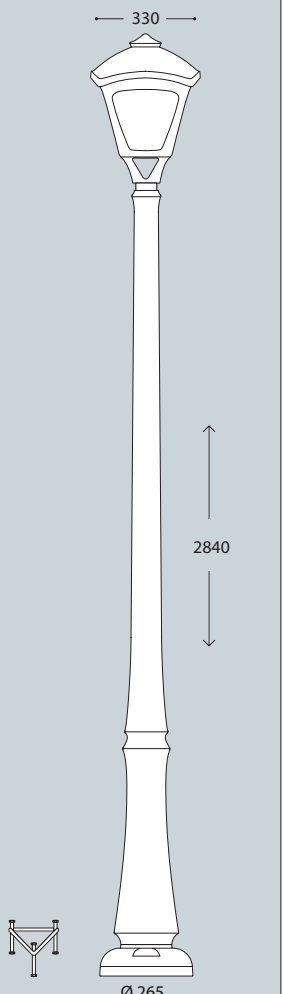


VANNI 2500 IOLE/SERGIO 1L

T33.310.E10

GX53 T35.310.E10

Pcs 1
Kg 25,6
mc 0,233

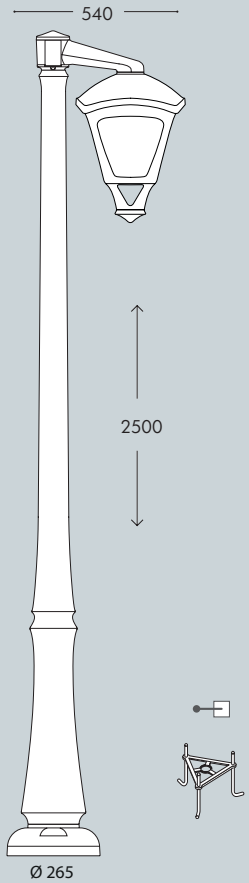


VANNI 2500 IOLE/SERGIO 2L

T33.310.E20

GX53 T35.310.E20

Pcs 1
Kg 30,8
mc 0,268

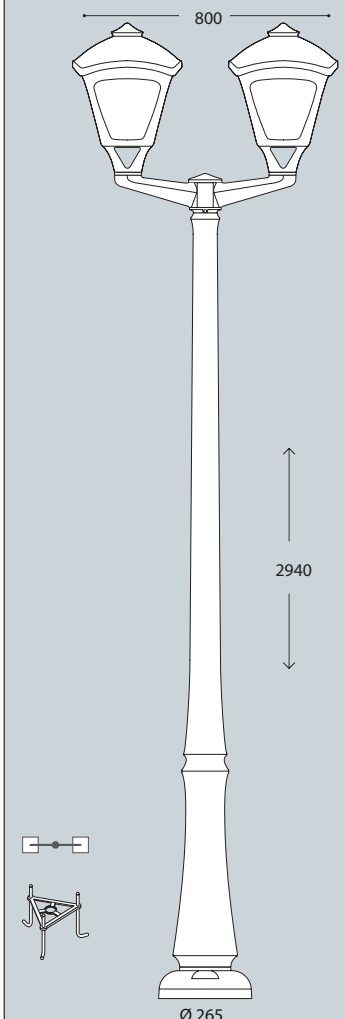


VANNI 2500 IOLE/SERGIO 3L

T33.310.E30

GX53 T35.310.E30

Pcs 1
Kg 35
mc 0,342

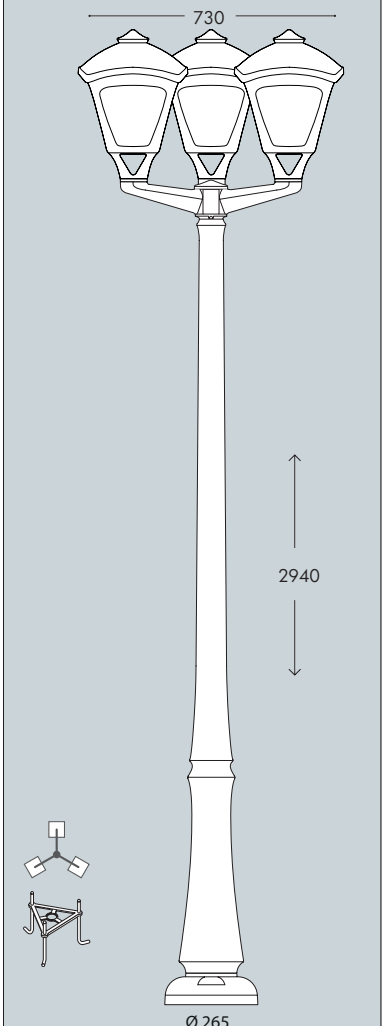

SERGIO

LARGE SIZE








MADE IN ITALY

EKTOR 3000 IOLE/SERGIO 2L

T33.364.E20

GX53 T35.364.E20

Pcs 1
Kg 40,7
mc 0,315

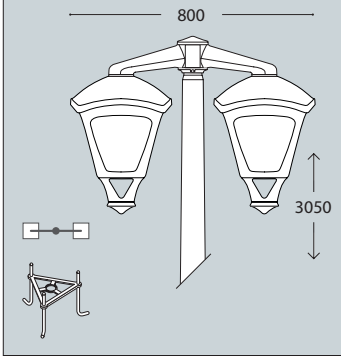


EKTOR 3000 IOLE/SERGIO 3L

T33.364.E30

GX53 T35.364.E30

Pcs 1
Kg 45,3
mc 0,369




EKTOR 3000/SERGIO

T33.364

GX53 T35.364

Pcs 1
Kg 35,7
mc 0,223

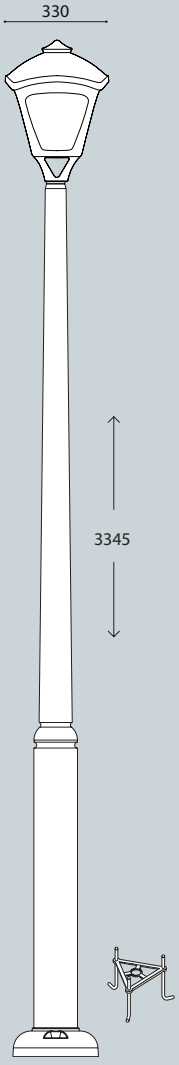


EKTOR 3000 IOLE/SERGIO 1L

T33.364.E10

GX53 T35.364.E10

Pcs 1
Kg 36,1
mc 0,282

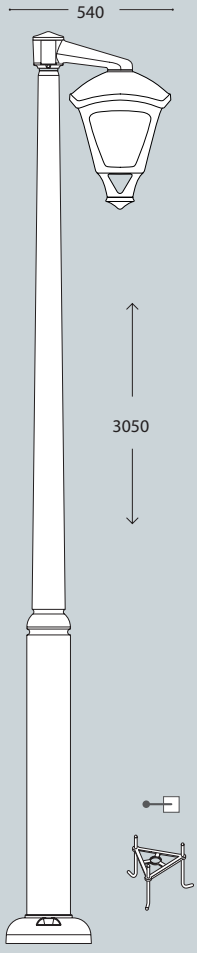


EKTOR 3000 IOLE/SERGIO 2L

T33.364.E20

GX53 T35.364.E20

Pcs 1
Kg 40,7
mc 0,315

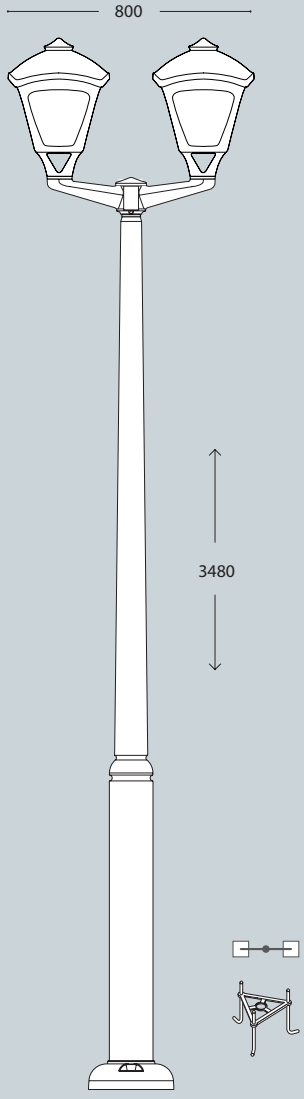


EKTOR 3000 IOLE/SERGIO 3L

T33.364.E30

GX53 T35.364.E30

Pcs 1
Kg 45,3
mc 0,369

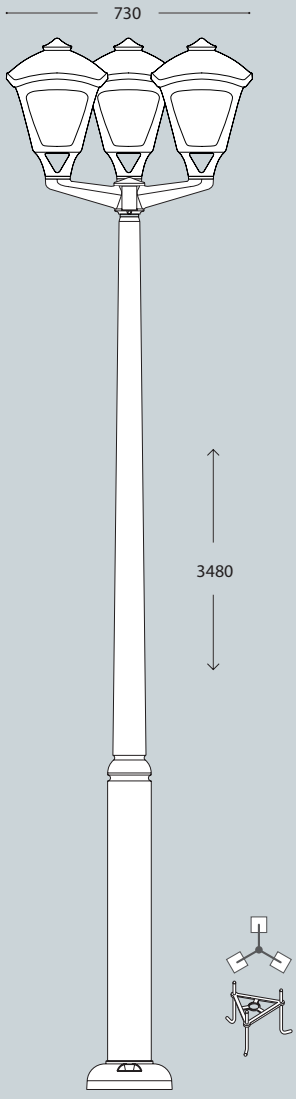

SERGIO

LARGE SIZE









EKTOR 3500-4000/SERGIO

LARGE SIZE

EKTOR 3500/SERGIO	
	T33.367
GX53	T35.367

Pcs 1
Kg 39,3
mc 0,249




EKTOR 4000 MIDIPILAR/SERGIO 1L	
	T33.371.A10
GX53	T35.371.A10

Pcs 1
Kg 45,1
mc 0,306

EKTOR 3500 MIDIPILAR/SERGIO 1L	
	T33.367.A10
GX53	T35.367.A10

Pcs 1
Kg 40,3
mc 0,281

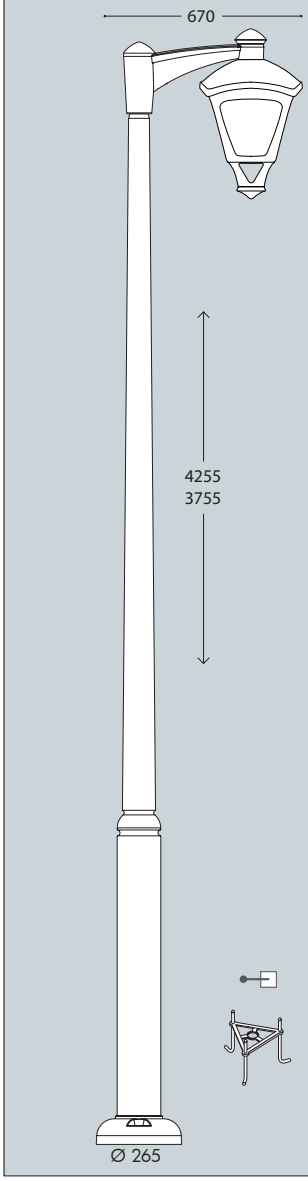


EKTOR 4000 MIDIPILAR/SERGIO 2L	
	T33.371.A20
GX53	T35.371.A20

Pcs 1
Kg 50,3
mc 0,49

EKTOR 3500 MIDIPILAR/SERGIO 2L	
	T33.367.A20
GX53	T35.367.A20

Pcs 1
Kg 43
mc 0,342

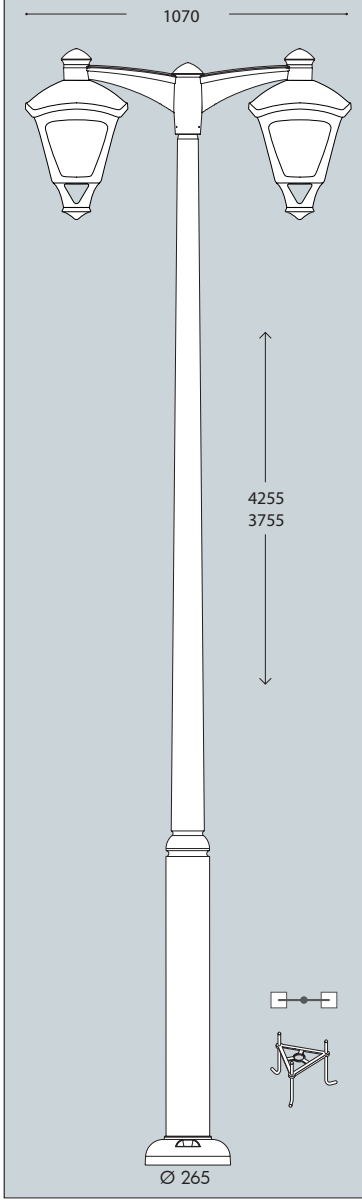


EKTOR 4000 MIDIPILAR/SERGIO 3L	
	T33.371.A30
GX53	T35.371.A30

Pcs 1
Kg 50,3
mc 0,490

EKTOR 3500 MIDIPILAR/SERGIO 3L	
	T33.367.A30
GX53	T35.367.A30

Pcs 1
Kg 55,5
mc 0,568

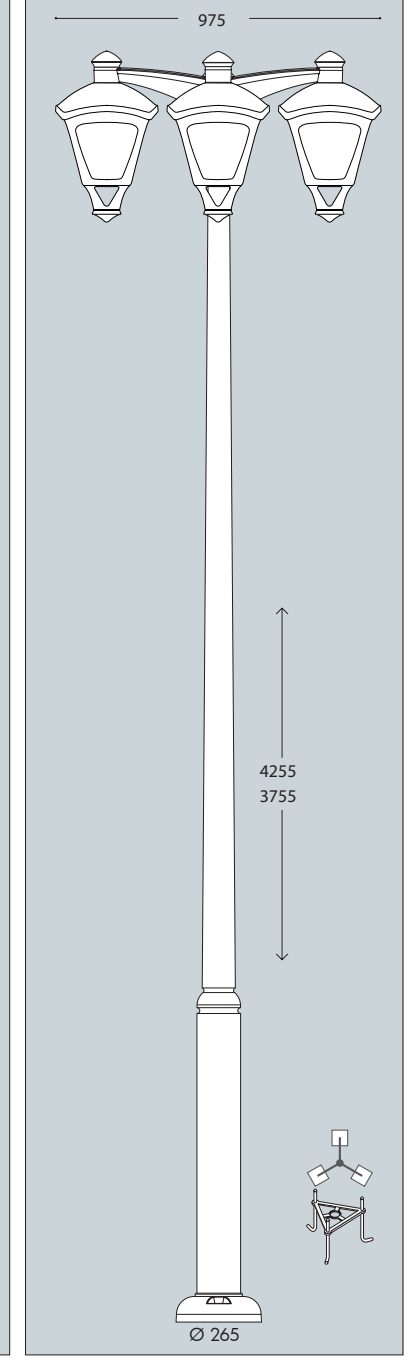





URBAN MODERN

GIORGIO-ROSA


FLOODLIGHT

Post top system complete with single or double luminaries made in in shockproof resin material, UV-rays stabilized, rust and corrosion-free. The provided bracket allows a fully adjustable floodlight position to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with 2x E27 lampholders. Insulation class II, Protection rating IP66.

*Sistema completo di diffusori per istallazioni a palo con luce singola o doppia. Fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Il braccio in dotazione permette l'inclinazione e l'orientamento del proiettore per direzionare il flusso luminoso. Fornito con **incluse lampadine a LED GX53 con kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione 2x E27. Classe di isolamento II, grado di protezione IP66.*



GIORGIO
4P2.000.G10
4P1.000.G10



ROSA
4P2.000.G20
4P1000.G20

4P2.000.G10



4P2.000.G20


CCT SETTABLE

2700 K
3000 K
4000 K
6500 K

SDCM < 6

CE
CB IECEE CB SCHEME
U.V. UV-TREATED
CLASS II DOUBLE INSULATION
PUBLIC
RECYCLABLE
ANTI-SHOCK
+90° -60° TEMPERATURE
WALL
GROUND
POST

MADE IN ITALY



GIORGIO-ROSA

FLOODLIGHT


GIORGIO/ROSA - COMPONENTS

IP66



Square **FLOODLIGHT** with no visible screws made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life and efficient GX53 LED lamps included or provided with 2x E27 lampholders.

PROIETTORE *quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvisto di lampadine a LED GX53 approvate TÜV di lunga durata ed elevata efficienza o fornito nella versione 2x E27.*



POST TOP SYSTEM with single or double bracket made in shockproof resin material, UV-rays stabilized. The provided bracket allows a fully adjustable position of the floodlight to direct at will the light emission.

SISTEMA A PALO *con braccio singolo o doppio realizzato in resina antiurto, stabilizzata ai raggi UV. Il braccio permette l'orientamento in qualsiasi posizione del proiettore per poter direzionare il flusso luminoso.*

GIORGIO

4P2.000.G10 *



Dimensions and weight
Height:200 mm
Width: 420 mm
Weight: 4 Kg

ROSA

4P2.000.G20 *



Dimensions and weight
Height:200 mm
Width: 700 mm
Weight: 6 Kg

Moulded Colours:
Black *Grey* *White*

Diffuser PMMA:
Opal

4x GX53 LED




4P2.000

Floodlight supplied **with white resin reflective ceiling fully pre-wired** and complete with 4 x TÜV-CB certified long-life efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	4x 10W **40W**	**5160 lm**	6500 K	.D4K
			4000 K	
			3000 K	



4x 10W 5160 Lm = **100W** SON-HQI

SAVE 60%



GX53 LED




4P1.000

Floodlight supplied **fully pre-wired** and complete with TÜV approved, long-life, efficient, **Kelvin and Power settable GX53 LED lamp** in different wattages.


100 - 240 V


LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	**15 W**	**1940 lm**	4000 K	.E1P
			2700 K	
	9 W eco mode	**1300 lm**	4000 K	
			2700 K	
GX53 LED	**15 W** + SENSOR	**1940 lm**	4000 K	.ESP
			2700 K	
	9W eco mode + SENSOR	**1300 lm**	4000 K	
			2700 K	



15W-9W = 150W-100W incandescent

SAVE 90%





2x E27



4P2.000

Floodlight supplied **fully pre-wired** with white resin reflective ceiling and complete with **2x E27 lampholders**.
Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

		*ADD. SUFFIX
2x E27 (CFL -LED)	max 160 mm	.E28
2x E27 + SENSOR	max 160 mm	.ES8

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GIORGIO-ROSA


FLOODLIGHT












GIORGIO-ROSA

FLOODLIGHT

GIORGIO	
15W/9W	4P1.000.G10.E1P
40W	4P2.000.G10.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED




Pcs 1
Kg 4
mc 0,029

2x E27 lampholder 4P2.000.G10.E28

ROSA	
2x 15W/9W	4P1.000.G20.E1P
2x 40W	4P2.000.G20.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED




Pcs 1
Kg 6
mc 0,049

2x E27 lampholder 4P2.000.G20.E28

GIOVA/GIUSEPPE	
15W/9W	4P1.702.E1P
40W	4P2.702.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED

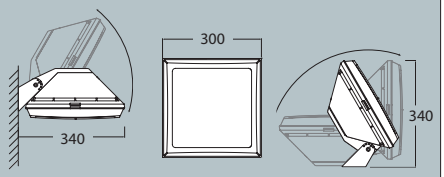


Pcs 10
Kg 31
mc 0,195

2x E27 lampholder 4P2.702.E28


EKTOR 2500/ROSA
4P2.361.G20

Pcs 1
Kg 27
mc 0,181

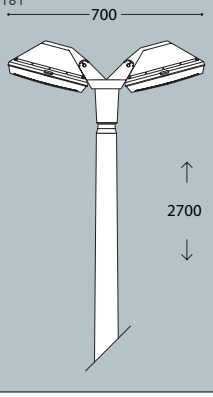

EKTOR 2500/GIORGIO
4P2.361.G10

Pcs 1
Kg 24
mc 0,161

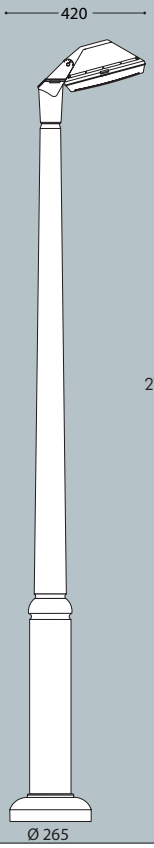

EKTOR 4000/GIORGIO	AKILLE 4000/GIORGIO
4P2.371.G10	4P2.421.G10


Pcs 1
Kg 40
mc 0,240

EKTOR 3500/GIORGIO	AKILLE 3500/GIORGIO
4P2.367.G10	4P2.417.G10

Pcs 1
Kg 37
mc 0,214

EKTOR 3000/GIORGIO	AKILLE 3000/GIORGIO
4P2.364.G10	4P2.414.G10

Pcs 1
Kg 34
mc 0,188

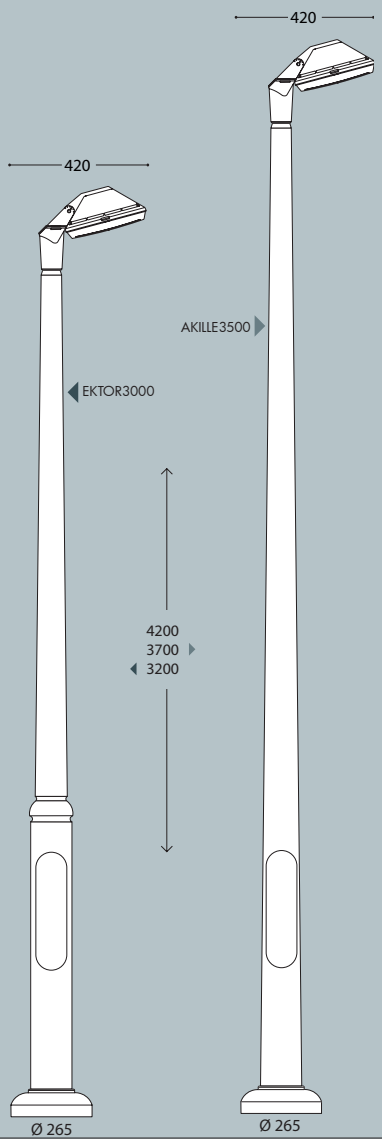

EKTOR 4000/ROSA	AKILLE 4000/ROSA
4P2.371.G20	4P2.421.G20


Pcs 1
Kg 43
mc 0,260

EKTOR 3500/ROSA	AKILLE 3500/ROSA
4P2.367.G20	4P2.417.G20

Pcs 1
Kg 40
mc 0,234

EKTOR 3000/ROSA	AKILLE 3000/ROSA
4P2.364.G20	4P2.414.G20

Pcs 1
Kg 37
mc 0,208

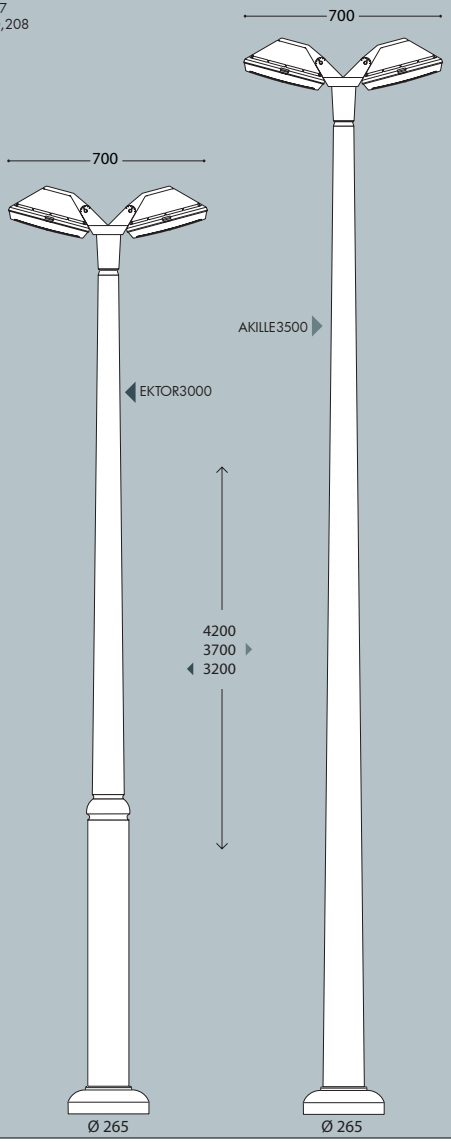

VIVI 400 HIGH POWER LED


LARGE SIZE

Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

V50.000.H1L



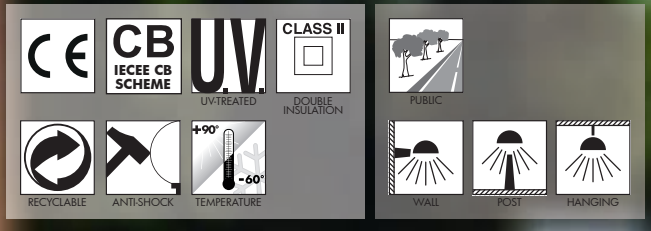

VIVI 400 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with HIGH POWER LED lamp. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

VIVI 400 HIGH POWER LED

V50.000 *



Dimensions and weight
Height: 420 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m^2 0,1449

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R


LED LAMPS

TÜV SÜD CE CB

LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP






CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(30W only)

PHOTOMETRIC DATA SAMPLE

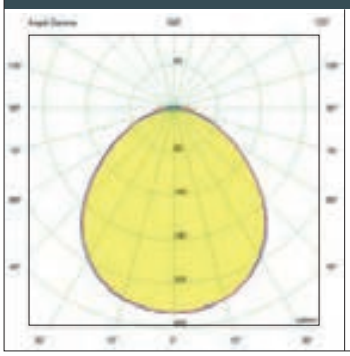



VIVI 400 E27 HIGH POWER LED
50W

POST height 3,5mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

VIVI 400 GX53 LED


LARGE SIZE


Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.


*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di **sistema modulare a LED GX53 con kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*



V50.000.D6K

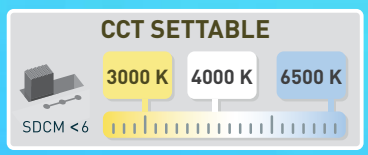

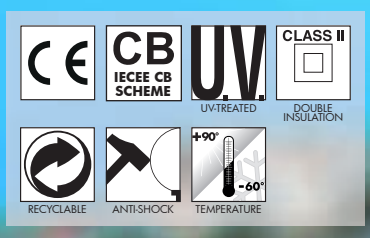





VIVI 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO *in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

VIVI 400 GX53 LED

V50.000 *



Dimensions and weight
Height: 420 mm
Diameter: 480 mm
Weight: 4,9 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m^2 0,1449

Moulded colours:
Black *White* *Grey*
Diffuser PMMA:
Clear *Opal*

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	6x 10W **60W**	**7740 lm**	6500 K	.D6K
			4000 K	
			3000 K	

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

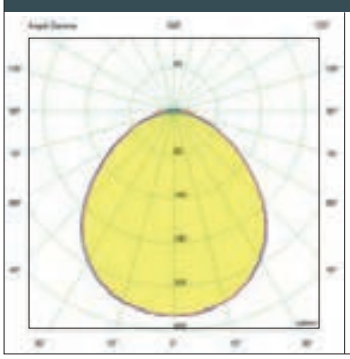



VIVI 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


VIVI 400 E27

LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.

V50.000.E27

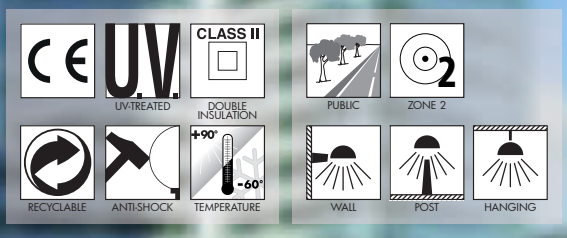



VIVI 400 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

VIVI 400 E27

V50.000 *



Dimensions and weight
Height: 420 mm
Diameter: 480 mm
Weight: 3,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1449


Moulded colours:
Black *White* *Grey*


Diffuser PMMA:
Clear *Opal*

E27-E40

		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 100W	**E27** Lampholder only	.E27
Luminaries supplied with E27 or E40 lampholder.		**E40** Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

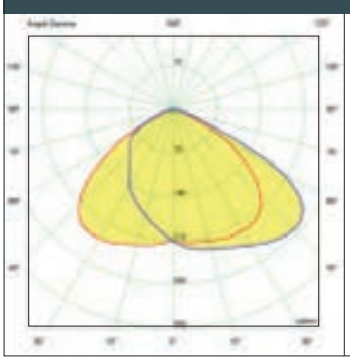



VIVI 400 E27
HQI 70W

POST height 4mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

HORIZONTAL BULB

AGAINST LIGHT POLLUTION



E27 - E40 VERSION

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

VIVI 400

LARGE SIZE








MADE IN ITALY

LUIGI 400-DR


L41.128



Pcs 1
Kg 4,2
mc 0,09

NEW LOT/VIVI400


V50.115



Pcs 1
Kg 5,2
mc 0,071

VIVI 400


V50.000



Pcs 1
Kg 4,9
mc 0,09

MIDIPILAR/VIVI400


V50.254



Pcs 1
Kg 5,5
mc 0,092

MARIO/VIVI400

V50.129



Pcs 1
Kg 5,2
mc 0,07

EKTOR 4000 MIDIPILAR/VIVI400 1L | AKILLE 4000 MIDIPILAR/VIVI400 1L


V50.371.A10 | V50.421.A10

Pcs 1
Kg 41
mc 0,314

EKTOR 3500 MIDIPILAR/VIVI400 1L | AKILLE 3500 MIDIPILAR/VIVI400 1L

V50.367.A10 | V50.417.A10


Pcs 1
Kg 37,5
mc 0,284

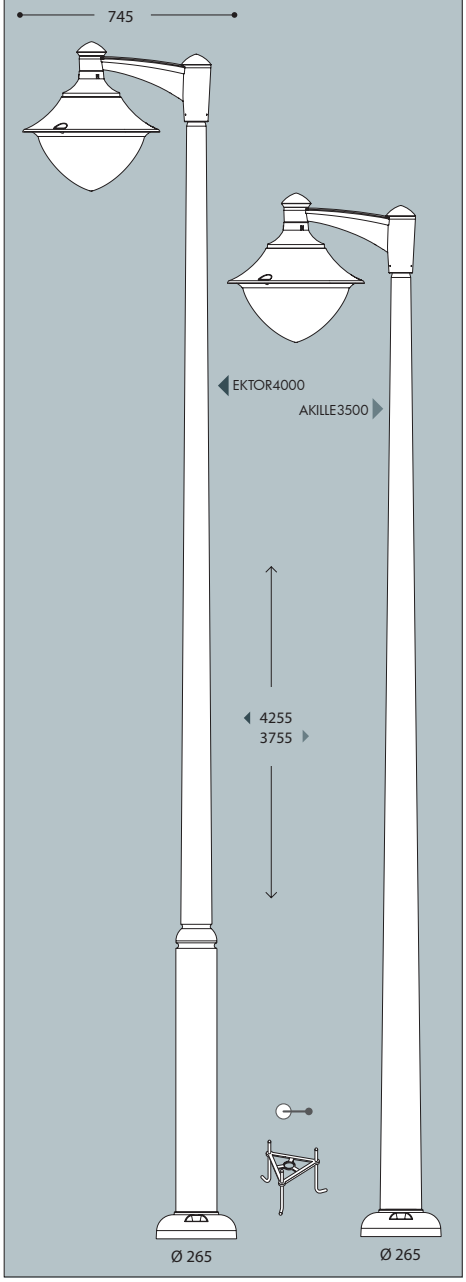

EKTOR 2500 MIDIPILAR/VIVI400 1L

V50.361.A10


Pcs 1
Kg 30,6
mc 0,235

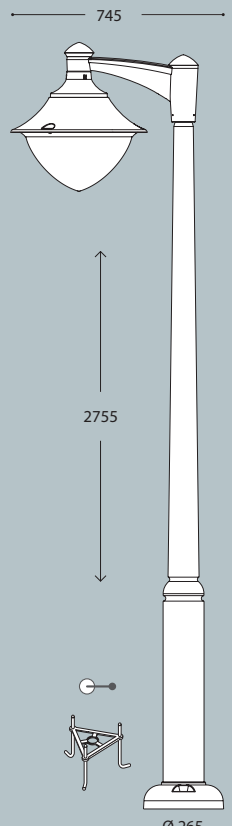

EKTOR 3000 MIDIPILAR/VIVI400 1L | AKILLE 3000 MIDIPILAR/VIVI400 1L

V50.364.A10 | V50.414.A10

Pcs 1
Kg 34
mc 0,262

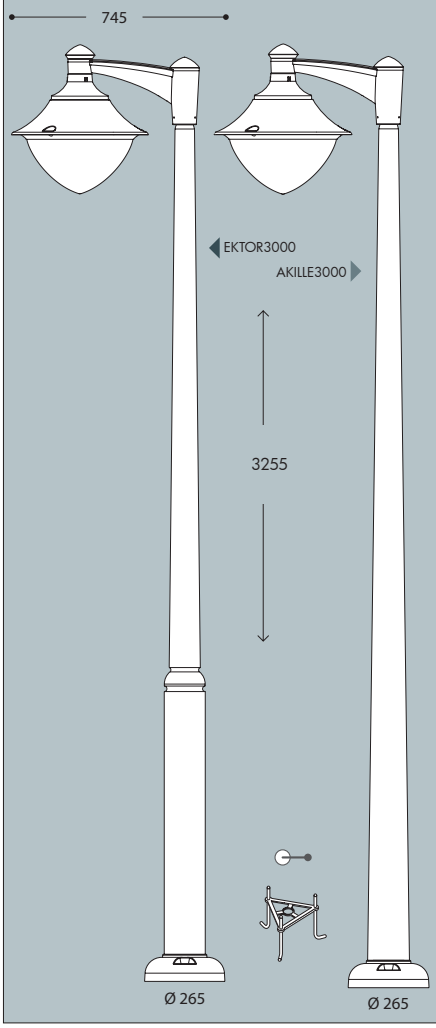

VIVI 400

LARGE SIZE












EKTOR 2500 MIDIPILAR/VIVI400 3L

V50.361.A30


Pcs 1
Kg 42
mc 0,497

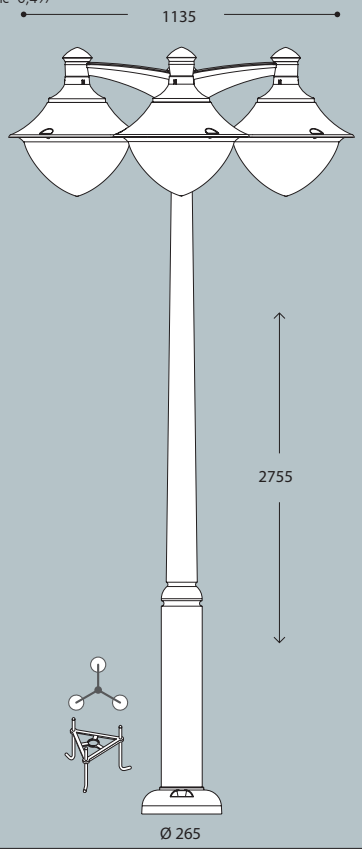

EKTOR 2500 MIDIPILAR/VIVI400 2L

V50.361.A20

Pcs 1
Kg 86,2
mc 0,306

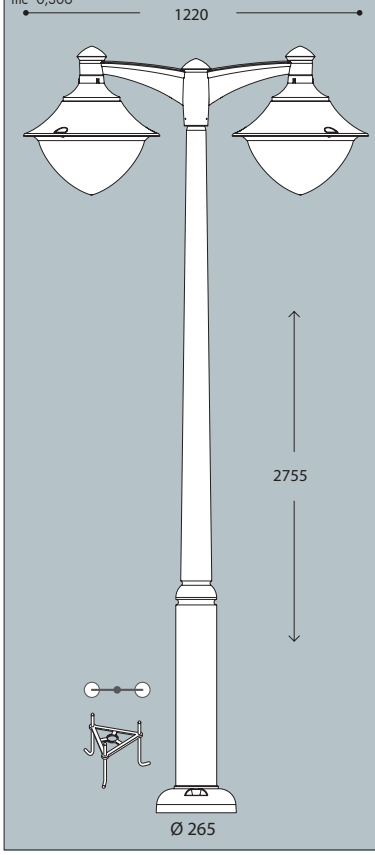

EKTOR 4000 MIDIPILAR/VIVI400 2L	AKILLE 4000 MIDIPILAR/VIVI400 2L
V50.371.A20	V50.421.A20


Pcs 1
Kg 46,5
mc 0,385

EKTOR 3500 MIDIPILAR/VIVI400 2L	AKILLE 3500 MIDIPILAR/VIVI400 2L
V50.367.A20	V50.417.A20

Pcs 1
Kg 43
mc 0,358

EKTOR 3000 MIDIPILAR/VIVI400 2L	AKILLE 3000 MIDIPILAR/VIVI400 2L
V50.364.A20	V50.414.A20

Pcs 1
Kg 39,6
mc 0,332

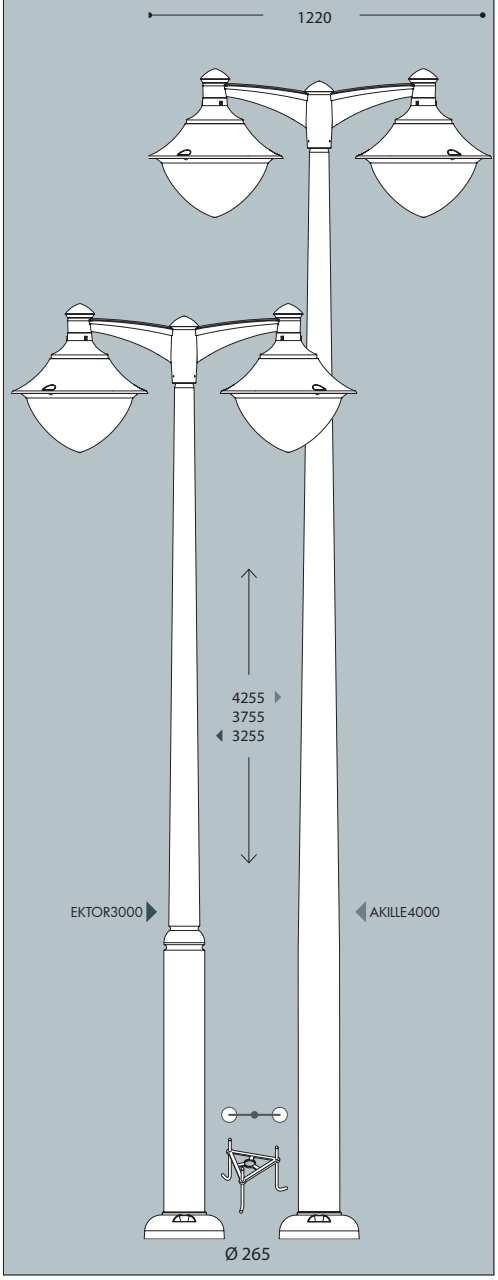

EKTOR 4000 MIDIPILAR/VIVI400 3L	AKILLE 4000 MIDIPILAR/VIVI400 3L
V50.371.A30	V50.421.A30


Pcs 1
Kg 52
mc 0,576

EKTOR 3500 MIDIPILAR/VIVI400 3L	AKILLE 3500 MIDIPILAR/VIVI400 3L
V50.367.A30	V50.417.A30

Pcs 1
Kg 48,6
mc 0,55

EKTOR 3000 MIDIPILAR/VIVI400 3L	AKILLE 3000 MIDIPILAR/VIVI400 3L
V50.364.A30	V50.414.A30

Pcs 1
Kg 45,2
mc 0,523

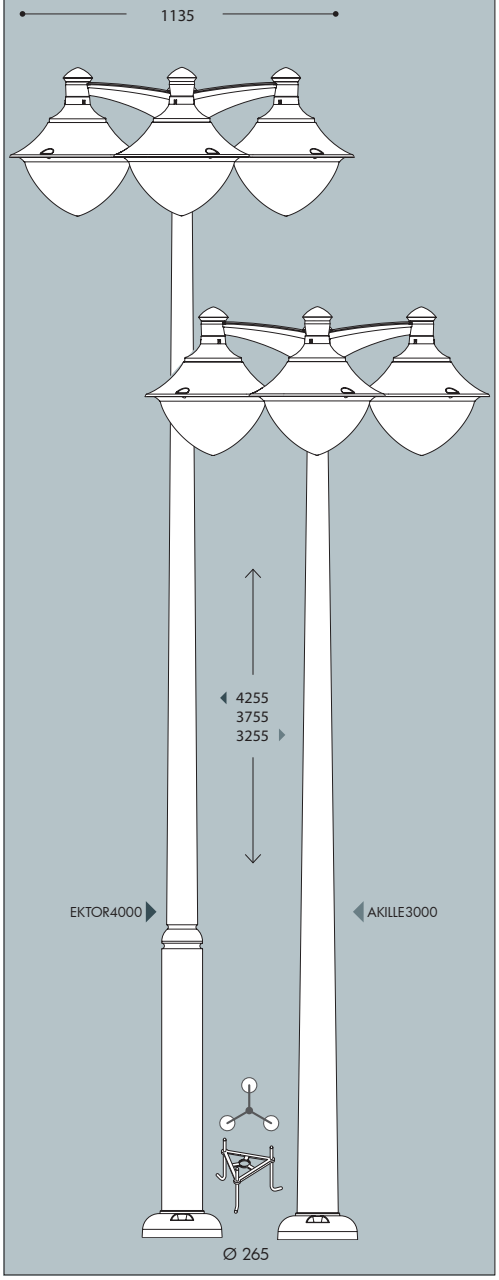

ECOVIVI 400 GX53 LED


LARGE SIZE


Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto.
*Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.*



EV4.000.D6K

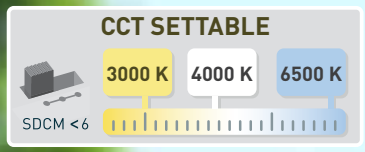

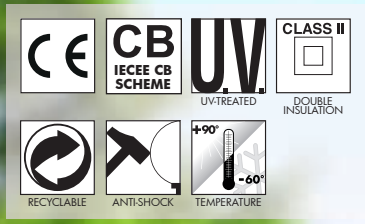



ECOVIVI 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

***TETTO** in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

***DIFFUSORE** con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.*





Decorative connection **RING** to be fixed on the luminaries diffuser.

***ANELLO** decorativo di connessione da fissare sul diffusore dell'apparecchio.*

ECOVIVI 400 GX53 LED

EV4.000 *



Dimensions and weight
Height: 243 mm
Diameter: 480 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,1449

Moulded colours:
Black | White | Grey

Diffuser PC (UV treated):
Clear

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	6x 10W **60W**	**7740 lm**	6500 K	.D6K
			4000 K	
			3000 K	

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

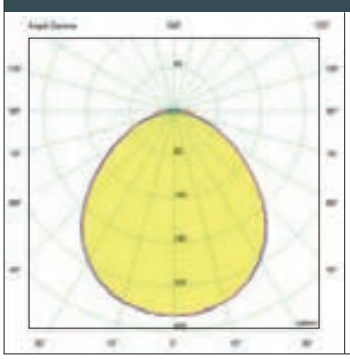



ECOVIVI 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ECOVIVI 400 E27


LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 - Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EV4.000.E27

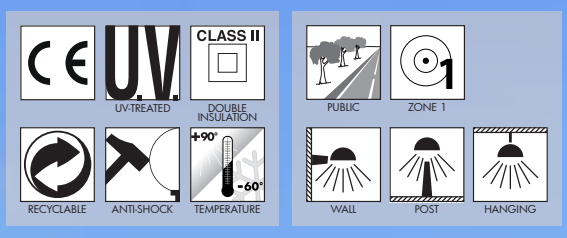



ECOVIVI 400 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE *con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

ECOVIVI 400 E27

EV4.000 *



Dimensions and weight
Height: 243 mm
Diameter: 480 mm
Weight: 3,4 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,1449

Moulded colours:
Black *White* *Grey*
Diffuser PC (UV treated):
Clear

E27-E40



Luminaries supplied with E27 or E40 lampholder.


suitable lamps:


CFL-LED
SON-HQI

max 100W

	*ADD. SUFFIX
E27 Lampholder only	.E27
E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

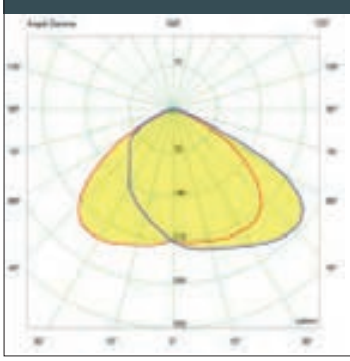




ECOVIVI 400 E27
HQI 70W

POST height 3,5mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

HORIZONTAL BULB

AGAINST LIGHT POLLUTION



E27 - E40 VERSION

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ECOVIVI 400

LARGE SIZE








MADE IN ITALY

LUIGI 400

L4F.128




Pcs 1
Kg 3,7
mc 0,09

*rope not included

NEW LOT/ECOVIVI400


EV4.115



Pcs 1
Kg 4,9
mc 0,071

ECOVIVI 400


EV4.000



Pcs 1
Kg 4,6
mc 0,09

MIDIPILAR/ECOVIVI400


EV4.254



Pcs 1
Kg 5,2
mc 0,092

MARIO/ECOVIVI400

EV4.129



*rope not included


Pcs 1
Kg 4,9
mc 0,07

EKTOR 4000 MIDIPILAR/ECOVIVI400 1L	AKILLE 4000 MIDIPILAR/ECOVIVI400 1L
EV4.371.A10	EV4.421.A10

Pcs 1
Kg 40,5
mc 0,314

EKTOR 3500 MIDIPILAR/ECOVIVI400 1L	AKILLE 3500 MIDIPILAR/ECOVIVI400 1L
EV4.367.A10	EV4.417.A10


Pcs 1
Kg 37,1
mc 0,284

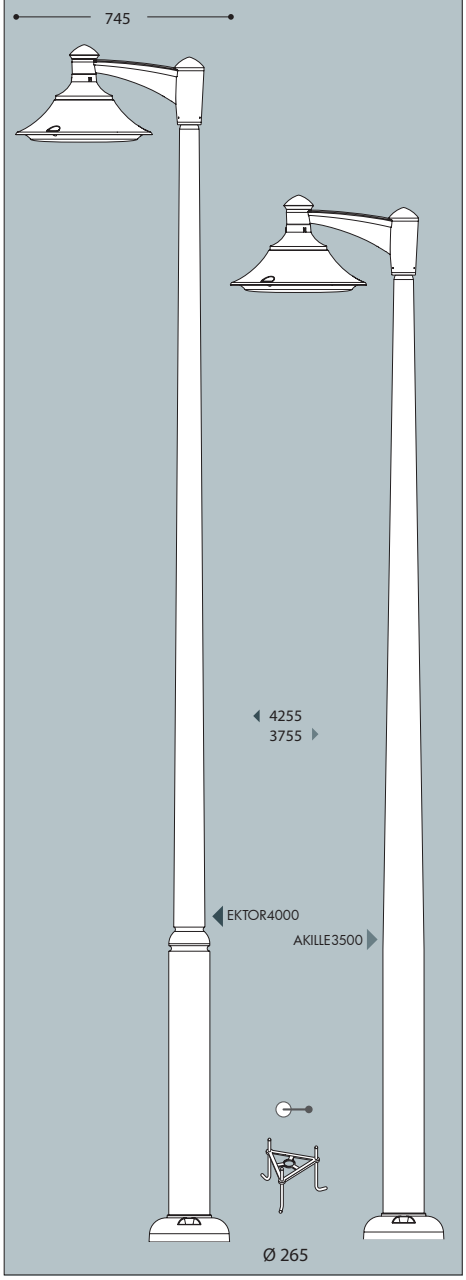

EKTOR 2500 MIDIPILAR/ECOVIVI400 1L


EV4.361.A10

Pcs 1
Kg 30,3
mc 0,235

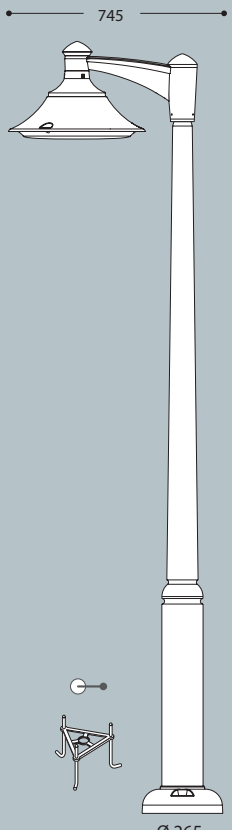

EKTOR 3000 MIDIPILAR/ ECOVIVI400 1L	AKILLE 3000 MIDIPILAR/ ECOVIVI400 1L
EV4.364.A10	EV4.414.A10

Pcs 1
Kg 33,7
mc 0,262

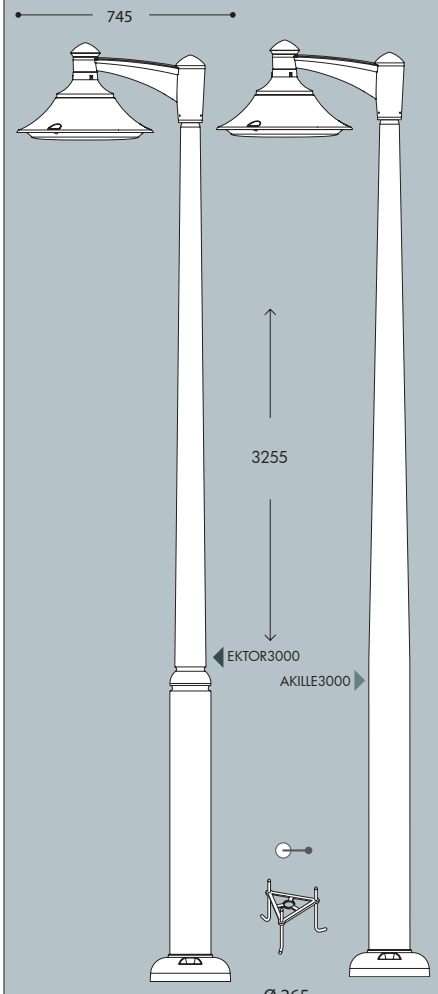

ECOVIVI 400

LARGE SIZE



EV4.254.C6K



EV4.364.A20.D6K

FumaTech® FUMAGALLI POLES TECHNOLOGY




EV4.421.A30.D6K

MADE IN ITALY

EKTOR 2500 MIDIPILAR/ECOVIVI400 3L

EV4.361.A30


Pcs 1
Kg 41
mc 0,497

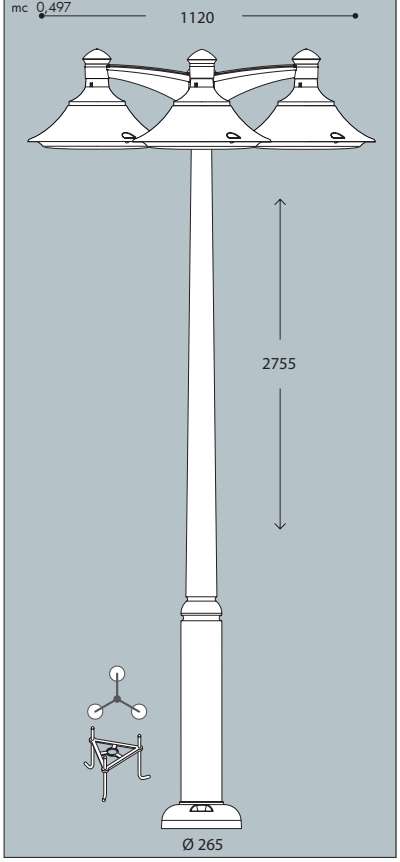

EKTOR 2500 MIDIPILAR/ECOVIVI400 2L

EV4.361.A20

Pcs 1
Kg 35,7
mc 0,306

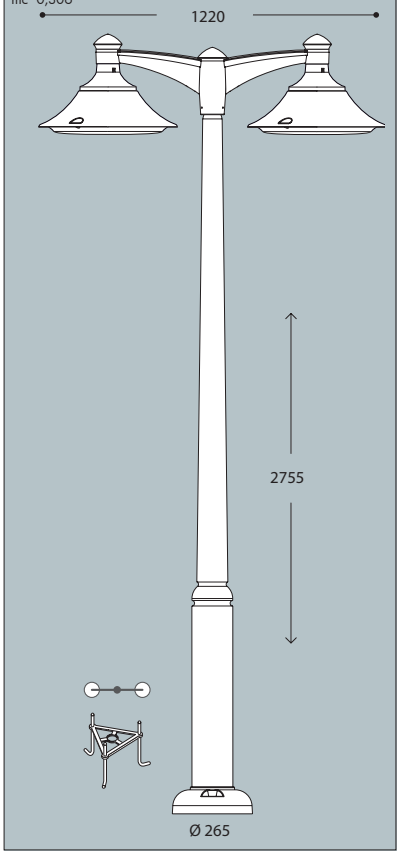

EKTOR 4000 MIDIPILAR/ECOVIVI400 2L	AKILLE 4000 MIDIPILAR/ECOVIVI400 2L
EV4.371.A20	EV4.421.A20


Pcs 1
Kg 46
mc 0,385

EKTOR 3500 MIDIPILAR/ECOVIVI400 2L	AKILLE 3500 MIDIPILAR/ECOVIVI400 2L
EV4.367.A20	EV4.417.A20

Pcs 1
Kg 42,5
mc 0,358

EKTOR 3000 MIDIPILAR/ECOVIVI400 2L	AKILLE 3000 MIDIPILAR/ECOVIVI400 2L
EV4.364.A20	EV4.414.A20

Pcs 1
Kg 39,1
mc 0,332

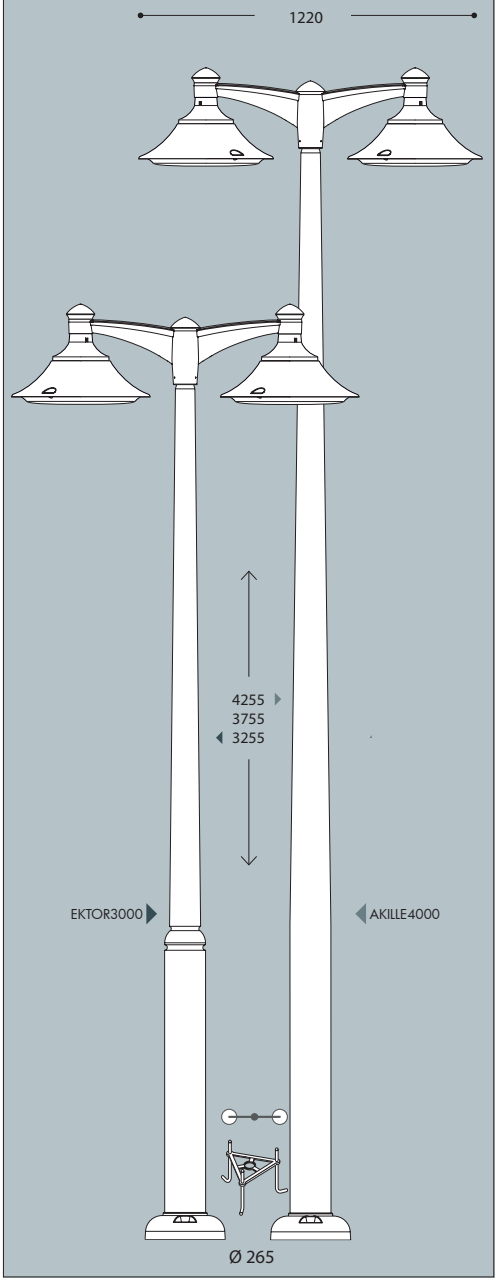

EKTOR 4000 MIDIPILAR/ECOVIVI400 3L	AKILLE 4000 MIDIPILAR/ECOVIVI400 3L
EV4.371.A30	EV4.421.A30


Pcs 1
Kg 51,1
mc 0,576

EKTOR 3500 MIDIPILAR/ECOVIVI400 3L	AKILLE 3500 MIDIPILAR/ECOVIVI400 3L
EV4.367.A30	EV4.417.A30

Pcs 1
Kg 47,7
mc 0,55

EKTOR 3000 MIDIPILAR/ECOVIVI400 3L	AKILLE 3000 MIDIPILAR/ECOVIVI400 3L
EV4.364.A30	EV4.414.A30

Pcs 1
Kg 44,3
mc 0,523

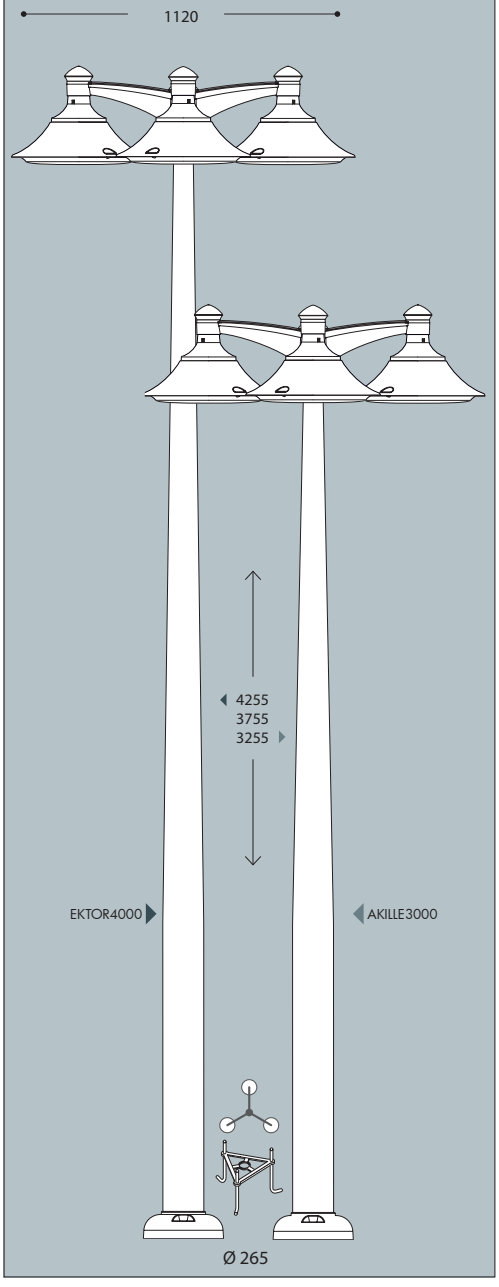

BEPPE 400 HIGH POWER LED


LARGE SIZE

Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



P50.000.H1L

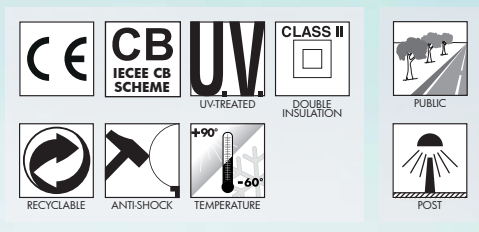



BEPPE 400 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with HIGH POWER LED lamp. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

BEPPE 400 HIGH POWER LED

P50.000 *



Dimensions and weight
Height: 680 mm
Diameter: 480 mm
Weight: 4 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP






CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(30W only)

PHOTOMETRIC DATA SAMPLE

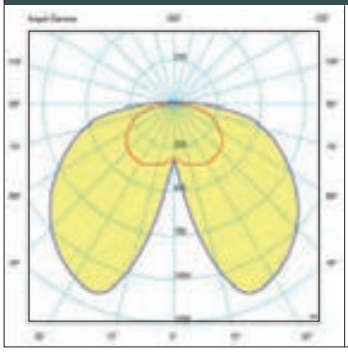



BEPPE 400 E27 *HIGH POWER LED 50W*

POST height 3,5mt
10x10mt area: average 21 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


BEPPE 400 GX53 LED


LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** *certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

P50.000.D6K

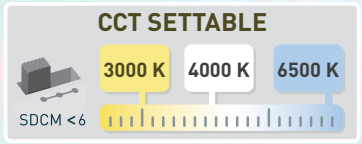

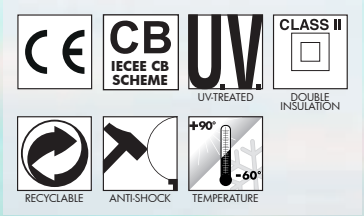



BEPPE 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

***TETTO** in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

***DIFFUSORE** realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

***BIPODE** in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

BEPPE 400 GX53 LED

P50.000 *



Dimensions and weight
Height: 680 mm
Diameter: 480 mm
Weight: 5 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m^2 0,1449

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	6x 10W **60W**	**7740 lm**	6500 K 4000 K 3000 K	.D6K

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

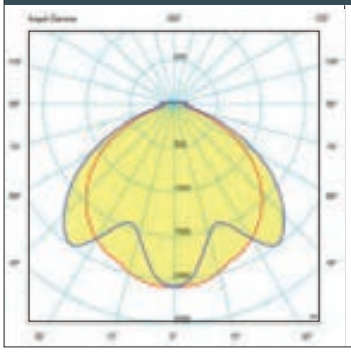



BEPPE 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


BEPPE 400 E27

LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.

P50.000.E27

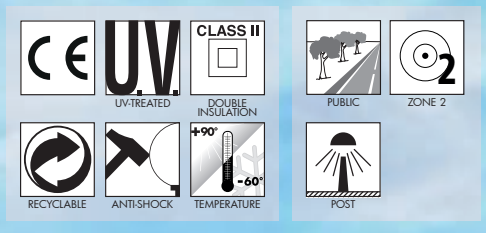



BEPPE 400 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

BEPPE 400 E27

P50.000 *




Dimensions and weight
Height: 680 mm
Diameter: 480 mm
Weight: 3,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

E27-E40

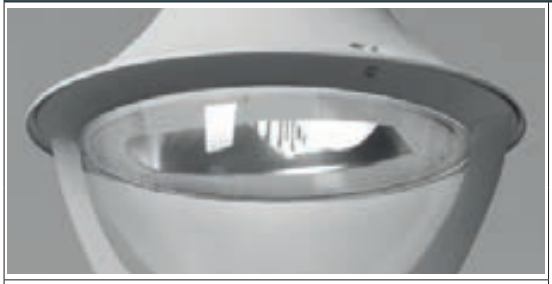

Luminaries supplied with E27 or E40 lampholder.


suitable lamps:


CFL-LED
SON-HQI

max 100W

	*ADD. SUFFIX
E27 Lampholder only	.E27
E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

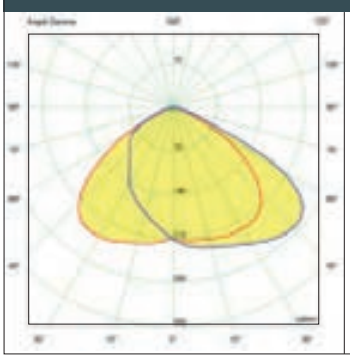



BEPPE 400 E27
HQI 70W

POST height 3,5mt
10x10mt area: average 20 lux

The photometric data for all the versions are available upon request or on our website.

BEPPE 400


LARGE SIZE












BEPPE 400

LARGE SIZE

NEW LOT/BEPPE400

P50.115


Pcs 1
Kg 5,3
mc 0,119



BEPPE400

P50.000


Pcs 1
Kg 5
mc 0,113



EKTOR 2500/BEPPE400

P50.361.000


Pcs 1
Kg 29,3
mc 0,256

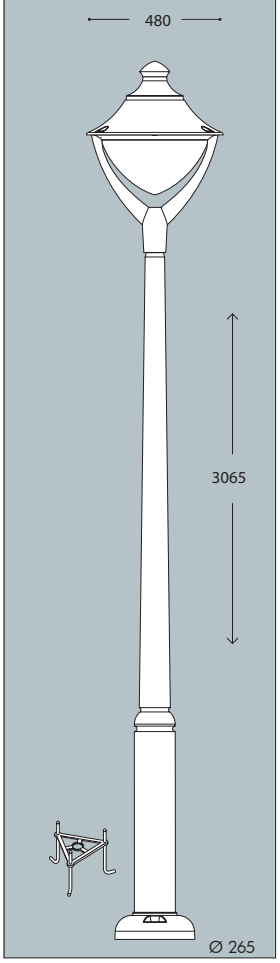

EKTOR 3000/BEPPE400 | AKILLE 3000/BEPPE400

P50.364.000 | P50.414.000


Pcs 1
Kg 32,7
mc 0,282

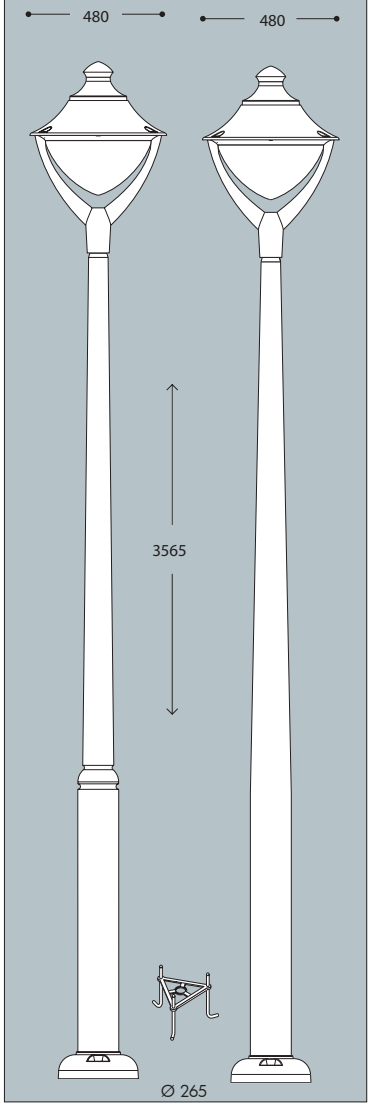

EKTOR 3500/BEPPE400 | AKILLE 3500/BEPPE400

P50.367.000 | P50.417.000


Pcs 1
Kg 36,1
mc 0,309

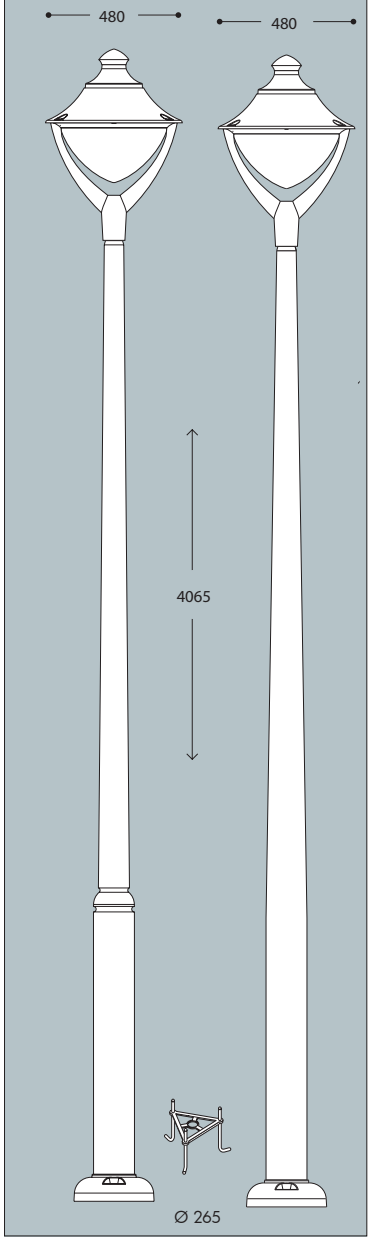

EKTOR 4000/BEPPE400 | AKILLE 4000/BEPPE400

P50.371.000 | P50.421.000

Pcs 1
Kg 39,5
mc 0,335

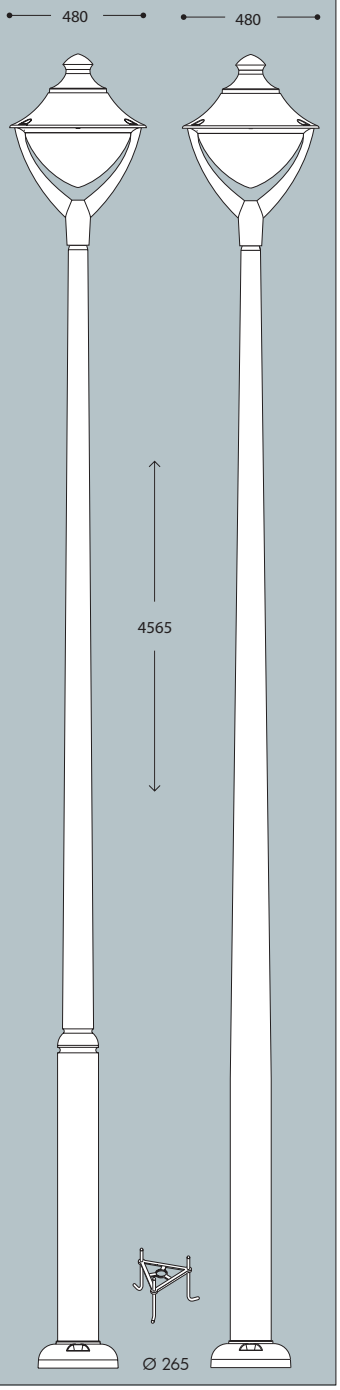


ECOBEPPE 400 GX53 LED


LARGE SIZE


Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.*

EP5.000.D6K

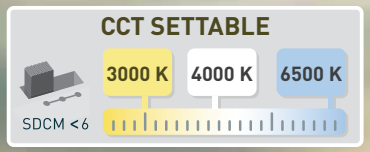

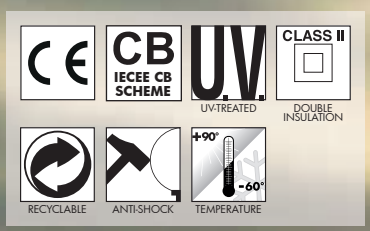



ECOBEPPE 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO *in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE *con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

ECOBEPPE 400 GX53 LED

EP5.000 *



Dimensions and weight
Height: 680 mm
Diameter: 480 mm
Weight: 4,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m^2 0,1449

Moulded colours:
Black *White* *Grey*
Diffuser PC (UV treated):
Clear

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	6x 10W **60W**	**7740 lm**	6500 K	.D6K
			4000 K	
			3000 K	

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

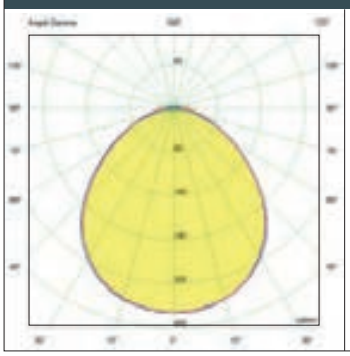



ECOBEPPE 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


ECOBEPPE 400 E27

LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 – Intallation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.

EP5.000.E27

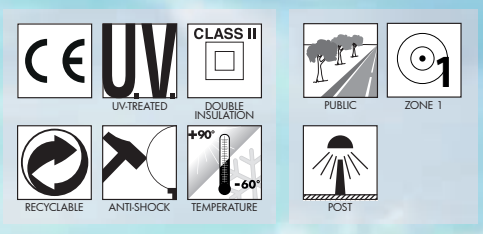



ECOBEPPE 400 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.
TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE *con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

ECOBEPPE 400 E27

EP5.000 *




Dimensions and weight
Height: 680 mm
Diameter: 480 mm
Weight: 3,4 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1449


Moulded colours:
Black *White* *Grey*
Diffuser PC (UV treated):
Clear

E27-E40

		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 100W	**E27** Lampholder only	.E27
Luminaries supplied with E27 or E40 lampholder.		**E40** Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

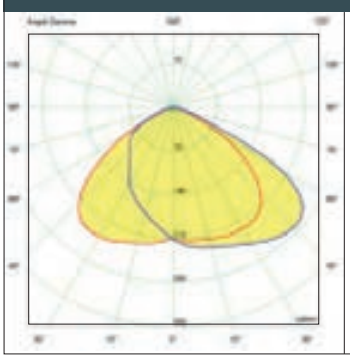



ECOBEPPE 400 E27
HQI 70W

POST height 3,5mt
10x10mt area: average 20 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ECOBEPPE 400


LARGE SIZE







MADE IN ITALY




ECOBEPPE 400

LARGE SIZE

NEW LOT/ECOBEPPE400

EP5.115


Pcs 1
Kg 5
mc 0,119



ECOBEPPE400

EP5.000


Pcs 1
Kg 4,7
mc 0,113



EKTOR 2500/ECOBEPPE400

EP5.361.000


Pcs 1
Kg 29,3
mc 0,256

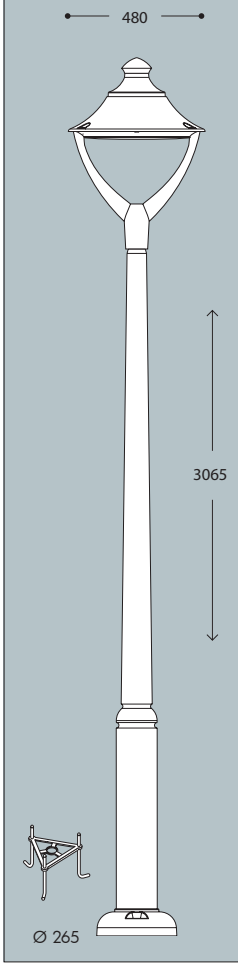

EKTOR 3000/ECOBEPPE400 | AKILLE 3000/ECOBEPPE400

EP5.364.000 | EP5.414.000


Pcs 1
Kg 32,7
mc 0,282

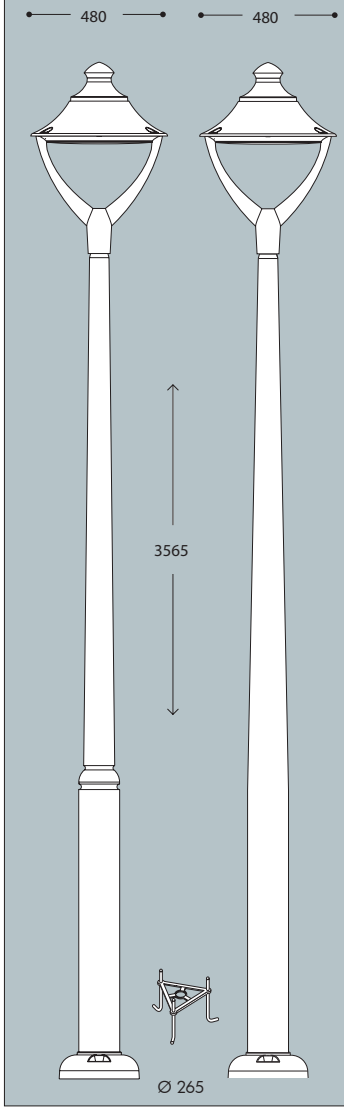

EKTOR 3500/ECOBEPPE400 | AKILLE 3500/ECOBEPPE400

EP5.367.000 | EP5.417.000


Pcs 1
Kg 36,1
mc 0,309

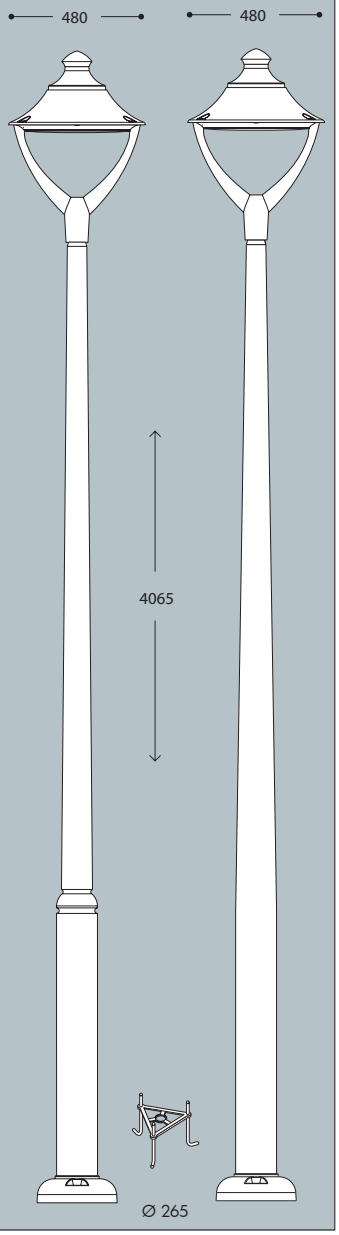

EKTOR 4000/ECOBEPPE400 | AKILLE 4000/ECOBEPPE400

EP5.371.000 | EP5.421.000

Pcs 1
Kg 39,5
mc 0,335

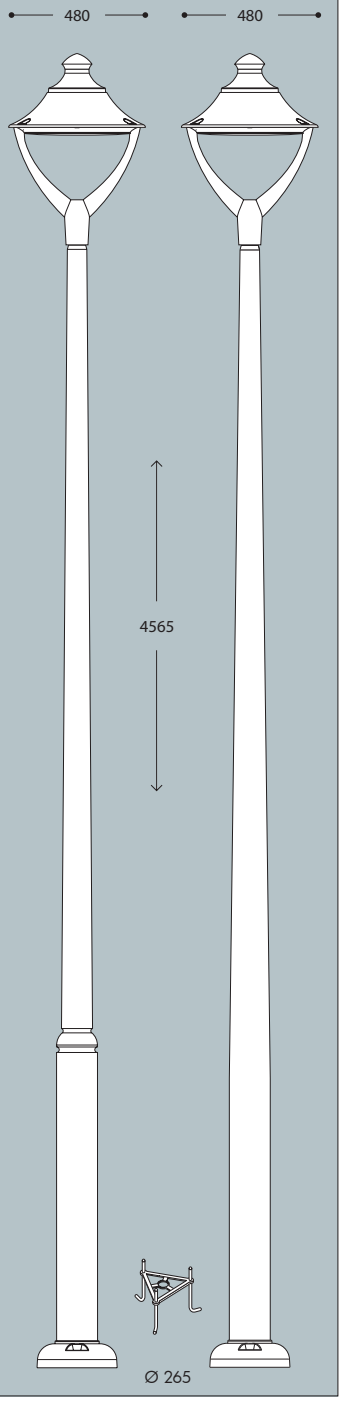


REMO 400 HIGH POWER LED


LARGE SIZE


Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

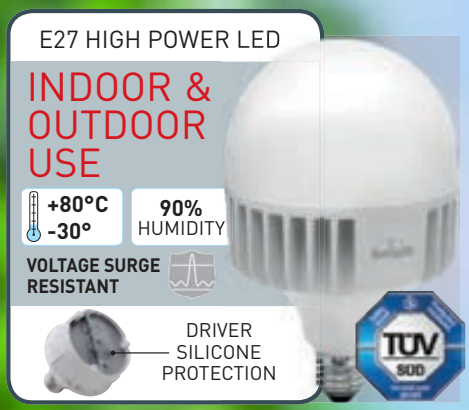

R50.000.Q1K

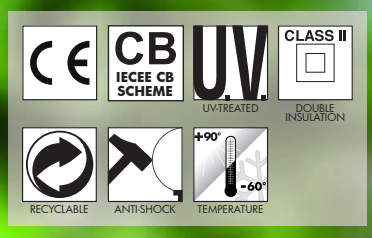





REMO 400 HIGH POWER LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with HIGH POWER LED lamp. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

INNER DIFFUSER *made of opal PMMA to gather the lighting output and get its uniform spread.*

DIFFUSORE INTERNO *realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.*

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

BASE *made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.*

BASE *dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno.*

REMO 400 GX53 LED

R50.000 *



Dimensions and weight
Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,157

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

HIGH POWER LED




- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	**30 W**	**3620 lm**	4000 K	.Q1K
			3000 K	
LED E27	**50 W**	**6550 lm**	4000 K	.H1L
			3000 K	.H1R

DOWNWARD LIGHT EMISSION




CCT SETTABLE LED LAMP






CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(30W only)

PHOTOMETRIC DATA SAMPLE

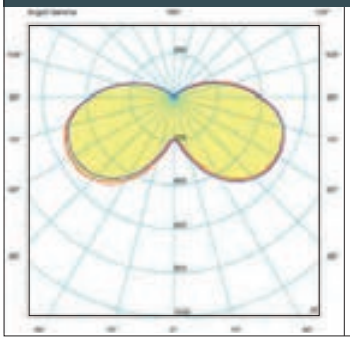



REMO 400 E27 *HIGH POWER LED 50W*

POST height 3,5mt
10x10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


REMO 400 GX53 LED


LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.*

R50.000.D6K

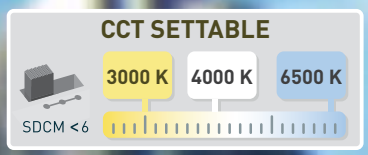

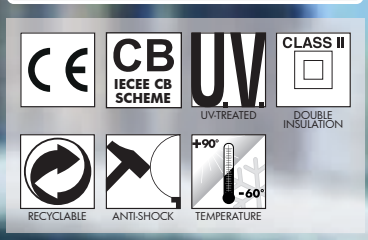





REMO 400 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made in shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output.

BASE *dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.*

REMO 400 GX53 LED

R50.000 *



Dimensions and weight
Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,157

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED




- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	6x 10W **60W**	**7740 lm**	6500 K	.D6K
			4000 K	
			3000 K	


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

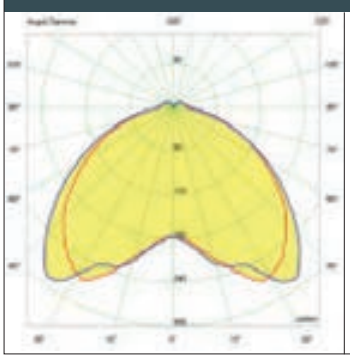



REMO 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 34 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


REMO 400 E27

LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.

R50.000.E27FC6

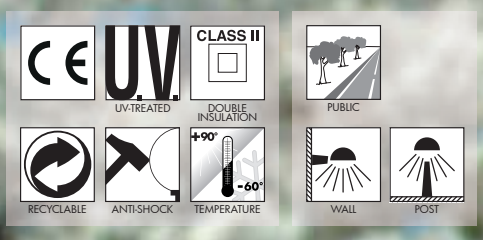

REMO 400 E27 - E40 - COMPONENTS



ROOF complete with decorative pinnacle made in shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.*

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA *riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*

Resin **BASE** consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder on its upper side.

BASE *in resina composta da un supporto e da un coperchio nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso).*

REMO 400 E27

R50.000 *



Dimensions and weight
Height: 715 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position



E27-E40




Luminaries supplied with E27 or E40 lampholder.


suitable lamps:

CFL-LED
max 50W

	*ADD. SUFFIX
E27 Lampholder only	.E27
E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

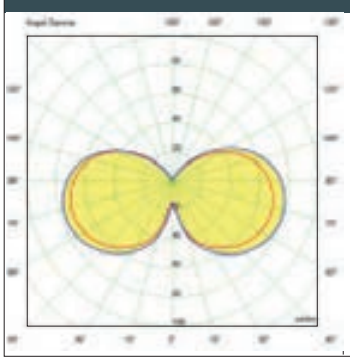



***REMO 400* E27** *- opal*
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

REMO 400


LARGE SIZE







MADE IN ITALY




REMO 400

LARGE SIZE

MIDIPILAR/REMO400

R50.254


Pcs 1
Kg 6,4
mc 0,09



NEW LOT/REMO400

R50.115


Pcs 1
Kg 6,1
mc 0,07



REMO400

R50.000


Pcs 1
Kg 5,8
mc 0,06



EKTOR 2500/REMO400

R50.361.000


Pcs 1
Kg 30,1
mc 0,21

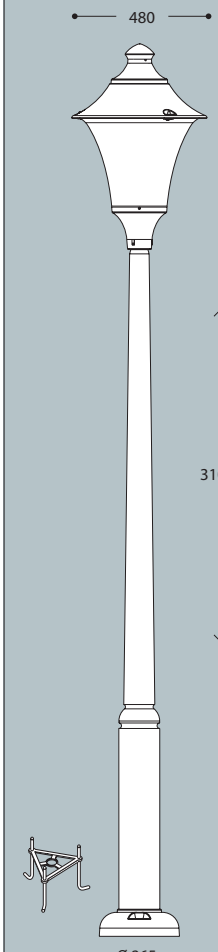

EKTOR 3000/ REMO400 | AKILLE 3000/ REMO400

R50.364.000 | R50.414.000


Pcs 1
Kg 33,5
mc 0,241

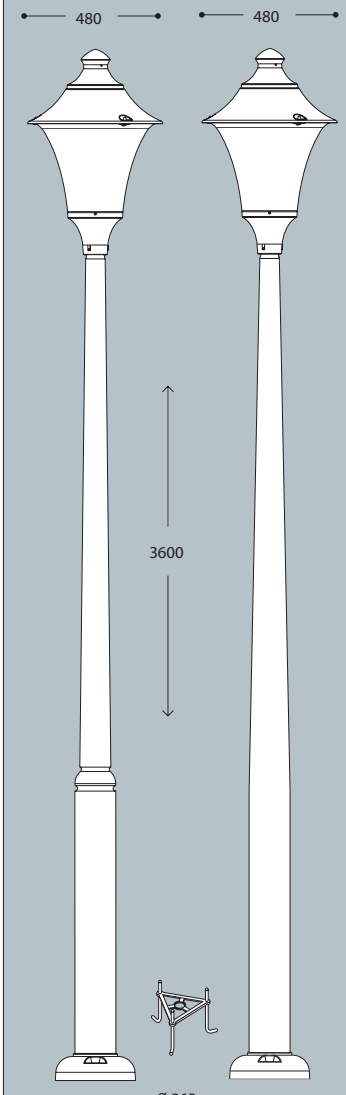

EKTOR 3500/ REMO400 | AKILLE 3500/ REMO400

R50.367.000 | R50.417.000


Pcs 1
Kg 36,9
mc 0,268

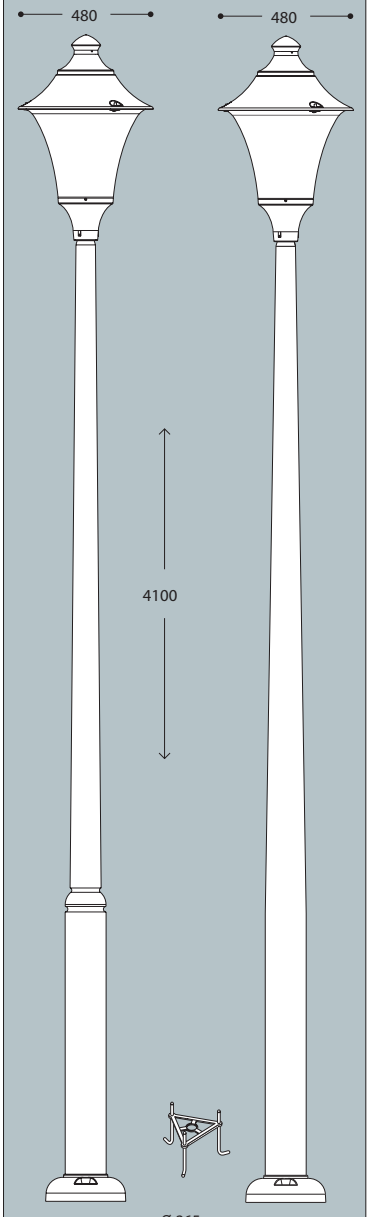

EKTOR 4000/ REMO400 | AKILLE 4000/ REMO400

R50.371.000 | R50.421.000

Pcs 1
Kg 40,3
mc 0,294

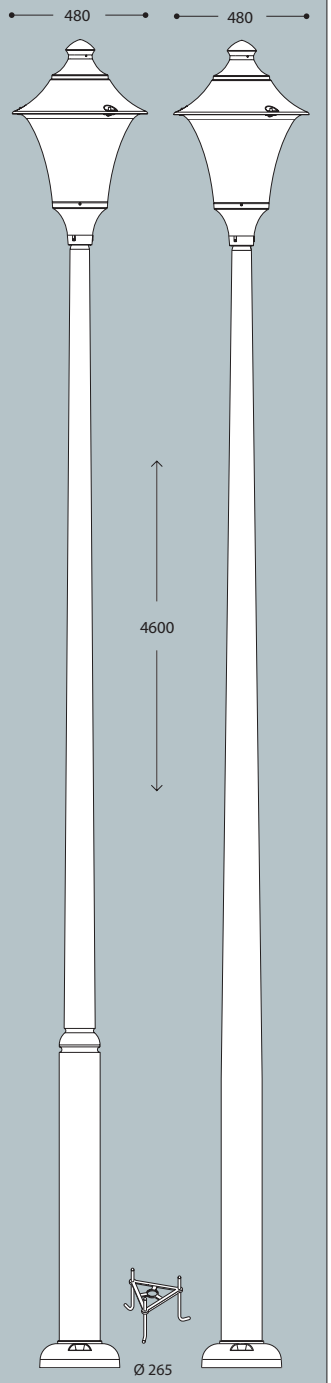

GINO 400 HIGH POWER LED


LARGE SIZE

Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito **completo di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



F50.000.Q1K

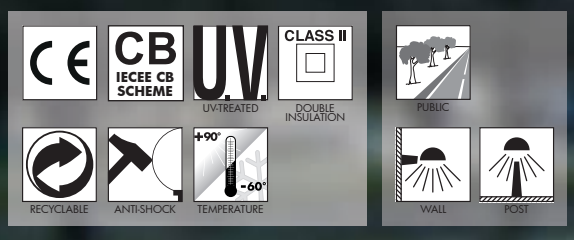

GINO 400 HIGH POWER LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with HIGH POWER LED lamp. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

INNER DIFFUSER *made of opal PMMA to gather the lighting output and get its uniform spread.*

DIFFUSORE INTERNO *realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.*

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

BASE *made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.*

BASE *dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno.*

GINO 400 HIGH POWER LED

F50.000 *



Dimensions and weight
Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

HIGH POWER LED




- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	**30 W**	**3620 lm**	4000 K	.Q1K
			3000 K	
LED E27	**50 W**	**6550 lm**	4000 K	.H1L
			3000 K	.H1R

DOWNWARD LIGHT EMISSION




CCT SETTABLE LED LAMP






CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.
(30W only)

PHOTOMETRIC DATA SAMPLE

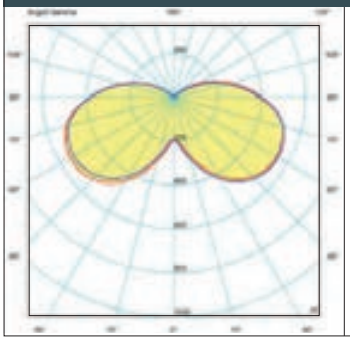



GINO 400 E27 *HIGH POWER LED 50W*

POST height 3,5mt
10x10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


GINO 400 GX53 LED


LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and K**elvin settable GX53 LED modular system** in different wattages. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP55.*

F50.000.D6K

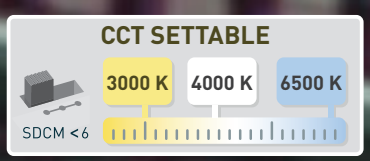

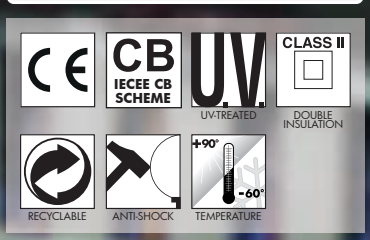



GINO 400 GX53 LED

LARGE SIZE

GINO 400 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output.

BASE *dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.*

GINO 400 GX53 LED

F50.000 *



Dimensions and weight
Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

GX53 LED




- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6X TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	6x 10W **60W**	**7740 lm**	6500 K	.D6K
			4000 K	
			3000 K	


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

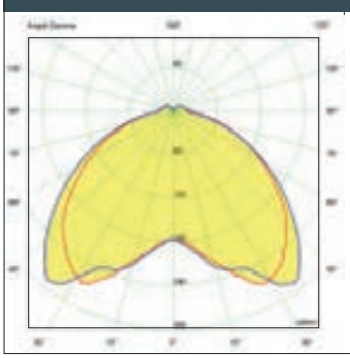



GINO 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 34 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


GINO 400 E27

LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.

F50.000.E27FC6

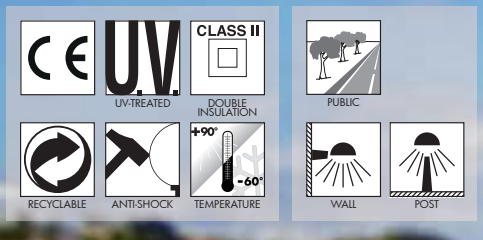

GINO 400 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.*

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA *riflettente reaalizzata in alluminio anodizzato fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*

Resin **BASE** consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder on its upper side.

BASE *in resina composta da un supporto e da un coperchio nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso).*

GINO 400 E27

F50.000 *



Dimensions and weight
Height: 715 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,157

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position




E27-E40




		*ADD. SUFFIX
suitable lamps: CFL-LED max 50W	**E27** Lampholder only	.E27
	E40 Lampholder only	.E40

Luminaries supplied with E27 or E40 lampholder.

PHOTOMETRIC DATA SAMPLE

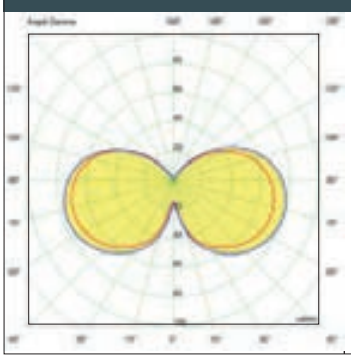



GINO 400 E27 *- opal*
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GINO 400

LARGE SIZE










MADE IN ITALY




GINO 400

LARGE SIZE

MIDIPILAR/GINO400

F50.254


Pcs 1
Kg 6,4
mc 0,09



NEW LOT/GINO400

F50.115


Pcs 1
Kg 6,1
mc 0,07



GINO400

F50.000


Pcs 1
Kg 5,8
mc 0,06



EKTOR 2500/GINO400

F50.361.000


Pcs 1
Kg 30,1
mc 0,21

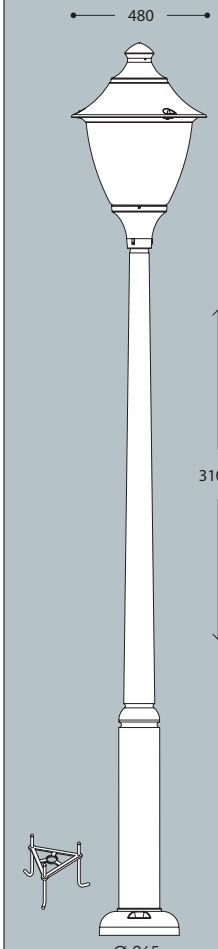

EKTOR 3000/ GINO400 | AKILLE 3000/ GINO400

F50.364.000 | F50.414.000


Pcs 1
Kg 33,5
mc 0,24

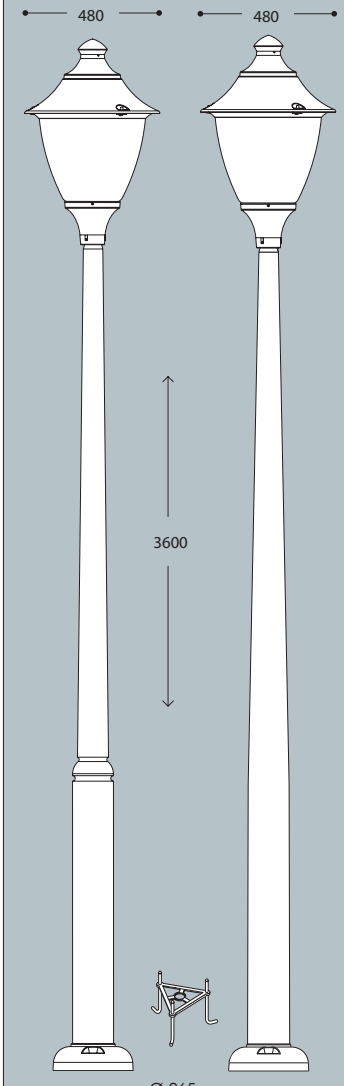

EKTOR 3500/ GINO400 | AKILLE 3500/ GINO400

F50.367.000 | F50.417.000


Pcs 1
Kg 26,9
mc 0,26

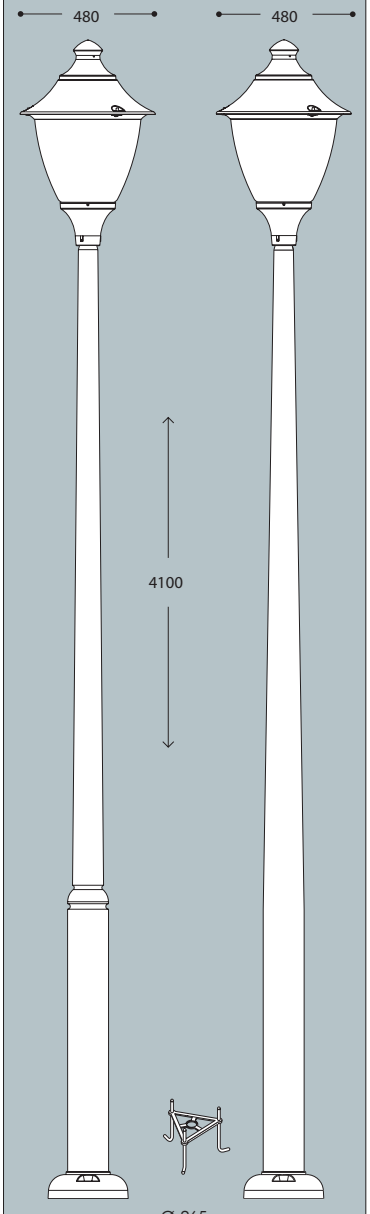

EKTOR 4000/ GINO400 | AKILLE 4000/ GINO400

F50.371.000 | F50.421.000

Pcs 1
Kg 40,3
mc 0,29

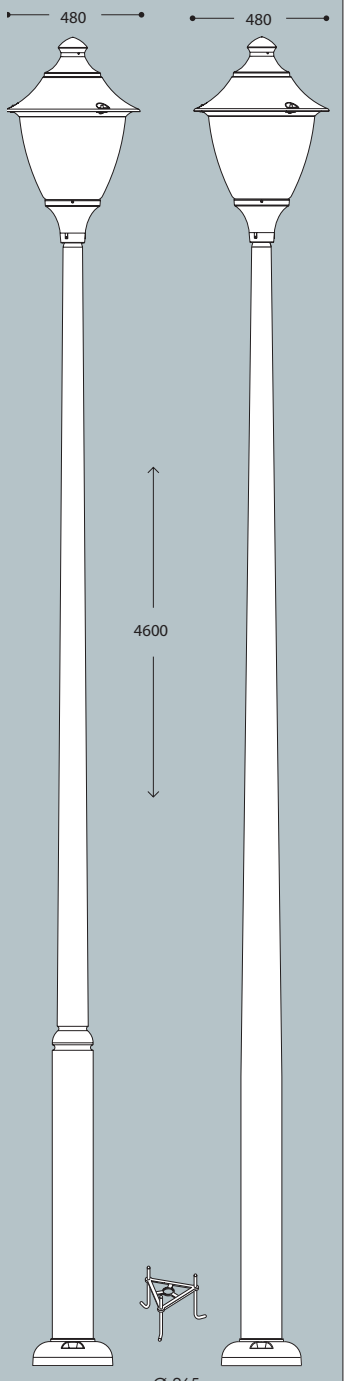


VIVI 500 HIGH POWER LED


GRAND SIZE


Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito ***completo di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

V60.000.W1L

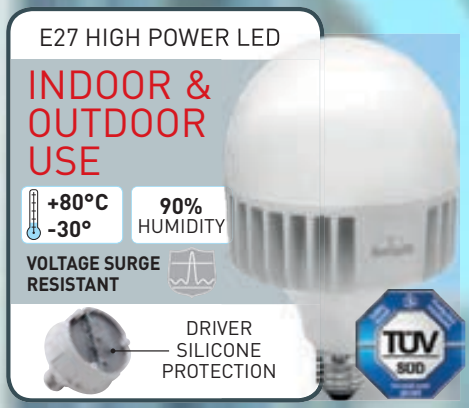

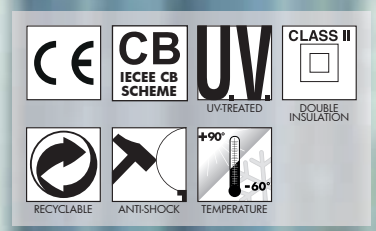





VIVI 500 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di* ***lampada a LED ad ALTA POTENZA****. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

VIVI 500 HIGH POWER LED

V60.000 *



Dimensions and weight
Height: 600 mm
Diameter: 600 mm
Weight: 7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1932

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R
E27	60 W	7600 lm	4000 K	.W1L
			3000 K	.W1R


LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

PHOTOMETRIC DATA SAMPLE

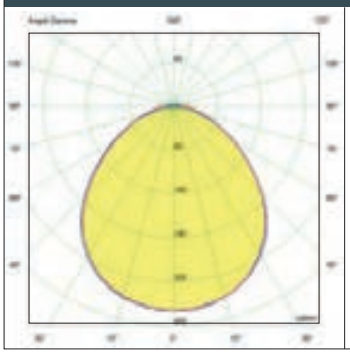



VIVI 500 E27 *HIGH POWER LED*
60W

POST height 5mt
10x10mt area: average 27 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


VIVI 500 GX53 LED


GRAND SIZE


Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

V60.000.D9K

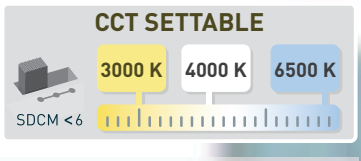

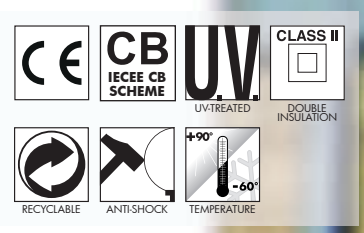



VIVI 500 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO *in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

VIVI 500 GX53 LED

V60.000 *



Dimensions and weight
Height: 600 mm
Diameter: 600 mm
Weight: 7,7 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,1932

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 9x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	9x 10W **90W**	**11610 lm**	6500 K	.D9K
			4000 K	
			3000 K	

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP






CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

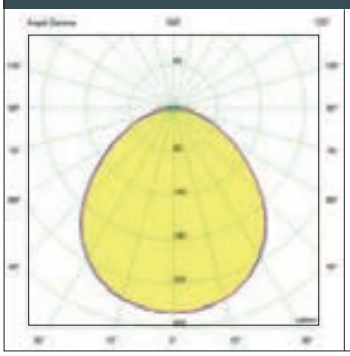



VIVI 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 34 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

VIVI 500 E27

GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.



VIVI 500 E27

GRAND SIZE

VIVI 500 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

VIVI 500 E27

V60.000 *



Dimensions and weight
Height: 600 mm
Diameter: 600 mm
Weight: 6 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,1932

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

E27-E40



Luminaries supplied with E27 or E40 lampholder.

suitable lamps:


CFL-LED
SON-HQI

max 150W

	*ADD. SUFFIX
E27 Lampholder only	.E27
E40 Lampholder only	.E40


HORIZONTAL BULB


AGAINST LIGHT POLLUTION



E27 - E40 VERSION

PHOTOMETRIC DATA SAMPLE

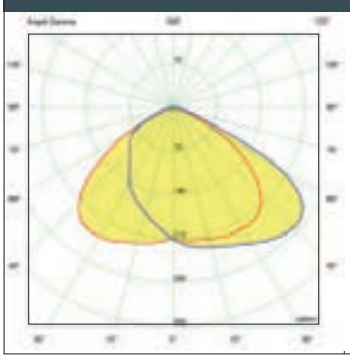



VIVI 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 35 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

VIVI 500

GRAND SIZE











MADE IN ITALY

VIVI 500
V60.000




Pcs 1
Kg 7,7
mc 0,10

LUIGI 500-DR
L51.128




Pcs 1
Kg 7,7
mc 0,10
*rope not included

PILAR/VIVI500
V60.253




Pcs 1
Kg 9,7
mc 0,15

NEW LOT/VIVI500
V60.115



Pcs 1
Kg 8,7
mc 0,13


MARIO/VIVI500
V60.129



Pcs 1
Kg 7,1
mc 0,11
*rope not included

EKTOR 6000 PILAR/VIVI500 2L
V60.384.P20

Pcs 1
Kg 94,6
mc 1,46

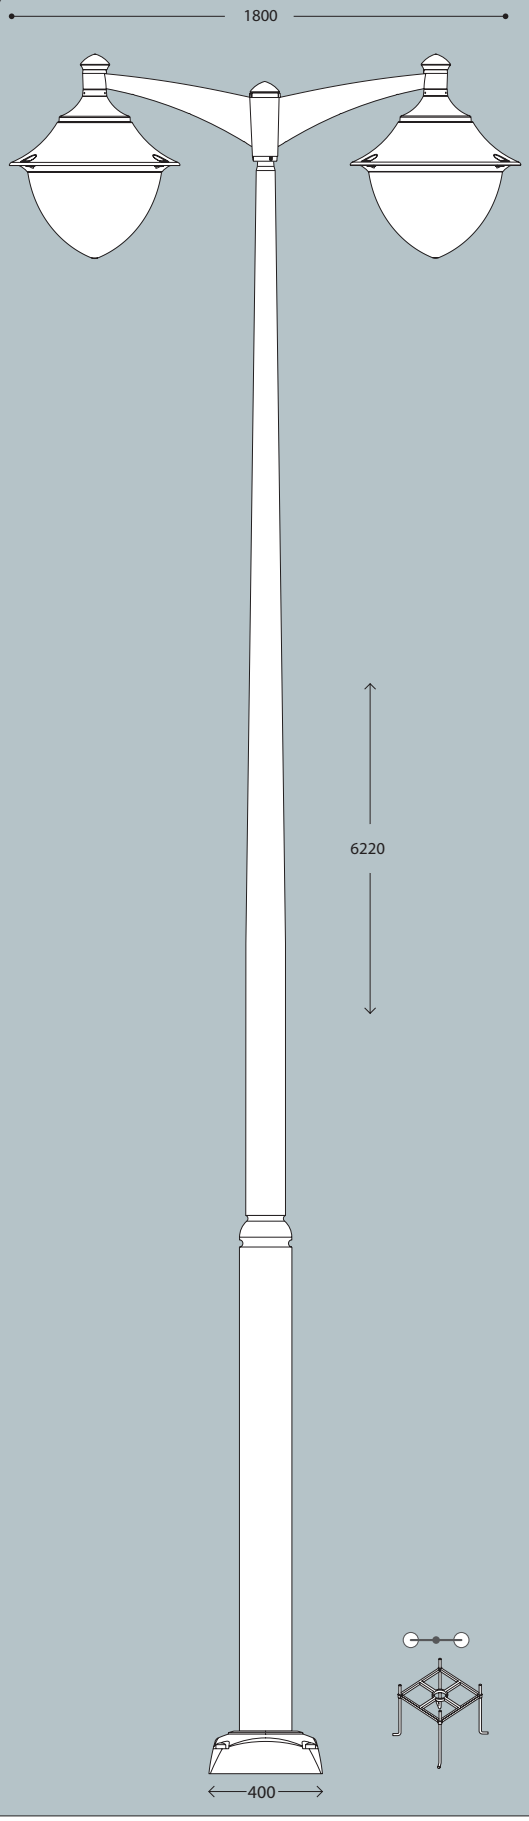

EKTOR 6000 PILAR/VIVI500 1L
V60.384.P10

Pcs 1
Kg 86,2
mc 1,36



VIVI 500

GRAND SIZE





EKTOR 5000 PILAR/VIVI500 1L	AKILLE 5000 PILAR/VIVI500 1L
V60.377.P10	V60.427.P10


Pcs 1
Kg 55,7
mc 0,43

EKTOR 4500 PILAR/VIVI500 1L	AKILLE 4500 PILAR/VIVI500 1L
V60.374.P10	V60.424.P10

Pcs 1
Kg 50,2
mc 0,40

EKTOR 4000 PILAR/VIVI500 1L	AKILLE 4000 PILAR/VIVI500 1L
V60.371.P10	V60.421.P10

Pcs 1
Kg 44,7
mc 0,37

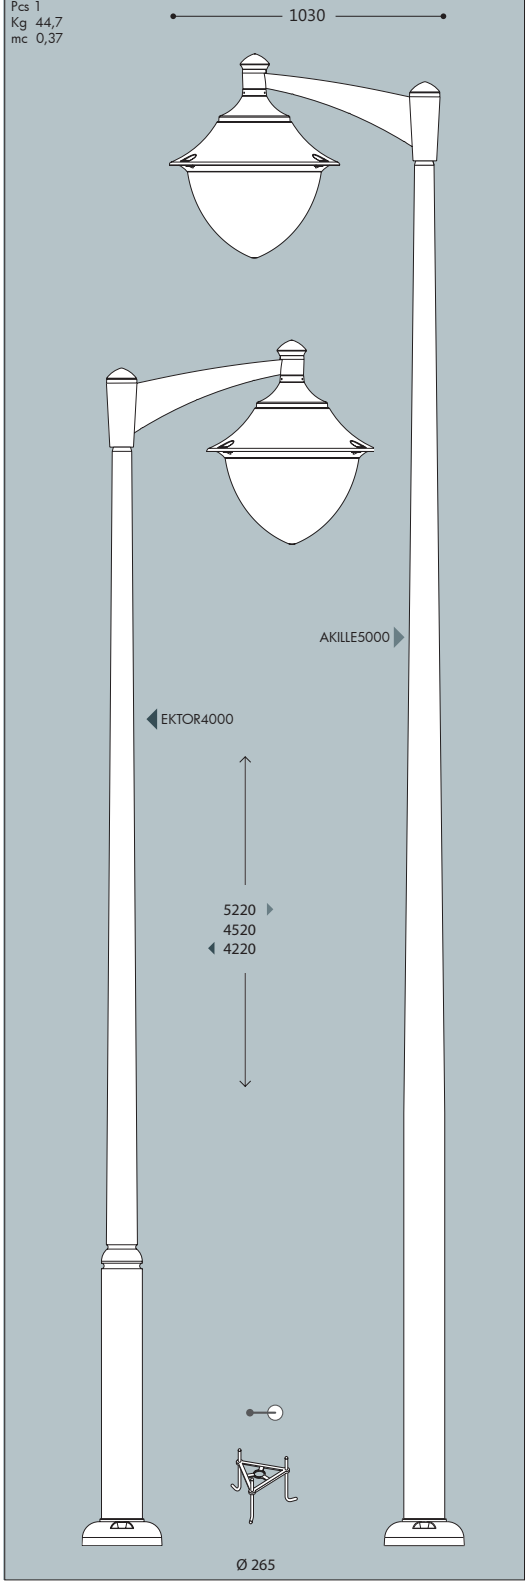

EKTOR 5000 PILAR/VIVI500 2L	AKILLE 5000 PILAR/VIVI500 2L
V60.377.P20	V60.427.P20


Pcs 1
Kg 65,1
mc 0,60

EKTOR 4500 PILAR/VIVI500 2L	AKILLE 4500 PILAR/VIVI500 2L
V60.374.P20	V60.424.P20

Pcs 1
Kg 59,6
mc 0,57

EKTOR 4000 PILAR/VIVI500 2L	AKILLE 4000 PILAR/VIVI500 2L
V60.371.P20	V60.421.P20

Pcs 1
Kg 54,1
mc 0,54

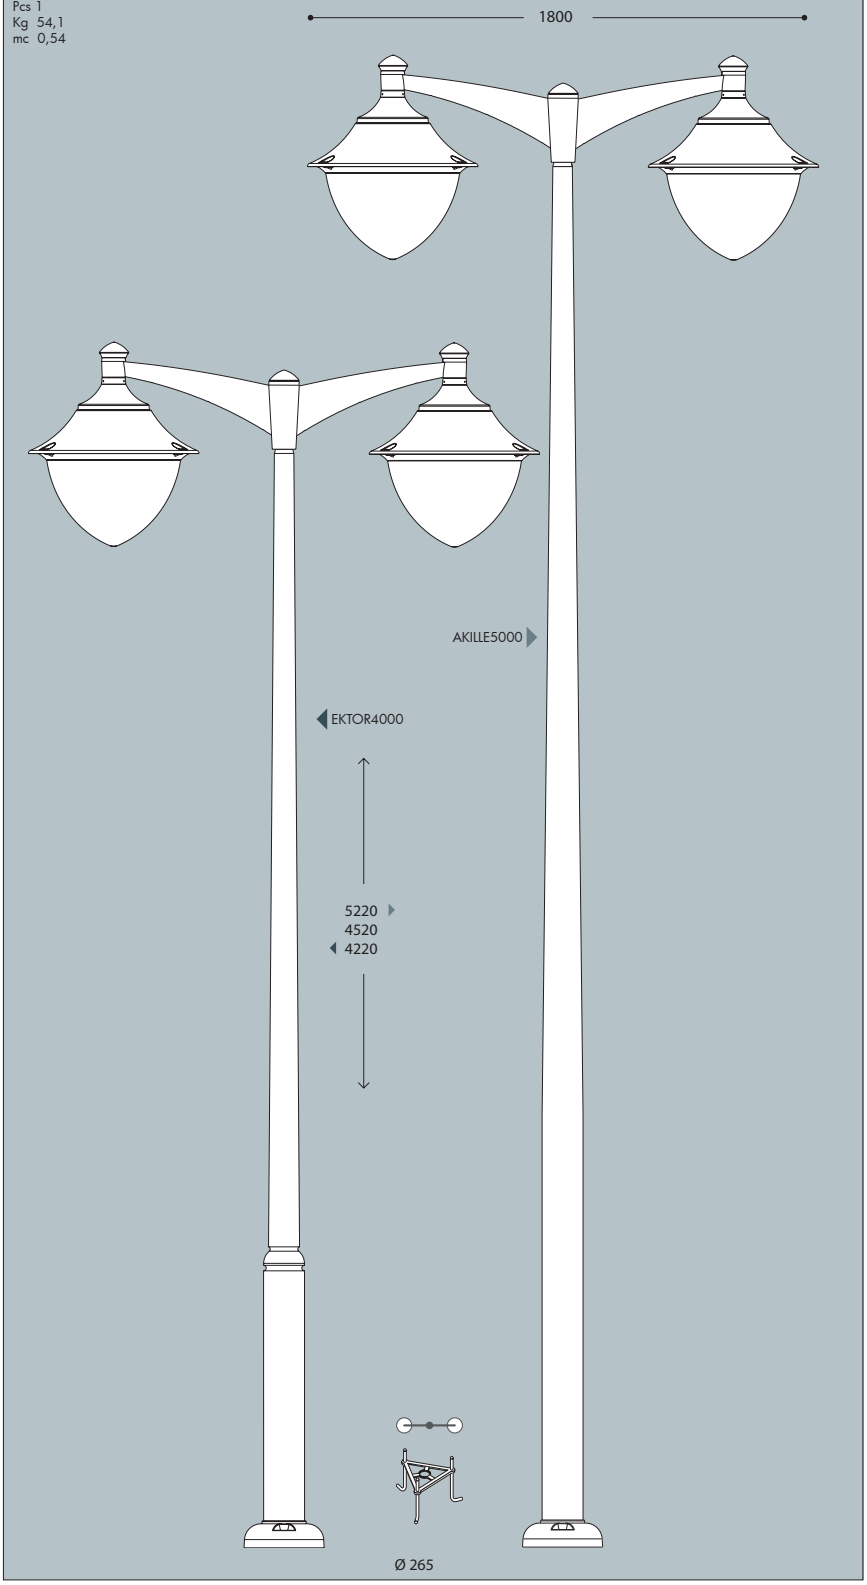


ECOVIVI 500 GX53 LED


GRAND SIZE


Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV -CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.*

EV6.000.D9K

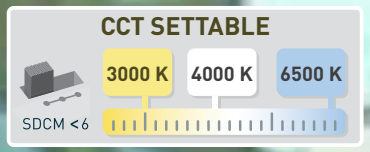

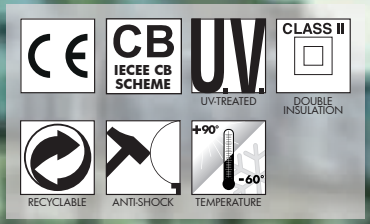



ECOVIVI 500 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO *in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE *con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.*





Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

ECOVIVI 500 GX53 LED

EV6.000 *



Dimensions and weight
Height: 300 mm
Diameter: 600 mm
Weight: 6,7 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,0982

Moulded colours:
Black *White* *Grey*

Diffuser PC (UV treated):
Clear

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 9x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	9x 10W **90W**	**11610 lm**	6500 K 4000 K 3000 K	.D9K

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

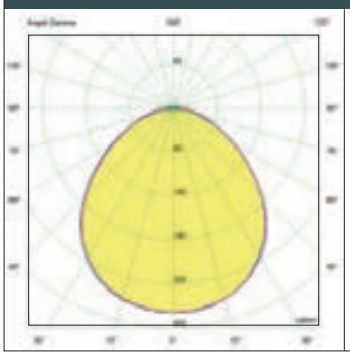



ECOVIVI 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 38 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ECOVIVI 500 E27


GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 - Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EV6.000.E27

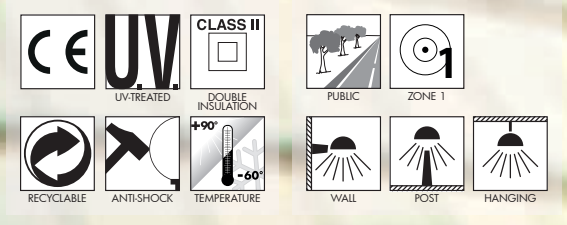



ECOVIVI 500 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*



Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE *con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.*



Decorative connection **RING** to be fixed on the luminaries diffuser.
ANELLO *decorativo da fissare sul diffusore dell'apparecchio.*

ECOVIVI 500 E27

EV6.000 *



Dimensions and weight
Height: 300 mm
Diameter: 600 mm
Weight: 5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,0982


Moulded colours:
Black *White* *Grey*
Diffuser PC (UV treated):
Clear

E27-E40

		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 150W	**E27** Lampholder only — .E27
Luminaries supplied with E27 or E40 lampholder.		**E40** Lampholder only — .E40


HORIZONTAL BULB


AGAINST LIGHT POLLUTION



E27 - E40 VERSION

PHOTOMETRIC DATA SAMPLE

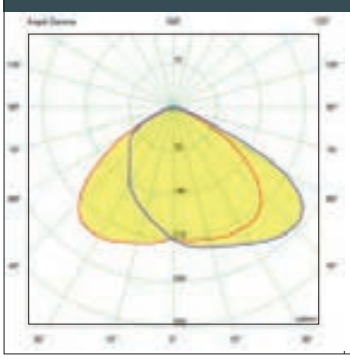



ECOVIVI 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 38 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

ECOVIVI 500

GRAND SIZE

fumagalli® since 1973










ECOVIVI 500


EV6.000



Pcs 1
Kg 6,7
mc 0,06

LUIGI 500

L5F.128




*rope not included

Pcs 1
Kg 3,7
mc 0,09

NEW LOT/ECOVIVI500


EV6.115



Pcs 1
Kg 4,9
mc 0,09

PILAR/ECOVIVI500


EV6.253



Pcs 1
Kg 8,7
mc 0,11

MARIO/ECOVIVI500

EV6.129




*rope not included

Pcs 1
Kg 4,9
mc 0,09

EKTOR 6000 PILAR/ECOVIVI500 2L

EV6.384.P20


Pcs 1
Kg 92,6
mc 1,42

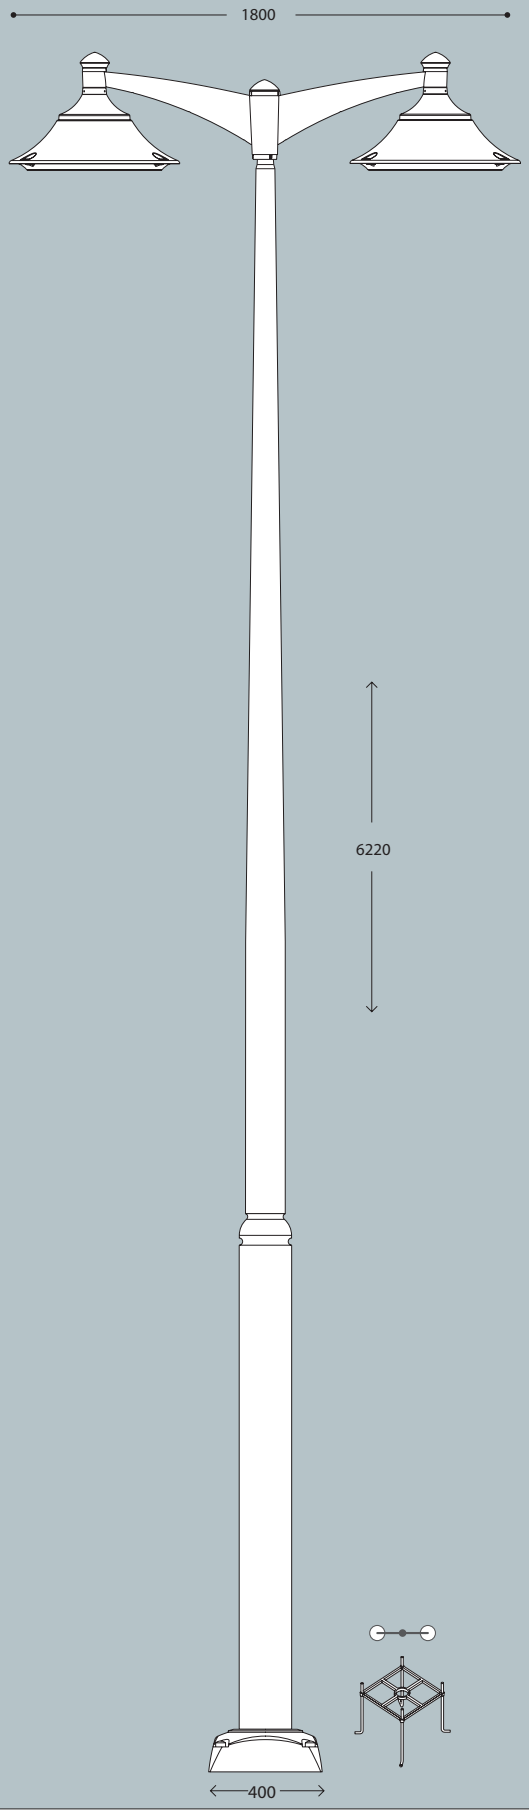

EKTOR 6000 PILAR/ECOVIVI500 1L

EV6.384.P10

Pcs 1
Kg 84,2
mc 1,32

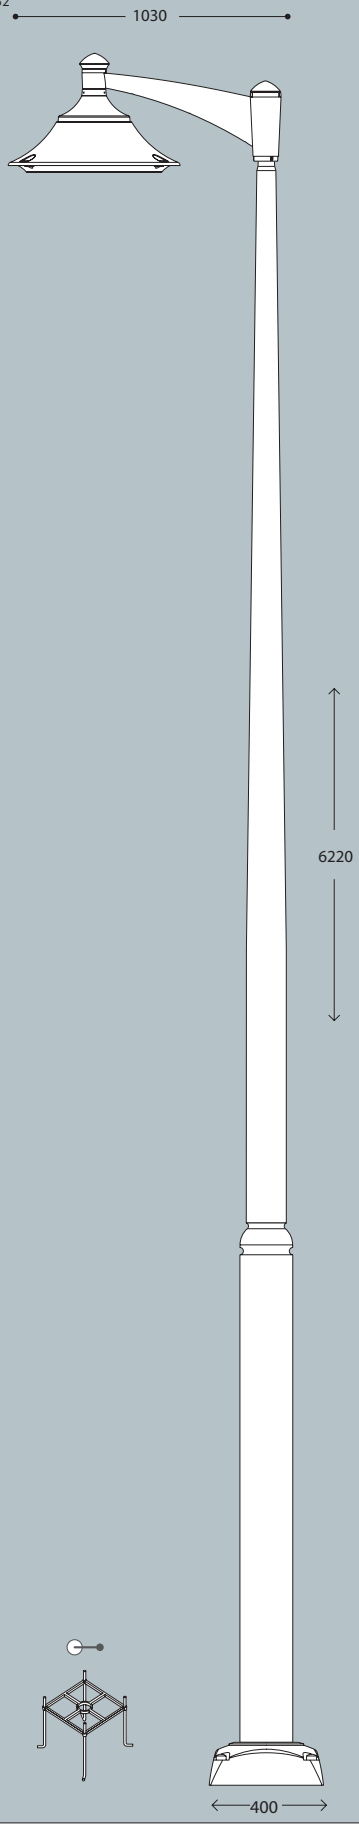


ECOVIVI 500

GRAND SIZE





MADE IN ITALY



ECOVIVI 500

GRAND SIZE

EKTOR 5000 PILAR/ECOVIVI500 1L	AKILLE 5000 PILAR/ECOVIVI500 1L
EV6.377.P10	EV6.427.P10


Pcs 1
Kg 54,7
mc 0,39

EKTOR 4500 PILAR/ECOVIVI500 1L	AKILLE 4500 PILAR/ECOVIVI500 1L
EV6.374.P10	EV6.424.P10

Pcs 1
Kg 49,2
mc 0,37

EKTOR 4000 PILAR/ECOVIVI500 1L	AKILLE 4000 PILAR/ECOVIVI500 1L
EV6.371.P10	EV6.421.P10

Pcs 1
Kg 43,7
mc 0,35

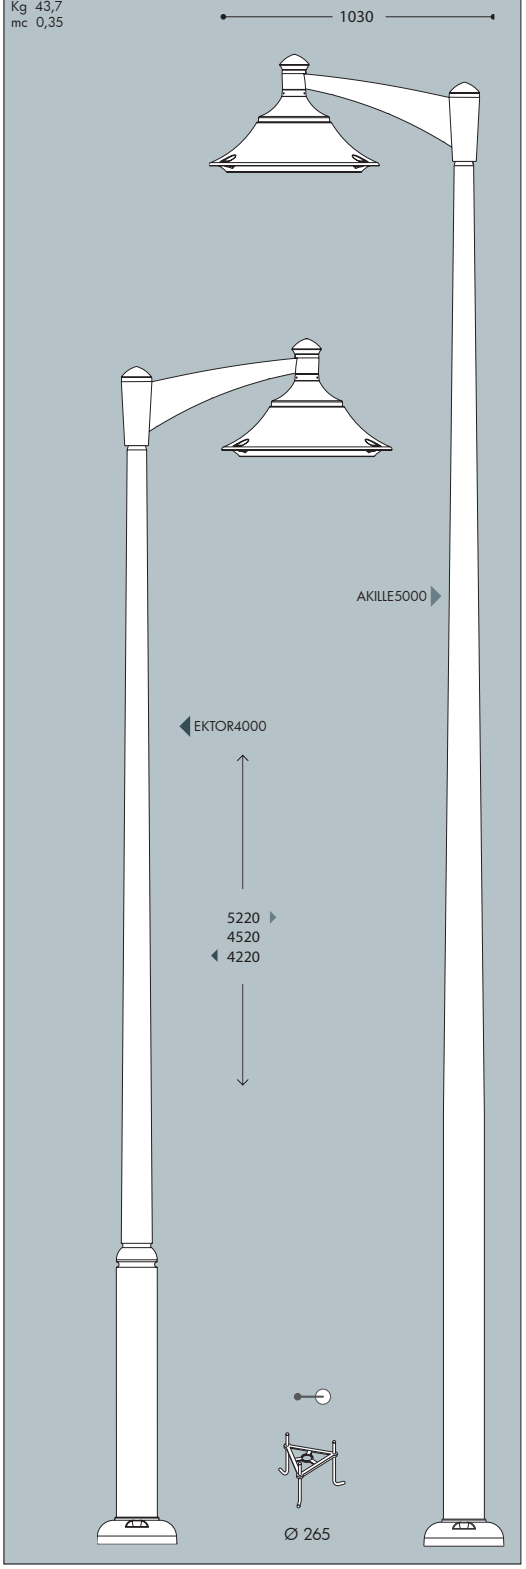

EKTOR 5000 PILAR/ECOVIVI500 2L	AKILLE 5000 PILAR/ECOVIVI500 2L
EV6.377.P20	EV6.427.P20


Pcs 1
Kg 63,1
mc 0,49

EKTOR 4500 PILAR/ECOVIVI500 2L	AKILLE 4500 PILAR/ECOVIVI500 2L
EV6.374.P20	EV6.424.P20

Pcs 1
Kg 57,6
mc 0,47

EKTOR 4000 PILAR/ECOVIVI500 2L	AKILLE 4000 PILAR/ECOVIVI500 2L
EV6.371.P20	EV6.421.P20

Pcs 1
Kg 52,1
mc 0,45

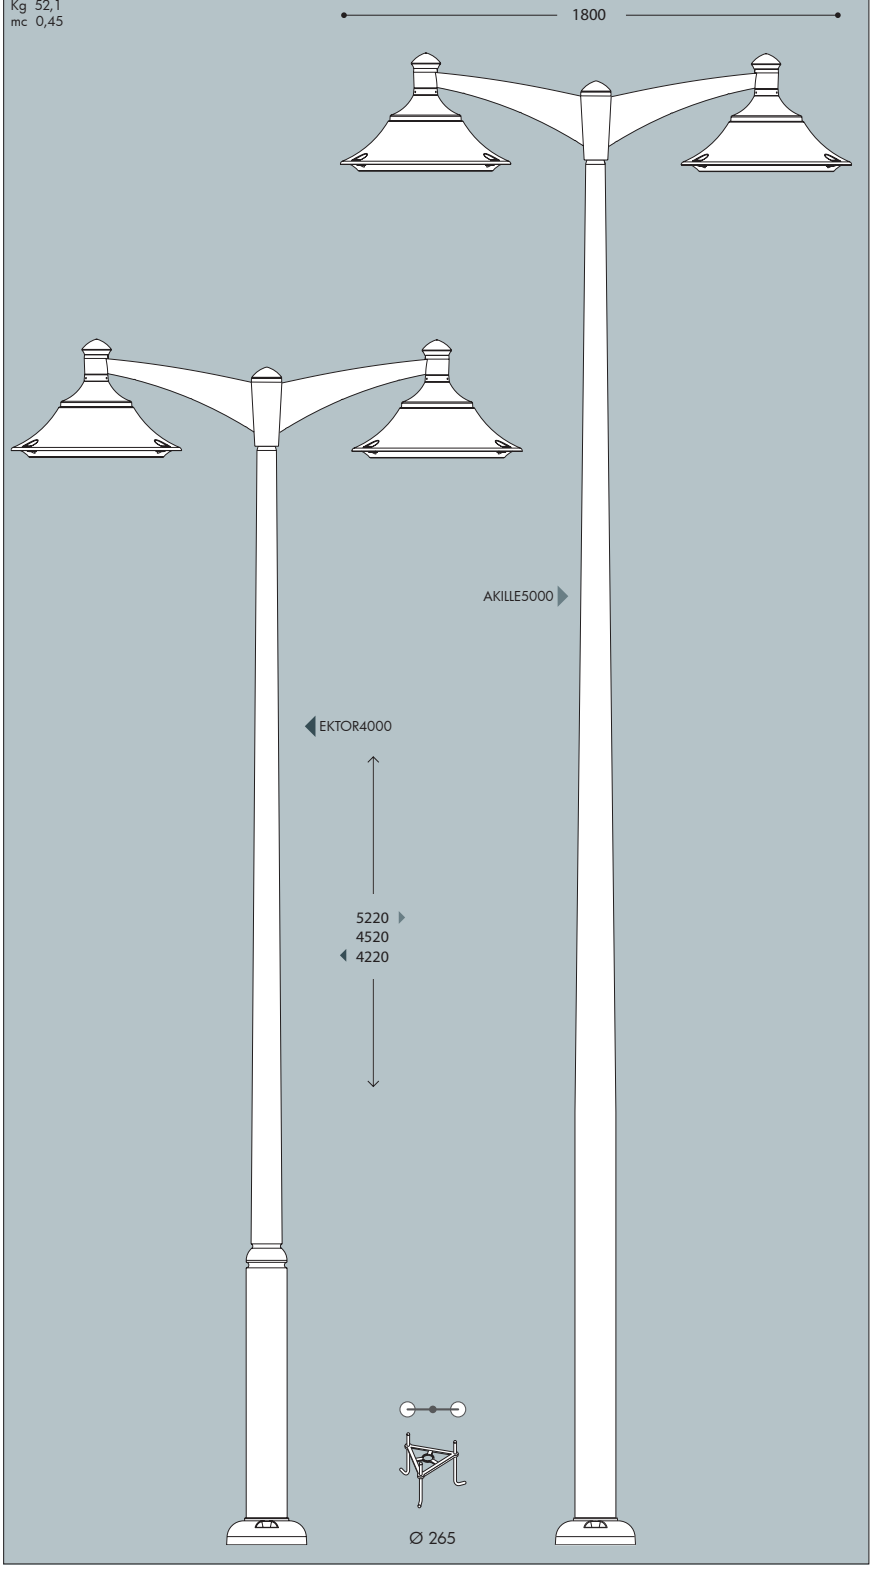

BEPPE 500 HIGH POWER LED


GRAND SIZE

Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito ***completo di lampada a LED E27 ad ALTA POTENZA****, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

P50.000.H1L



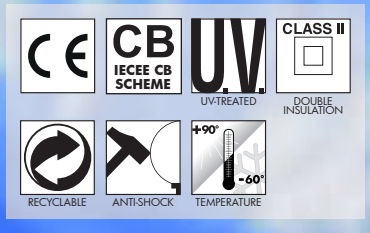





BEPPE 500 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with HIGH POWER LED lamp. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

BEPPE 500 HIGH POWER LED

P60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 7.5 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:
Black White Grey

Diffuser PMMA:
Clear Opal

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.


100 - 240 V				
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R
E27	60 W	7600 lm	4000 K	.W1L
			3000 K	.W1R


LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

PHOTOMETRIC DATA SAMPLE

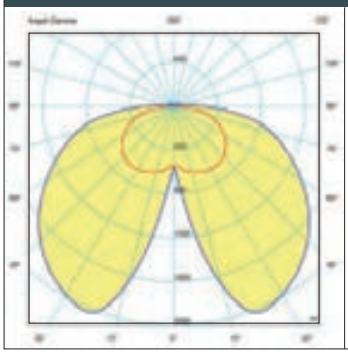



BEPPE 500 E27 *HIGH POWER LED 60W*

POST height 5mt
10x10mt area: average 25 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


BEPPE 500 GX53 LED


GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

P60.000.D9K

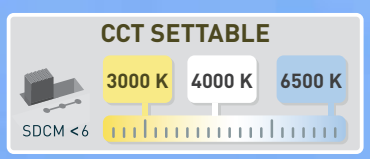

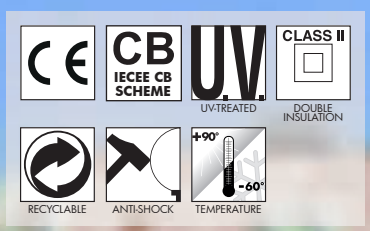



BEPPE 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

BEPPE 500 GX53 LED

P60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 9,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,246

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	9x 10W **90W**	**11610 Lm**	6500 K 4000 K 3000 K	.D9K

LED LAMPS


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668.*


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

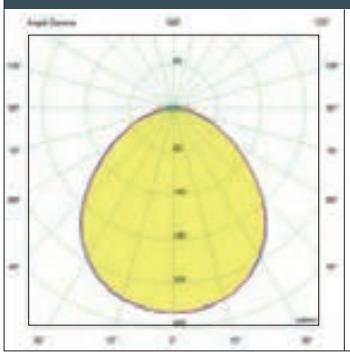



BEPPE 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


BEPPE 500 E27

GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.

P60.000.E27

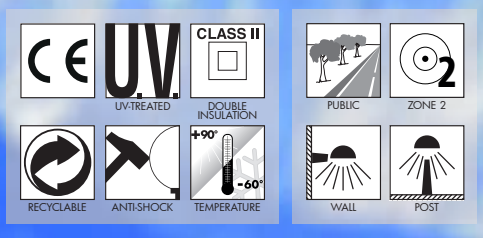



BEPPE 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

BEPPE 500 E27

P60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,246


Moulded colours:
Black *White* *Grey*


Diffuser PMMA:
Clear *Opal*

E27-E40

		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 150W	**E27** Lampholder only — .E27
Luminaries supplied with E27 or E40 lampholder.		**E40** Lampholder only — .E40

PHOTOMETRIC DATA SAMPLE

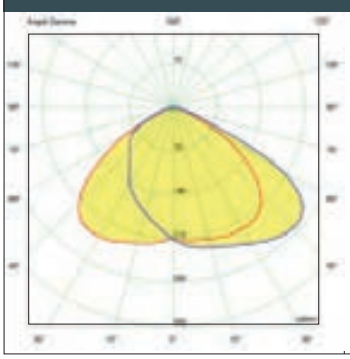



BEPPE 500 E27
HQI 150W


POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

BEPPE 500

GRAND SIZE

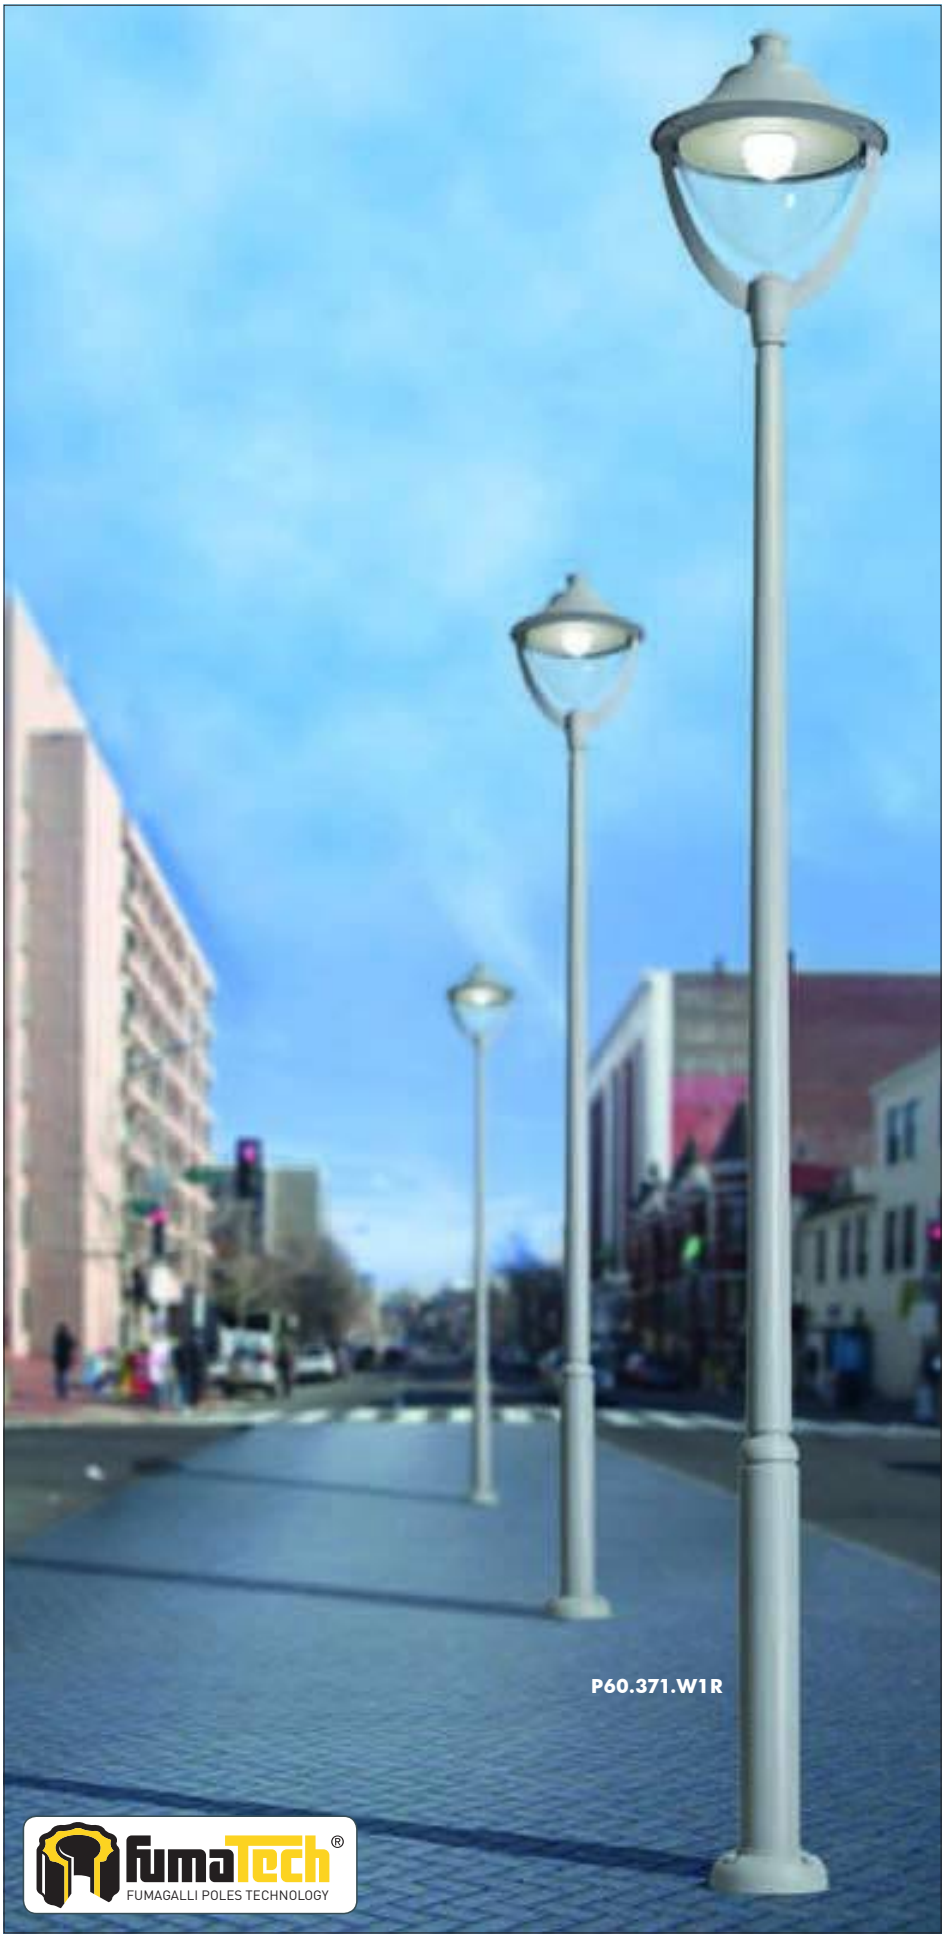




MADE IN ITALY

EKTOR 6000/BEPPE500

P60.384.000

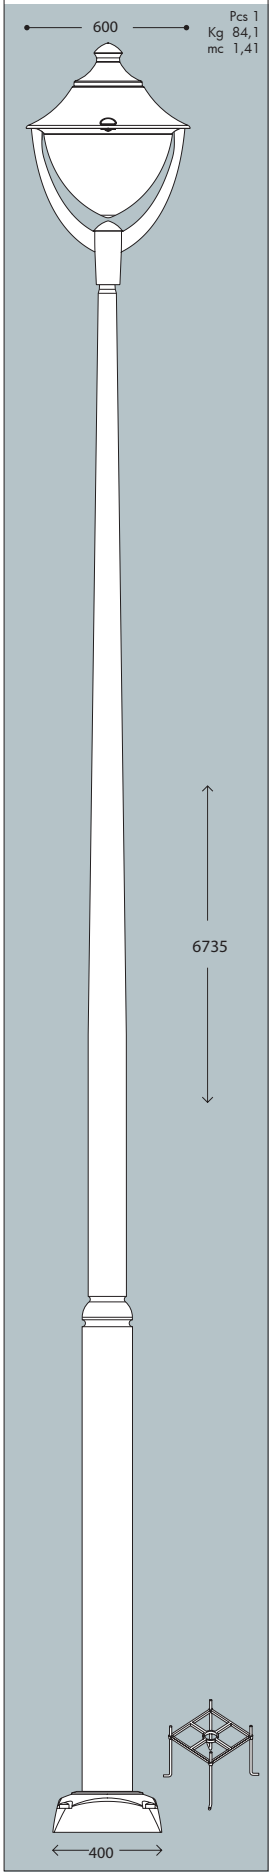


EKTOR 5000/ BEPPE500	AKILLE 5000/ BEPPE500
P60.377.000	P60.427.000

Pcs 1
Kg 54,6
mc 0,48

EKTOR 4500/ BEPPE500	AKILLE 4500/ BEPPE500
P60.374.000	P60.424.000

Pcs 1
Kg 49,1
mc 0,46

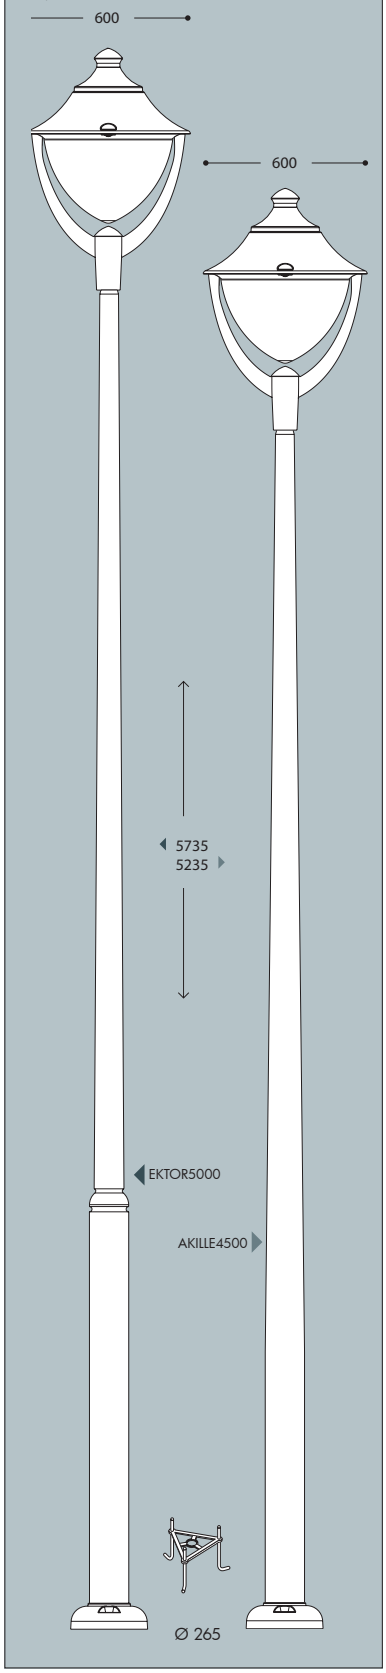

EKTOR 4000/ BEPPE500	AKILLE 4000/ BEPPE500
P60.371.000	P60.421.000


Pcs 1
Kg 43,6
mc 0,43

EKTOR 3500/ BEPPE500	AKILLE 3500/ BEPPE500
P60.367.000	P60.417.000

Pcs 1
Kg 40,2
mc 0,40

EKTOR 3000/ BEPPE500	AKILLE 3000/ BEPPE500
P60.364.000	P60.414.000


Pcs 1
Kg 36,8
mc 0,38

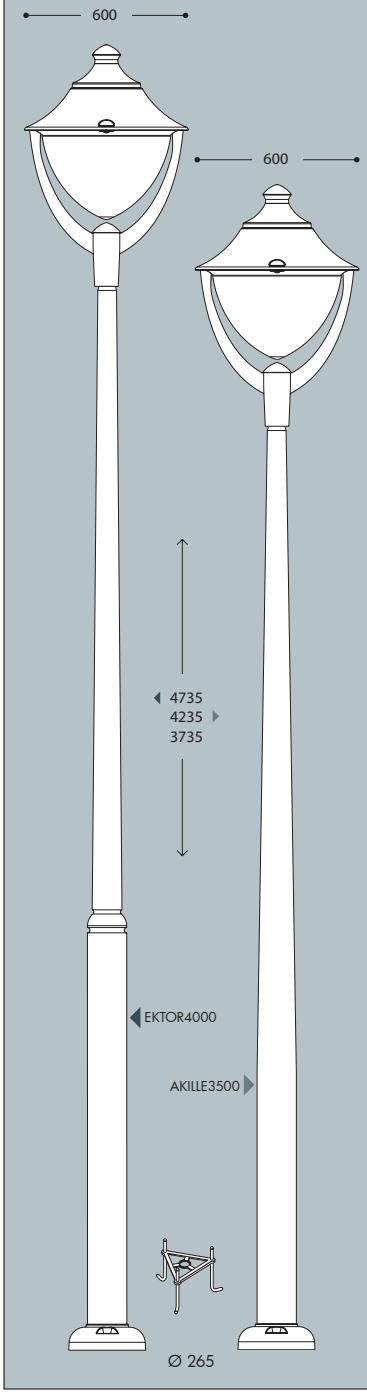

BEPPE500

P60.000


Pcs 1
Kg 9,1
mc 0,20



PILAR/BEPPE500

P60.253


Pcs 1
Kg 11,1
mc 0,24

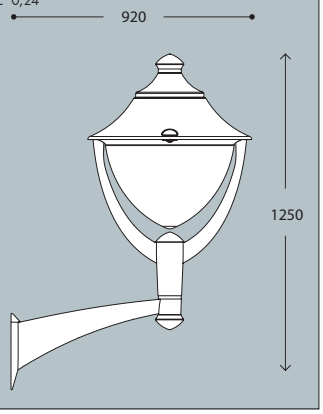

NEW LOT/BEPPE500

P60.115

Pcs 1
Kg 9,4
mc 0,21




ECOBEPPE 500 GX53 LED


GRAND SIZE

Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin regolabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.*

EP6.000.D9K

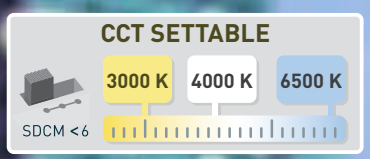

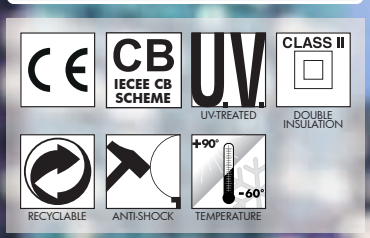





ECOBEPPE 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione*

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE *con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

ECOBEPPE 500 GX53 LED

EP6.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 8,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,246

Moulded colours:
Black *White* *Grey*
Diffuser PC (UV treated):
Clear

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	9x 10W **90W**	**11610 Lm**	6500 K 4000 K 3000 K	.D9K

LED LAMPS

CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

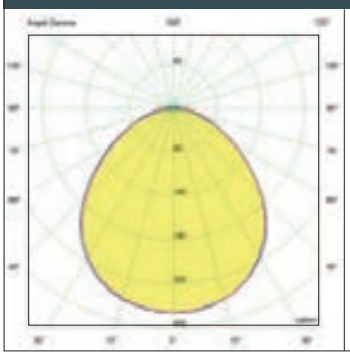



ECOBEPPE 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


ECOBEPPE 500 E27

GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 – Intallation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.

EP6.000.E27

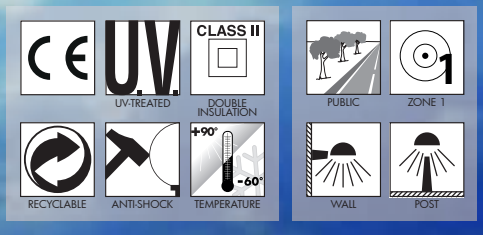



ECOBEPPE 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO *realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.*

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA *riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.*

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE *con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE *in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

ECOBEPPE 500 E27

EP6.000 *




Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 6,5Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,246


Moulded colours:
Black *White* *Grey*
Diffuser PC (UV treated):
Clear

E27-E40

		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 150W	**E27** Lampholder only — .E27
Luminaries supplied with E27 or E40 lampholder.		**E40** Lampholder only — .E40

PHOTOMETRIC DATA SAMPLE

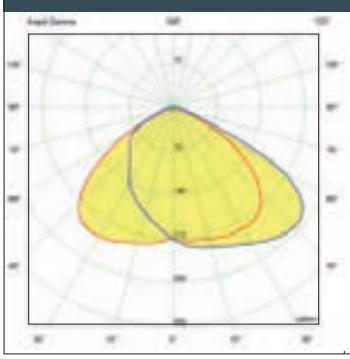



BEPPE 500 E27
HQI 150W


POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


ECOBEPPE 500

GRAND SIZE

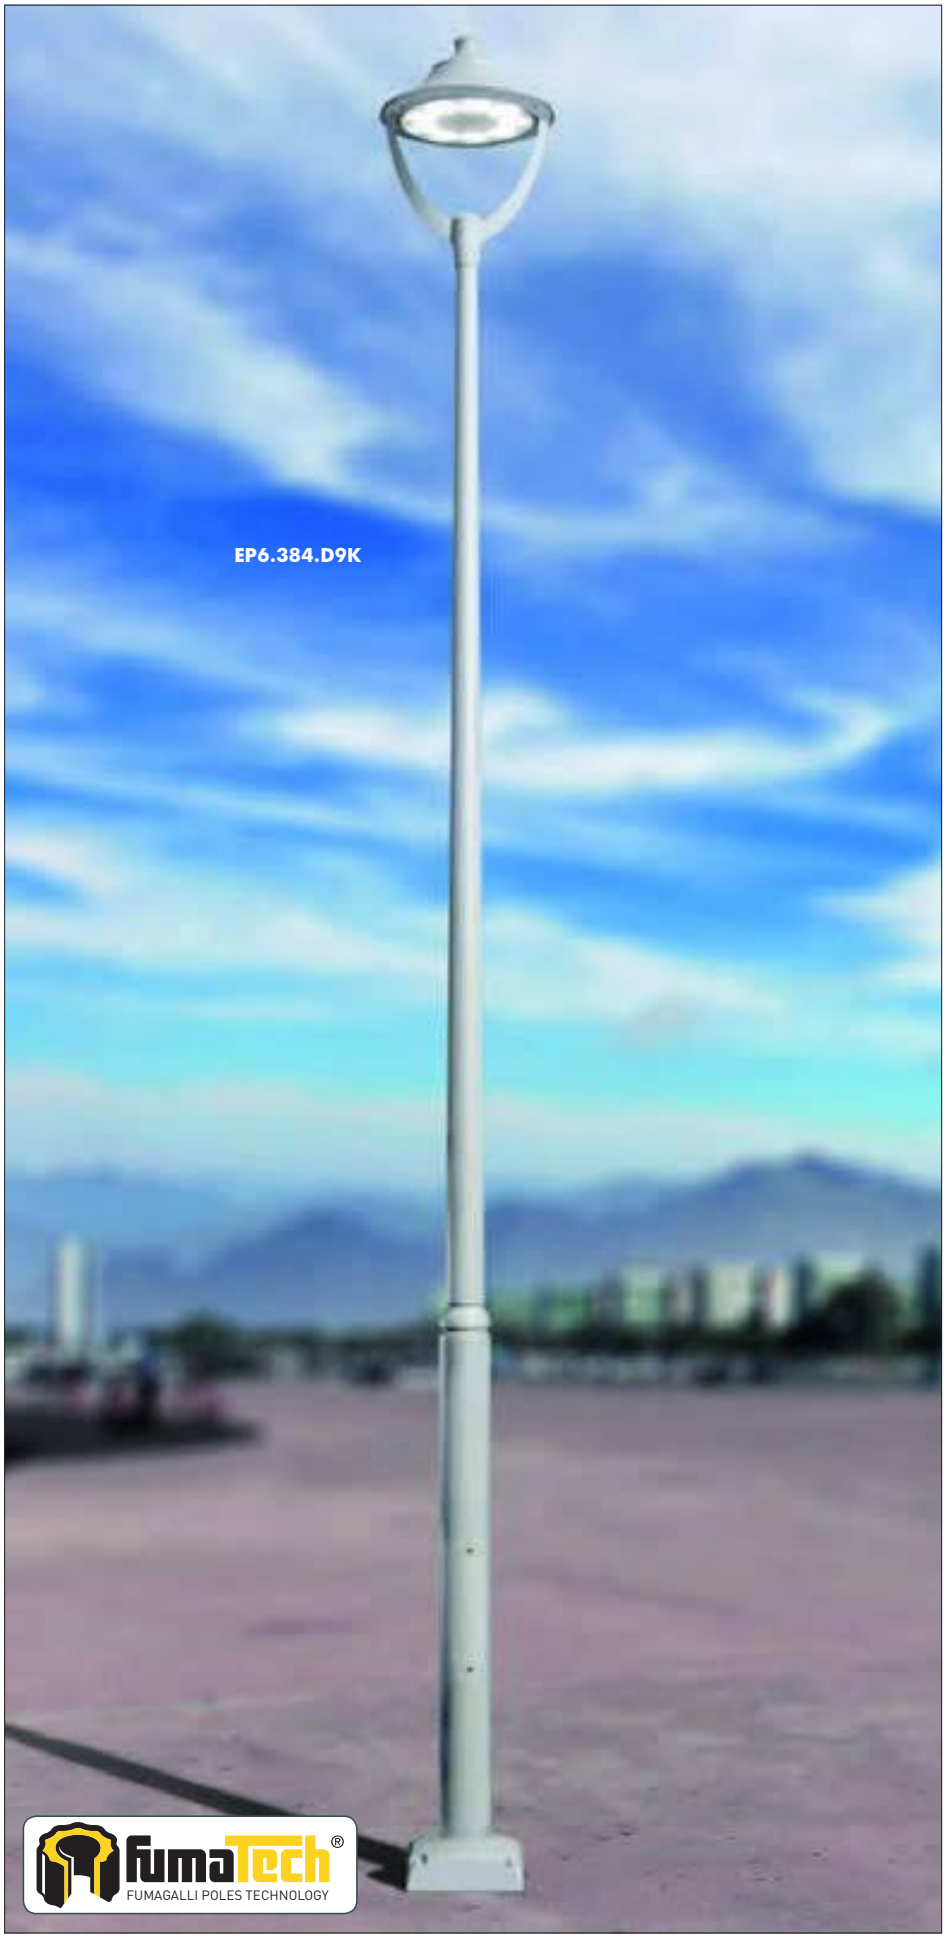



MADE IN ITALY




ECOBEPPE 500

GRAND SIZE

EKTOR 6000/ECOBEPPE500

EP6.384.000

Pcs 1
Kg 83,1
mc 1,41

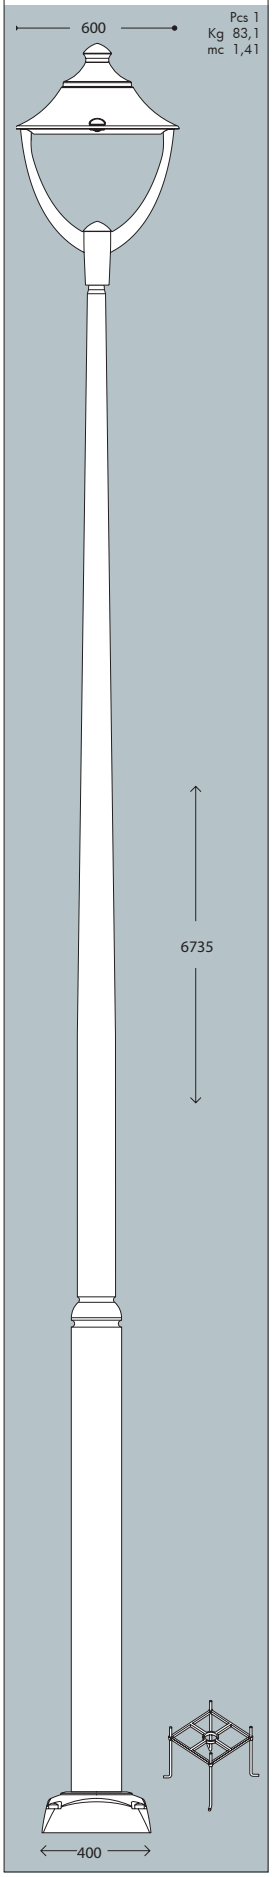

EKTOR 5000/ ECOBEPPE500 | AKILLE 5000/ ECOBEPPE500


EP6.377.000 | EP6.427.000

Pcs 1
Kg 53,6
mc 0,48

EKTOR 4500/ ECOBEPPE500 | AKILLE 4500/ ECOBEPPE500

EP6.374.000 | EP6.424.000

Pcs 1
Kg 48,1
mc 0,46

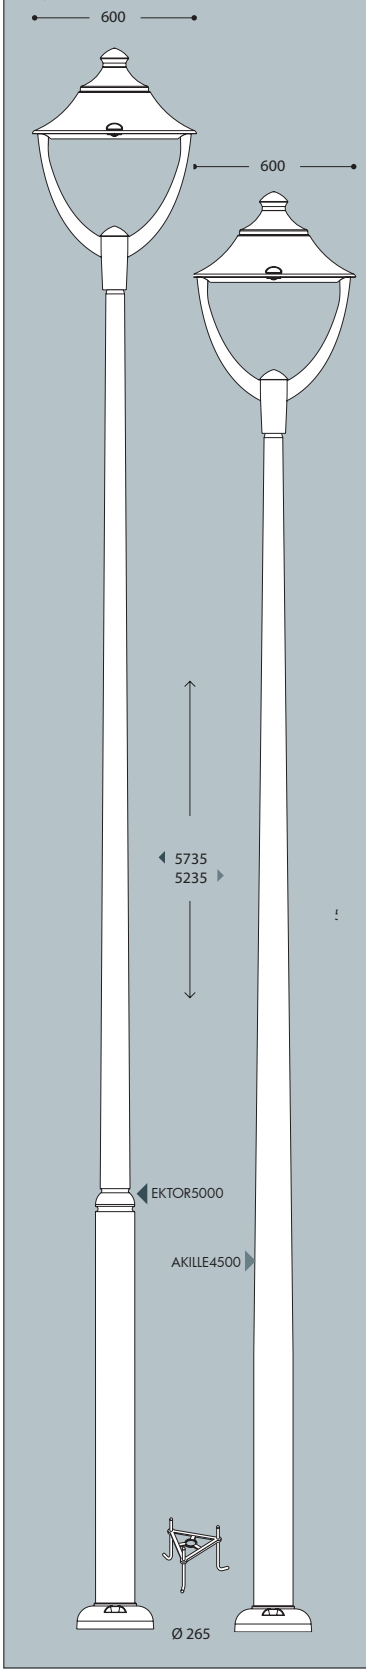

EKTOR 4000/ ECOBEPPE500 | AKILLE 4000/ ECOBEPPE500

EP6.371.000 | EP6.421.000

Pcs 1
Kg 42,6
mc 0,43

EKTOR 3500/ ECOBEPPE500 | AKILLE 3500/ ECOBEPPE500


EP6.367.000 | EP6.417.000

Pcs 1
Kg 39,2
mc 0,40

EKTOR 3000/ ECOBEPPE500 | AKILLE 3000/ ECOBEPPE500

EP6.364.000 | EP6.414.000


Pcs 1
Kg 35,8
mc 0,38

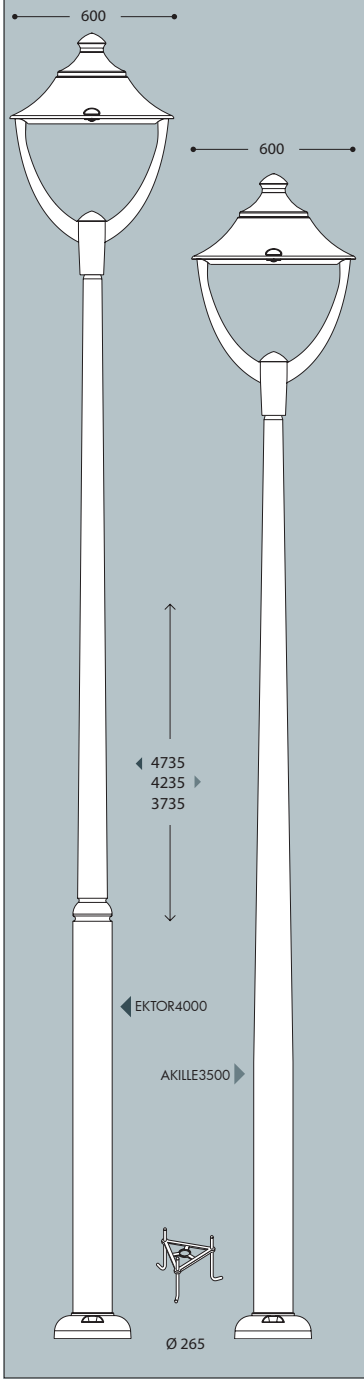

ECOBEPPE500

EP6.000


Pcs 1
Kg 8,1
mc 0,20



PILAR/ECOBEPPE500

EP6.253


Pcs 1
Kg 10,1
mc 0,24

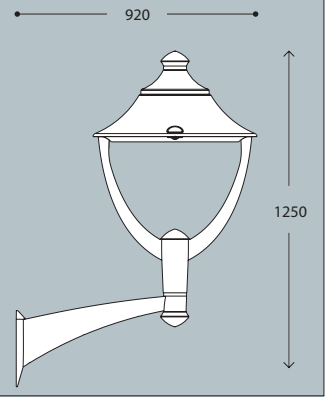

NEW LOT/ECOBEPPE500

EP6.115

Pcs 1
Kg 8,4
mc 0,21

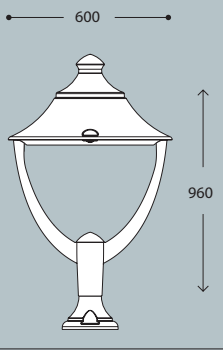

REMO 500 HIGH POWER LED

GRAND SIZE

Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito **completo di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



R60.000.W1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

CE · CB IECEE CB SCHEME · U.V. UV-TREATED · CLASS II DOUBLE INSULATION · RECYCLABLE · ANTI-SHOCK · +90° -60° TEMPERATURE

PUBLIC · WALL · POST

MADE IN ITALY

REMO 500 HIGH POWER LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with HIGH POWER LED lamp. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

INNER DIFFUSER *made of opal PMMA to gather the lighting output and get its uniform spread.*

DIFFUSORE INTERNO *realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.*

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

BASE *made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.*

BASE *dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno.*

REMO 500 GX53 LED

R60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 9 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,238

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27	**50 W**	**6550 lm**	4000 K	.H1L
			3000 K	.H1R
E27	**60 W**	**7600 lm**	4000 K	.W1L
			3000 K	.W1R


LED LAMPS

TÜV SÜD CE CB


LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

DOWNWARD LIGHT EMISSION



PHOTOMETRIC DATA SAMPLE

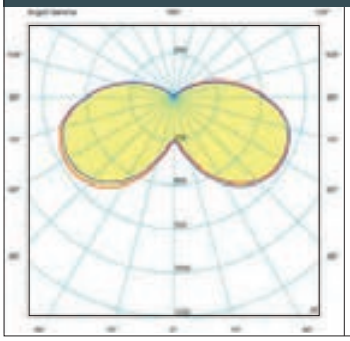



REMO 500 E27 *HIGH POWER LED 60W*

POST height 5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

REMO 500 GX53 LED

GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.*



REMO 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output.

BASE *dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.*

REMO 500 GX53 LED

R60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 9 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,238

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	9x 10W **90W**	**11610 lm**	6500 K 4000 K 3000 K	.D9K


LED LAMPS

TÜV SÜD CE CB

LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

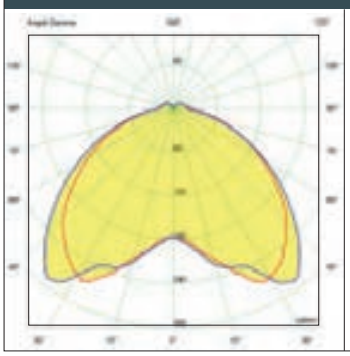



REMO 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

REMO 500 E27

GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.



R60.000.E27FC6

REMO 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.*

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA *riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*

Resin **BASE** consisting of a support (Ø 60mm) and of a cover suitable for ballast fixation on its lower side and provided with E27 or E40 lampholder on its upper side.

BASE *in resina composta da un supporto e da un coperchio nella cui parte inferiore possono essere fissati i reattori e nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso).*

REMO 500 E27

R60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 6,5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,238

Moulded colours:
Black White Grey


Diffuser PMMA:
Clear Opal

CHROME ALUMINIUM LOUVRE


H.FC6 open
Upward position




E27-E40

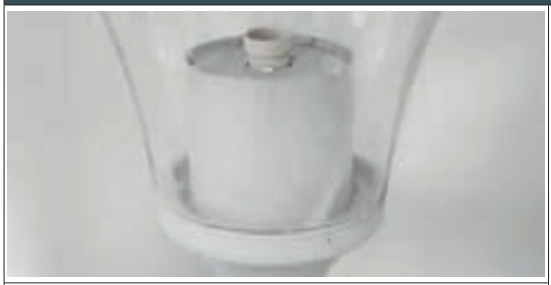		*ADD. SUFFIX
	suitable lamps: CFL-LED SON-HQI max 150W	**E27** Lampholder only — .E27
Luminaries supplied with E27 or E40 lampholder.		**E40** Lampholder only — .E40

PHOTOMETRIC DATA SAMPLE

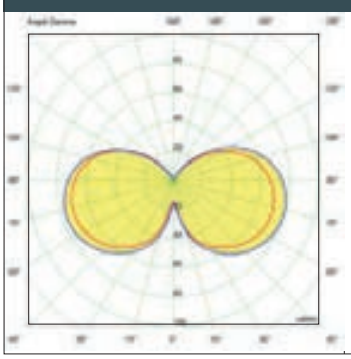



REMO 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 19 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

REMO 500

GRAND SIZE










MADE IN ITALY

EKTOR 6000/REMO500

R60.384.000

Pcs 1
Kg 84
mc 1,32

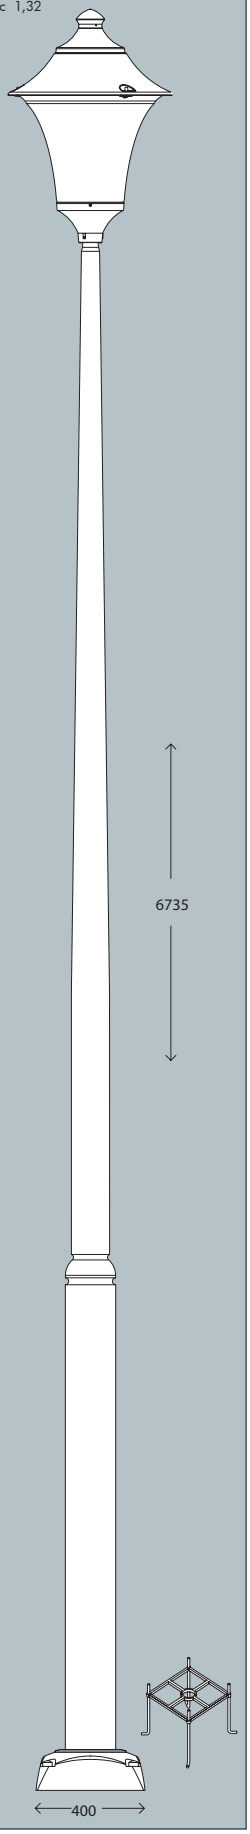

EKTOR 5000/REMO500

R60.377.000

Pcs 1
Kg 54,5
mc 0,39

AKILLE 5000/REMO500

R60.427.000


EKTOR 4500/REMO500

R60.374.000

Pcs 1
Kg 49
mc 0,36

AKILLE 4500/REMO500

R60.424.000

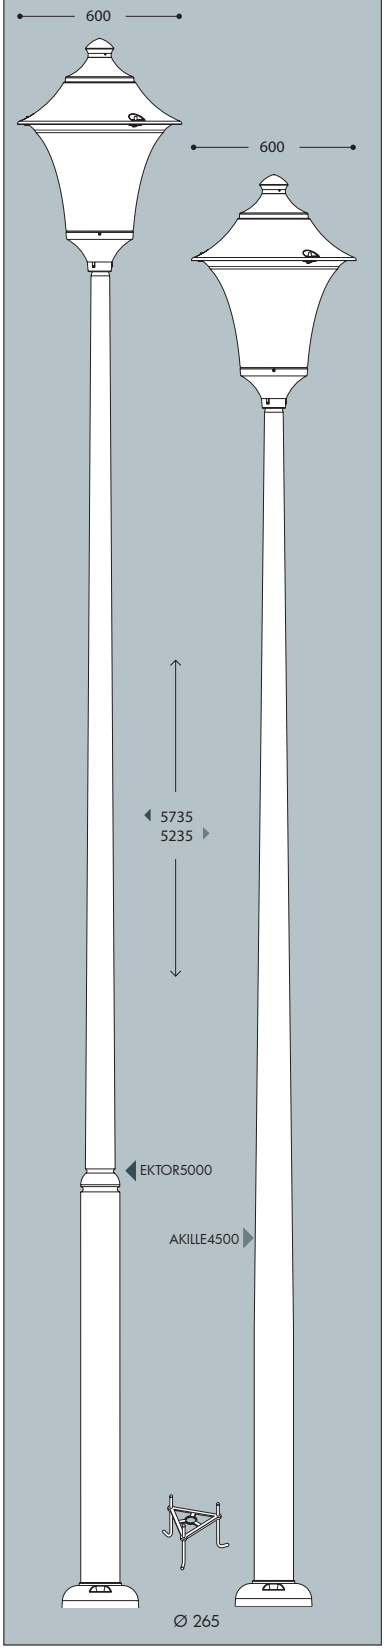

EKTOR 4000/REMO500

R60.371.000

Pcs 1
Kg 43,5
mc 0,33

AKILLE 4000/REMO500

R60.421.000

EKTOR 3500/REMO500

R60.367.000

Pcs 1
Kg 40,1
mc 0,31

AKILLE 3500/REMO500

R60.417.000


EKTOR 3000/REMO500

R60.364.000

Pcs 1
Kg 36,7
mc 0,28

AKILLE 3000/REMO500


R60.414.000

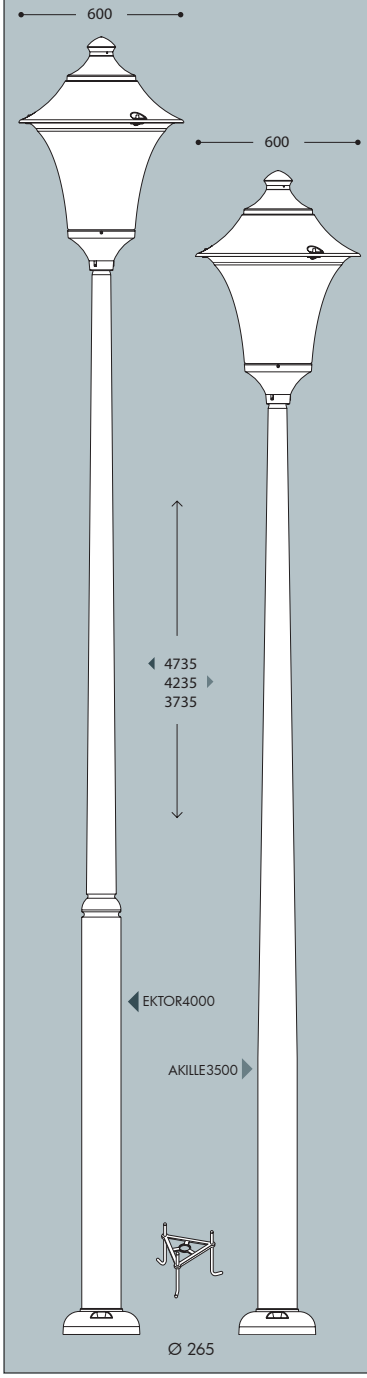

REMO500

R60.000


Pcs 1
Kg 9
mc 0,11



PILAR/REMO500

R60.253


Pcs 1
Kg 11
mc 0,14

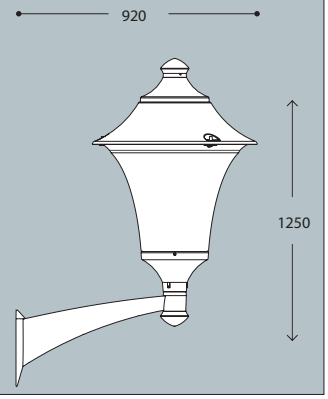

NEW LOT/REMO500

R60.115

Pcs 1
Kg 9,3
mc 0,12



GINO 500 HIGH POWER LED


GRAND SIZE

Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



F60.000.W1L

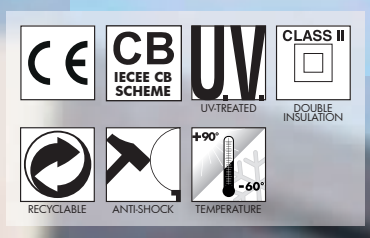

GINO 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with HIGH POWER LED lamp. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO *riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.*

INNER DIFFUSER *made of opal PMMA to gather the lighting output and get its uniform spread.*

DIFFUSORE INTERNO *realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.*

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

BASE *made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.*

BASE *dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno.*

GINO 500 E27

F60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 7,3 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,262

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

HIGH POWER LED



- **COST SAVING**: long-life and efficient LED light source.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27	50 W	6550 Lm	4000 K	.H1L
			3000 K	.H1R
E27	60 W	7600 Lm	4000 K	.W1L
			3000 K	.W1R

LED LAMPS


TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.

DOWNWARD LIGHT EMISSION



PHOTOMETRIC DATA SAMPLE

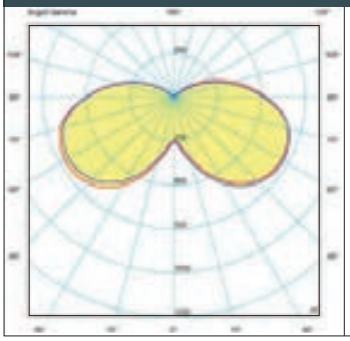



GINO 500 E27 HIGH POWER *LED 60W*

POST height 5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


GINO 500 GX53 LED


GRAND SIZE


Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV -CBdi lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.*

F60.000.D9K

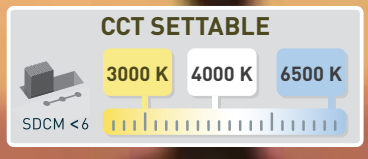

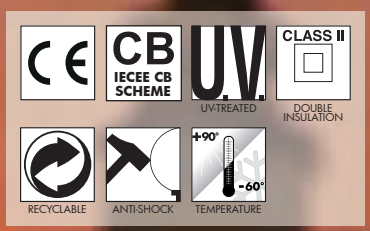



GINO 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO *decorativo di connessione da fissare sul diffusore dell'apparecchio.*

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output.

BASE *dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.*

GINO 500 GX53 LED

F60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 9,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,262

Moulded colours:
Black *White* *Grey*
Diffuser PMMA:
Clear *Opal*

GX53 LED



- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	9x 10W **90W**	**11610 lm**	6500 K 4000 K 3000 K	.D9K

LED LAMPS

TÜV SÜD CE CB
LVD EMC ERP


Comply with:EU2019/2015
EU2019/2020
Technical details on page *668*.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

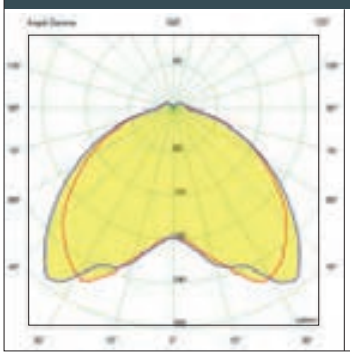



GINO 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*


GINO 500 E27

GRAND SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.

F60.000.E27FC6

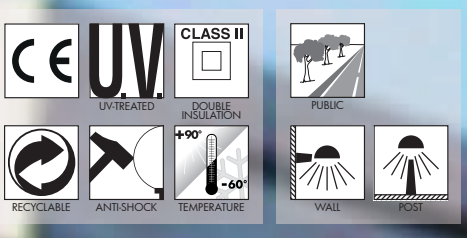



GINO 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO *completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.*

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA *riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE *realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.*



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*

Luminaries **BASE** consisting of a support (Ø 60mm) and of a cover suitable for ballast fixation on its lower side and provided with E27 or E40 lampholder on its upper side.

BASE *in resina composta da un supporto e da un coperchio nella cui parte inferiore possono essere fissati i reattori e nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso).*

GINO 500 E27

F60.000 *



Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 7,3 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,262

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal*

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position



E27-E40



Luminaries supplied with E27 or E40 lampholder.


suitable lamps:


CFL-LED
SON-HQI

max 150W

	*ADD. SUFFIX
E27 Lampholder only	.E27
E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

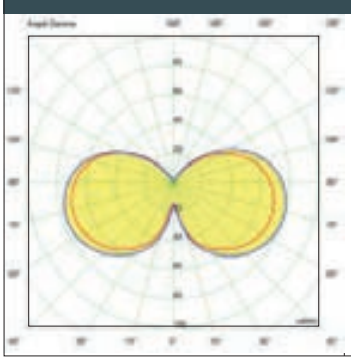



GINO 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 19 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GINO 500

GRAND SIZE










MADE IN ITALY




GINO 500

GRAND SIZE

EKTOR 6000/GINO 500

F60.384.000

Pcs 1
Kg 84,8
mc 1,32

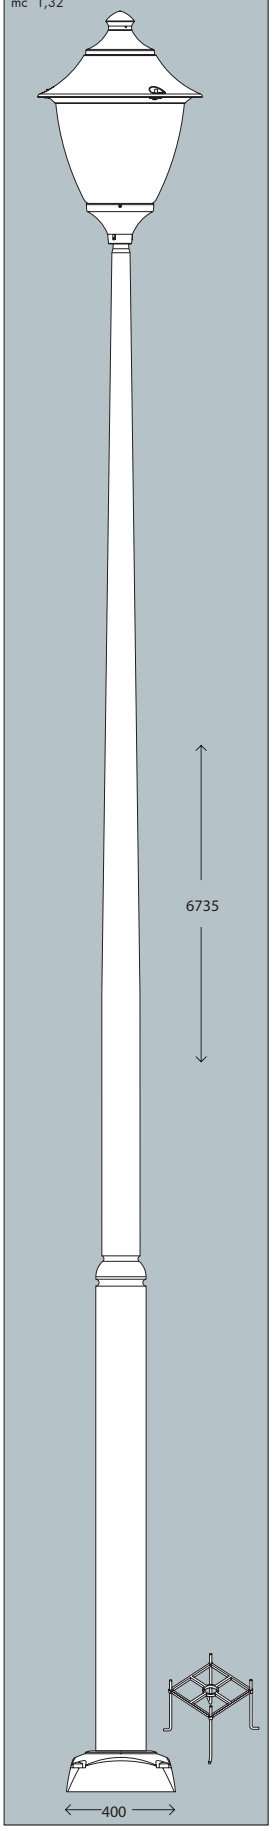

EKTOR 5000/ GINO 500

F60.377.000

AKILLE 5000/ GINO 500

F60.427.000

Pcs 1
Kg 55,3
mc 0,39


EKTOR 4500/ GINO 500

F60.374.000

AKILLE 4500/ GINO 500

F60.424.000

Pcs 1
Kg 49,8
mc 0,36

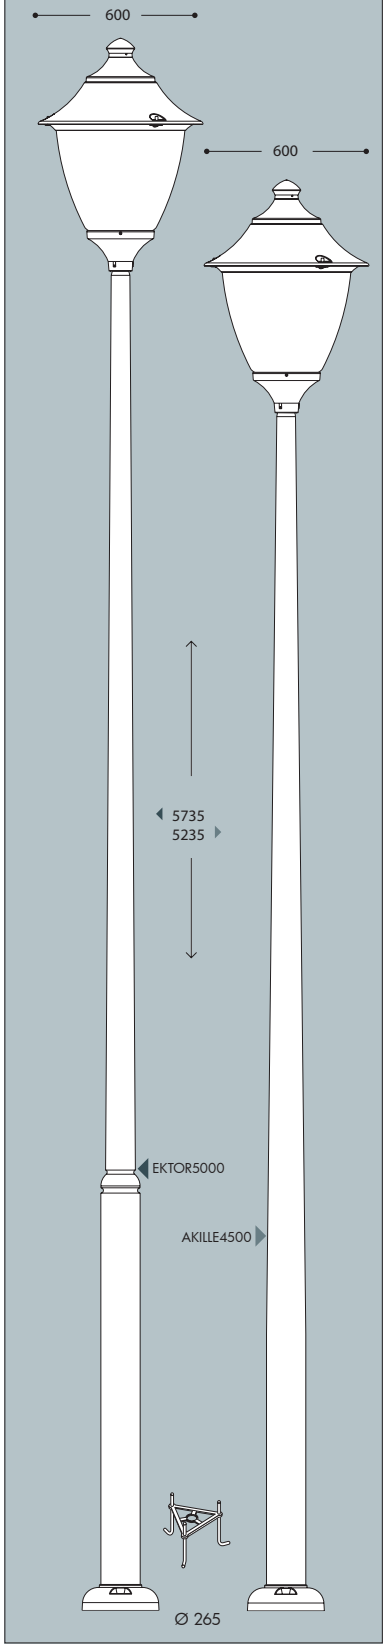

EKTOR 4000/ GINO 500

F60.371.000

AKILLE 4000/ GINO 500

F60.421.000

Pcs 1
Kg 44,3
mc 0,33

EKTOR 3500/ GINO 500

F60.367.000

AKILLE 3500/ GINO 500

F60.417.000

Pcs 1
Kg 40,9
mc 0,31


EKTOR 3000/ GINO 500

F60.364.000

AKILLE 3000/ GINO 500

F60.414.000


Pcs 1
Kg 37,5
mc 0,28

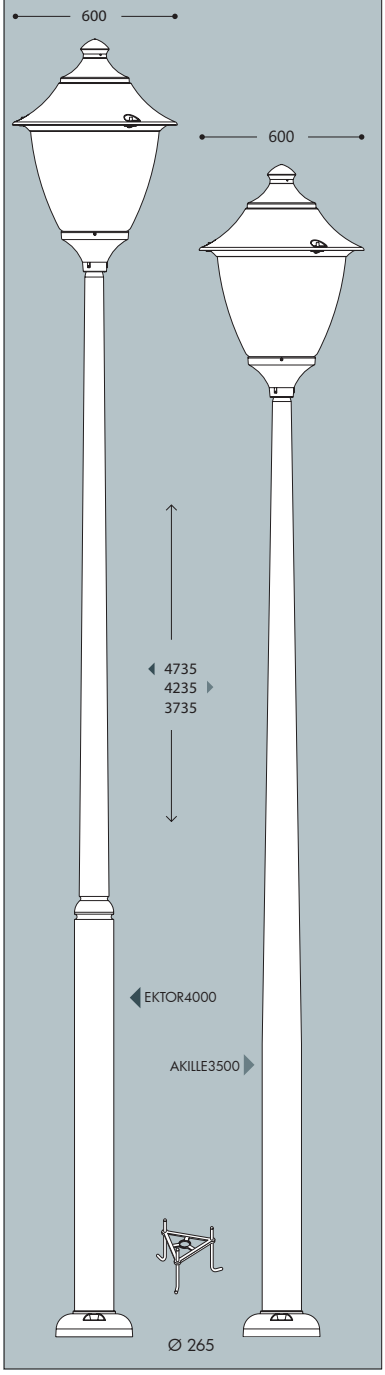

GINO 500

F60.000


Pcs 1
Kg 9,8
mc 0,11



PILAR/GINO 500

F60.253


Pcs 1
Kg 11,8
mc 0,14

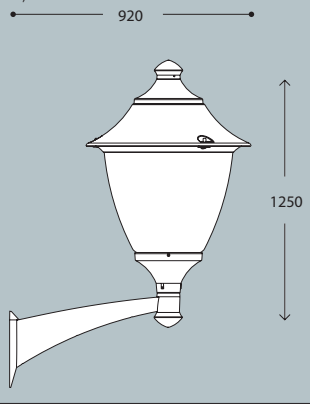

NEW LOT/GINO 500

F60.115

Pcs 1
Kg 10,1
mc 0,12




GLOBE 400 MODERN

LARGE SIZE

Ø 400 mm PMMA globe, complete with modern base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 400 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.

G41.B40.E27FC1

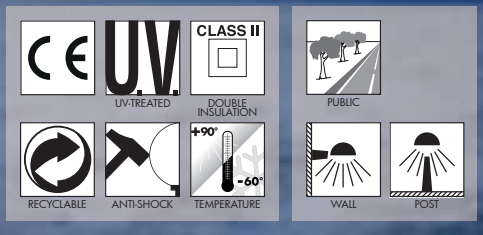

GLOBE 400 MODERN E27 - COMPONENTS

IP55



400 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 400 mm *in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)





Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*



Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support (Ø 60mm) and of a cover provided with E27 lampholder.

BASE *del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampada E27 (incluso).*



GLOBE 400 MODERN

G41.B40 *



Dimensions and weight
Height: 530 mm
Diameter: 400 mm
Weight: 2,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,122

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal* *Smoked*

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position





H.FC6 open
Downward position



E27			*ADD. SUFFIX
	suitable lamps: CFL-LED max 50W	**E27** Lampholder only	.E27
Globe complete with modern base and E27 lampholder.			

PHOTOMETRIC DATA SAMPLE

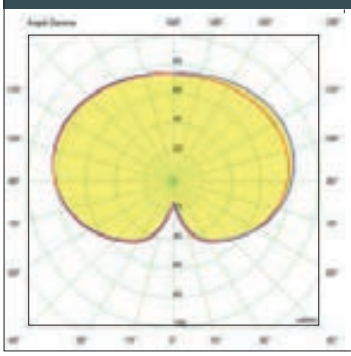



GLOBE 400 E27 *- opal*
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GLOBE 400 MODERN

LARGE SIZE











EKTOR 4000 /GLOBE400
G41.371.000

AKILLE 4000 /GLOBE400
G41.421.000

Pcs 1
Kg 36,6
mc 0,21

EKTOR 3500 /GLOBE400
G41.367.000

AKILLE 3500 /GLOBE400
G41.417.000

Pcs 1
Kg 33,2
mc 0,19


EKTOR 3000 /GLOBE400
G41.364.000

AKILLE 3000 /GLOBE400
G41.414.000

Pcs 1
Kg 29,8
mc 0,17


EKTOR 2500/GLOBE400
G41.361.000

Pcs 1
Kg 26,4
mc 0,15

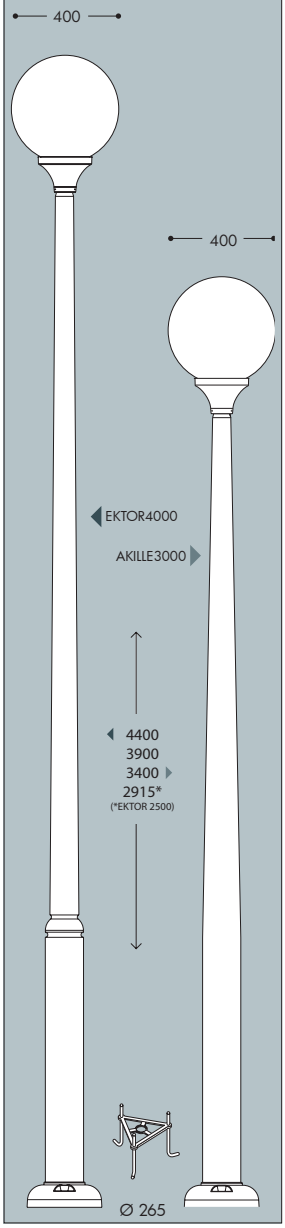


MIDIPILAR/GLOBE 400
G41.254

Pcs 1
Kg 2,7
mc 0,09

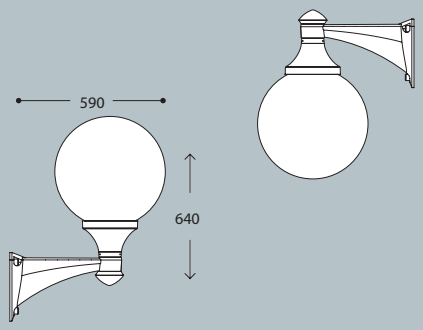


NEW LOT/GLOBE 400
G41.115

Pcs 1
Kg 2,4
mc 0,07



GLOBE 400
G41.B40

Pcs 2
Kg 4,2
mc 0,17



EKTOR 4000 MIDIPILAR/GLOBE400 2L	AKILLE 4000 MIDIPILAR/GLOBE400 2L
G41.371.A20	G41.421.A20


Pcs 1
Kg 40,8
mc 0,49

EKTOR 3500 MIDIPILAR/GLOBE400 2L	AKILLE 3500 MIDIPILAR/GLOBE400 2L
G41.367.A20	G41.417.A20

Pcs 1
Kg 37,4
mc 0,47

EKTOR 3000 MIDIPILAR/GLOBE400 2L	AKILLE 3000 MIDIPILAR/GLOBE400 2L
G41.364.A20	G41.414.A20

Pcs 1
Kg 34
mc 0,45

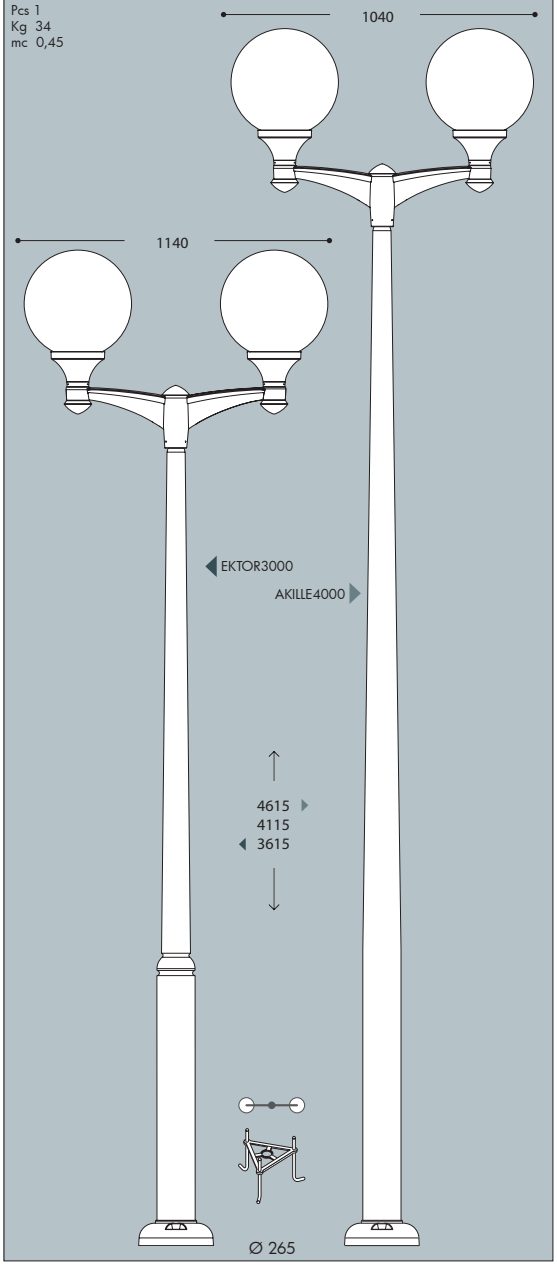


EKTOR 4000 MIDIPILAR/GLOBE400 1L	AKILLE 4000 MIDIPILAR/GLOBE400 1L
G41.371.A10	G41.421.A10

Pcs 1
Kg 37,9
mc 0,30

EKTOR 3500 MIDIPILAR/GLOBE400 1L	AKILLE 3500 MIDIPILAR/GLOBE400 1L
G41.367.A10	G41.417.A10

Pcs 1
Kg 34,5
mc 0,26

EKTOR 3000 MIDIPILAR/GLOBE400 1L	AKILLE 3000 MIDIPILAR/GLOBE400 1L
G41.364.A10	G41.414.A10

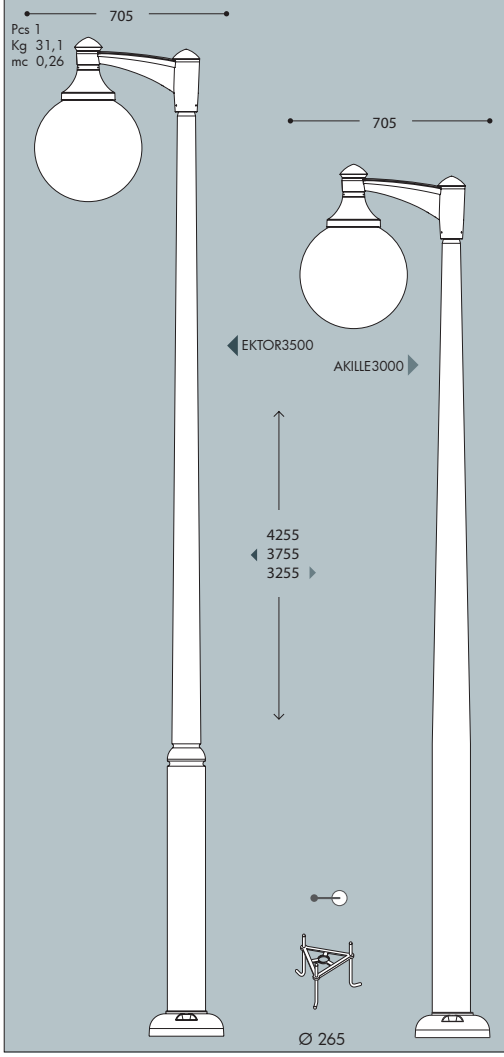


GLOBE 500 MODERN

GRAND SIZE

Ø 500 mm PMMA globe, complete with modern base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 o E40 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.

G51.B50.E27FC1

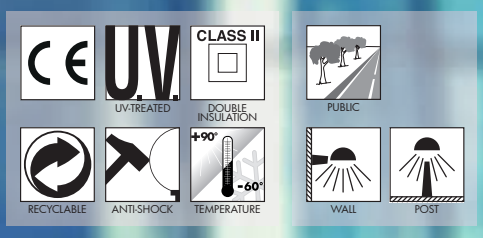



GLOBE 500 MODERN E27 - COMPONENTS

IP55









500 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 500 mm *in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) | Opal (Y) | Smoked (Z)



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE *in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*

Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder.

BASE *del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampada E27 o E40 (incluso).*

GLOBE 500

G51.B50 *



Dimensions and weight
Height: 630 mm
Diameter: 500 mm
Weight: 4 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m^2 0,181

Moulded colours:
Black *White* *Grey*

Diffuser PMMA:
Clear *Opal* *Smoked*

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position





H.FC6 open
Downward position



E27-E40			*ADD. SUFFIX
 Globe complete with modern base and E27 lampholder.	suitable lamps: CFL-LED SON-HQI max 100W	**E27** Lampholder only	.E27
		E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

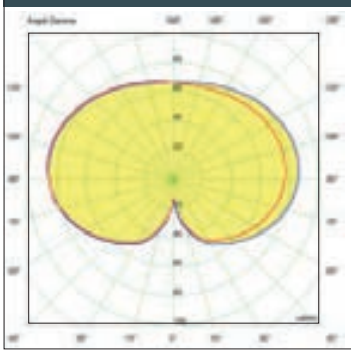



GLOBE 500 E27 *- opal*
HQI 100W

POST height 4,5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

GLOBE 500 MODERN

GRAND SIZE










NEW LOT/GLOBE500

G51.115


Pcs 1
Kg 4,3
mc 0,15



PILAR/GLOBE500

G51.253


Pcs 1
Kg 6
mc 0,17

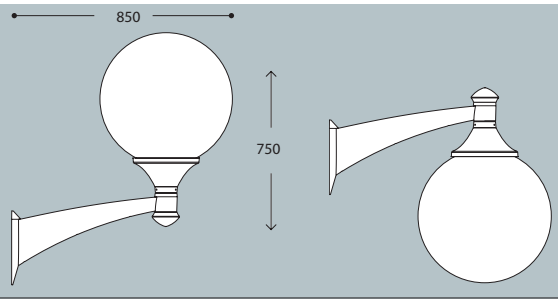

GLOBE500

G51.B50

Pcs 2
Kg 8
mc 0,29



EKTOR 5000/ GLOBE500	AKILLE 5000/ GLOBE500
G51.377.000	G51.427.000

Pcs 1
Kg 49,5
mc 0,42

EKTOR 4500/ GLOBE500	AKILLE 4500/ GLOBE500
G51.374.000	G51.424.000


Pcs 1
Kg 44
mc 0,39

EKTOR 4000/ GLOBE500	AKILLE 4000/ GLOBE500
G51.371.000	G51.421.000

Pcs 1
Kg 38,5
mc 0,37

EKTOR 3500/ GLOBE500	AKILLE 3500/ GLOBE500
G51.367.000	G51.417.000

Pcs 1
Kg 35,1
mc 0,34

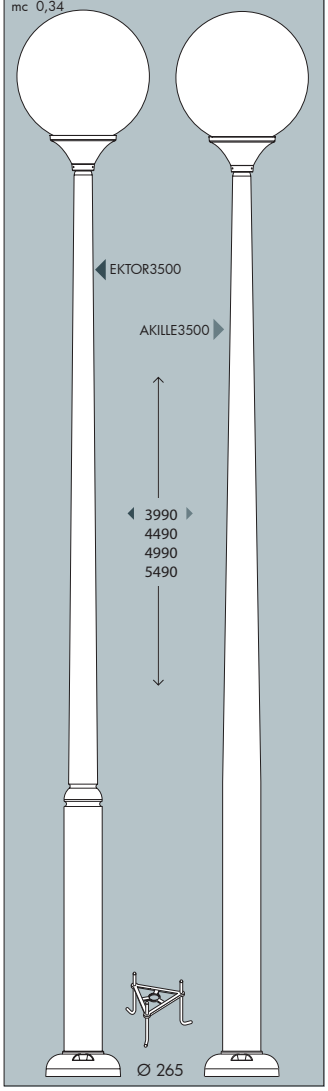

EKTOR 5000 PILAR/GLOBE500 2L	AKILLE 5000 PILAR/GLOBE500 2L
G51.377.P20	G51.427.P20


Pcs 1
Kg 57,7
mc 0,64

EKTOR 4500 PILAR/GLOBE500 2L	AKILLE 4500 PILAR/GLOBE500 2L
G51.374.P20	G51.424.P20

Pcs 1
Kg 52,2
mc 0,61

EKTOR 4000 PILAR/GLOBE500 2L	AKILLE 4000 PILAR/GLOBE500 2L
G51.371.P20	G51.421.P20

Pcs 1
Kg 46,7
mc 0,58

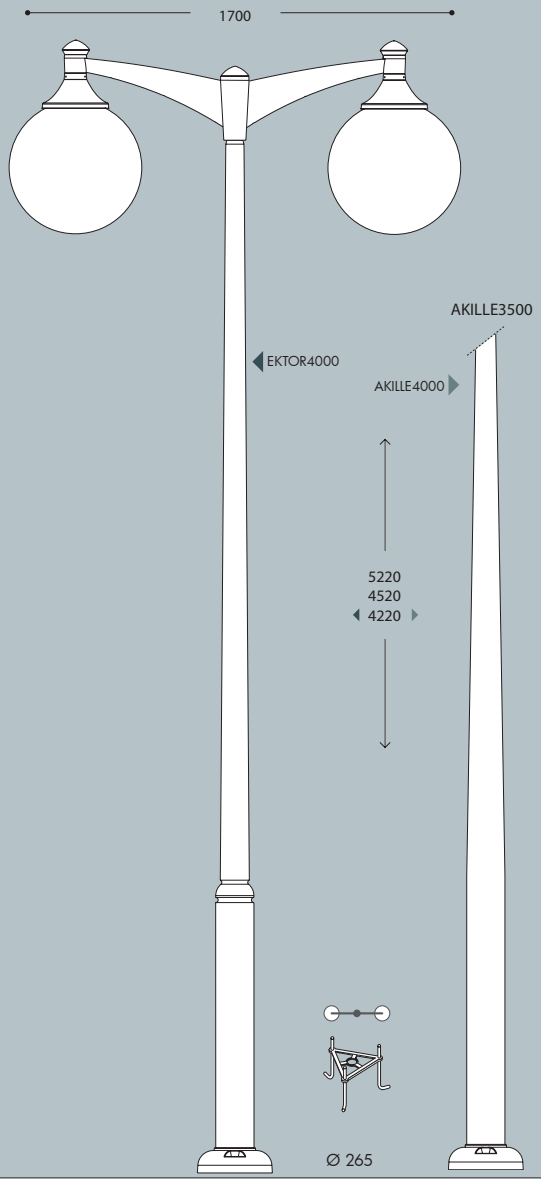

EKTOR 5000 PILAR/GLOBE500 1L	AKILLE 5000 PILAR/GLOBE500 1L
G51.377.P10	G51.427.P10


Pcs 1
Kg 52
mc 0,45

EKTOR 4500 PILAR/GLOBE500 1L	AKILLE 4500 PILAR/GLOBE500 1L
G51.374.P10	G51.424.P10

Pcs 1
Kg 46,5
mc 0,42

EKTOR 4000 PILAR/GLOBE500 1L	AKILLE 4000 PILAR/GLOBE500 1L
G51.371.P10	G51.421.P10

Pcs 1
Kg 41
mc 0,39

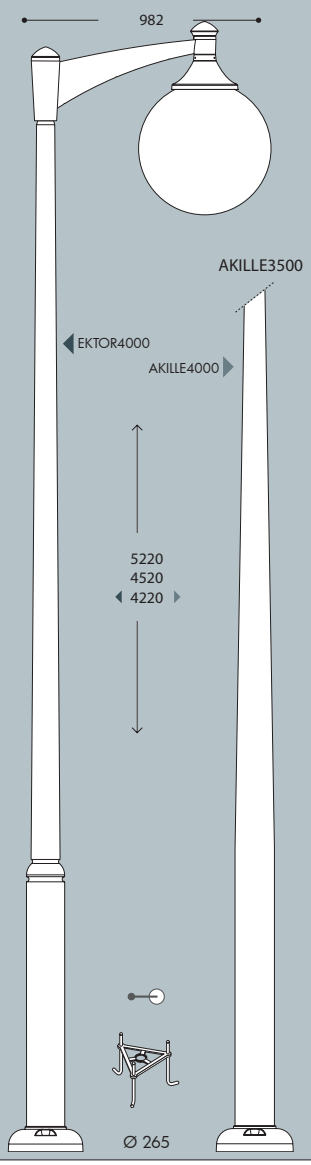



POST

FumaTech®
FUMAGALLI POLES TECHNOLOGY

POSTS

OUR COLLECTION

OUTDOOR lighting poles of a single piece without joints, made of shockproof composite material (steel-expanse-resin), UV-rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Insulation class II. Available in many design options and different sizes from 0,7mt up to 6 mt high. Provided with suitable cage for ground fixation.

Pali per uso esterno fabbricati in un unico pezzo senza giunzioni. Realizzati in materiale composito antiurto (ferro-resina-poliuretano), stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Classe di isolamento II. Disponibili in numerose varianti decorative e in diverse altezze da mt. 0,7 a mt. 6. Provvisti di gabbia per il fissaggio a terra.

METAL POST COVERED BY RESIN

*Fumagalli **created** and developed a unique post technology, registered as **FUMATECH**. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.*

*L'azienda Fumagalli ha **creato** e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come **FUMATECH**. La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.*

more details at Pag.30

FumaTech®
FUMAGALLI POLES TECHNOLOGY



INNER METAL POLE STRUCTURE

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

Palo strutturale in metallo galvanizzato a caldo sia all'interno che all'esterno tramite immersione in bagno di zinco.

EXPANSE


High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

Il poliuretano ad alta densità, rigido ma molto leggero, garantisce una coesione duratura nel tempo tra il palo interno in metallo e la copertura esterna in resina.

OUTER RESIN COVER

Outer coating of a single piece without joints made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

*Rivestimento esterno in **un unico pezzo** fabbricato in resina antiurto:*
- *Inattaccabile da ruggine e corrosione*
- *Colori in pasta stabilizzati ai raggi UV*
- *Autoestinguente al fuoco*

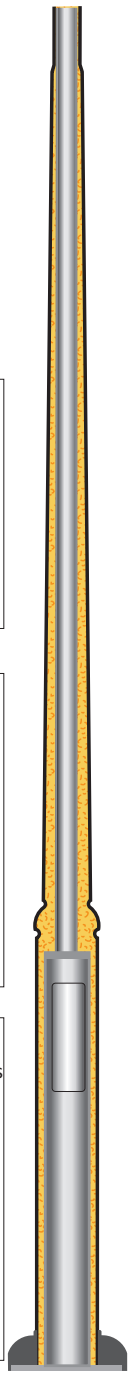











MODULAR SYSTEM



All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.


POST COLOURS

CLASSIC		REVIVAL	MODERN
BLACK	WHITE	BLACK	BLACK
ANTIQUE BRONZE *(painted)*	ANTIQUE GREEN *(painted)*	WHITE	WHITE
		GREY	GREY

POSTS


INSPECTION DOORS

for EKTOR and AKILLE posts

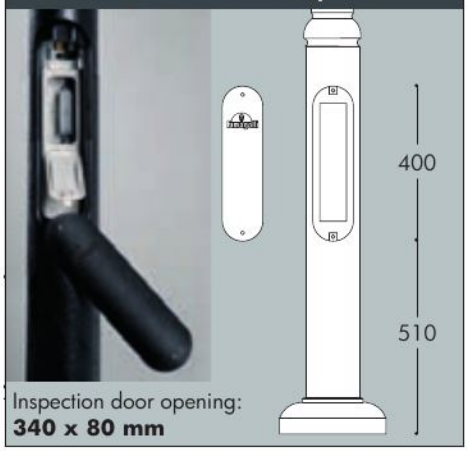

Inspection door opening:
340 x 80 mm

for EKTOR 2500 post

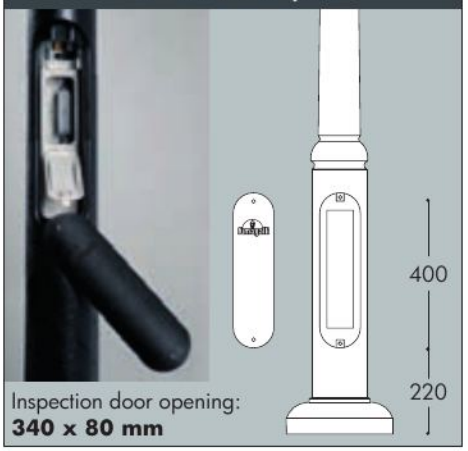

Inspection door opening:
340 x 80 mm

The inspection door can be personalized with your own logo (available for EKTOR, AKILLE and KARMELposts)

La porta di ispezione può essere personalizzata con il vostro LOGO (disponibile per i pali EKTOR, AKILLE e KARMEL)



for KARMEL posts



Inspection door opening:
340 x 80 mm

for NEBO TABOR HOREB posts




Inspection door opening:
320 x 60 mm

Duble Insulation
4 x 16 mm2
3 - WAY

CLASS II | IP44

Fuse holder Ifo electric cc.10



for GIONA posts




Inspection door opening:
185 x 80 mm



CLASSIC POST - FOUNDATION SYSTEM



SUGGESTED SIZES FOR CONCRETE FOUNDATION

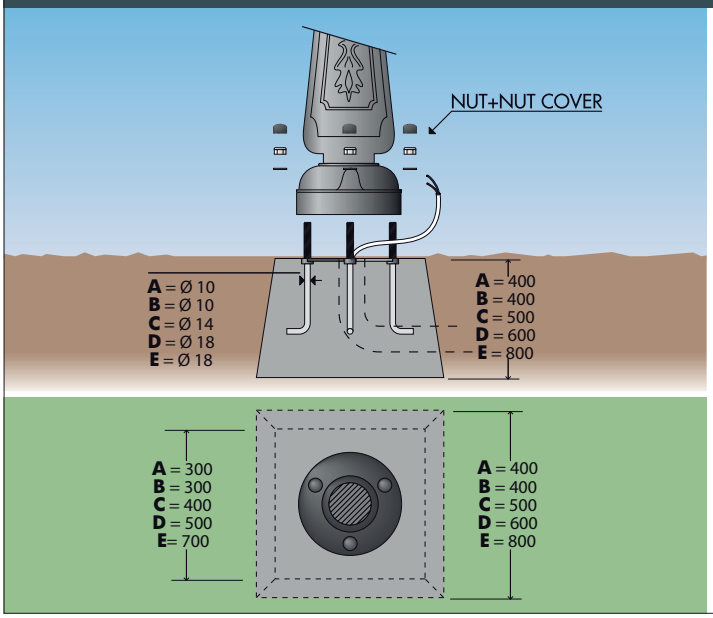


All Fumagalli poles are supplied with suitable cages for fixing into concrete foundations. The size of the cages and the size of the concrete foundation varies according to the high of the post.

Tutti i pali Fumagalli sono forniti complete di gabbie per il fissaggio a terra. Le dimensioni della gabbia e del plinto di cemento variano a secondo dell'altezza del palo.


The fixation system with two triangles allows the anchor bolts to be cemented perpendicularly to the ground. The second triangle has to be removed before installing the pole.

Il sistema di fissaggio con due triangoli assicura che i tiranti vengano affogati nel cemento in maniera perfettamente perpendicolare rispetto al terreno. Il secondo triangolo deve essere rimosso prima di procedere al fissaggio del palo.


CAGE - A
H.GAB.10.A




CAGE - B
H.GAB.10.B




CAGE - C
H.GAB.14.C

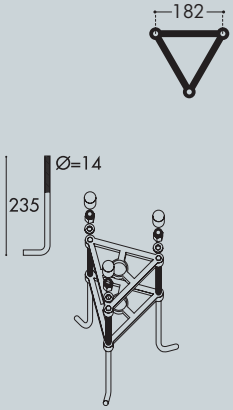

CAGE - D
H.GAB.18.D

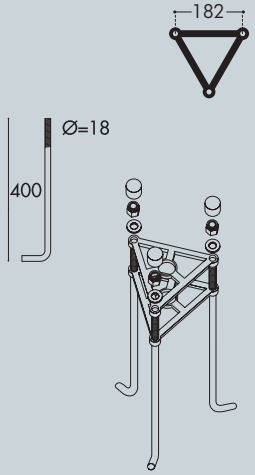

CAGE - E
H.GAB.18.E

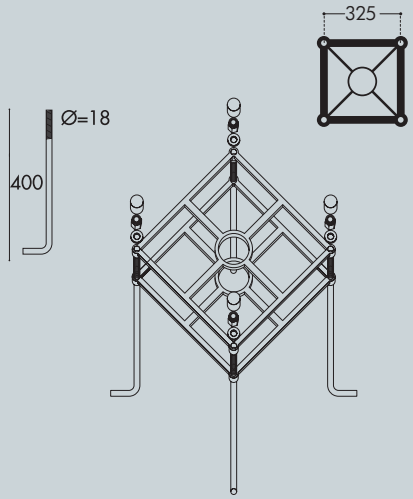

CLASSIC POSTS

CLASSIC POST COLLECTION




Each post is supplied with the suitable cage or screws for fixation.



Colours available for the CLASSIC range are the following:


Moulded colours: **Black - White**


Painted Colours: **Antique Green - Antique Bronze**


WITHOUT DOOR
WITH DOOR
WITH DOOR AND BOX

CAGE - A	CAGE - B	CAGE - C
H.GAB.10.A	H.GAB.10.B	H.GAB.14.C
		

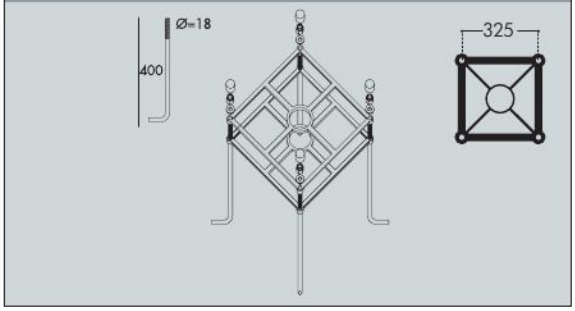
CAGE - D	CAGE - E
H.GAB.18.D	H.GAB.18.E
	

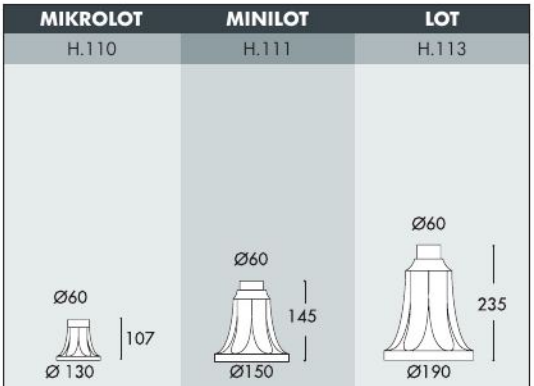MIKROLOT	MINILOT	LOT
H.110	H.111	H.113
		
SCREWS	SCREWS	SCREWS

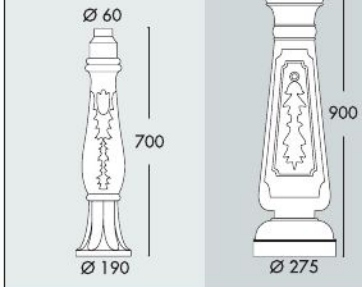IAFET.R	ERMON.R
000.162	000.195
DOOR NOT AVAILABLE	
resin	resin
Pcs 2 Kg 5,3 mc 0,057	Pcs 1 Kg 4,3 mc 0,075
	
CAGE - A	CAGE - C

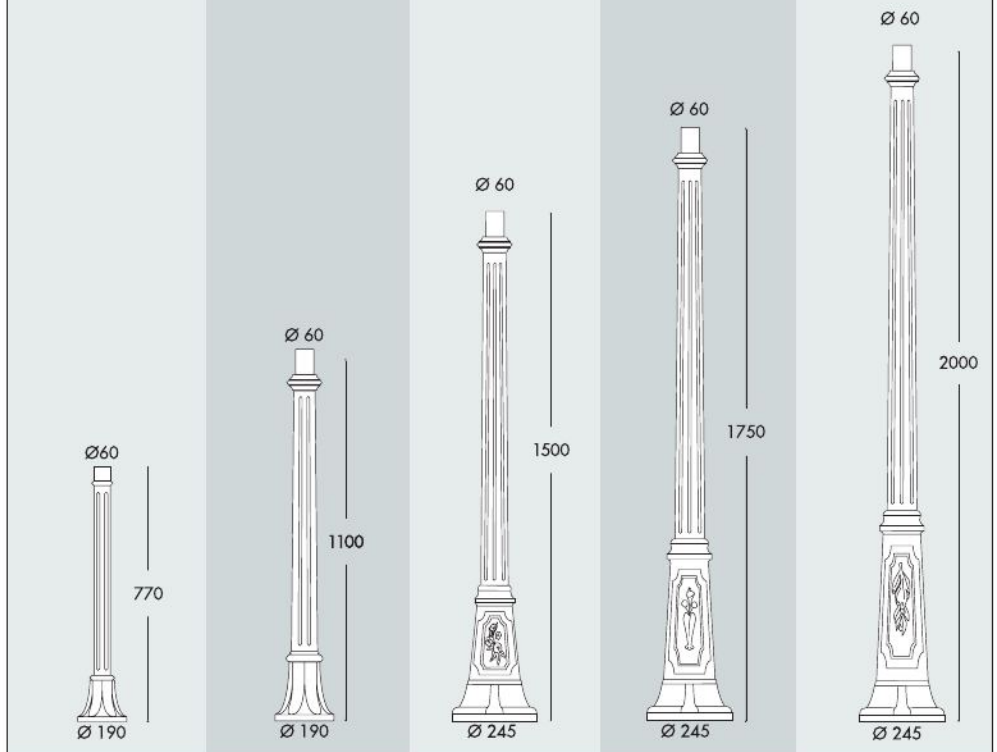MIZAR	ALOE'.R	ARTU'	GIGI	RICU
000.151	000.163	000.158	000.156	000.157
DOOR NOT AVAILABLE				
resin	resin			
Pcs 5 Kg 3 mc 0,61	Pcs 2 Kg 6 mc 0,086	Pcs 2 Kg 15,5 mc 0,151	Pcs 2 Kg 18,5 mc 0,182	Pcs 2 Kg 20 mc 0,214
				
SCREWS	CAGE - A	CAGE -B	CAGE - B	CAGE - B

NEBO	TABOR	HOREB	KARMEL 3000	KARMEL 3500	KARMEL 4000	GIONA 4000*	GIONA 4500*	GIONA 5000*
000.201	000.204	000.207	000.231	000.234	000.237	000.221	000.224	000.227
000.202	000.205	000.208	000.232	000.235	000.238	000.222	000.225	000.228
000.203	000.206	000.209	000.233	000.236	000.239	000.223	000.226	000.229
DOOR IS OPTIONAL			DOOR IS OPTIONAL			DOOR IS OPTIONAL		
Pcs 1 Kg 21 mc 0,135	Pcs 1 Kg 25,5 mc 0,164	Pcs 1 Kg 28 mc 0,190	Pcs 1 Kg 25,5 mc 0,167	Pcs 1 Kg 28 mc 0,193	Pcs 1 Kg 30,5 mc 0,220	Pcs 1 Kg 55 mc 0,744	Pcs 1 Kg 58 mc 0,871	Pcs 1 Kg 60 mc 0,968

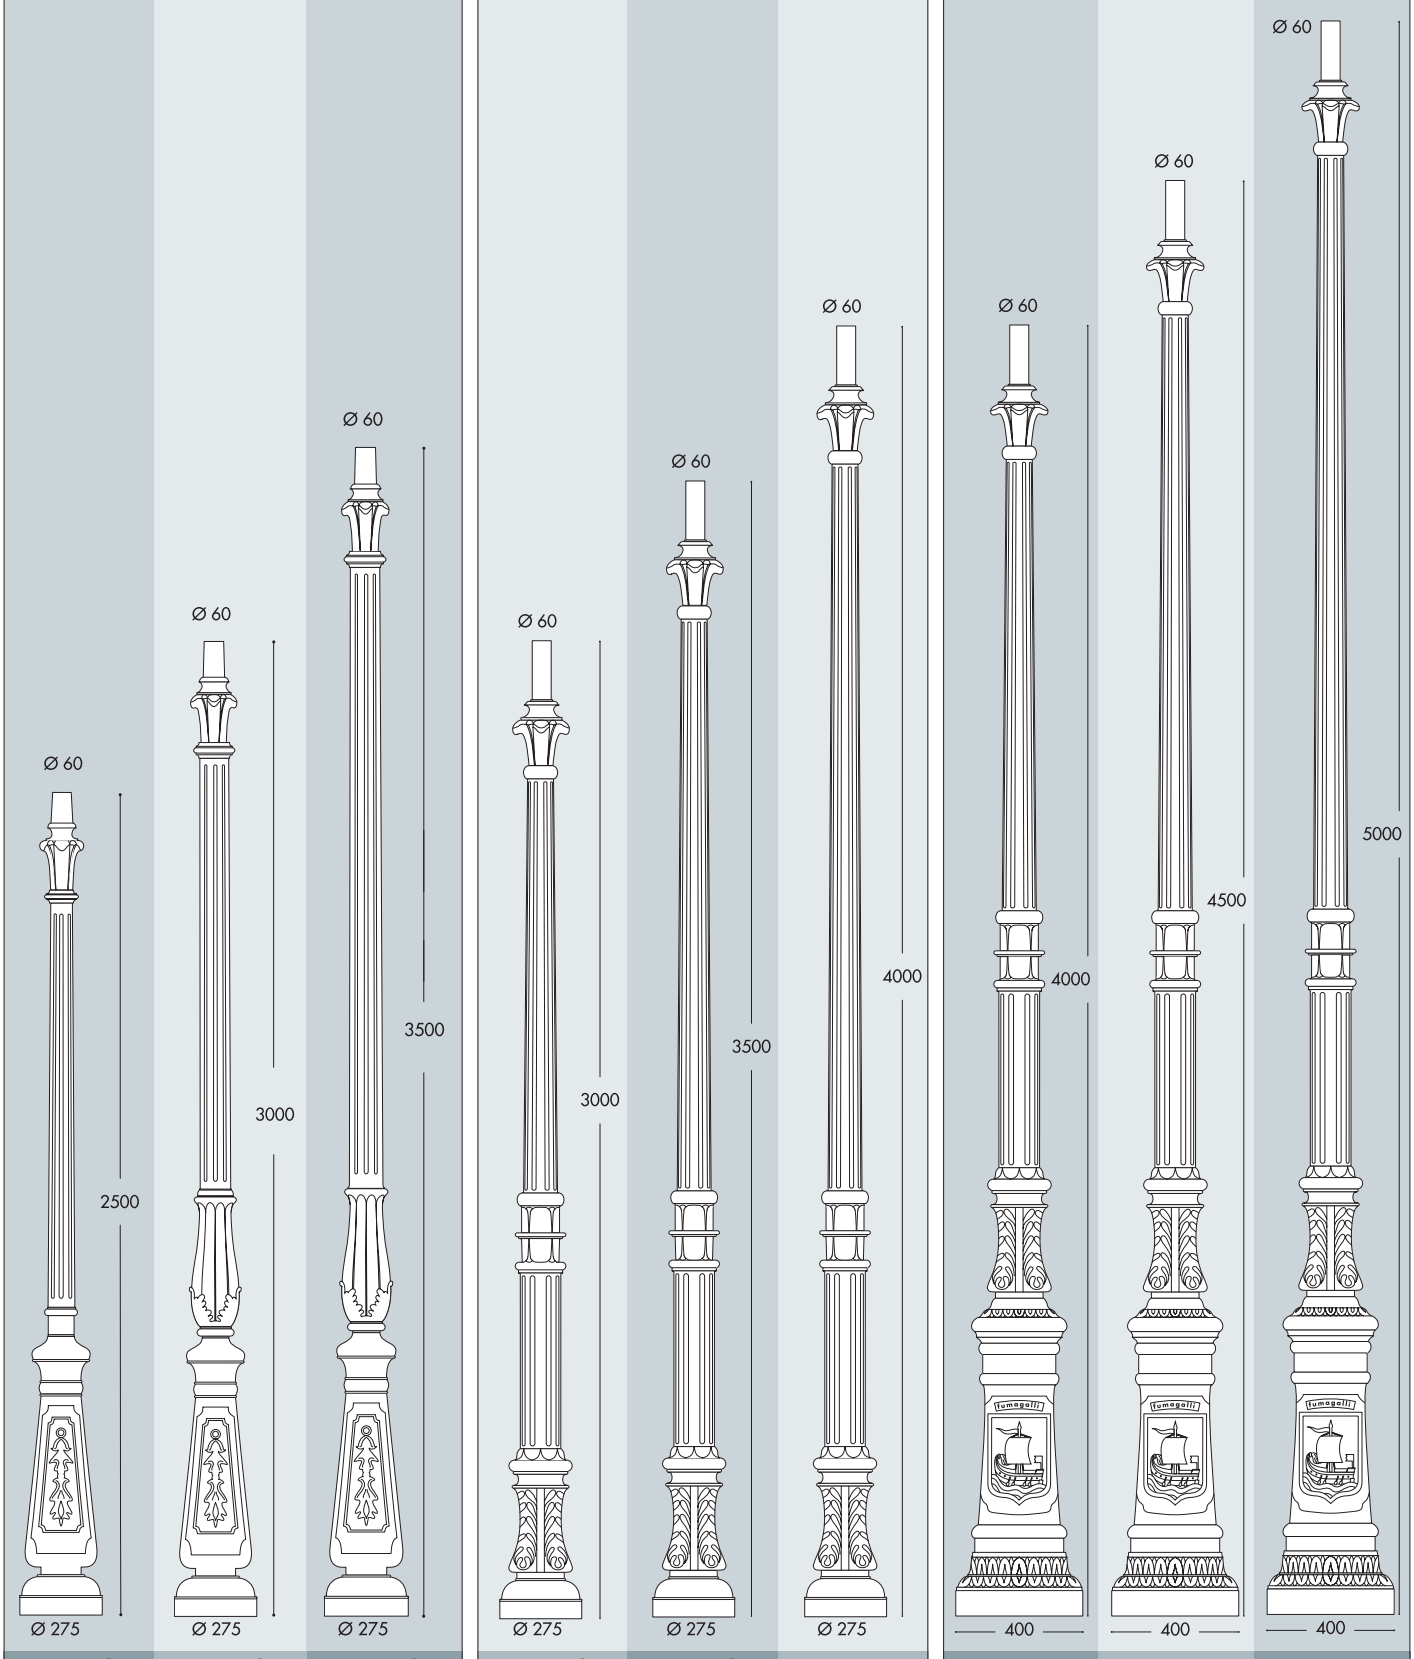

CAGE - C	CAGE - C	CAGE - C	CAGE - C	CAGE - C	CAGE - D	CAGE - E	CAGE - E	CAGE - E

*available in black colour only

CLASSIC POSTS

CLASSIC POST TOP SYSTEMS




FULLY MODULAR

All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

I terminali di connessione dei pali e delle lanterne FUMAGALLI hanno sempre un diametro di 60 mm; questa caratteristica unica permette svariate combinazioni di lampade complete con i medesimi componenti per una grande flessibilità di magazzino.


BISSO SYSTEM

BISSO SYSTEM 2L	BISSO SYSTEM 2 + 1	BISSO SYSTEM 3L	BISSO SYSTEM 3 + 1
000.000.S20	000.000.S21	000.000.S30	000.000.S31

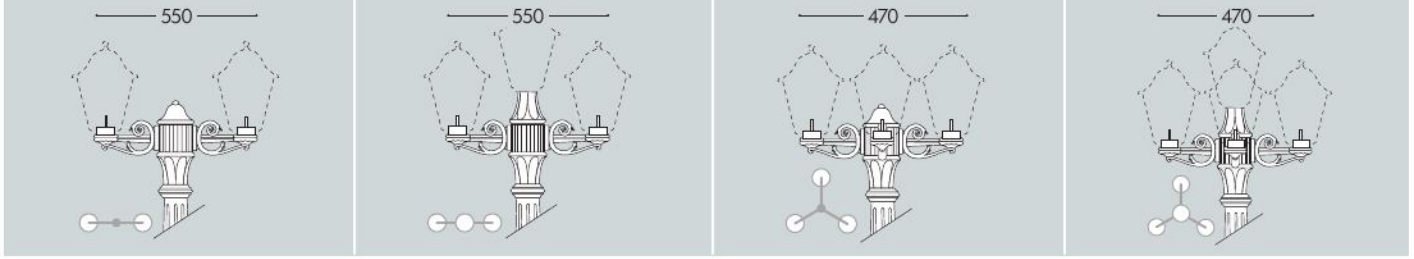


OFIR SYSTEM

OFIR SYSTEM 2L	OFIR SYSTEM 3L
000.000.R20	000.000.R30

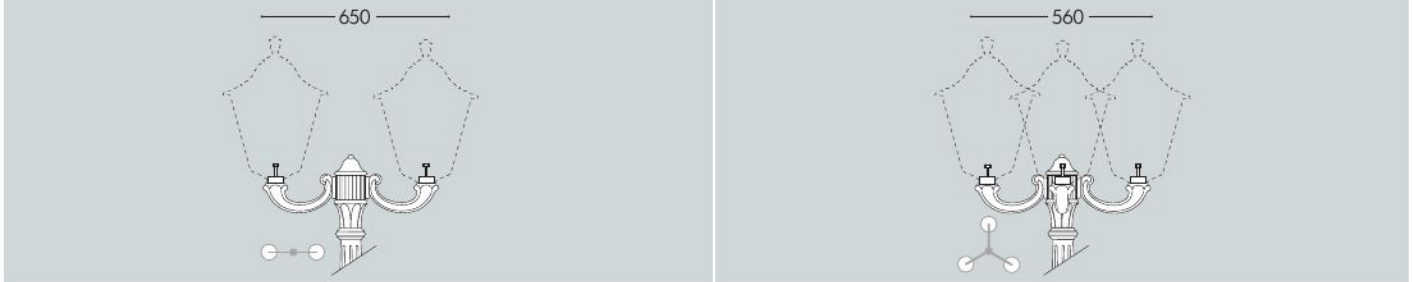


ADAM SYSTEM

ADAM SYSTEM 2L	ADAM SYSTEM 2 + 1	ADAM SYSTEM 3L	ADAM SYSTEM 3 + 1
000.000.M20	000.000.M21	000.000.M30	000.000.M31

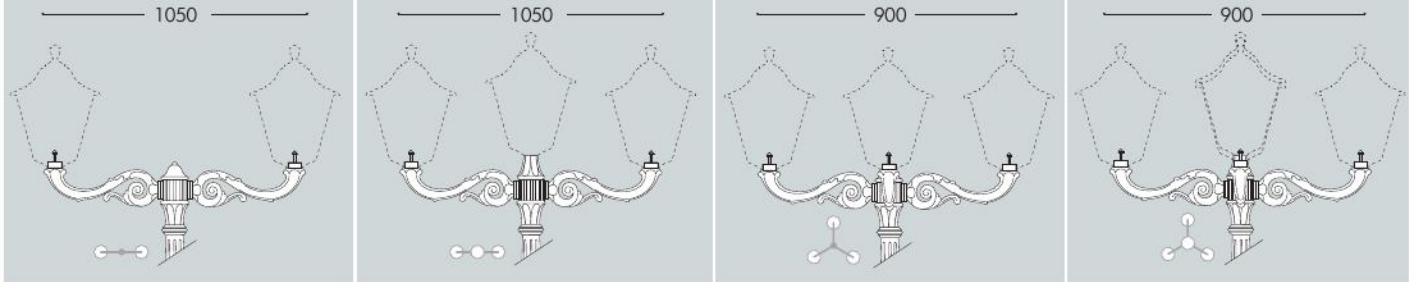


ARON SYSTEM

ARON SYSTEM 1L	ARON SYSTEM 2L	ARON SYSTEM 4L
000.000.N10	000.000.N20	000.000.N40

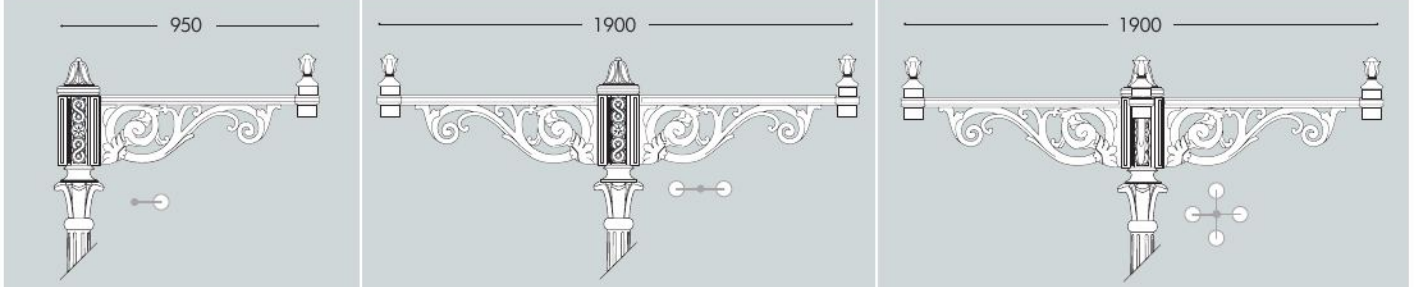


HEXAGONAL LANTERNS

SMALL SIZE		MEDIUM SIZE		LARGE SIZE		GRAND SIZE
ANNA	SABA	RUT	SALEM	NOEMI	SILOE	
E22.000	K22.000	E26.000	K26.000	E35.000	K35.000	

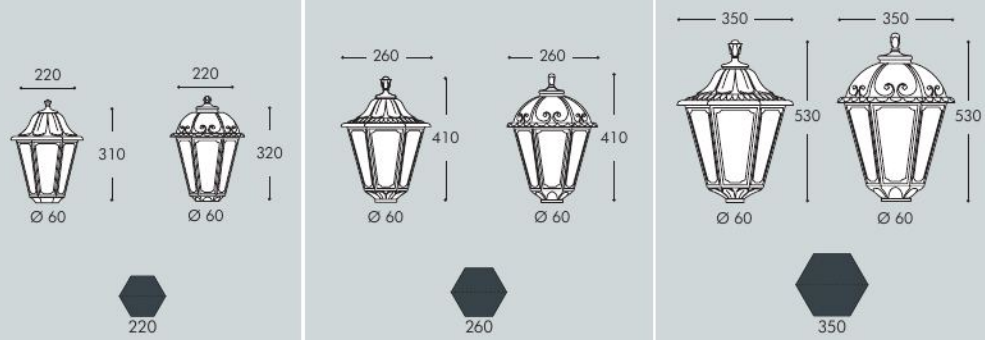

SQUARE LANTERNS

MARY	GOLIA	CEFA	TOBIA	SIMON	ELIA	PIETRO
Q18.000	Q23.000	U23.000	Q33.000	U33.000	Q43.000	U43.000
			Q35.000 *	U35.000 *	Q45.000 *	U45.000 *

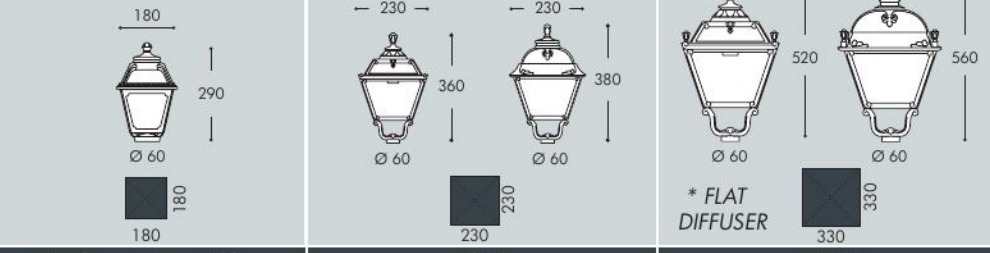


HALF LANTERNS

PIERO	IESSE	ESAU	DARIA
M18.000	M22.000	M26.000	M28.000



GLOBES

GLOBE 250 CLASSIC	GLOBE 300 CLASSIC	GLOBE 400 CLASSIC	GLOBE 500 CLASSIC
G25.B25	G30.B30	G40.B40	G50.B50

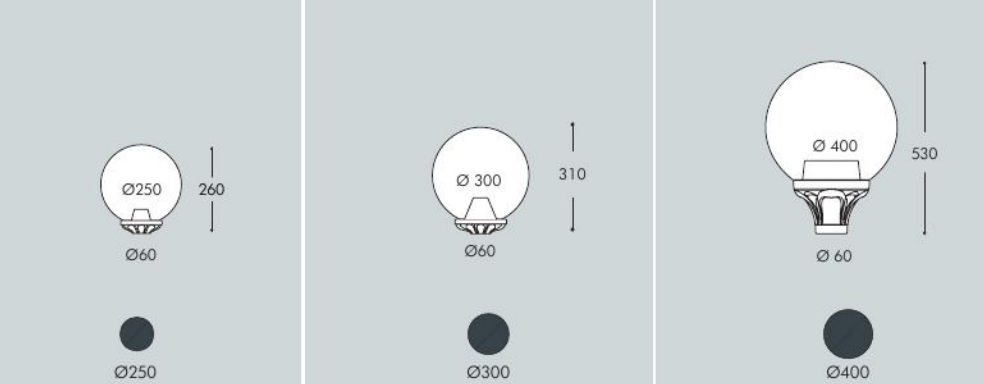

MODERN POSTS




MODERN POST COLLECTION


Each post is supplied with the suitable cage or screws for fixation.





Moulded Colours available for the MODERN poles are the following:

For ARGO, FEBO and ENEA posts: **Black**


For EKTOR and AKILLE posts: **Black - White - Grey**

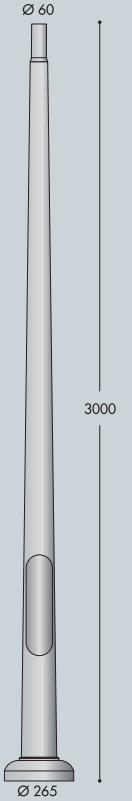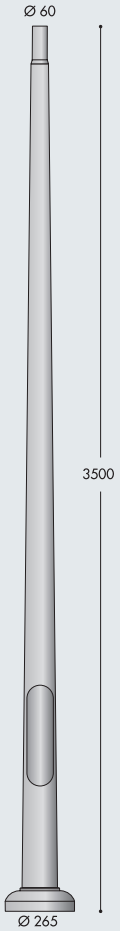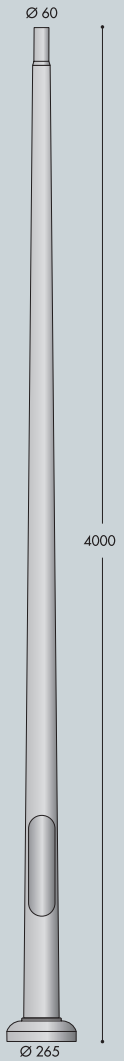	AKILLE 3000	AKILLE 3500	AKILLE 4000
WITHOUT DOOR	000.414	000.417	000.421
WITH DOOR	000.415	000.418	000.422
WITH DOOR AND BOX	000.416	000.419	000.423
	DOOR IS OPTIONAL		
	Pcs 1 Kg 27,7 mc 0,159	Pcs 1 Kg 31,1 mc 0,185	Pcs 1 Kg 34,5 mc 0,212
			
	CAGE - C	CAGE - C	CAGE - D


	ENEA 2000	ENEA 2400
	000.264	000.265
	DOOR NOT AVAILABLE	
	Pcs 1 Kg 8 mc 0,111	Pcs 1 Kg 10 mc 0,132
		
	CAGE - A	CAGE - A

	ARGO 300	ARGO 500	ARGO 800	FEBO1500
	000.255	000.256	000.257	000.263
	DOOR NOT AVAILABLE			
	resin Pcs 2 Kg 1,28 mc 0,025	resin Pcs 2 Kg 1,69 mc 0,035	resin Pcs 2 Kg 2,26 mc 0,057	Pcs 2 Kg 9,80 mc 0,148
				
	SCREWS	SCREWS	SCREWS	CAGE - A


CAGE - A
H.GAB.10.A




CAGE - B
H.GAB.10.B




CAGE - C
H.GAB.14.C



CAGE - D
H.GAB.18.D




CAGE - E
H.GAB.18.E





NEWLOT
H.115

Black
White
Grey



SCREWS

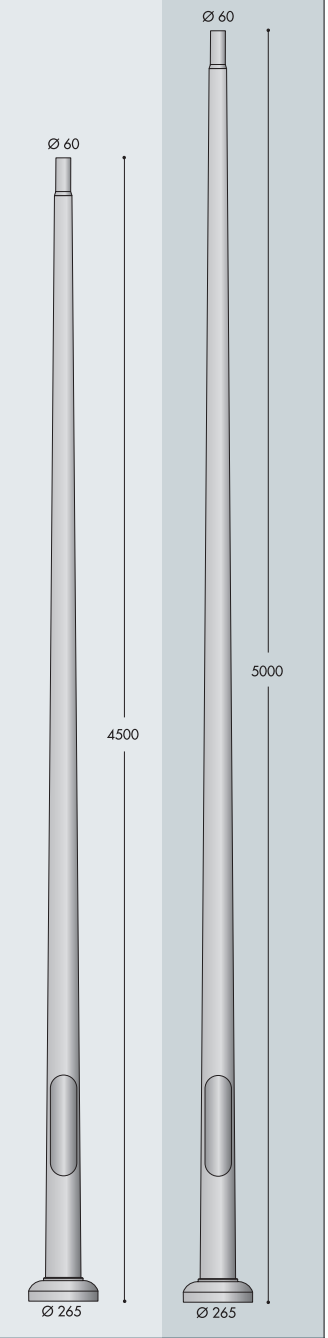AKILLE 4500	AKILLE 5000
000.424	000.427
000.425	000.428
000.426	000.429
DOOR IS OPTIONAL	
Pcs 1 Kg 40 mc 0,238	Pcs 1 Kg 45,5 mc 0,265
	
CAGE - D	CAGE - D

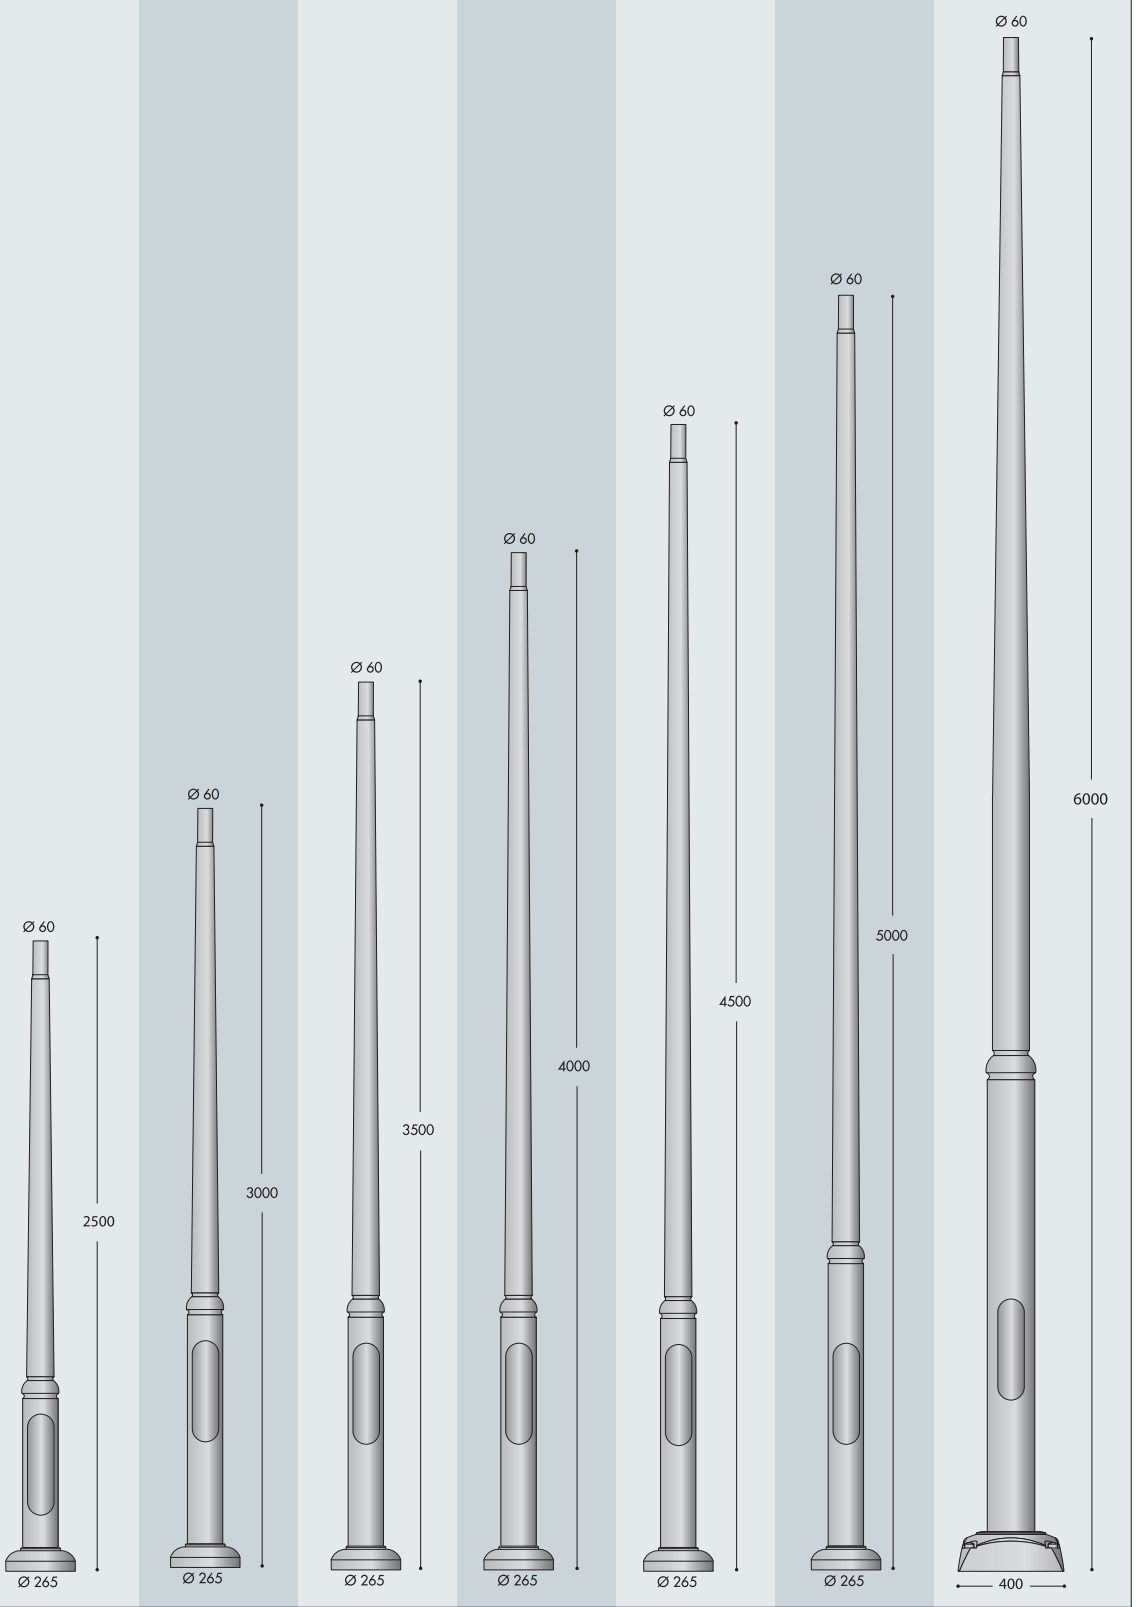EKTOR 2500	EKTOR 3000	EKTOR 3500	EKTOR 4000	EKTOR 4500	EKTOR 5000	EKTOR 6000
000.361	000.364	000.367	000.371	000.374	000.377	000.384
000.362	000.365	000.368	000.372	000.375	000.378	000.385
000.363	000.366	000.369	000.373	000.376	000.379	000.386
DOOR IS OPTIONAL						
Pcs 1 Kg 24,3 mc 0,159	Pcs 1 Kg 27,7 mc 0,159	Pcs 1 Kg 31,1 mc 0,185	Pcs 1 Kg 34,5 mc 0,212	Pcs 1 Kg 40 mc 0,238	Pcs 1 Kg 45,5 mc 0,265	Pcs 1 Kg 75 mc 1,21
						
CAGE - C	CAGE - C	CAGE - C	CAGE - D	CAGE - D	CAGE - D	CAGE - E

MODERN POSTS



MODERN POST TOP SYSTEMS






FULLY MODULAR

All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.



I terminali di connessione dei pali e delle lanterne FUMAGALLI hanno sempre un diametro di 60 mm; questa caratteristica unica permette svariate combinazioni di lampade complete con i medesimi componenti per una grande flessibilità di magazzino.

GIORGIO	ROSA
4P2.000.G10 4P1.000.G10	4P2.000.G20 4P1.000.G20
	

MIDIPILAR SYSTEM

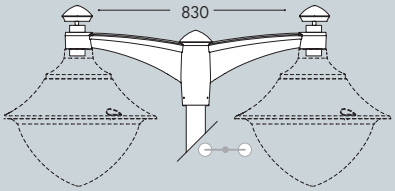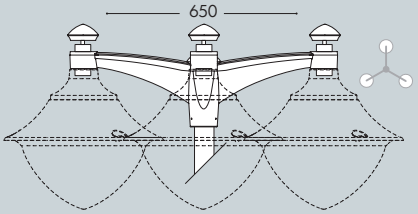
MIDIPILAR SYSTEM 1L	MIDIPILAR SYSTEM 2L	MIDIPILAR SYSTEM 3L
000.000.A10	000.000.A20	000.000.A30
		

PILAR SYSTEM

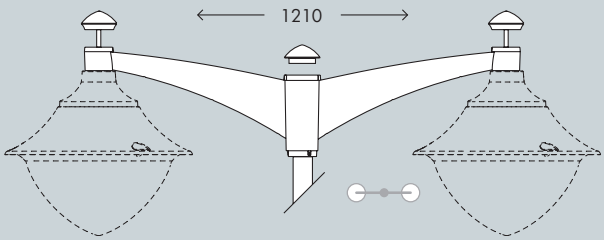PILAR SYSTEM 1L	PILAR SYSTEM 2L
000.000.P10	000.000.P20
	


LARGE SIZE

REMO 400
R50.000





Ø480

GINO 400
F50.000




Ø480

BEPPE 400
P50.000





Ø480

ECOBEPPE 400
EP5.000





Ø480

VIVI 400
V50.000





Ø480

ECOVIVI 400
EV4.000





Ø480

GLOBE 250 MODERN
G26.B26




Ø250


GLOBE 300 MODERN
G31.B31




Ø300


GRAND SIZE

REMO 500
R60.000





Ø600

GINO 500
F60.000





Ø600

BEPPE 500
P60.000





Ø600

ECOBEPPE 500
EP6.000





Ø600

VIVI 500
V60.000





Ø600

ECOVIVI 500
EV6.000





Ø600

GLOBE 400 MODERN
G41.B40




Ø400

GLOBE 500 MODERN
G51.B50




Ø500

REVIVAL POSTS

REVIVAL POST COLLECTION



Each post is supplied with the suitable cage or screws for fixation.




Moulded Colours available for the REVIVAL poles are:
Black - White - Grey




FULLY MODULAR







All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

DISMA	MIDIDISMA	MAXIDISMA
H.114	H.116	H.117
Black White Grey	Black White Grey	Black White Grey
		
SCREWS	SCREWS	SCREWS

CAGE - B	CAGE - C	CAGE - D
H.GAB.10.B	H.GAB.14.C	H.GAB.18.D
		

	EKTOR 3000	EKTOR 3500	EKTOR 4000
WITHOUT DOOR	000.364	000.367	000.371
WITH DOOR	000.365	000.368	000.372
WITH DOOR AND BOX	000.366	000.369	000.373
	Pcs 1 Kg 27,7 mc 0,159	Pcs 1 Kg 31,1 mc 0,185	Pcs 1 Kg 34,5 mc 0,212
			
	CAGE - C	CAGE - C	CAGE - D


GIAFFA	DANILO	DINO	EMILIO	VANNI 2500
000.242	000.305	000.306	000.307	000.310
DOOR NOT AVAILABLE	DOOR NOT AVAILABLE			DOOR NOT AVAILABLE
resin				
Pcs 5 Kg 3 mc 0,61	Pcs 1 Kg 15 mc 0,151	Pcs 2 Kg 15,8 mc 0,182	Pcs 2 Kg 17 mc 0,214	Pcs 1 Kg 24 mc 0,159
				
SCREWS	CAGE - B	CAGE - B	CAGE - B	CAGE - C


HEXAGONAL LANTERNS / SQUARE LANTERNS / GLOBES


SMALL SIZE	MEDIUM SIZE	LARGE SIZE
GIAMPY H21.000	**SANDRO** H24.000	**LUCA** H35.000
ROBY T20.000	**DARIO** T24.000	**SERGIO** T33.000 / T35.000 *
GLOBE 250 MODERN G26.B26	**GLOBE 300 MODERN** G31.B31	





















HALF LANTERNS


FABIO M20.000	GIULIO M24.000







NARDO SYSTEM

NARDO SYSTEM 1L	NARDO SYSTEM 2L	NARDO SYSTEM 3L
000.000.D10	000.000.D20	000.000.D30










IOLE SYSTEM

IOLE SYSTEM 1L	IOLE SYSTEM 2L	IOLE SYSTEM 3L
000.000.E10	000.000.E20	000.000.E30










MIDIPILAR SYSTEM

MIDIPILAR SYSTEM 1L	MIDIPILAR SYSTEM 2L	MIDIPILAR SYSTEM 3L
000.000.A10	000.000.A20	000.000.A30



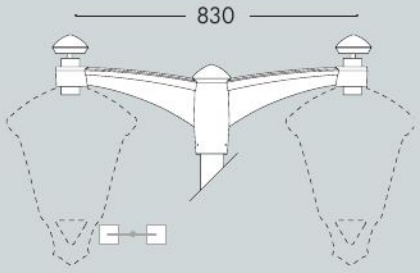

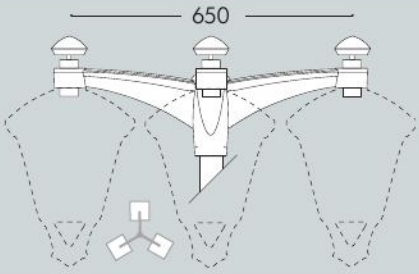


fumagalli
LED
SOLAR
7600 lm
1100 lm
840 lm
280 lm
450 lm



LAMPS

FUMAGALLI LED LAMPS

MODULAR SYSTEM

Innovative **TÜV certified LED lamps** with standard E27, GX53 ,R7s, GU10 or G9 lamp holder to get a very efficient LED lighting system. Heatsink and driver are built-in the lamps. LED modules can be easily replaced without the help of a qualified technician. Available in different wattage versions and color temperature. Moreover combing in series Fumagalli GX53 lamps you get a powerful and efficient public lighting system both on classic and modern luminaries.

TÜV SÜD CE CB

LVD | EMC | ERP | RoHS REACH compliant



BENEFITS:

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.
- **TÜV CERTIFIED QUALITY:** Production monitored, CE marked, LVD and EMC tested, in compliance with the European Ecodesign Directive (ERP) and with RoHS and REACH directives. CB certified.





Power surges resistant

- **Wide voltage range (100-240V)** to protect the driver both from voltage droop and voltage overshoot, which are quite frequent in case of outdoor installations.
- **Double 400V capacitors** and multiple resistances to withstand power surges.
- **Silicone paste** to avoid – in case of voltage swings- the vibration of the electronic components of the driver and the consequent risk of components unsoldering.

Heat resistant - Working temperature -30°+80°C

- **Gold wire bonding:** Chips connected by pure gold wires, which are able to withstand at the highest and lowest temperatures and at temperature fluctuations between day and night. The gold wire bonding can grant a lumens maintenance factor > 80%.
- **Silicone paste:** Thermoconductive silicone paste with metal powder inside for helping heat dissipation and avoid overheating problems and for protecting the electronic components in case of high and low temperatures.

Humidity resistant - Weatherproof driver for a longer lifetime

- **Silicone paste:** The driver is fully enclosed in a special silicone paste, which ensures the highest driver protection against moisture and humidity up to 90%, both unavoidable in outdoor installations.

LVD TESTED

LVD Certificate: *Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.*

EMC TESTED

EMC Certificate: *Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU and its amendments.*

NEW ERP

New ERP Attestation of conformity: *Fumagalli lamps fulfil the NEW European Ecodesign Directive EU 2019/2020, which sets stricter energy efficiency requirements, new verification tolerances and other factors such as bulb lifetime and warm-up time.*

CB IECEE CB SCHEME

IECEE CB Certificate: *Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.*

RoHS REACH COMPLIANT

RoHS REACH compliant: *Fumagalli lamps fulfil the RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendements and the REACH regulation (EC) No. 1907/2006, regarding the concentration of Very High Concern Substances (SVHC).*

Tested according to :
EN 62560:2012/A11: 2019
IEC/TR 62778:2014
EN 62493:2015/A1: 2022







Saudi Standards

Fumagalli lamps meet the Saudi energy efficiency and functionality requirements according to SASO Directive 2870:2018/ADM1:2021. A SASO version packaging with Energy Efficiency label, according to 6.000 hours EEI test report, is available upon request.

SOLAR MODULE

TÜV- CB CERTIFIED LED MODULES

BATTERY ACTIVATION BOTTON

SOLAR PANEL
- Panel 2W/5V
- Monocrystaline
- Antishock tempered glass
- UV rays treated.

MATERIAL
- **PC material** suitable for outdoor use
- **UV rays stabilized**
- **Anti shock**



REPLACEABLE BATTERY
- Quick and easy battery replacement
- LiFePO4 IFR 26650 3,4Ah-3,2V
- No risk of explosion



PIR SENSOR
- Detection angle **120°**
- Fields of detection up to **5m**
- Active for 25 sec.




LENS
- Frosted color lens reducing dazzle.
- Made of UV rays stabilized resin material to avoid yellowing process.
- Very compact and slim design for a better light distribution and for improving the light efficiency.

LED
- Power absorption of the led plate 2,7W (at 100% light)
- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 2835 LED.
- 4000K CRI**>80**



IECEE CB CERTIFICATE
SG PSB-LE-05512




SOLAR MODULE

TÜV- CB CERTIFIED LED MODULES

SOLAR MODULE

IP65



SIZE			
ENERGY SAVING MODE		LUMEN	20
		AUTONOMY	46h
FULL POWER MODE		LUMEN	280
		ACTIVE TIME	25 sec
SOLAR PANEL	SOLAR PANEL	5V/2W	
		Monocrystaline	
		Antishock material	
CHARGING TIME		6h	
REPLACEABLE BATTERY	REPLACEABLE BATTERY	LiFePO4 IFR26650E3400, 3.2V	
		No Risk of explosion	
		Longer Lifetime	
PIR SENSOR	SENSOR	Detection angle 120°	
		Fields of detection up to 5 mt	
		Active for 25 sec.	
LED		1 CIRCUITS	SMD 2835
		COLOR RENDERING INDEX RA	> 80
		SDCM	< 6
		LIFETIME	30.000 h
		KELVIN	4000 K
REF. CODE		H2.LED.SOL.4K	

IECEE CB CERTIFICATE:
SG PSB-LE-05512

CE
CB

LVD | EMC | ERP

E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES

SILICONE PROTECTION



INDOOR & OUTDOOR USE

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528.



LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.



THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.





HEATSINK

- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.




DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



CCT SETTABLE

- Switch settable in two different positions, to select the desired Kelvin temperature (3000K, 4000K) and get a customized ambiance.
- 3000k and 4000K led chips on 2 separate circuits to grant SDCM < 6.

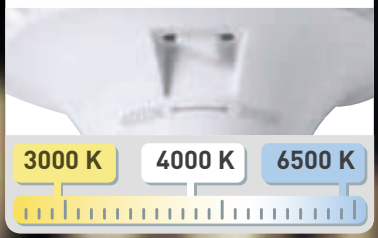

IECEE CB CERTIFICATE

E27 HIGH POWER LED - CCT SETTABLE



CCT SETTABLE
3000 K | 4000 K
SDCM <6

SILICONE PROTECTION
DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG
F
15 kWh/1000h

COMPLY WITH:
EU 2019/2015
EU 2019/2020

CE LVD EMC
CB ERP

IECEE CB CERTIFICATE:
SG PSB-LE-03835

POWER		15 W
LUMINOUS FLUX (Φ TOTAL)	3000 K	1545 lm
	4000 K	1690 lm
SIZE & SOCKET		Ø100, 165, E27
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,7
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		30.000
WARM UP TIME		< 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		F
REF. CODE		H3.LED.HIP.CCT

E27 HIGH POWER LED - CCT SETTABLE



CCT SETTABLE
3000 K | 4000 K
SDCM <6

SILICONE PROTECTION
DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG
E
30 kWh/1000h

COMPLY WITH:
EU 2019/2015
EU 2019/2020

CE LVD EMC
CB ERP

IECEE CB CERTIFICATE:
SG PSB-LE-03834

POWER		30W
LUMINOUS FLUX (Φ TOTAL)	3000 K	3325 lm
	4000 K	3620 lm
SIZE & SOCKET		Ø100, 165, E27
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,9
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		30.000
WARM UP TIME		< 1"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H2.LED.HIP.CCT

*SASO version available upon request.

E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES

SILICONE PROTECTION



INDOOR & OUTDOOR USE

-30 +80 °C	90% HUMIDITY

VOLTAGE SURGE RESISTANT

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528.





LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.



HEATSINK

- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.




THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



IECEE CB CERTIFICATE




E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES

E27 HIGH POWER LED



POWER		50 W
LUMINOUS FLUX (Φ TOTAL)	3000 K	5850 lm
	4000 K	6550 lm
SIZE & SOCKET		 E27

SILICONE PROTECTION
DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C
90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG
E
50 kWh/1000h

COMPLY WITH:
EU 2019/2015
EU 2019/2020

TÜV
CE LVD EMC
CB ERP

IECEE CB CERTIFICATE:
SG PSB-LE-03791

VOLTAGE	100-240 V	
FREQUENCY	50/60 Hz	
DISPLACEMENT FACTOR	>0,9	
PSTLM (NO FLICKER)	<1	
SVM	0,4	
CRI	> 80	
SWITCHING CYCLE	30.000	
WARM UP TIME	< 1"	
LIFETIME	25.000 h	
KELVIN	3000 K	4000 K
EFFICIENCY CLASS	E	E
REF. CODE	H.LED.HIP.3K	H.LED.HIP.4K

E27 HIGH POWER LED



POWER		60W
LUMINOUS FLUX (Φ TOTAL)	3000 K	6800 lm
	4000 K	7600 lm
SIZE & SOCKET		 E27

SILICONE PROTECTION
DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C
90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG
E
60 kWh/1000h

COMPLY WITH:
EU 2019/2015
EU 2019/2020

TÜV
CE LVD EMC
CB ERP

IECEE CB CERTIFICATE:
SG PSB-LE-03799

VOLTAGE	100-240 V	
FREQUENCY	50/60 Hz	
DISPLACEMENT FACTOR	>0,9	
PSTLM (NO FLICKER)	<1	
SVM	0,4	
CRI	> 80	
SWITCHING CYCLE	30.000	
WARM UP TIME	< 0,5"	
LIFETIME	25.000 h	
KELVIN	3000 K	4000 K
EFFICIENCY CLASS	E	E
REF. CODE	H4.LED.HIP.3K	H4.LED.HIP.4K

*SASO version available upon request.

E27 LED

TÜV- CB CERTIFIED LED MODULES

fumagalli since 1973

INDOOR & OUTDOOR USE


-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

LENS
- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.




GOLD WIRE BONDING
- LED chips connected by **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.

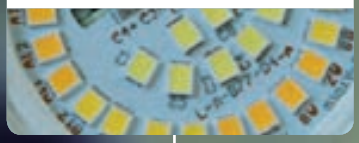



CCT SETTABLE
- Switch settable in three different positions, to select the desired Kelvin temperature (2700K, 4000K, 6500K) and get a customized ambiance.
- 2700K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.


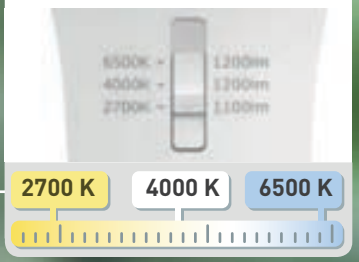


DRIVER 100-240V
- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.



E27 LED A60- CCT SETTABLE



POWER		8,5 W	11 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	840 lm *	1100 lm
	4000 K	920 lm	1200 lm
	6500 K	920 lm	1200 lm
SIZE & SOCKET			
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,5	>0,7
PSTLM (NO FLICKER)		< 1	< 1
SVM		0,4	0,4
CRI		> 80	> 80
SDCM		<6	<6
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		F	F
REF. CODE		H.LED.A60.CCT	H2.LED.A60.CCT

CCT SETTABLE — 2700 K | 4000 K | 6500 K — SDCM <4

INDOOR & OUTDOOR USE — -30 +80 °C | 90% HUMIDITY — VOLTAGE SURGE RESISTANT

ENERG — FUMAGALLI S.R.L. H.LED.A60.CCT — A B C D E F G — F — 9 kWh/1000h

COMPLY WITH: EU 2019/2015 EU 2019/2020


LVD EMC ERP

IECEE CB CERTIFICATE: SG PSB-LE-03297

*SASO version available upon request.

E27 LED FILAMENT A60

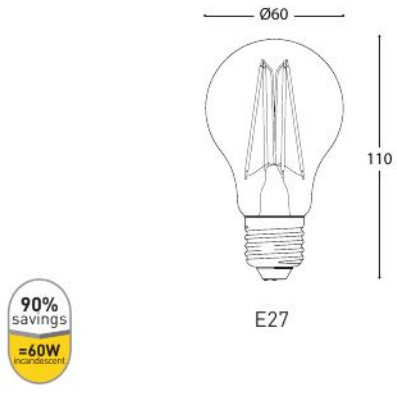

POWER		6,5 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	800 lm
SIZE & SOCKET		
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,5
CRI		> 80
SWITCHING CYCLE		>100.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H.LED.FIL.3K

INDOOR & OUTDOOR USE — -30 +80 °C | 90% HUMIDITY — VOLTAGE SURGE RESISTANT

ENERG — FUMAGALLI S.R.L. H.LED.FIL.3K(E) — A B C D E F G — E — 7 kWh/1000h

COMPLY WITH: EU 2019/2015 EU 2019/2020

LVD EMC ERP

IECEE CB CERTIFICATE: SG PSB-LE-03735

*SASO version available upon request.

GX53 LED Ø75mm

TÜV- CB CERTIFIED LED MODULES

fumagalli since 1973

INDOOR & OUTDOOR USE

-30 +80 °C	90% HUMIDITY
VOLTAGE SURGE RESISTANT	


PCB AND CONNECTION RING

- Special connection ring to avoid the PCB deformation under high temperatures and to keep the PCB adhering to the heatsink.



LENS

- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Very compact and **slim design** for a better light distribution and for improving the light efficiency.

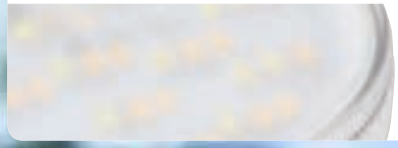



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- High quality capacitors and multiple resistances able to withstand power surges.



GX53 LAMPHOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- ENEC certified.






CCT SETTABLE

- Switch settable in three different positions, to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.
- 3000K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.



IECEE CB CERTIFICATE





GX53 LED Ø75mm

TÜV- CB CERTIFIED LED MODULES

GX53 LED Ø75mm- CCT SETTABLE



POWER		3 W
LUMINOUS FLUX (Φ TOTAL)	3000 K	405 lm
	4000 K	410 lm
	6500 K	410 lm
SIZE & SOCKET		



INDOOR & OUTDOOR USE

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT



COMPLY WITH:
EU 2019/2015
EU 2019/2020

CE LVD EMC
CB ERP

IECEE CB CERTIFICATE:
SG PSB-LE-03887

LUMINOUS FLUX (Φ USE 120°)	335 lm
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
PSTLM (NO FLICKER)	< 1
SVM	0,4
CRI	> 80
SDCM	<6
BEAM ANGLE	112°
SWITCHING CYCLE	> 30.000
WARM UP TIME	0s
LIFETIME	25.000 h
EFFICIENCY CLASS	E
REF. CODE	H.LED.G53.CCT


*SASO version available upon request.

GX53 LED Ø100mm

TÜV- CB CERTIFIED LED MODULES

fumagalli since 1973

SILICONE PROTECTION



INDOOR & OUTDOOR USE

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

LENS
- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.



PCB AND CONNECTION RING
- Special connection ring to avoid PCB deformation under high temperatures and to keep the PCB adhering to the heatsink.
- Special thermoconductive paste for gluing firmly the PCB to the heatsink and for helping the heat dissipation.





GOLD WIRE BONDING
- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



HEATSINK
- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.

DRIVER 100-240V
- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



GX53 LAMP HOLDER
- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- ENEC certified.







THERMOCONDUCTIVE SILICONE PASTE
- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



CCT SETTABLE
- Switch settable in three different positions, to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.
- 3000K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.

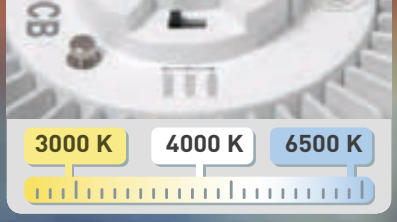

IECEE CB CERTIFICATE





GX53 LED Ø100mm

TÜV- CB CERTIFIED LED MODULES

GX53 LED Ø100mm - CCT SETTABLE



POWER		10W
LUMINOUS FLUX (Φ TOTAL)	3000 K	1190 lm
	4000 K	1290 lm
	6500 K	1210 lm
SIZE & SOCKET		 GX53







COMPLY WITH:
EU 2019/2015
EU 2019/2020



CE LVD
EMC
CB ERP



IECEE CB CERTIFICATE:
SG PSB-LE-03887

LUMINOUS FLUX (Φ USE 120°)	975 lm
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
DISPLACEMENT FACTOR	>0,5
PSTLM (NO FLICKER)	< 1
SVM	0,4
CRI	> 80
SDCM	<6
BEAM ANGLE	112°
SWITCHING CYCLE	> 30.000
WARM UP TIME	0s
LIFETIME	25.000 h
EFFICIENCY CLASS	E
REF. CODE	H3.LED.G53.CCT


*SASO version available upon request.

GX53 LED Ø160mm

TÜV- CB CERTIFIED LED MODULES

fumagalli since 1973

POWER SETTABLE
- Switch settable in two different positions, to select the desired power.
- **Full Power** mode or eco mode settable.

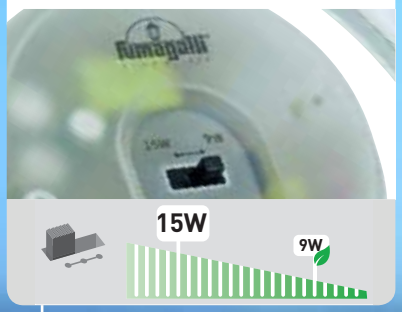

LENS
- Lens designed to widen the lamp beam angle and **avoid shadows on the diffuser**.
- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.




GOLD WIRE BONDING
- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 2835 LED.
- LM80 STANDARD






CCT SETTABLE
- Switch settable in two different positions, to select the desired Kelvin temperature (2700K, 4000K) and get a customized ambiance.
- 2700K and 4000K led chips on 2 separate circuits to grant SDCM < 6.

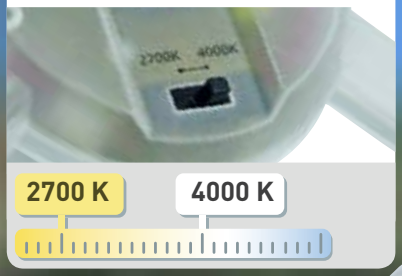

DRIVER 100-240V
- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



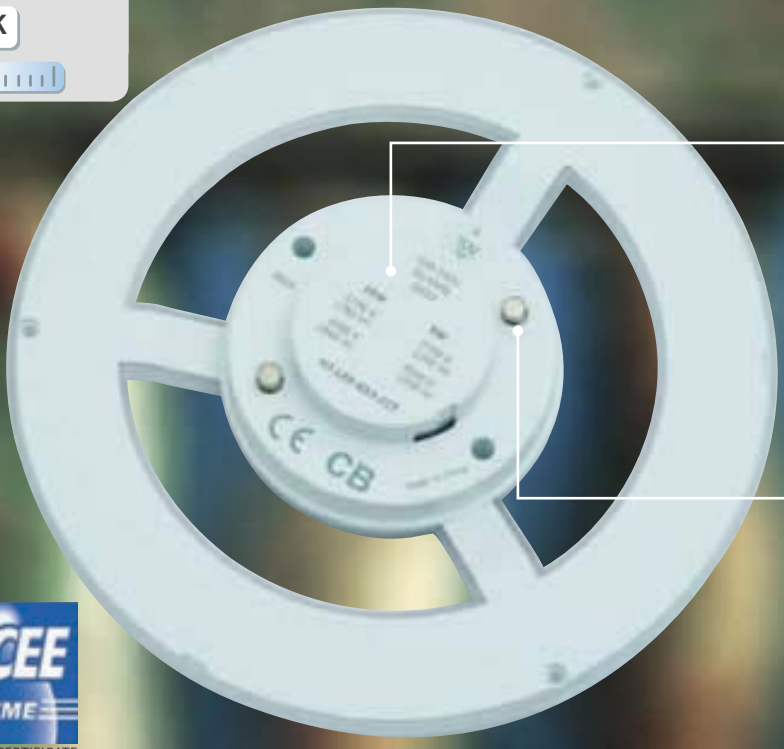

INDOOR & OUTDOOR USE

-20 +40 °C	90% HUMIDITY
VOLTAGE SURGE RESISTANT	


GX53 LAMP HOLDER
- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- ENEC certified.



TÜV SÜD

IECEE CB SCHEME

IECEE CB CERTIFICATE





GX53 LED Ø160mm


TÜV- CB CERTIFIED LED MODULES

GX53 LED Ø160mm- POWER SETTABLE / CCT SETTABLE

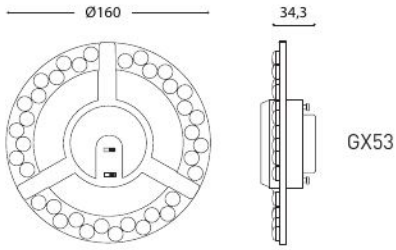

POWER		**15W /** 9 W eco mode
LUMINOUS FLUX (Φ TOTAL)	2700 K	**1780 lm** 1200 lm
	4000 K	**1940 lm** 1300 lm
SIZE & SOCKET		

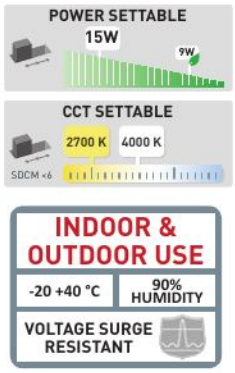



COMPLY WITH:
EU 2019/2015
EU 2019/2020



CE LVD EMC
CB ERP



IECEE CB CERTIFICATE:
SG PSB-LE-06107

VOLTAGE	**100-240 V**
FREQUENCY	50/60 Hz
DISPLACEMENT FACTOR	>0,9
PSTLM (NO FLICKER)	<0,1
SVM	0,4
CRI	> 80
SDCM	<6
SWITCHING CYCLE	> 15.000
WARM UP TIME	≤ 0,5"
LIFETIME	25.000 h
EFFICIENCY CLASS	E
REF. CODE	H7.LED.G53.CCT

G9 LED

TÜV- CB CERTIFIED LED MODULES

fumagalli since 1973

INDOOR & OUTDOOR USE

-30 +80 °C	90% HUMIDITY
VOLTAGE SURGE RESISTANT	

LENS
- Opal lens made of UV stabilized resin material to avoid yellowing process.
- Designed for granting 110° light distribution and for improving light efficiency.




GOLD WIRE BONDING
- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



DRIVER 100-240V
- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.




G9 LAMPHOLDER
- Quick and easy lamp replacement and version upgrade.
- Made of steatite material to resist up to 250°.
- ENEC certified.

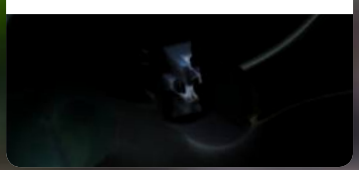

HEATSINK
- Made by thermo-conductive ceramic material.
- Special design to grant a correct heat dissipation

IECEE CB CERTIFICATE




G9 LED

TÜV- CB CERTIFIED LED MODULES

G9 LED




POWER		1,7 W
LUMINOUS FLUX (Φ TOTAL)	3000 K	150 lm
	4000 K	150 lm
SIZE & SOCKET		
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
PSTLM (NO FLICKER)		<1
SVM		0,9
CRI		> 80
SDCM		<6
SWITCHING CYCLE		>40.000
WARM UP TIME		⩽ 0,5"
LIFETIME		15.000 h
KELVIN	3000 K	4000 K
EFFICIENCY CLASS	F	F
REF. CODE	H.LED.G09.3K	H.LED.G09.4K

INDOOR & OUTDOOR USE

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT



COMPLY WITH:
EU 2019/2015
EU 2019/2020

CE LVD EMC
CB ERP


IECEE CB CERTIFICATE:
SG PSB-LE-02130

*SASO version available upon request.

GU10 LED

TÜV- CB CERTIFIED LED MODULES

SILICONE PROTECTION (4,8 W)




INDOOR & OUTDOOR USE

-30 +80 °C | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CCT SETTABLE

- Switch settable in two different positions, to select the desired Kelvin temperature (2700K, 4000K) and get a customized ambiance.
- 2700k and 4000K led chips on 2 separate circuits to grant SDCM < 6.

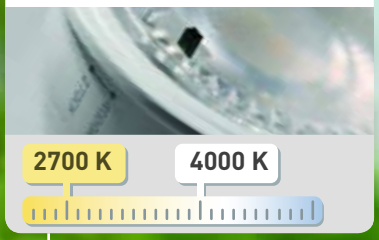

LENS

- Frosted lens with prismatic shape reducing dazzle.
- Made of UV stabilized PMMA to avoid yellowing process.





GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



HEATSINK

- Made by aluminum and designed to grant a correct heat dissipation.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



GU10 LAMPHOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of ceramic material to resist up to 250°.
- VDE certified.



THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



IECEE CB CERTIFICATE

GU10 LED - CCT SETTABLE



POWER		2,9 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	360 lm
	4000 K	390 lm
SIZE & SOCKET		Ø50, 54, GU10
LUMINOUS FLUX (Φ USE 90°)		280 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,95
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<5
BEAM ANGLE		48°
SWITCHING CYCLE		> 25.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H.LED.GU10.CCT

CCT SETTABLE 2700 K 4000 K SDCM <3

INDOOR & OUTDOOR USE
-20 +40 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG — E — 3 kWh/1000h — 2019/2015

COMPLY WITH:
EU 2019/2015
EU 2019/2020

LVD EMC ERP

IECEE CB CERTIFICATE:
SG PSB-LE-06599

GU10 LED - CCT SETTABLE



POWER		4,8 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	580 lm
	4000 K	625 lm
SIZE & SOCKET		Ø50, 54, GU10
LUMINOUS FLUX (Φ USE 90°)		450 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,95
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<5
BEAM ANGLE		47°
SWITCHING CYCLE		> 25.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H2.LED.GU10.CCT

CCT SETTABLE 2700 K 4000 K SDCM <3

SILICONE PROTECTION
DRIVER

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG — E — 5 kWh/1000h — 2019/2015

COMPLY WITH:
EU 2019/2015
EU 2019/2020


LVD EMC ERP

IECEE CB CERTIFICATE:
SG PSB-LE-06599

*SASO version available upon request.



CCT SETTABLE
- Switch settable in three different positions, to select the desired Kelvin temperature (2700K, 4000K, 6500K) and get a customized ambiance.
- 2700K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.

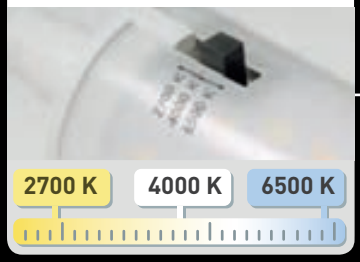


LENS
- Opal lens made of UV stabilized resin material to avoid yellowing process.
- Designed for granting 360° light distribution and for improving light efficiency.

HEATSINK
- Made by an aluminum tube on which the PCB is glued to.
- Special design to grant a correct heat dissipation




DRIVER 100-240V
- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- High quality capacitors and multiple resistances able to withstand power surges.



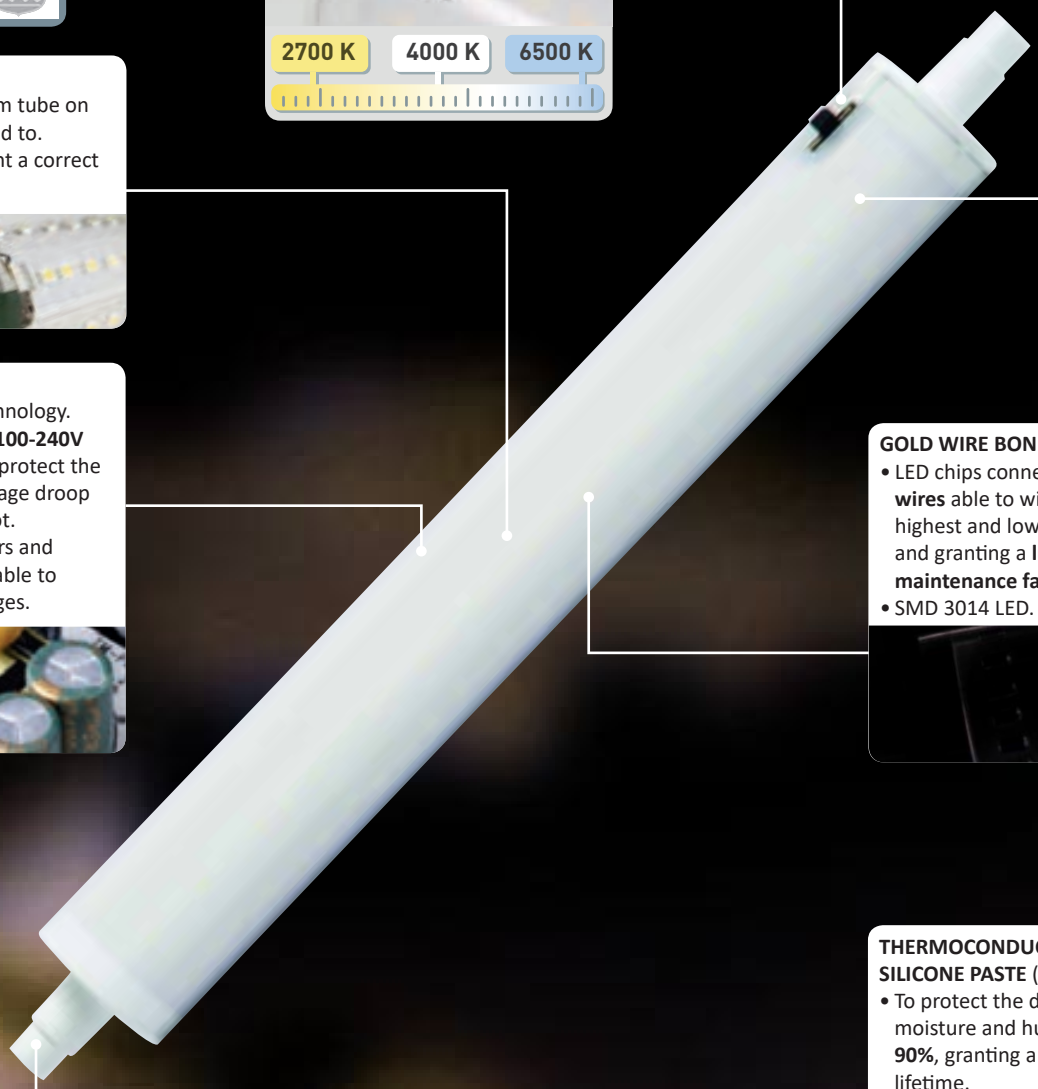

GOLD WIRE BONDING
- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3014 LED.

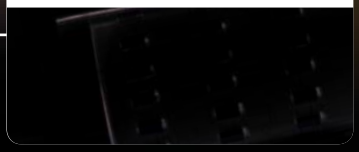

THERMOCONDUCTIVE SILICONE PASTE (7,5W-10,5W)
- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime.
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.





R7s LAMPHOLDER
- Quick and easy lamp replacement and version upgrade.
- Made of steatite material to resist up to 250°.
- VDE certified.




R7s LED 78mm- CCT SETTABLE

SIZE & SOCKET: R7s












COMPLY WITH:
EU 2019/2015
EU 2019/2020




POWER		**3,5W**
LUMINOUS FLUX (Φ TOTAL)	2700 K	325 lm
	4000 K	365 lm
	6500 K	365 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		45.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		F
REF. CODE		H7.LED.R7S.CCT


R7s LED 118mm- CCT SETTABLE

SIZE & SOCKET: R7s












COMPLY WITH:
EU 2019/2015
EU 2019/2020




POWER		**7,5 W**
LUMINOUS FLUX (Φ TOTAL)	2700 K	680 lm
	4000 K	775 lm
	6500 K	790 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,5
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		45.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		F
REF. CODE		H8.LED.R7S.CCT


R7s LED 189mm- CCT SETTABLE

SIZE & SOCKET: R7s












COMPLY WITH:
EU 2019/2015
EU 2019/2020




POWER		**10,5 W**
LUMINOUS FLUX (Φ TOTAL)	2700 K	1000 lm
	4000 K	1130 lm
	6500 K	1060 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,7
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		45.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		F
REF. CODE		H9.LED.R7S.CCT



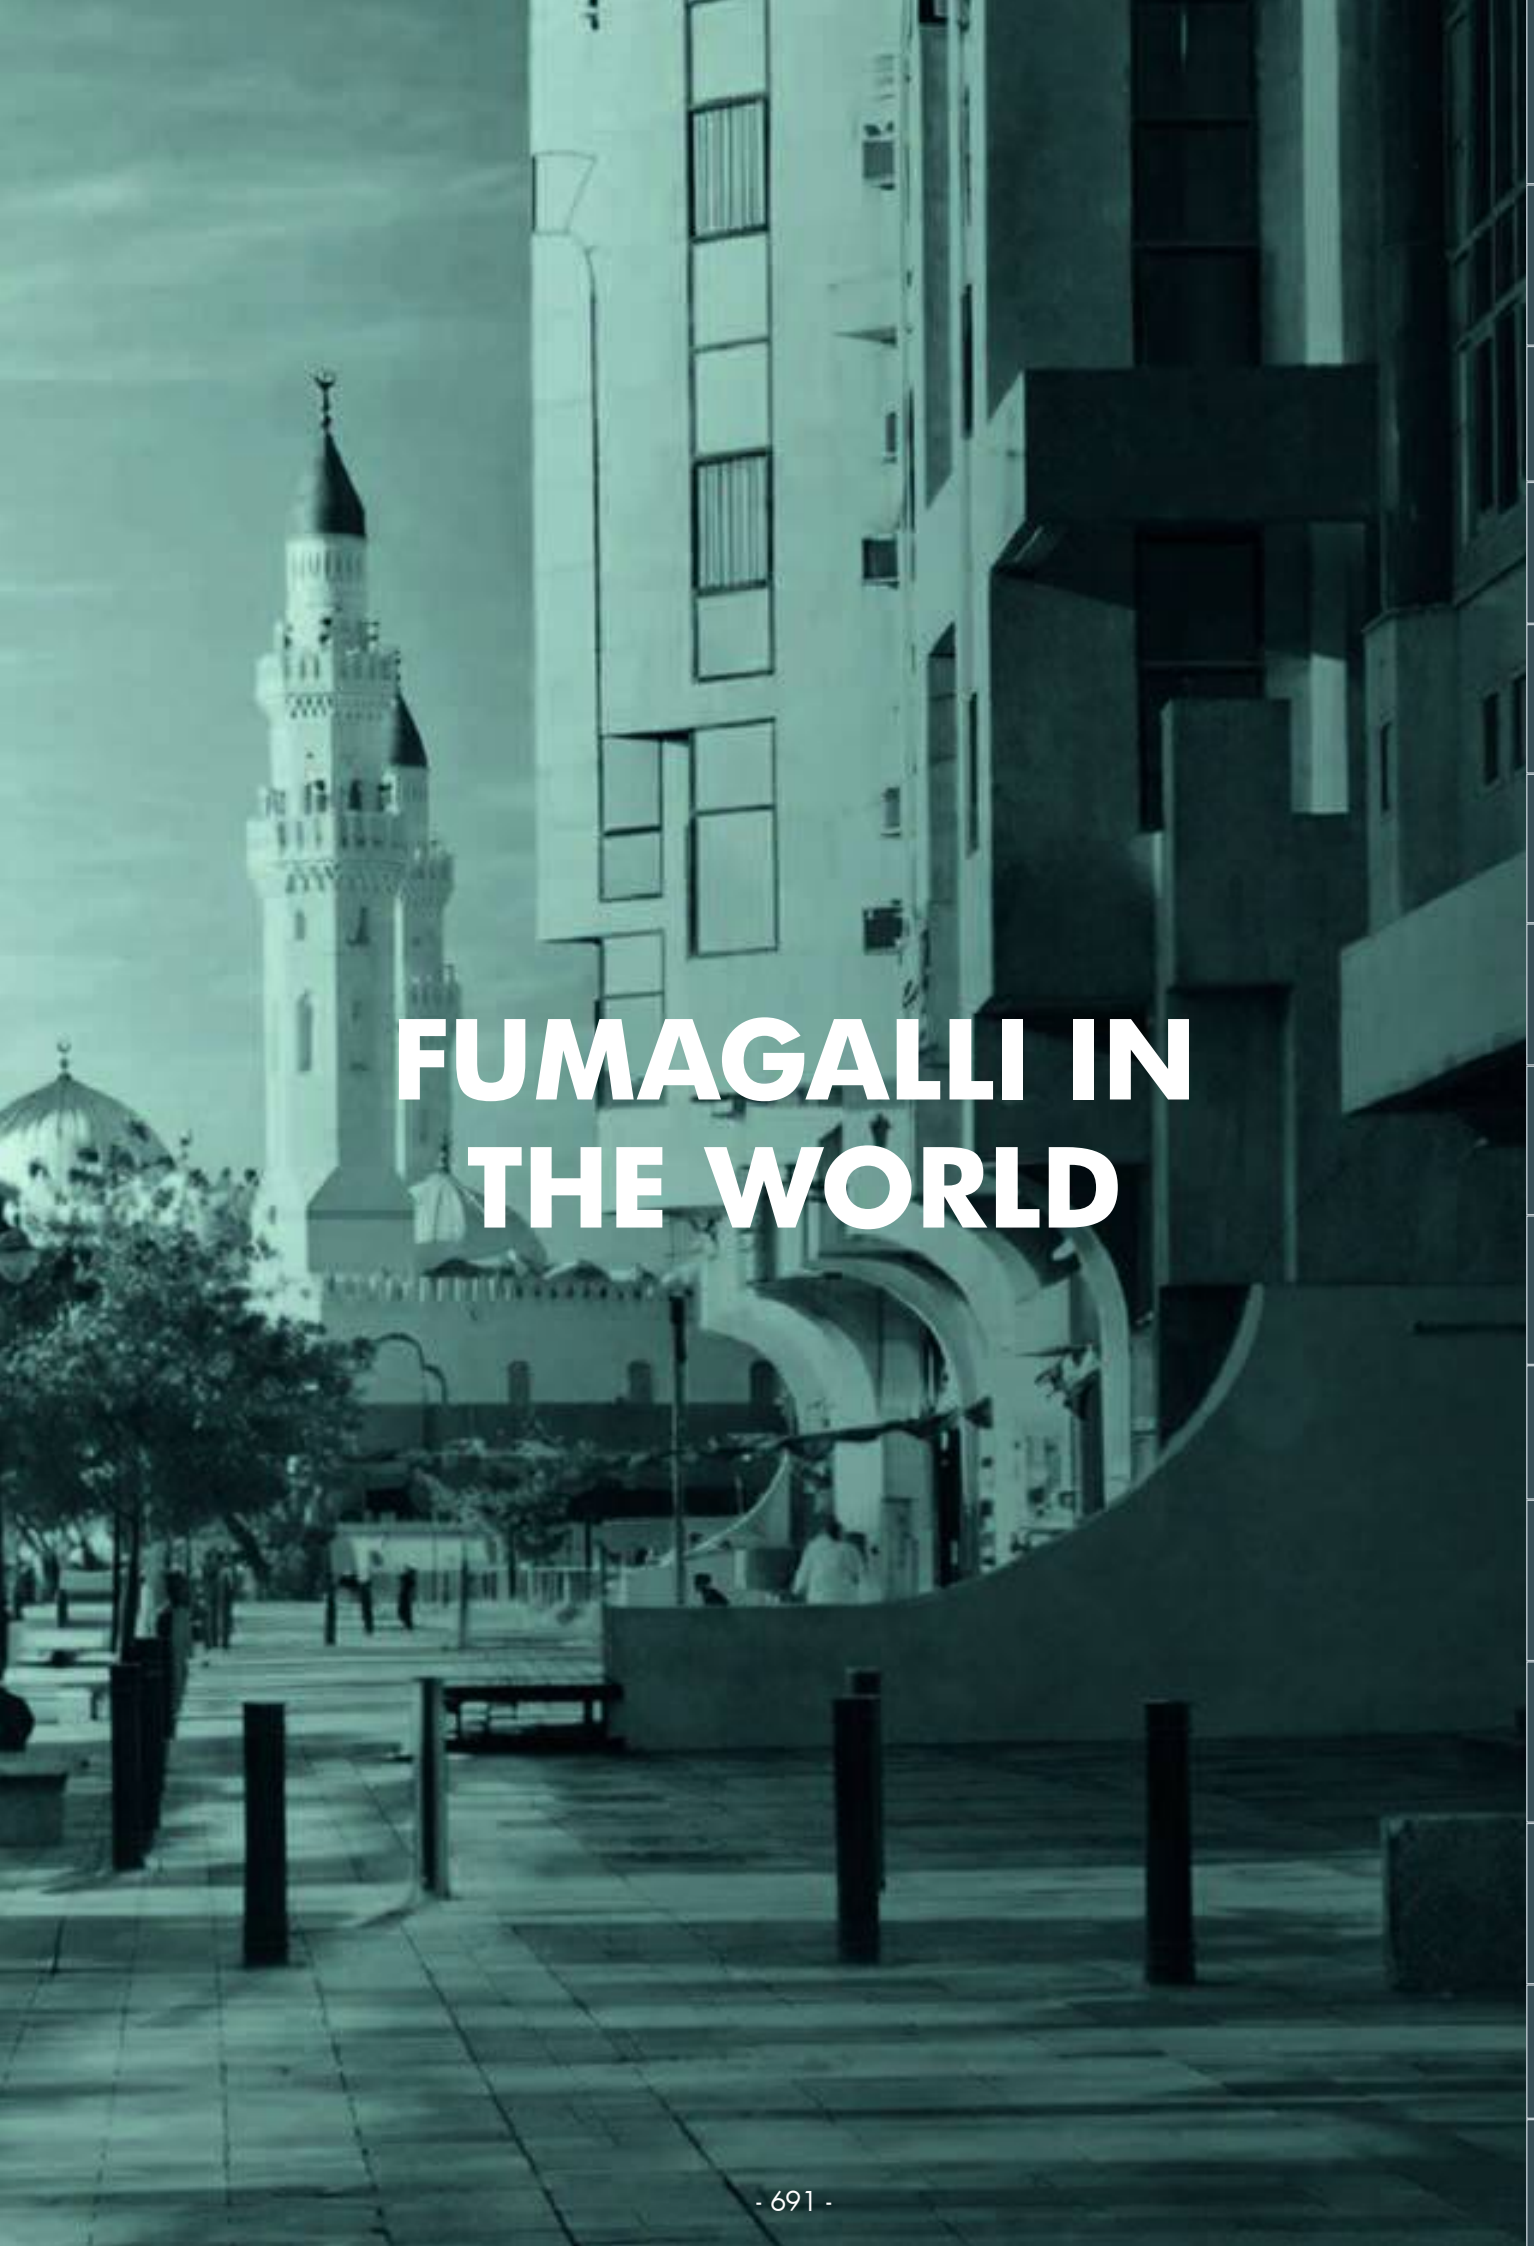


FUMAGALLI IN THE WORLD


ITALY

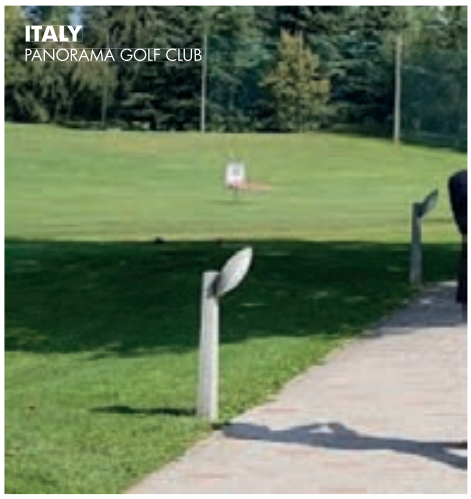
ITALY
PANORAMA GOLF CLUB


ITALY



ITALY

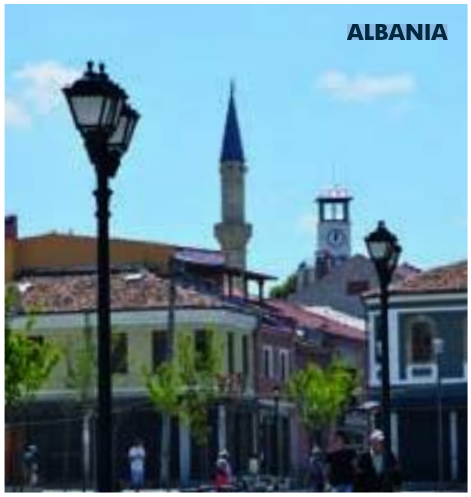
ALBANIA


ALBANIA TIRANA - TE STELA HOTEL


PORTUGAL


ALBANIA

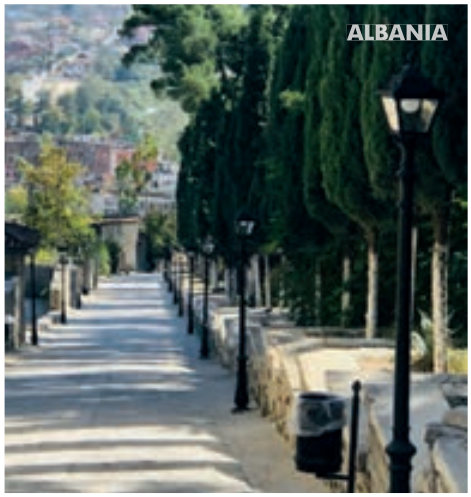

ALBANIA


PORTUGAL AZORES


PORTUGAL OESTE - PRAIA DEL REY GOLF CLUB

MADE IN ITALY


KOSOVO

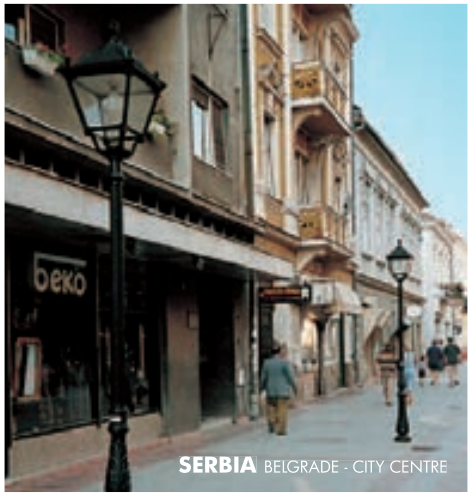

SERBIA BELGRADE - CITY CENTRE


GREAT BRITAIN



GREAT BRITAIN
CHESHIRE



GREAT BRITAIN


GREAT BRITAIN


GREAT BRITAIN
NORTH EAST ENGLAND


GREAT BRITAIN
CHESHIRE


GREAT BRITAIN
WATCHET HARBOUR


GREAT BRITAIN CARAVAN PARK - SOUTH WEST ENGLAND



GREAT BRITAIN
CHESHIRE


GREAT BRITAIN CORNWALL


fumagalli since 1973


IRELAND



IRELAND


IRELAND CAVAN - CABRA CASTLE HOTEL

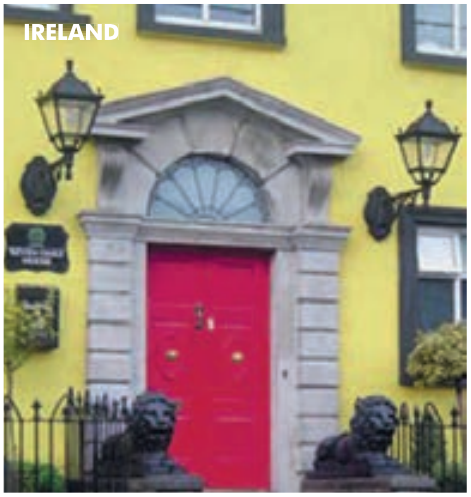
IRELAND


IRELAND
CAVAN - CABRA CASTLE HOTEL


LATVIJA


RUSSIA


RUSSIA SOKOLNIKI PARK


RUSSIA


MADE IN ITALY


ROMANIA



ROMANIA TARGU CETATE NEAMT


ROMANIA


ROMANIA

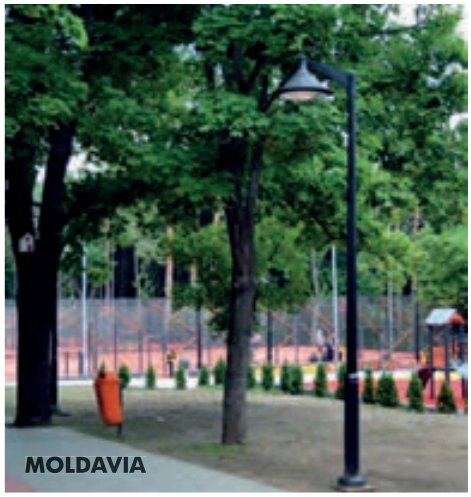
MOLDAVIA


GREECE PAROS

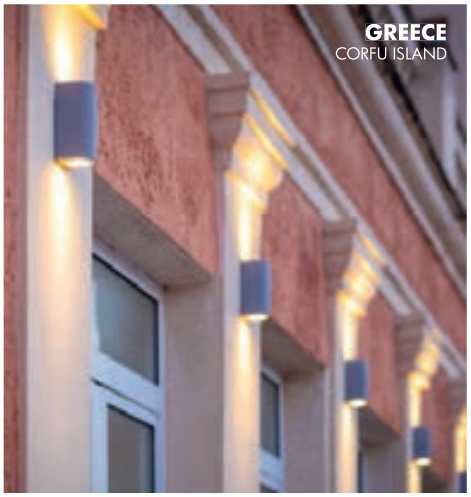
GREECE
CORFU ISLAND


GREECE
SANTORINI ISLAND


GREECE
LARISA


GREECE
MUNICIPALITY OF LESVOS


GREECE
CORFU ISLAND


GREECE ZANTE


GREECE PAROS


GREECE
CORFU ISLAND



GREECE



GREECE ILIDA'S PORT


GREECE NEAPOLIS COAST SIDE


CYPRUS
ISKELE MUNICIPALITY - MARINE PARK


CYPRUS

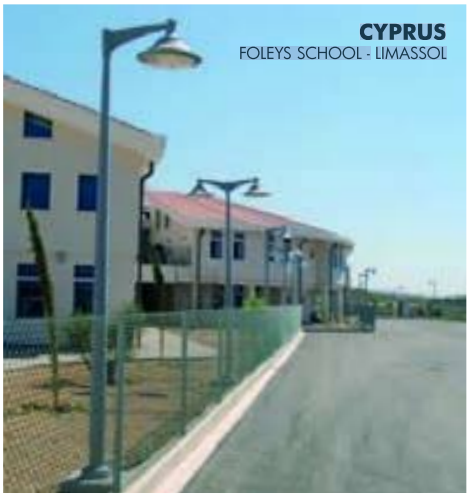

CYPRUS
FOLEYS SCHOOL - LIMASSOL

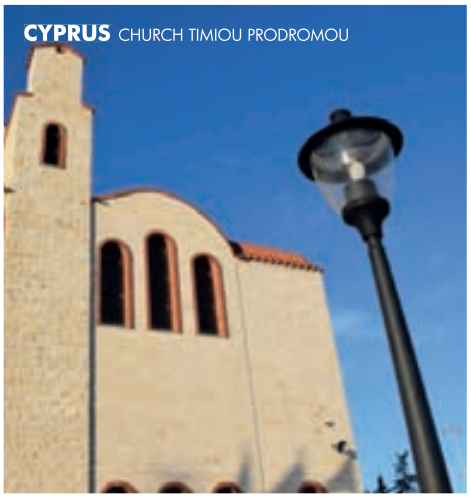
CYPRUS CHURCH TIMIOU PRODROMOU


CYPRUS PRINCESS BEACH HOTEL LARNACA

MADE IN ITALY


MALTA

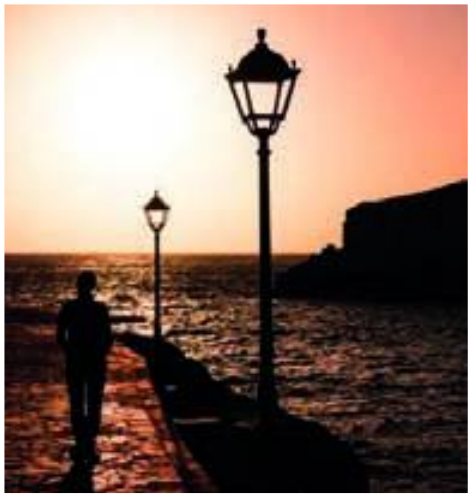


MALTA
GOZO


MALTA


MALTA RADISSON SAS HOTEL


MALTA



MALTA


MALTA


MALTA


MALTA VALLETTA PORT


MALTA

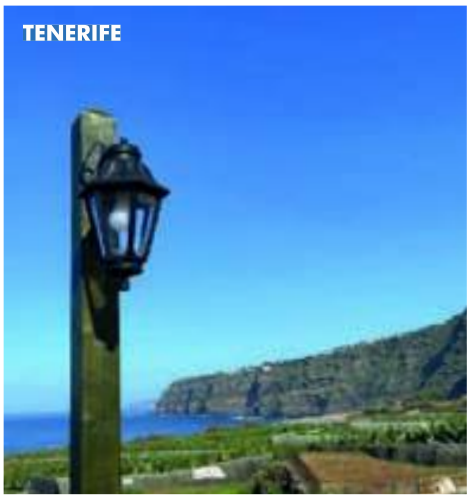
TENERIFE


MOROCCO



MOROCCO


MOROCCO


MOROCCO
MANSOURIA BEACH RESORT


MOROCCO AEROPORT DAKHLA


MOROCCO

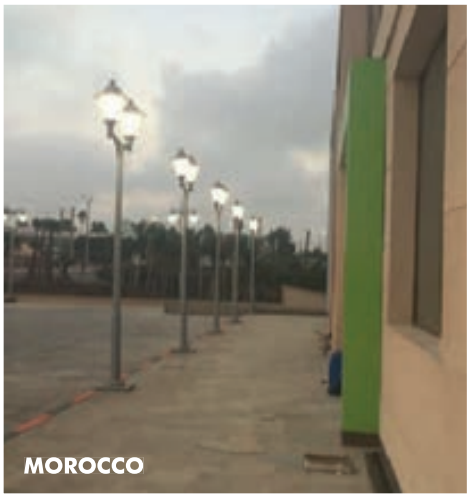
MOROCCO



MOROCCO



MOROCCO



TUNISIA TUNISI - SHERATON HOTEL



TUNISIA


TUNISIA

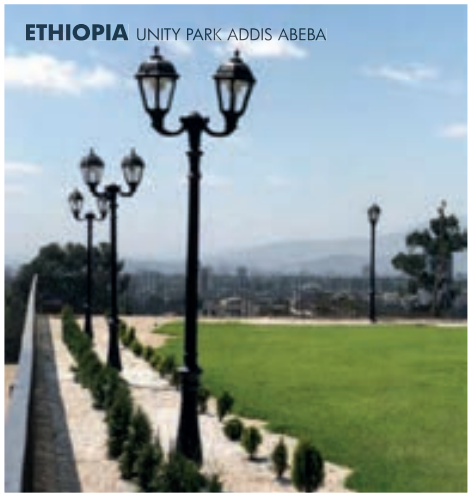

ETHIOPIA UNITY PARK ADDIS ABEBA

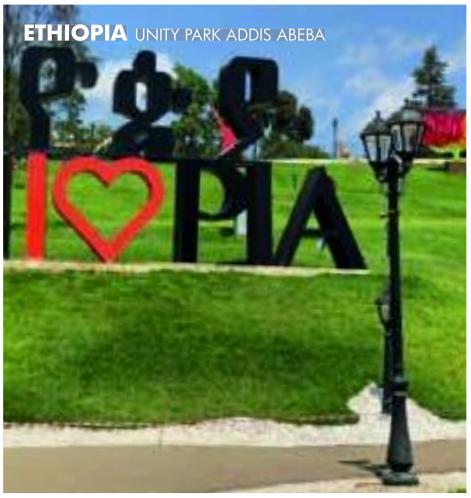
ETHIOPIA UNITY PARK ADDIS ABEBA

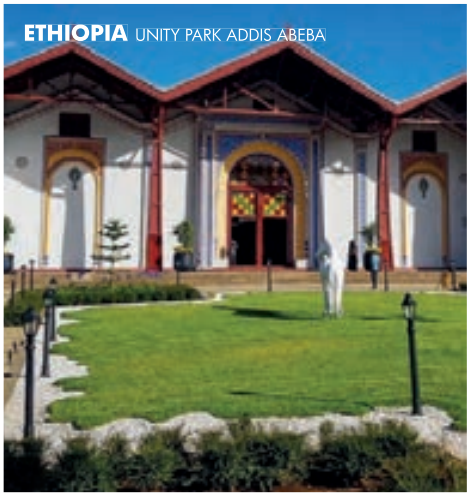

ETHIOPIA UNITY PARK ADDIS ABEBA

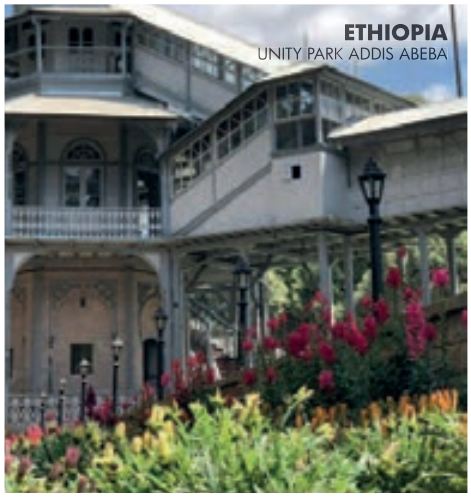
ETHIOPIA
UNITY PARK ADDIS ABEBA


PALESTINE

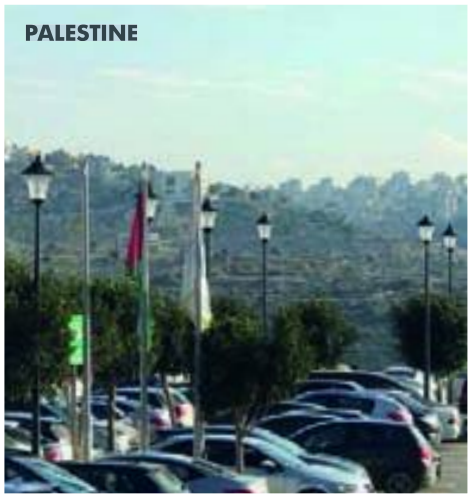
PALESTINE


PALESTINE

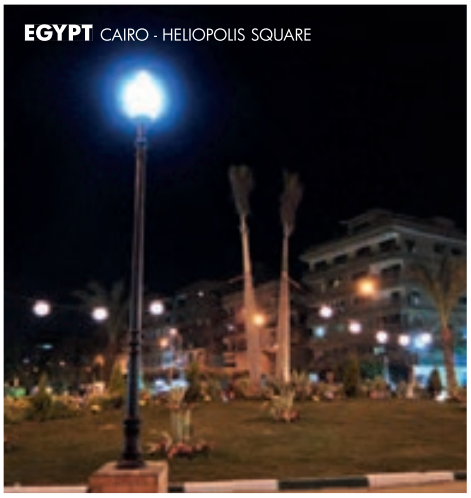
EGYPT CAIRO - HELIOPOLIS SQUARE


EGYPT


EGYPT


ISRAEL
מרכז מבקרים
VISITOR'S CENTER
כניסה
ENTRANCE


ISRAEL


ISRAEL


LEBANON



LEBANON



LEBANON
SAMJAD HORSES FARM


LEBANON


LEBANON JIEH MARINA RESORT


LEBANON

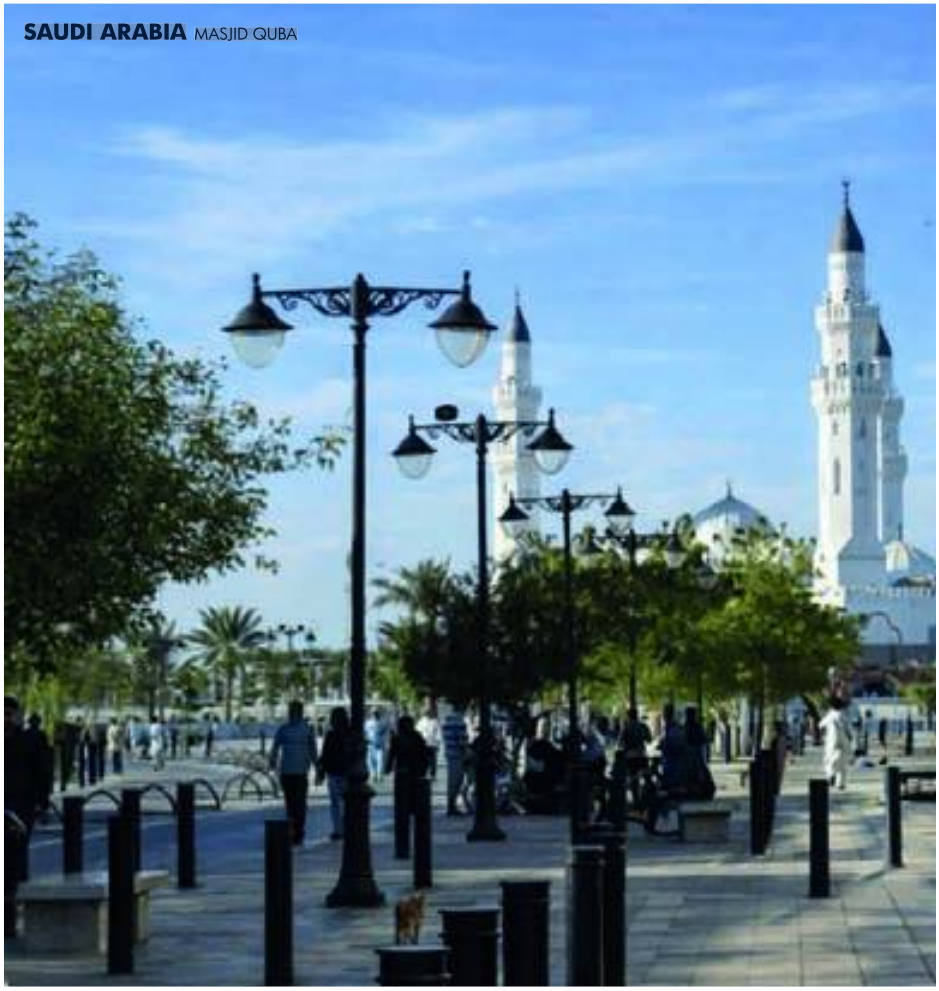
SAUDI ARABIA MASJID QUBA

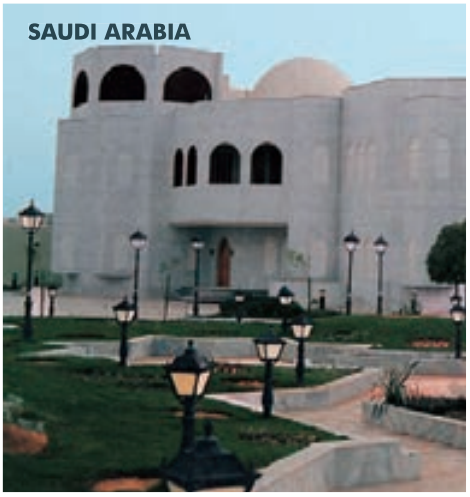
SAUDI ARABIA


SAUDI ARABIA


SAUDI ARABIA MASJID QUBA


SAUDI ARABIA DAMMAM


SAUDI ARABIA
TABOOK UNIVERSITY


SAUDI ARABIA


QATAR HOUSE OF MINISTER OF EDUCATION



DOHA - CORNICE QATAR


QATAR


QATAR


QATAR DOHA - SHERATON HOTEL



QATAR

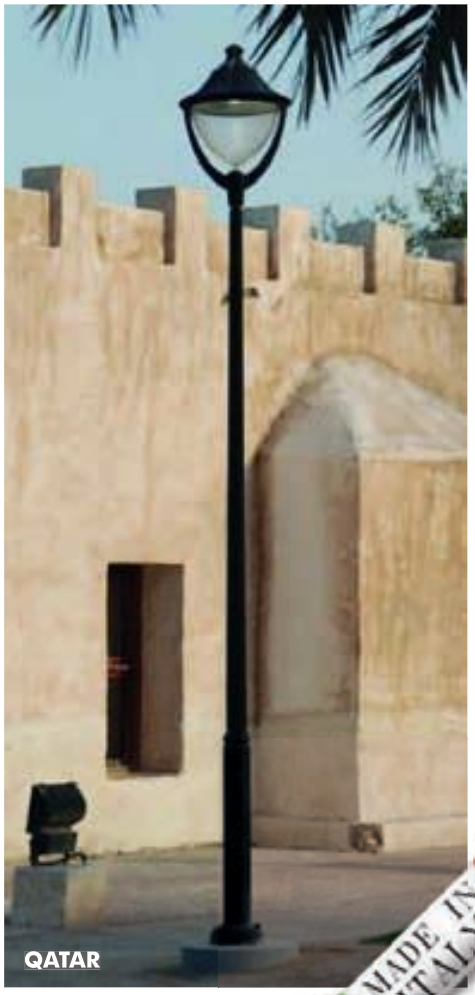
QATAR


QATAR DOHA - CORNICE


QATAR


QATAR DOHA - AL KHULAIFAT PARK

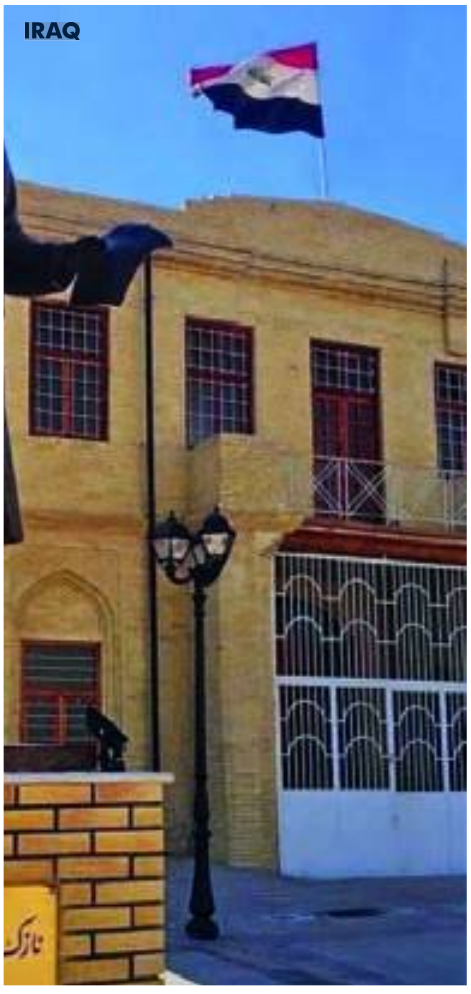
IRAQ


KUWAIT


KUWAIT
MINISTRY OF INTERIOR


BAHRAIN

fumagalli® since 1973


U.A.E. DUBAI DOWNTOWN - BURJ KHALIFA


U.A.E. DUBAI - JUMEIRAH BEACH HOTEL


U.A.E. DUBAI - BURJ AL ARAB



U.A.E.



U.A.E. DUBAI - THE PALM



U.A.E. DUBAI - ACADEMIC CITY

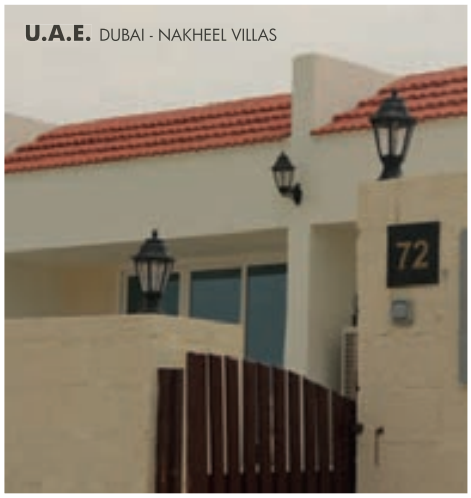

U.A.E. DUBAI - NAKHEEL VILLAS



U.A.E. DUBAI - SHOROOQ COMMUNITY CENTRE


MADE IN ITALY



OMAN MUSCAT - MINISTRY OF JUSTICE


OMAN


OMAN MUSCAT - MINISTRY OF JUSTICE

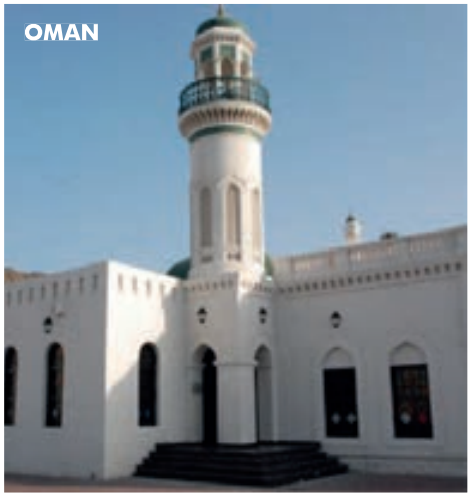

OMAN

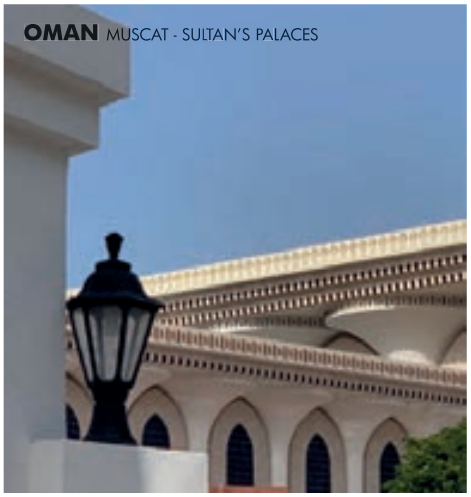
OMAN MUSCAT - SULTAN'S PALACES

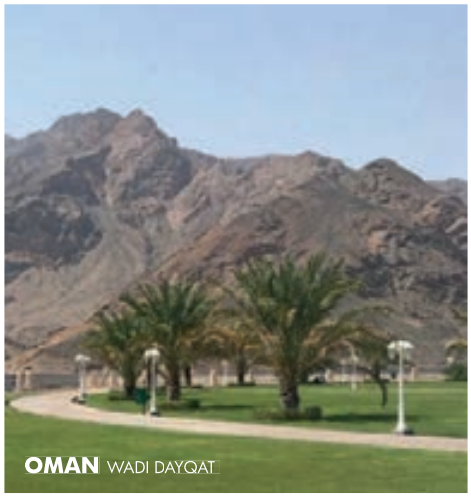
OMAN WADI DAYQAT


OMAN


OMAN MUSCAT - AL BUSTAN PALACE

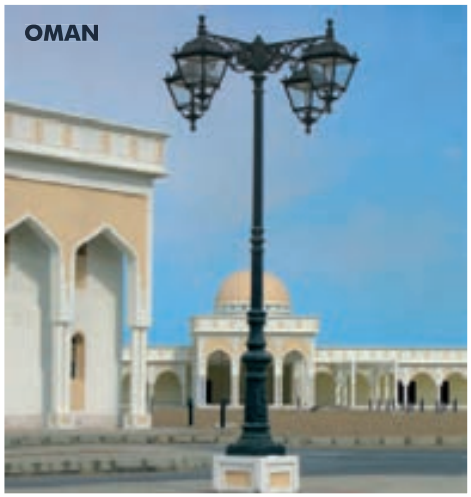
OMAN

fumagalli since 1973


GEORGIA


GEORGIA


GEORGIA


INDIA
THIRUVANANTHAPURAM
INTERNATIONAL AIRPORT


INDIA MAHABLESHWAR


INDIA JAMNAGAR


INDIA GUJRAT


MALAYSIA


MALAYSIA


MALAYSIA

MADE IN ITALY


MALAYSIA



MALAYSIA



MALAYSIA



THAILAND
KELAB MASYARA
தங்களின் சமூக மன்
TANGLIN COMMUNITY


THAILAND


TAIWAN KAOHSIUNG - ELEMENTARY SCHOOL

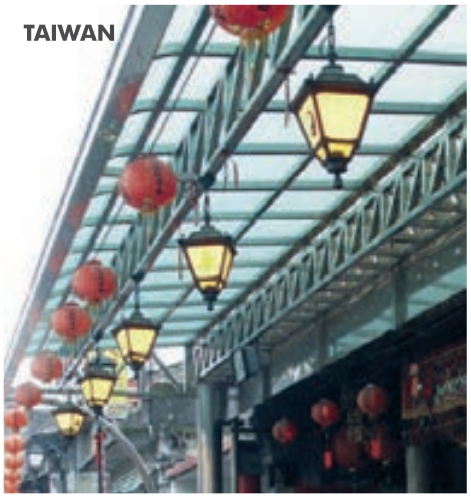
TAIWAN

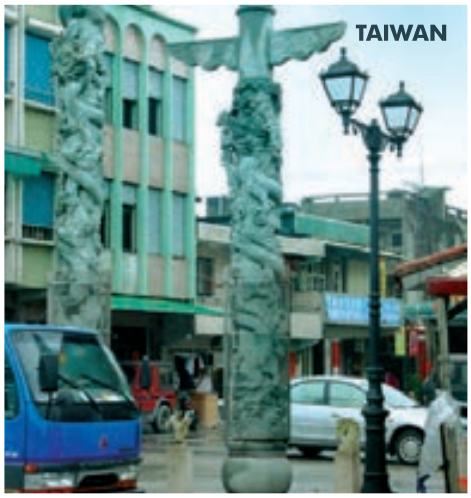
TAIWAN

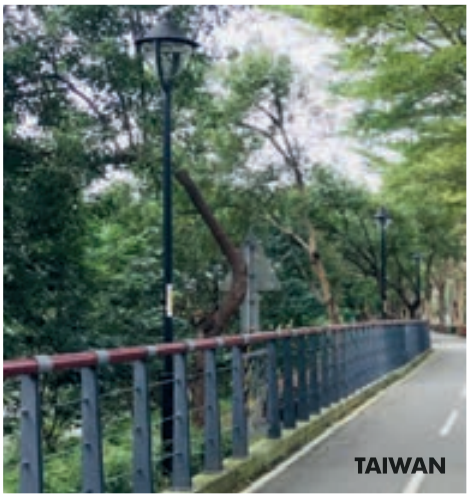
TAIWAN













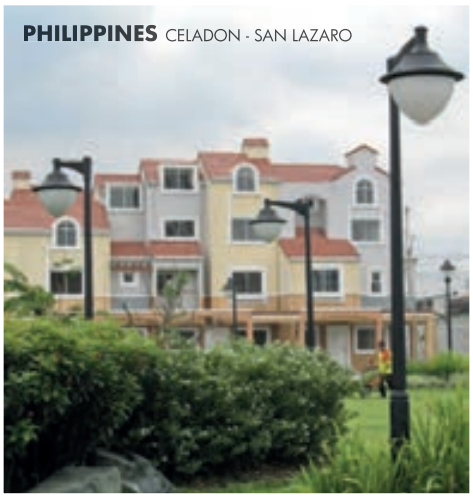



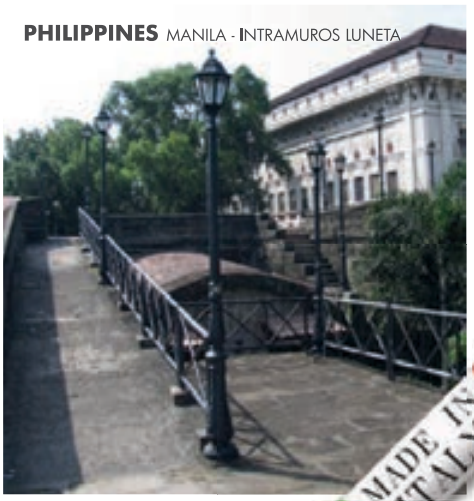

MADE IN ITALY



SOUTH KOREA


SOUTH KOREA


SOUTH KOREA



SOUTH KOREA


NEPAL LUMBINI - THE BIRTHPLACE OF THE LORD BUDDHA

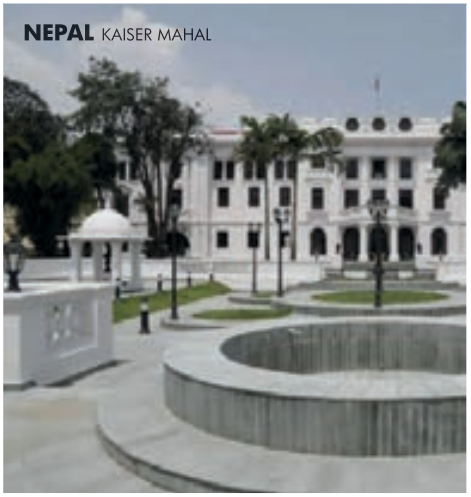
NEPAL KAISER MAHAL


NEPAL LUMBINI



NEPAL PRESIDENT HOUSE

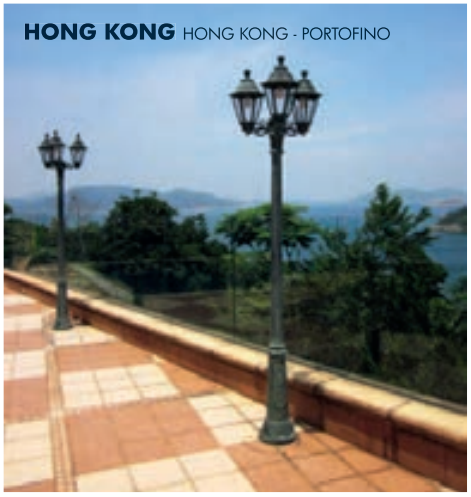
HONG KONG HONG KONG - PORTOFINO


HONG KONG



HONG KONG


HONG KONG

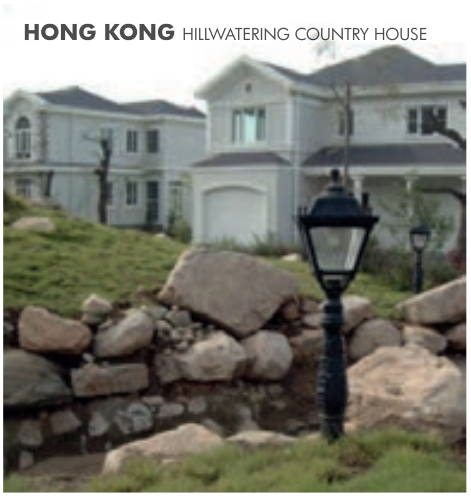
HONG KONG HILLWATERING COUNTRY HOUSE


MACAU


BRUNEI AE ASIA AGRI-MART

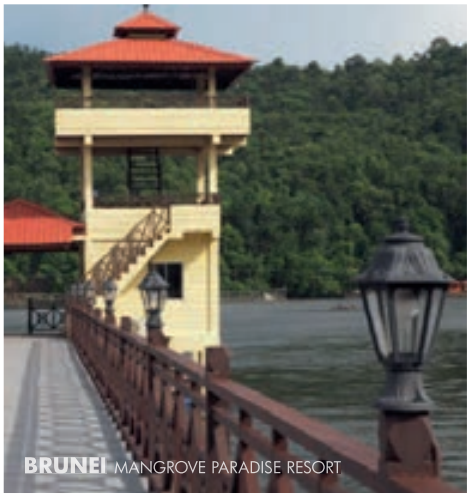
BRUNEI MANGROVE PARADISE RESORT


NEPAL KAISER MAHAL


BRUNEI


BRUNEI

MADE IN ITALY


PANAMA LA CALZADA DE AMADOR


COSTA RICA


COSTA RICA


MEXICO


MEXICO


SURINAME PARAMARIBO
INDEPENDENCE SQUARE MINISTRY OF FINANCE


SURINAME


ECUADOR COLEGIO ALEMAN


ECUADOR


ECUADOR


ECUADOR


ECUADOR


ECUADOR SAMBORONDON


ECUADOR


ECUADOR

fumagalli®
since 1973

INDEX

MADE IN ITALY

fumagalli®

since 1973

1973-2027

Fumagalli S.r.l.
Via Ca' Bassa, 59
21100 Varese - ITALY
Tel.+39.0332.336353
Fax.+39.0332.336358
E-mail info@fumagalli.it

www.fumagalli.it

LED Zona®
ОСВЕТИТЕЛНИ РЕШЕНИЯ

Харесахте ли нещо от каталога?

Разгледайте и поръчайте продукти на Fumagalli онлайн
на led-zona.bg – с актуални цени и наличности.

Продуктите на Fumagalli

Сканирайте или кликнете

Разгледайте продуктите →

Каталози на Fumagalli

Сканирайте или кликнете

Още каталози →

www.led-zona.bg

T: 0888 065 970 | E: sales@led-zona.bg

Сфера Лайт ООД · гр. София, ж.к. Банишора, ул. Опълченска, бл. 54 (до 7-ма поликлиника)