Systems, Spotlights, Tracks, Recessed lights,
Outdoor lamps, Light bulbs.
Selection for designers and architects.

Light shapes function.

ideal lux technical outdoor 2026

ideal lux technical outdoor

ideal lux technical outdoor

An old know-how accompanies people who work with light: the ability of designing with precision, of mastering the rules of this craft, the sensibility of those who are able to transform technique into vision.

This catalogue is born from that same attitude, from the experience of the people who knows the light, interprets it and turn it into a design tool.

This is a practice and functional guide, thought to support the work of professionals like you, by offering reliable, current and high quality technical and outdoor solutions.

It is our way of being at your side: with expertise, care and a constant commitment to the evolution of light as a language and inspiration.

Raffaele Strano, CEO





JEDI P. 498







EGO WIDE P. 116 →



SIRIO P. 482 →



IDEAL LUX

SOLE P. 468 →





ZEUS P. 242



PURE P. 454 →





SWIPE P. 386



IDEAL LUX

TESI P. 180



PUNTO P. 400 →









DEVA P. 54



AGOS P. 476 →





LOLITA P. 462






GUN P. 398



TAURUS P. 556 ↱



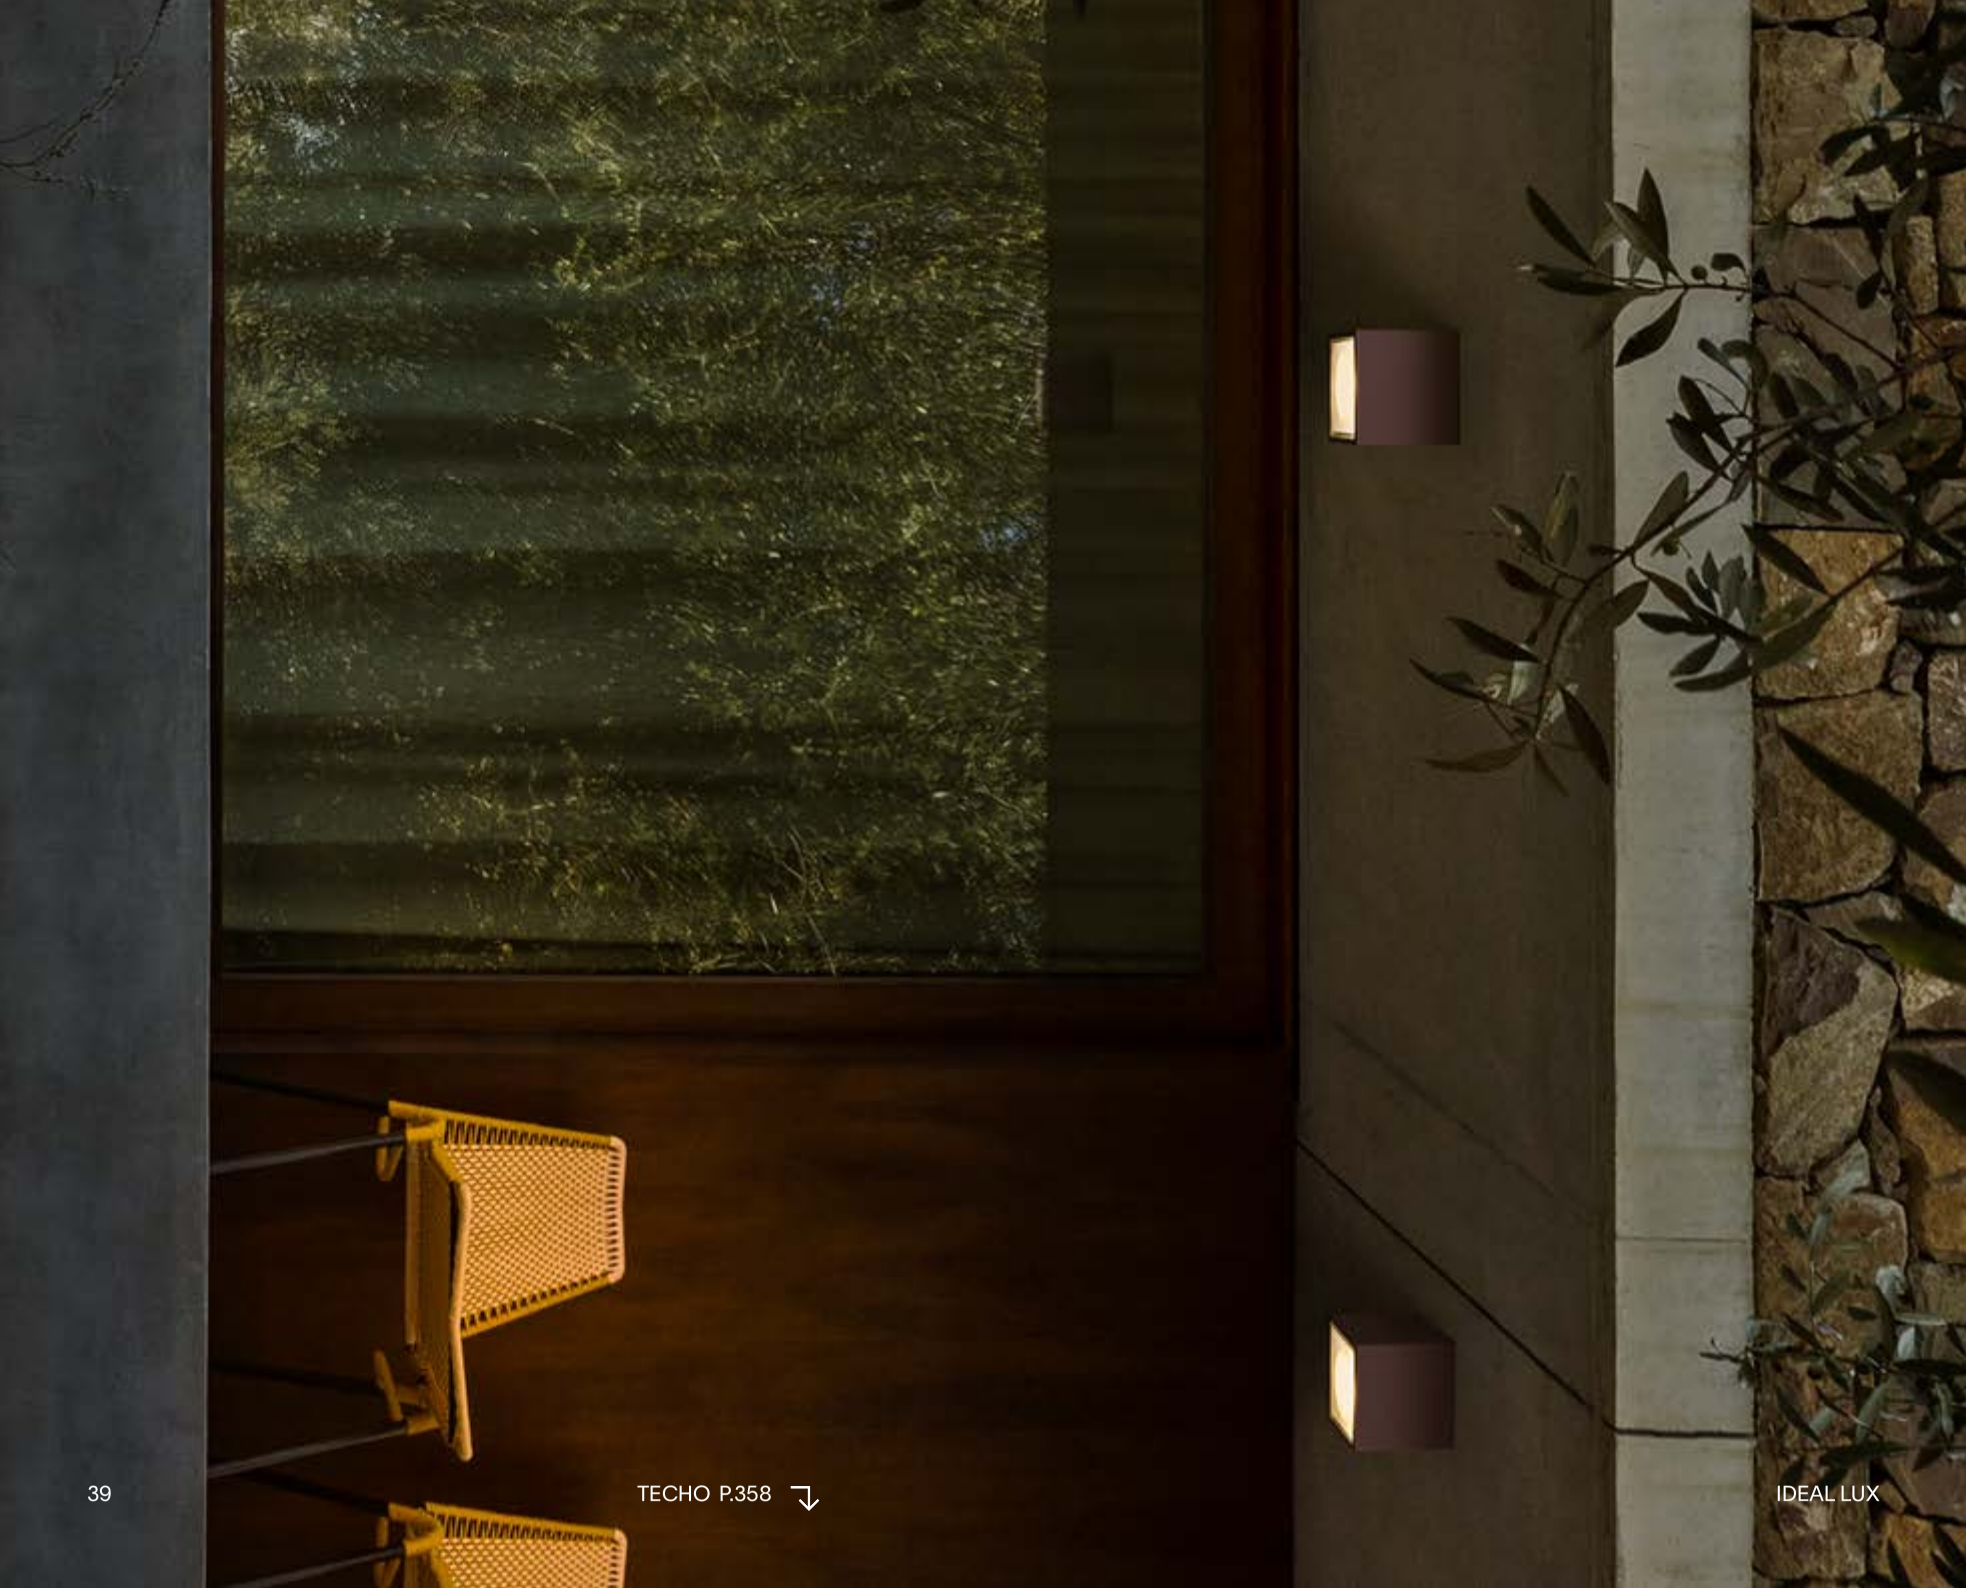

TECHO P.358







FIESTA P. 368

IDEAL LUX

Alphabetical index
technical outdoor

> Agos 476
> Andromeda 430
> Argo 422
> Atena 508
> Atom 414
+ Basic 288
+ Beyond 302
> Bit 548
> Boeing 502
> Bubble 364, 442
> Clio 356, 447, 518
> Cosmo 516
> Cute 458
> Dedra 452
+ Deep 286
+ Deva 54
+ Display 216
> Doris 466
> Down 448
+ Dynamite 212
> Edo 510
+ Ego 92
> Elio 376, 542
+ Eos 204
> Etere 392, 512
> Febe 450
> Felix 434
> Fiesta 368
> Floor 554
+ Fluo 146
+ Fox 194
+ Game 256
> Gas 382, 490
> Giove 432
+ Groove 294
> Gun 360, 398
> Hub 492
> Iko 410
+ Infinity 278
> Inside 546
+ Jazz 342
> Jedi 498
> Keope 396
> Koala 530
> Kurt 486
+ Led Panel 312
+ Lika 318
> Linea 406
+ Link 224
> Litio 378, 544
> Lolita 462
+ Look 214
> Luna 352, 472
> Mib 366
+ Nova 306
> O-Zone 370, 524
+ Off 282
+ Office 172
> Omega 372
> Park 560
+ Play 210, 300
> Polar 440
> Post-It 418
> Punto 400
> Pure 454
+ Quark 272
> Rex 436
> Rocket 568
+ Room-65 346
+ Samba 336
> Sasso 474
> Sirio 412, 482, 538

+ Slot 186
> Snif 394
> Snow 354, 444
> Sole 350, 468
> Starlight 526
+ Steel 156
+ Stick 74
+ Strip Led 174
> Style 388, 480
+ Swing 344
> Swipe 386
+ Tag 268
> Taurus 556
> Techo 358
> Terra 380, 540
+ Tesi 180
> Tesla 488
> Tetris 424
> Thor 520, 552
> Tifone 494
> Titano 484
> Toffee 404, 456
> Torre 514
> Tronco 390, 506
> Twiggy 464
> Twin 428
> Ulex 534
> Up 420
> Urano 362
> Vega 496
+ Walky 340
> Way 564
> Wire 550
> Xeno 384
+ Zephyr 332
+ Zeus 242

Bulbs

E14 576
E27 578
G4 584
G9 585
GX53 586
R7s 587
GU10 588
Kit emergency 590

technical +

outdoor >

Typology index
technical

LINEAR SYSTEMS


deva 54


stick 74


ego 92


fluo 146


steel 156


office 172


strip led 174


tesi 180

slot 186

SPOTLIGHTS AND TRACKS


fox 194


eos 204


play 210


dynamite 212


look 214


display 216


link 224

RECESSED LIGHTS


zeus 242

game 256

tag 268

quark 272

infinity 278


off 282


deep 286

basic 288

groove 294


play 300


beyond 302


nova 306

led panel 312


lika 318

zephyr 332

samba 336


walky 340


jazz 342


swing 344

room-65 346



Typology index
outdoor

SUSPENSIONS AND CEILING

Sole
350

Luna
352

Snow
354


Clio
356


Techo
358


Gun
360


Urano
362

Bubble
364

Mib
366


Fiesta
368

WALL LAMPS


O-Zone 370


Omega 372


Elio 376


Litio 378


Terra 380


Gas 382


Xeno 384


Swipe 386


Style 388


Tronco 390


Etere 392


Snif 394


Keope 396


Gun 398


Punto 400


Toffee 404


Linea 406


Iko 410


Sirio 412


Atom 414


Post-It 418


Up 420


Argo 422


Tetris 424


Twin 428


Andromeda 430


Giove 432


Felix 434


Rex 436


Polar 440

Bubble 442


Snow 444


Clio 447


Down 448


Febe 450


Dedra 452

BOLLARD AND TABLE LAMPS


Pure 454


Toffee 456


Cute 458


Lolita 462

Twiggy 464

Doris 466

Sole 468

Luna 472

Sasso 474


Agos 476


Style 480


Sirio 482


Titano 484


Kurt 486


Tesla 488


Gas 490


Hub 492


Tifone 494


Vega 496

Jedi 498


Boeing 502


Tronco 506


Atena 508

Edo 510

Etere 512


Torre 514


Cosmo 516


Clio 518

SPOTLIGHTS


Thor 520


O-zone 524


Starlight 526


Koala 530


Ulex 534


Sirio 538


Terra 540


Elio 542


Litio 544


Inside 546

DOWNLIGHTS


Bit 548


Wire 550

Thor 552

Floor 554

Taurus 556

Park 560

Way 564

Rocket 568

IDEAL LUX

STARLIGHT P. 526 ↱

deva 54
stick 74
ego 92
fluo 146
steel 156
office 172
strip led 174
tesi 180
slot 186
fox 194
eos 204
play 210, 300
dynamite 212
look 214
display 216
link 224
zeus 242
game 256
tag 268
quark 272
infinity 278
off 282
deep 286
basic 288
groove 294
beyond 302
nova 306
led panel 312
lika 318
zephyr 332
samba 336
walky 340
jazz 342
swing 344
room-65 346

TECHNICAL



DEVA




Linear system consisting of an extruded aluminium profile and magnetically fixed lighting elements.

deva spot

IP20 | MacAdam: SDCM 3 | LED COB OSRAM | 30.000 h life | light beam: ACCENT | Material: Aluminum






90° | 355° | 0,030 Kg/0,0002 m³

Power	Installation	Beam	CRI
2,5W	TRACK	37°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	150 lm	3000 K	Black	332765	40
On-Off	160 lm	4000 K	Black	370170	40

Photometry




m	lx	øm
1	229	0,68
2	57	1,40
3	25	2,00
4	14	2,70
5	9,1	3,40

Driver

No

IP20 | MacAdam: SDCM 3 | LED COB BRIDGELUX | 30.000 h life | light beam: ACCENT | Material: Aluminum






90° | 355° | 0,050 Kg/0,0003 m³

Power	Installation	Beam	CRI
4,5W	TRACK	34°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	450 lm	3000 K	Black	332789	46
On-Off	470 lm	4000 K	Black	370224	46

Photometry




m	lx	øm
1	913	0,51
2	228	1,00
3	101	1,50
4	57	2,10
5	37	2,60

Driver

No






90° | 355° | 0,090 Kg/0,0004 m³

Power	Installation	Beam	CRI
8W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	750 lm	3000 K	Black	332819	52
On-Off	780 lm	4000 K	Black	370149	52

Photometry



m	lx	øm
1	2147	0,49
2	537	0,98
3	239	1,50
4	134	2,00
5	86	2,50

Driver

No

P. 29

deva spot






The system is available
in matt black painted finish,
in surface-mounted or suspended
installation mode (SURFACE),
quick recessed installation in
plasterboard (TRIMLESS) or trimless
recessed installation between two
plasterboard panels (RECESSED).

Ideal for lighting small spaces
where minimal system footprint,
wide application flexibility and high
lighting quality are required,
such as RESIDENTIAL, MUSEUM
and RETAIL spaces.

1:1 Scale representation.
The diameter of Deva Spot 2.5 W
is 25mm.

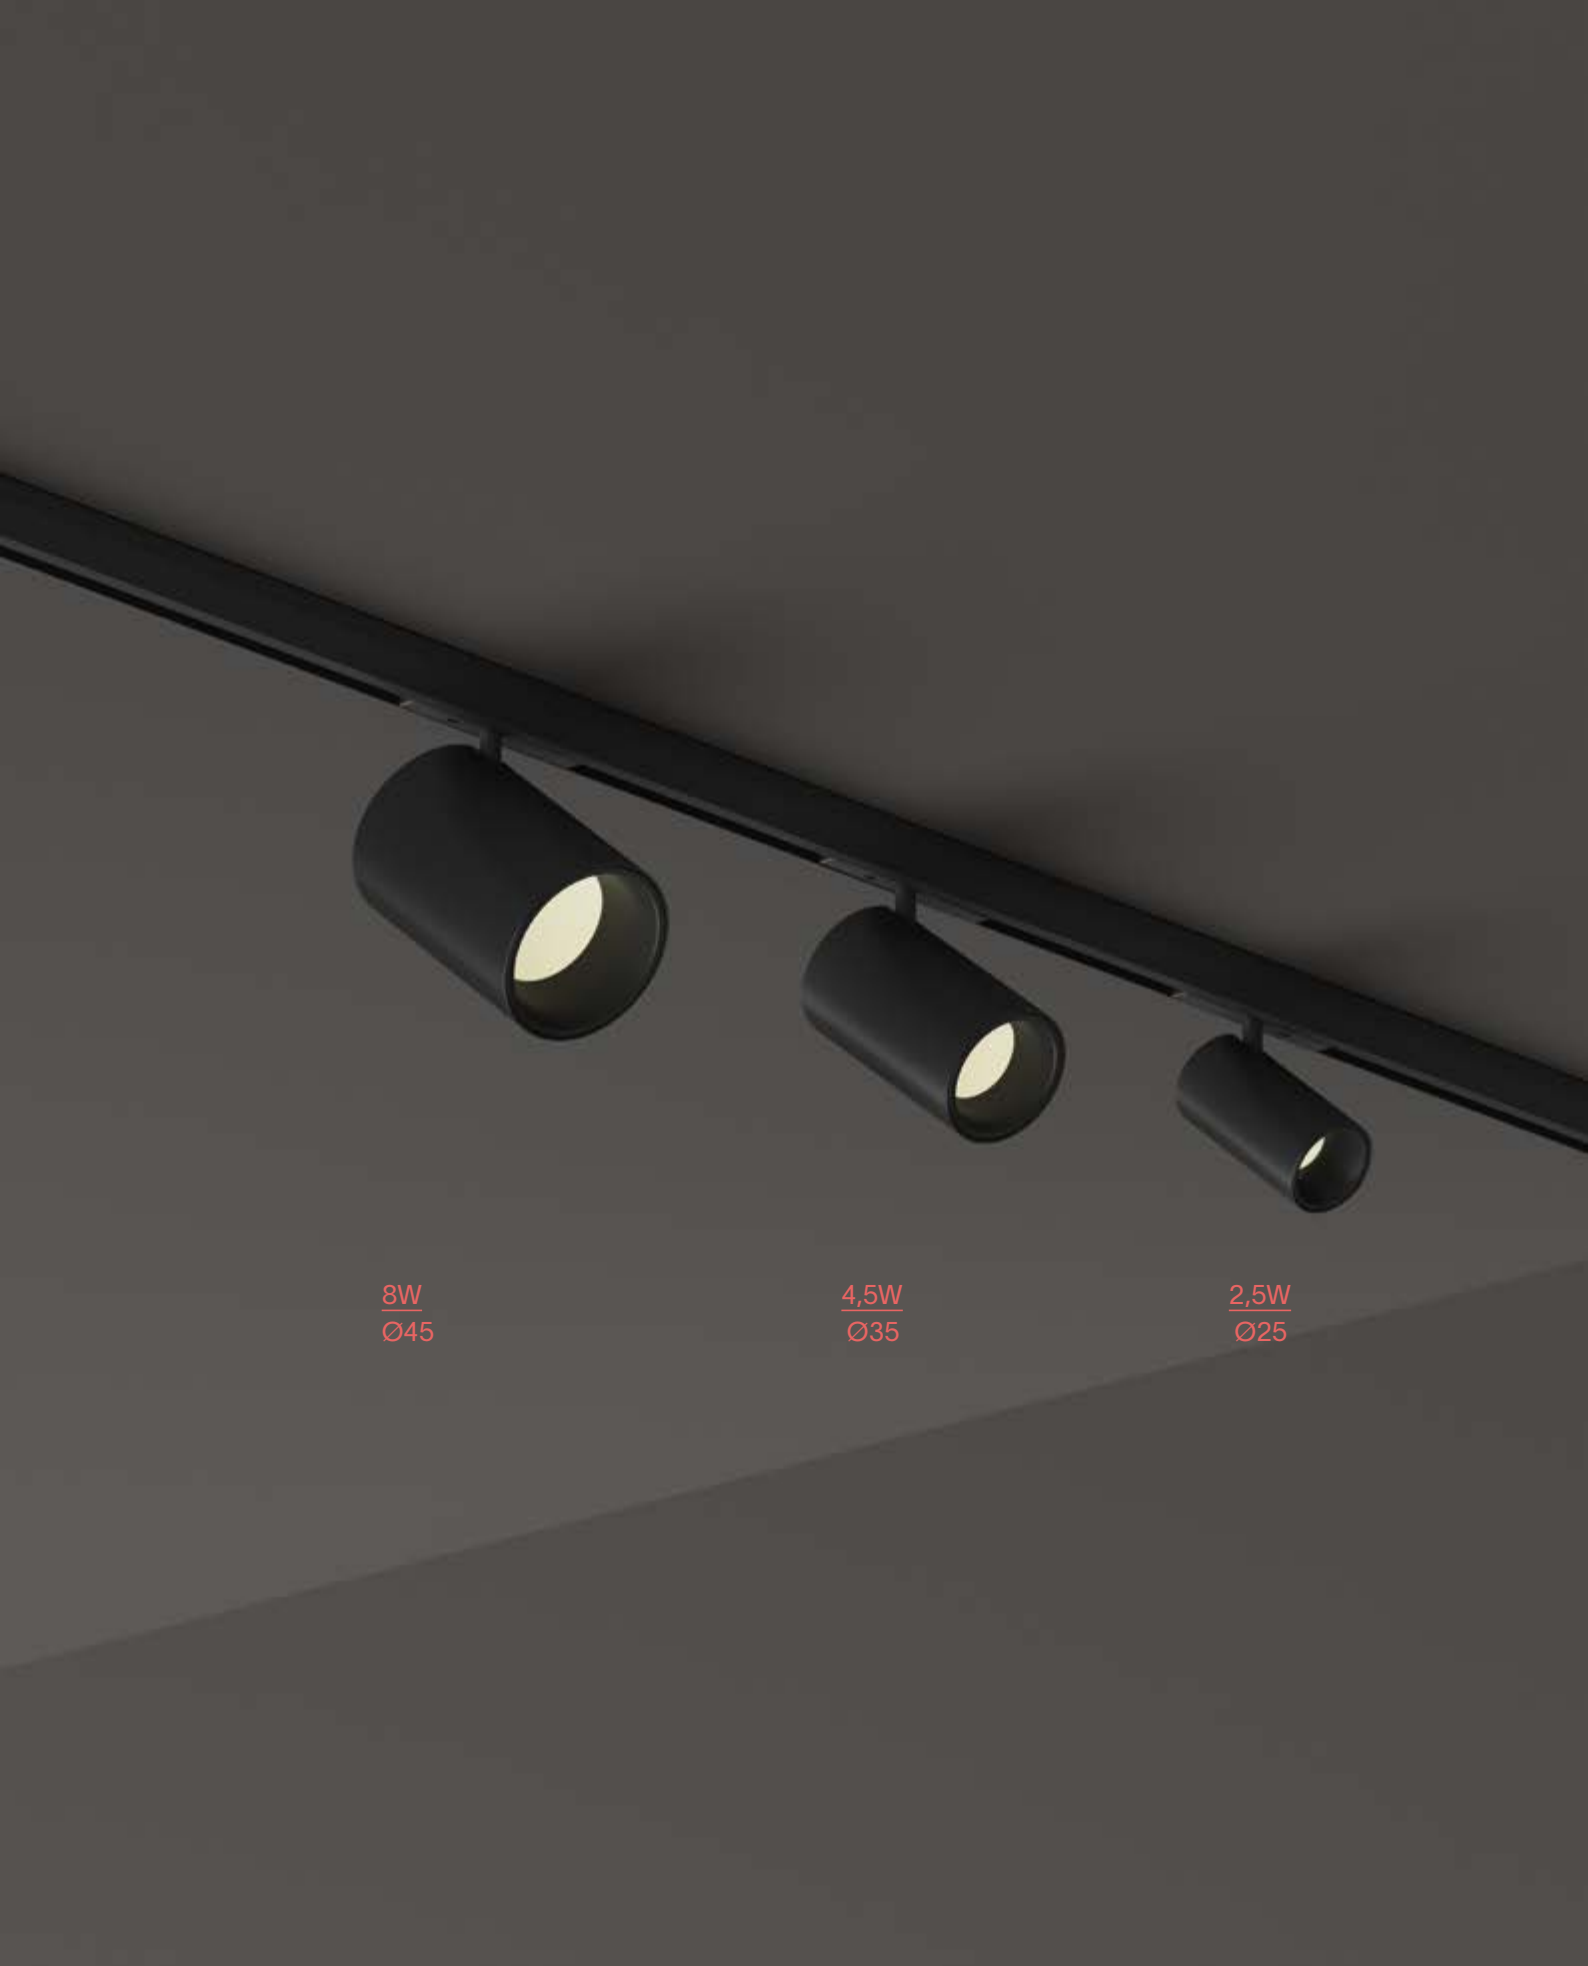

8W
Ø45


4,5W
Ø35

2,5W
Ø25

deva disc

IP20 | MacAdam: SDCM 3 | LED COB BRIDGELUX | 30.000 h life | light beam: ACCENT | Material: Aluminum






0,110 Kg/0,0004 m³

Power	Installation	Beam	CRI
5W	TRACK	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	500 lm	3000 K	Black	332840	46
On-Off	530 lm	4000 K	Black	370262	46

Photometry




m	lx	øm
1	863	0,68
2	216	1,40
3	96	2,00
4	54	2,70
5	35	3,40

Driver

No

IP20 | MacAdam: SDCM 3 | LED SMD | 30.000 h life | light beam: ACCENT | Material: Aluminum






0,330 Kg/0,0021 m³

Power	Installation	Beam	CRI
10W	TRACK	98°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1100 lm	3000 K	Black	332864	52
On-Off	1150 lm	4000 K	Black	370019	52

Photometry




m	lx	øm
1	280	3,30
2	70	6,60
3	31	9,80
4	17	13,00
5	11	16,00

Driver

No

IP20 | MacAdam: SDCM 3 | LED SMD | 30.000 h life | light beam: WIDE | Material: Aluminum






0,430 Kg/0,0021 m³

Power	Installation	Beam	CRI
15W	TRACK	98°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1750 lm	3000 K	Black	332901	63
On-Off	1800 lm	4000 K	Black	370057	63

Photometry



m	lx	øm
1	309	3,30
2	77	6,60
3	34	9,80
4	19	13,00
5	12	16,00

Driver


No



332840




332901

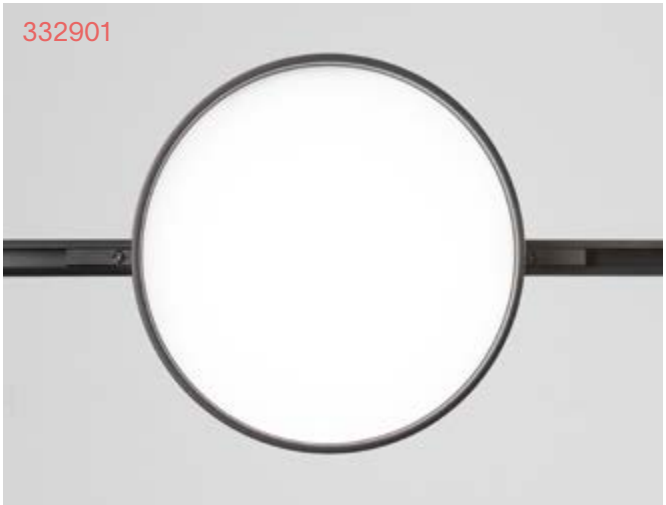

deva accent

IP20 | MacAdam: SDCM 3 | LED SMD | 30.000 h life | light beam: ACCENT | Material: Aluminum






0,070 Kg/0,0005 m³

Power	Installation	Beam	CRI
5W	TRACK	34°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	350 lm	3000 K	Black	332758	35
On-Off	360 lm	4000 K	Black	369907	35

Photometry




m	lx	ø m
1	913	0,51
2	228	1,00
3	101	1,50
4	57	2,10
5	37	2,60

Driver

No

IP20 | MacAdam: SDCM 3 | LED SMD OSRAM | 30.000 h life | light beam: ACCENT | Material: Aluminum






0,140 Kg/0,0005 m³

Power	Installation	Beam	CRI
10W	TRACK	34°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	Black	332734	46
On-Off	940 lm	4000 K	Black	369938	46

Photometry




m	lx	ø m
1	3030	0,51
2	758	1,00
3	337	1,50
4	189	2,10
5	121	2,60

Driver

No






0,230 Kg/0,0014 m³

Power	Installation	Beam	CRI
14W	TRACK	34°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	Black	332710	58
On-Off	1450 lm	4000 K	Black	369976	58

Photometry



m	lx	ø m
1	2698	0,51
2	675	1,00
3	300	1,50
4	169	2,10
5	108	2,60

Driver

No





Deva Accent 145 mm



Deva Accent 241 mm




Deva Accent 335 mm



deva wide inner

IP20 | MacAdam: SDCM 3 | LED SMD | 30.000 h life | light beam: WIDE | Material: Aluminum






0,020 Kg/0,0001 m³

Power	Installation	Beam	CRI
6W	TRACK	100°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	700 lm	3000 K	Black	332949	29
On-Off	740 lm	4000 K	Black	370309	29

Photometry




m	lx	øm
1	116	6,0
2	29	12
3	13	18
4	7,3	24
5	4,7	30

Driver

No






0,080 Kg/0,0004 m³

Power	Installation	Beam	CRI
11W	TRACK	100°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	Black	332925	40
On-Off	1500 lm	4000 K	Black	370347	40

Photometry




m	lx	øm
1	161	6,0
2	40	12
3	18	18
4	10	24
5	6,4	30

Driver

No






0,130 Kg/0,0009 m³

Power	Installation	Beam	CRI
16W	TRACK	100°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2100 lm	3000 K	Black	332895	58
On-Off	2200 lm	4000 K	Black	370378	58

Photometry



m	lx	øm
1	385	6,0
2	96	12
3	43	18
4	24	24
5	15	30

Driver

No





Deva Wide Inner 300 mm



Deva Wide Inner 600 mm




Deva Wide Inner 900 mm

deva wide outer

IP20 | MacAdam: SDCM 3 | LED SMD | 30.000 h life | light beam: WIDE | Material: Aluminum






0,130 Kg/0,0010 m³

Power	Installation	Beam	CRI
8W	TRACK	100°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	Black	332871	29

Photometry




m	lx	øm
1	359	1,90
2	90	3,70
3	40	5,60
4	22	7,50
5	14	9,40

Driver

No






0,330 Kg/0,0017 m³

Power	Installation	Beam	CRI
12W	TRACK	100°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1350 lm	3000 K	Black	332833	40

Photometry




m	lx	øm
1	257	1,90
2	64	3,70
3	29	5,60
4	16	7,50
5	10	9,40

Driver

No






0,310 Kg/0,0012 m³

Power	Installation	Beam	CRI
21W	TRACK	100°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	3000 K	Black	332802	58

Photometry



m	lx	øm
1	1104	1,90
2	276	3,70
3	123	5,60
4	69	7,50
5	44	9,40

Driver

No





Deva Wide Outer 346 mm



Deva Wide Outer 646 mm




Deva Wide Outer 945 mm



deva pendant

IP20 | MacAdam: SDCM 3 | LED COB BRIDGELUX | 30.000 h life | light beam: ACCENT | Material: Aluminum






0,280 Kg/0,0009 m³

Power	Installation	Beam	CRI
6W	TRACK	34°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	550 lm	3000 K	Black	332932	52
On-Off	570 lm	4000 K	Black	370095	52

Photometry



m	lx	øm
1	742	0,68
2	186	1,40
3	82	2,00
4	46	2,70
5	30	3,40

Driver

No







deva surface

IP20 | TRACK

No mounting Kit required, direct ceiling installation
Maximum length per power source: 10 meters

Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	0,280 Kg	0,0003 m³	Black	332475	23
2000 mm	0,470 Kg	0,0162 m³	Black	332482	46

IP20 | ROUND TRACK

Optional

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,017 Kg	0,0008 m³	On-Off	Black	339375	105

IP20 | L-JOINT

Optional

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,016 Kg	0,0001 m³	On-Off	Black	339382	47

IP20 | LINEAR JOINT

Required - 1 Kit x linear connection

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,009 Kg	0,0002 m³	On-Off	Black	339368	21

IP20 | POWER SUPPLY CONNECTOR

Required - 1 Kit x power source max 140W

Material: Aluminum





Cable length 1500 mm

Weight	Volume	Control	Finish	Code	€
0,006 Kg	0,0002 m³	On-Off	Black	332581	17

DRIVER ON/OFF

Required



Power	Output	Measure (L x H x W)	Code	€
75 W	24 Vdc	168x30x38 mm	332659	75
150 W	24 Vdc	227x30x38 mm	332628	109

END CAPS KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	10 x 7 x 15 mm	Black	332635	4

SUSPENSION KIT


Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	8 x 7 x 2049 mm	Black	332703	17

deva surface assembly plans

01 End cap
02 Track 1000 mm
03 Linear joint
04 Track 2000 mm
05 Round track
06 Suspension Kit
07 Power supply connector
08 Driver

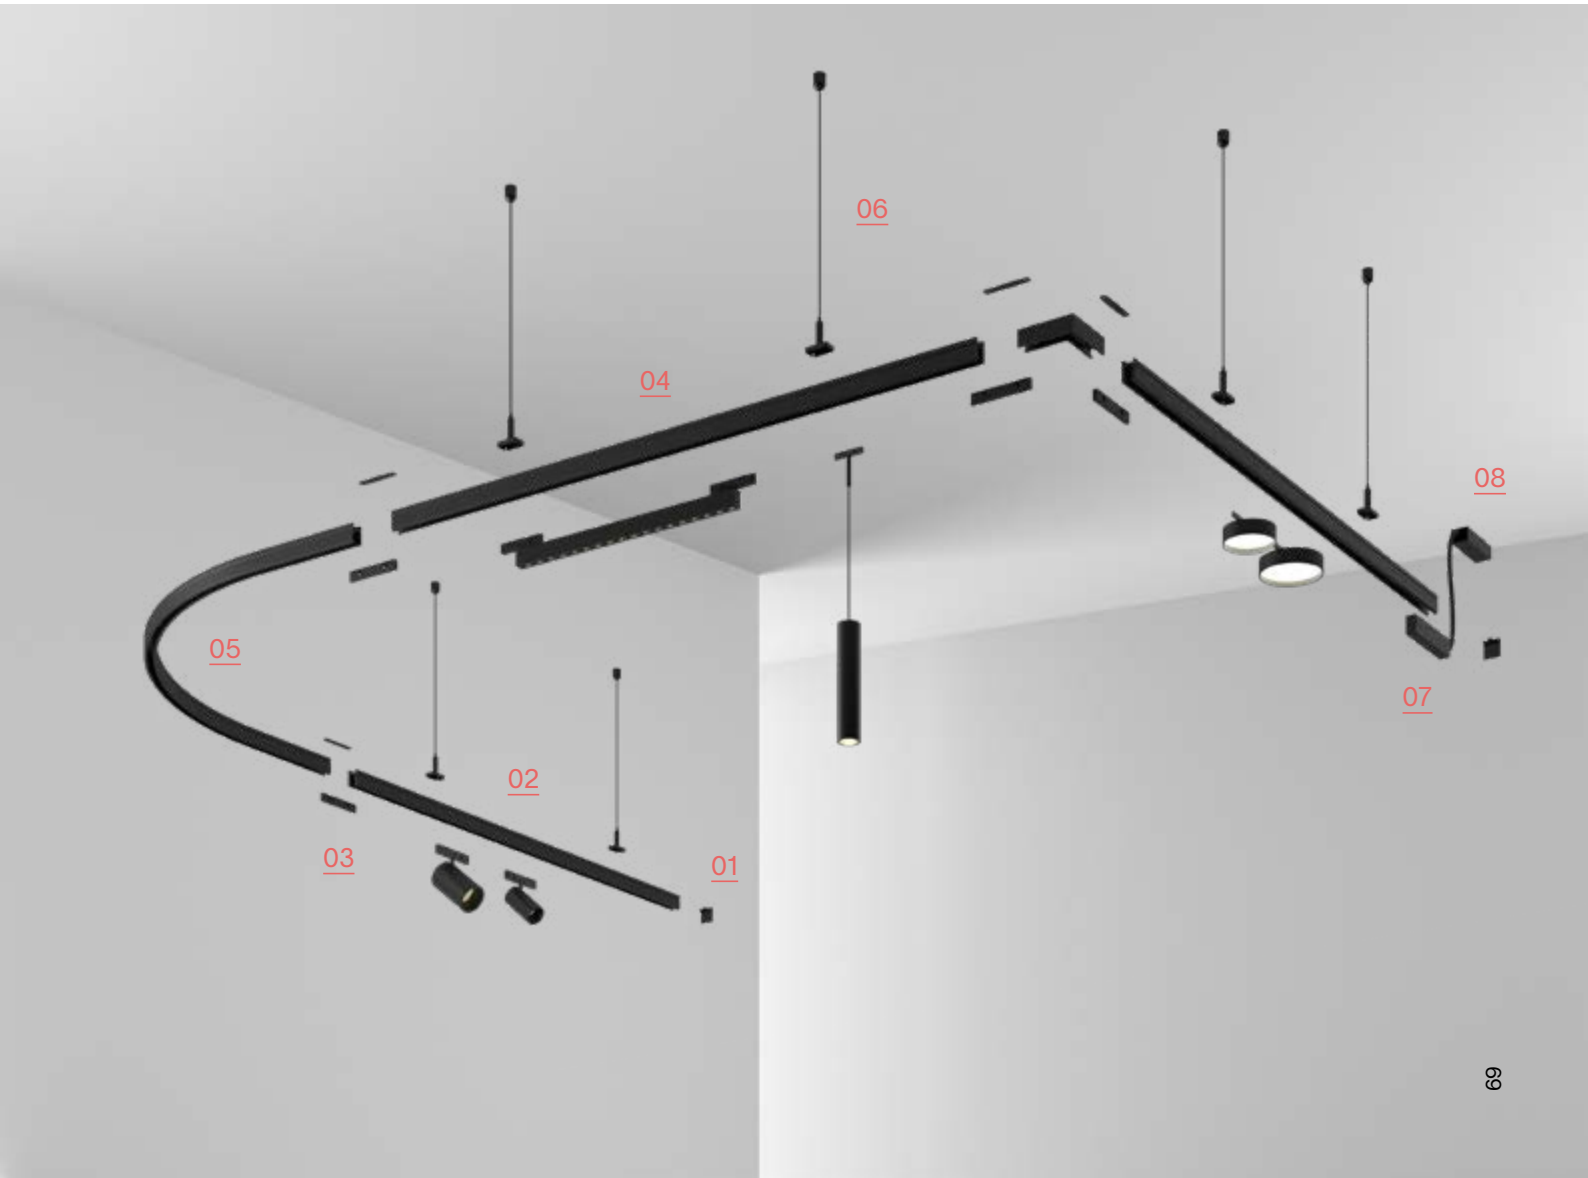


deva recessed

IP20 | TRACK

No mounting Kit required, direct ceiling installation
Maximum length per power source: 10 meters

Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	0,370 Kg	0,0010 m³	Black	332529	23
2000 mm	0,670 Kg	0,0020 m³	Black	332536	46

IP20 | ROUND TRACK

Optional

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,267 Kg	0,0026 m³	On-Off	Black	339405	105

IP20 | L-JOINT

Optional

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,030 Kg	0,0002 m³	On-Off	Black	339412	47

IP20 | LINEAR JOINT

Required - 1 Kit x linear connection

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,020 Kg	0,0002 m³	On-Off	Black	339399	21

IP20 | POWER SUPPLY CONNECTOR

Required - 1 Kit x power source max 140W

Material: Aluminum





Cable length 1500 mm

Weight	Volume	Control	Finish	Code	€
0,060 Kg	0,0002 m³	On-Off	Black	332581	17

DRIVER ON/OFF

Required



Power	Output	Measure (L x H x W)	Code	€
75 W	24 Vdc	168x30x38 mm	332659	75
150 W	24 Vdc	227x30x38 mm	332628	109

END CAPS KIT


Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	10 x 7 x 15 mm	Black	332635	4

deva recessed assembly plans

01 End cap
02 Track 1000 mm
03 Round track
04 Track 2000 mm
05 L-joint
06 Power supply connector
07 Driver

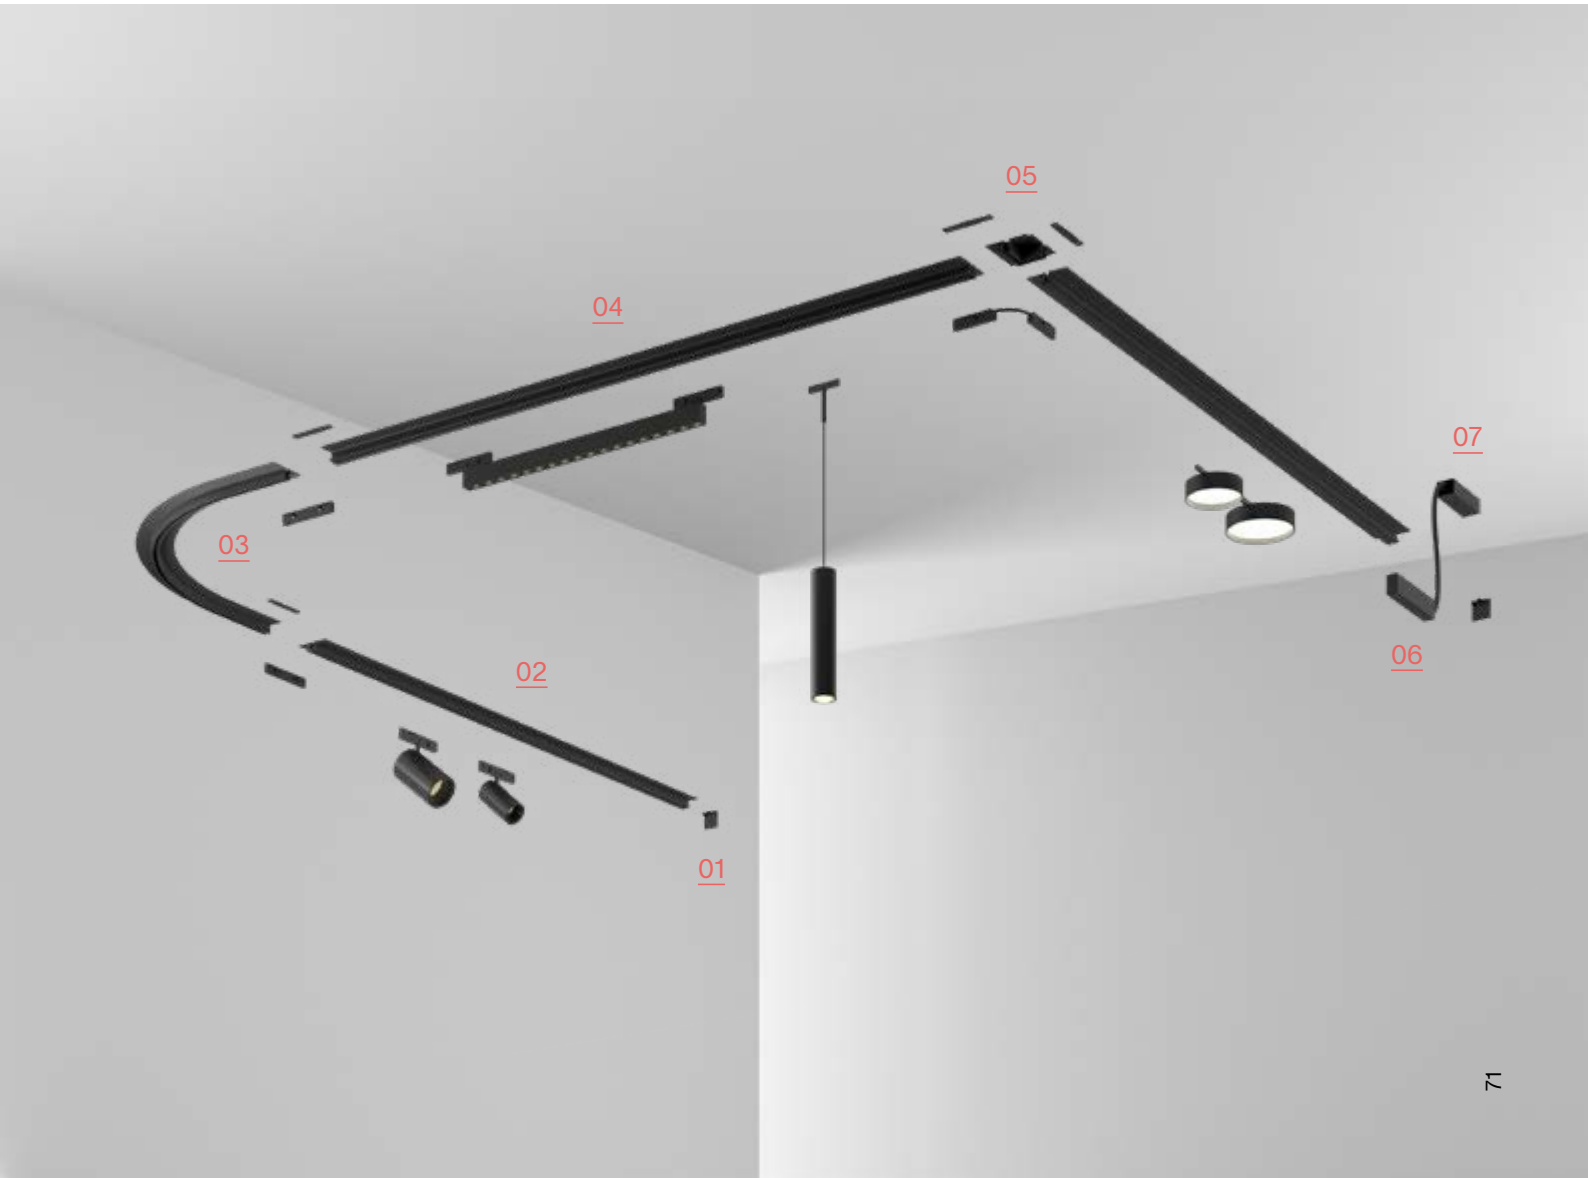


deva recessed easy

IP20 | TRACK

No mounting Kit required, direct ceiling installation
Maximum length per power source: 10 meters

Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	0,370 Kg	0,0065 m³	Black	332499	29
2000 mm	0,870 Kg	0,0450 m³	Black	332512	58

IP20 | L-JOINT

Optional

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,030 Kg	0,0001 m³	On-Off	Black	339429	47

IP20 | LINEAR JOINT

Required - 1 Kit x linear connection

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,020 Kg	0,0001 m³	On-Off	Black	339399	21

IP20 | POWER SUPPLY CONNECTOR

Required - 1 Kit x power source max 140W

Material: Aluminum





Cable length 1500 mm

Weight	Volume	Control	Finish	Code	€
0,060 Kg	0,0002 m³	On-Off	Black	332581	17

DRIVER ON/OFF

Required



Power	Output	Measure (L x H x W)	Code	€
75 W	24 Vdc	168x30x38 mm	332659	75
150 W	24 Vdc	227x30x38 mm	332628	109

END CAPS KIT


Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	10 x 7 x 15 mm	Black	332635	4

deva recessed easy assembly plans

01 End cap
02 Track 1000 mm
03 Linear joint
04 Track 2000 mm
05 L-joint
06 Power supply connector
07 Driver

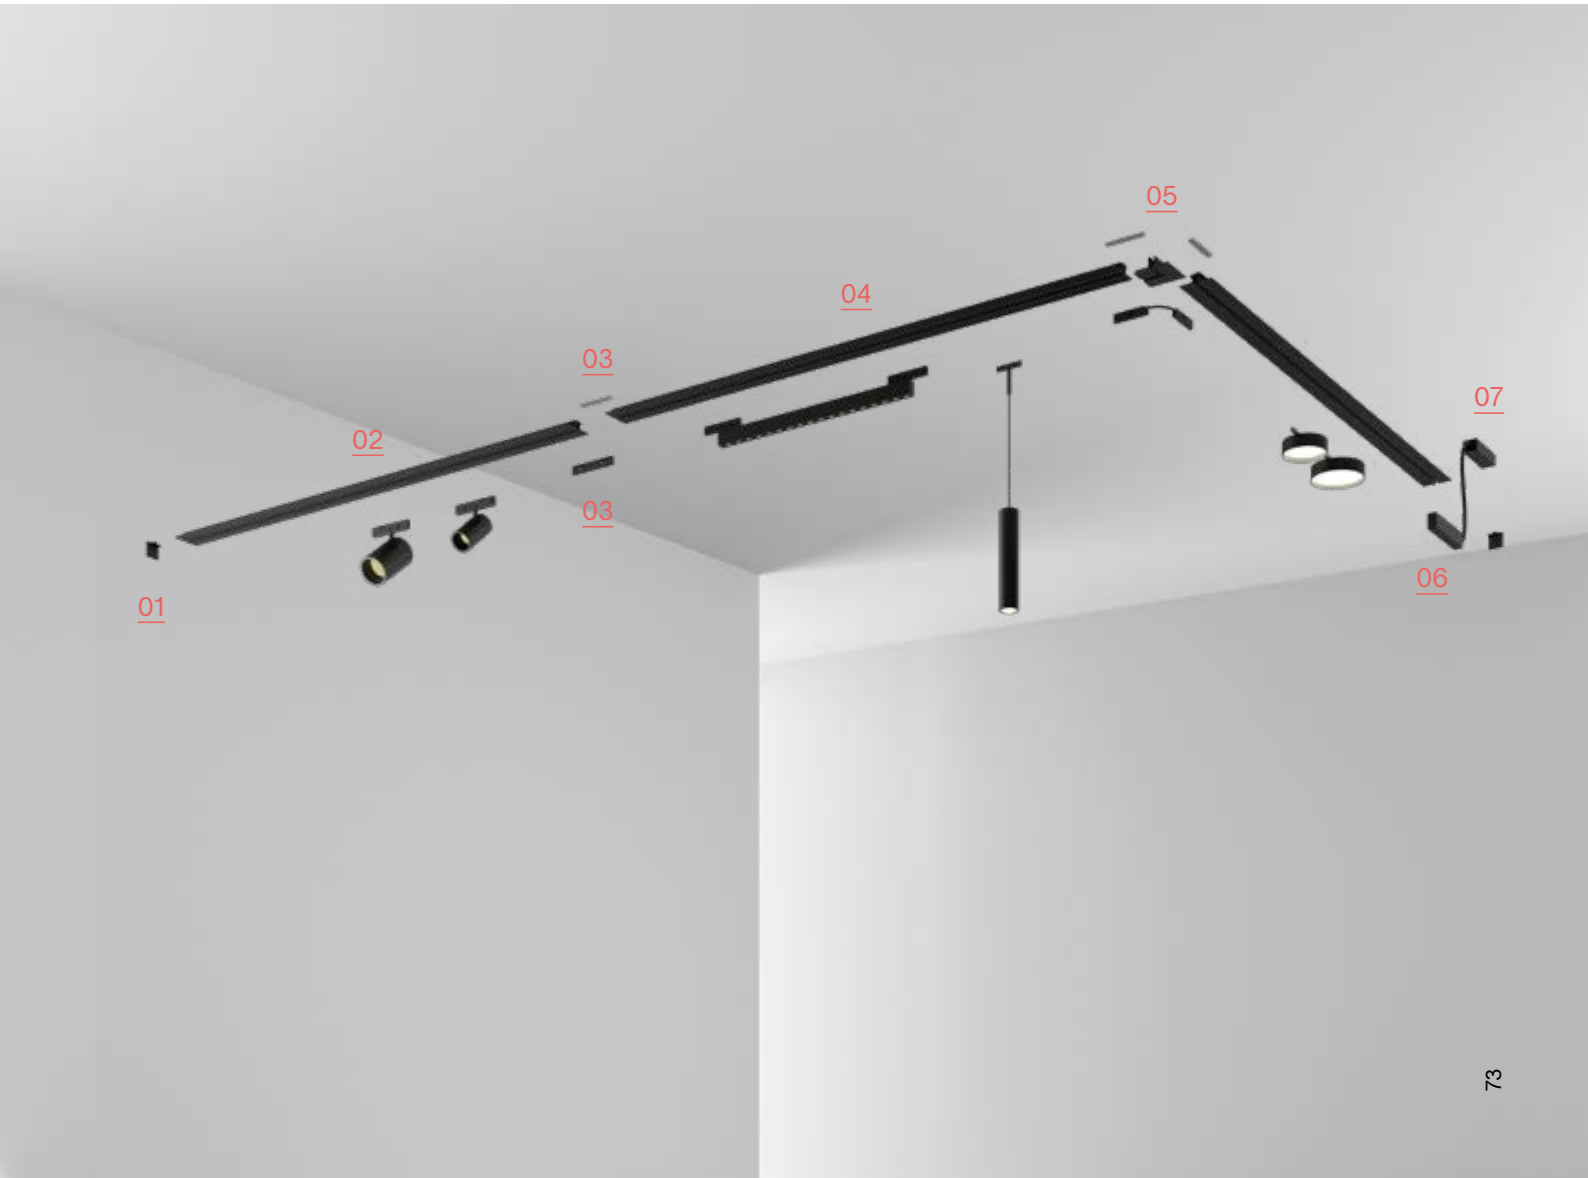

STICK



Linear dimmable system consisting of an extruded aluminium profile and magnetically attached lighting elements.




1:1 Scale representation
3W ø 22mm

stick spot single

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: SPOT | Material: Aluminum






90° | 355° | 0,010 Kg/0,0006 m³

Power	Installation	Beam	CRI
3W	TRACK	24°	≥90

Lumen	CCT	Finish	Code	€
200 lm	2700 K	Black	345048	45
210 lm	3000 K	White	364100	45
210 lm	3000 K	Black	329505	45

Photometry




m	lx	om
1	514	0,62
2	128	1,20
3	57	1,90
4	32	2,50
5	21	3,10

Driver

No

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 355° | 0,020 Kg/0,0006 m³

Power	Installation	Beam	CRI
5W	TRACK	30°	≥90

Lumen	CCT	Finish	Code	€
390 lm	2700 K	Black	345055	50
400 lm	3000 K	White	364117	50
400 lm	3000 K	Black	329529	50

Photometry



m	lx	om
1	822	0,62
2	205	1,20
3	91	1,90
4	51	2,50
5	33	3,10


Driver

No

stick spot single

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 355° | 0,018 Kg/0,0008 m³

Power	Installation	Beam	CRI
7W	TRACK	36°	≥90

Lumen	CCT	Finish	Code	€
600 lm	2700 K	Black	345062	80
620 lm	3000 K	White	369983	80
620 lm	3000 K	Black	343501	80

Photometry




m	lx	øm
1	922	0,70
2	230	1,40
3	102	2,10
4	58	2,80
5	37	3,50

Driver

No






90° | 355° | 0,018 Kg/0,0007 m³

Power	Installation	Beam	CRI
10W	TRACK	36°	≥90

Lumen	CCT	Finish	Code	€
840 lm	2700 K	Black	345079	85
860 lm	3000 K	White	364124	85
860 lm	3000 K	Black	343518	85

Photometry



m	lx	øm
1	514	0,62
2	128	1,20
3	57	1,90
4	32	2,50
5	21	3,10

Driver

No



7W / 10W
Ø42

5W
Ø32

3W
Ø22






The system is available in matt black or white for surface mounting (SURFACE) or recessed mounting in plasterboard (RECESSED).
Can be combined with different lighting modules depending on the desired layout, which can be modified as required: SPOT SINGLE and DOUBLE modules for spot lighting, ACCENT modules for focused light and WIDE modules for diffused and uniform lighting.
Ideal for lighting details or small spaces where great flexibility and high lighting quality are required, such as MUSEUMS, RESIDENTIAL and RETAIL spaces.



stick spot double

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: SPOT | Material: Aluminum






90° | 355° | 0,060 Kg/0,0005 m³

Power	Installation	Beam	CRI
6W	TRACK	24°	≥90

Lumen	CCT	Finish	Code	€
400 lm	2700 K	Black	345024	68
420 lm	3000 K	White	374307	68
420 lm	3000 K	Black	329512	68

Photometry




m	lx	øm
1	1028	0,62
2	257	1,20
3	114	1,90
4	64	2,50
5	41	3,10

Driver

No

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 355° | 0,100 Kg/0,0006 m³

Power	Installation	Beam	CRI
10W	TRACK	30°	≥90

Lumen	CCT	Finish	Code	€
780 lm	2700 K	Black	345031	75
800 lm	3000 K	White	369969	75
800 lm	3000 K	Black	329536	75

Photometry



m	lx	øm
1	1645	0,62
2	411	1,20
3	183	1,90
4	103	2,50
5	66	3,10

Driver

No








stick accent

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum






0,080 Kg/0,0002 m³

Power	Installation	Beam	CRI
6W	TRACK	40°	≥90

Lumen	CCT	Finish	Code	€
600 lm	2700 K	Black	344980	30
630 lm	3000 K	White	364087	30
630 lm	3000 K	Black	329468	30

Photometry




m	lx	øm
1	958	0,64
2	240	1,30
3	106	1,90
4	60	2,60
5	38	3,20

Driver

No






0,150 Kg/0,0006 m³

Power	Installation	Beam	CRI
12W	TRACK	40°	≥90

Lumen	CCT	Finish	Code	€
1200 lm	2700 K	Black	345000	60
1250 lm	3000 K	White	369921	60
1250 lm	3000 K	Black	329475	60

Photometry



m	lx	øm
1	1917	0,64
2	479	1,30
3	213	1,90
4	120	2,60
5	77	3,20

Driver

No

stick accent

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum






0,080 Kg/0,0004 m³

Power	Installation	Beam	CRI
8W	TRACK	40°	≥90

Lumen	CCT	Finish	Code	€
830 lm	2700 K	Black	344997	45
870 lm	3000 K	White	364094	45
870 lm	3000 K	Black	343525	45

Photometry



m	lx	øm
1	1259	0,75
2	315	1,50
3	140	2,20
4	79	3,00
5	50	3,70

Driver

No






0,140 Kg/0,0006 m³

Power	Installation	Beam	CRI
16W	TRACK	40°	≥90

Lumen	CCT	Finish	Code	€
1650 lm	2700 K	Black	345017	70
1750 lm	3000 K	White	369952	70
1750 lm	3000 K	Black	343532	70

Photometry



m	lx	øm
1	2519	0,75
2	630	1,50
3	280	2,20
4	157	3,00
5	101	3,70

Driver

No

329468




329475






stick wide

IP20 | LED SMD BRIDGELUX | 50.000 h life | light beam: WIDE | Material: Aluminum






0,070 Kg/0,0002 m³

Power	Installation	Beam	CRI
6W	TRACK	110°	≥90

Lumen	CCT	Finish	Code	€
510 lm	2700 K	Black	345086	25
530 lm	3000 K	White	364131	25
530 lm	3000 K	Black	329444	25

Photometry




m	lx	øm
1	138	2,50
2	35	4,90
3	15	7,40
4	8,7	9,80
5	5,5	12,00

Driver

No






0,130 Kg/0,0005 m³

Power	Installation	Beam	CRI
12W	TRACK	110°	≥90

Lumen	CCT	Finish	Code	€
1150 lm	2700 K	Black	345093	50
1200 lm	3000 K	White	374291	50
1200 lm	3000 K	Black	329451	50


Photometry



m	lx	øm
1	277	2,50
2	69	4,90
3	31	7,40
4	17	9,80
5	11	12,00

Driver

No

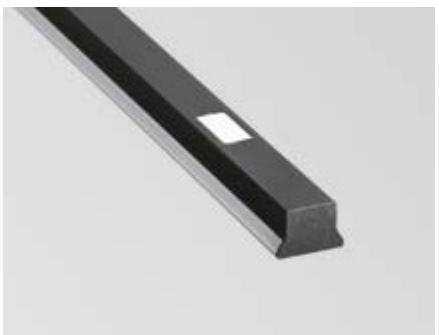

Stick Wide 300 mm



Stick Wide 600 mm






stick surface

IP20 | TRACK | Kit for profile installation and closing caps included | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	0,350 Kg	0,0017 m³	White	364063	30
1000 mm	0,350 Kg	0,0017 m³	Black	329574	30
2000 mm	0,700 Kg	0,0033 m³	White	370859	60
2000 mm	0,700 Kg	0,0033 m³	Black	329581	60

IP20 | L-JOINT | Optional | Material: Aluminum





Weight	Volume	Finish	Code	€
0,070 Kg	0,0004 m³	White	364155	37
0,070 Kg	0,0004 m³	Black	330358	37


IP20 | BLIND COVER | Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 3 x 15 mm	White	370453	4
No	1000 x 3 x 15 mm	Black	329635	4
No	2000 x 3 x 15 mm	White	370491	6
No	2000 x 3 x 15 mm	Black	329642	6

IP20 | LINEAR JOINT | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Finish	Code	€
0,03 Kg	0,0001 m³	White	370545	15
0,03 Kg	0,0001 m³	Black	329710	15

IP20 | POWER SUPPLY CONNECTOR | Required - 1 Kit x power source max 140W | Material: Aluminum





Weight	Volume	Finish	Code	€
0,08 Kg	0,0003 m³	White	364148	20
0,08 Kg	0,0003 m³	Black	329703	20

REMOTE DIMMABLE DRIVER 1-10V | Required



Power	Output	Measure (L x H x W)	Code	€
150 W	48 Vdc	350x18x30 mm	329673	90

ON-OFF DRIVER ON TRACK | Required - Cable length 300 mm
It replaces Driver + Power supply connector



Cable length 300 mm


Power	Output	Measure (L x H x W)	Finish	Code	€
150 W	48 Vdc	305x32x16 mm	White	364162	80
150 W	48 Vdc	305x32x16 mm	Black	329666	80

stick surface assembly plans

01 End cap
02 Blind cover
03 Linear joint
04 Track Surface 2000 mm
05 L-joint
06 Power supply connector
07 Driver






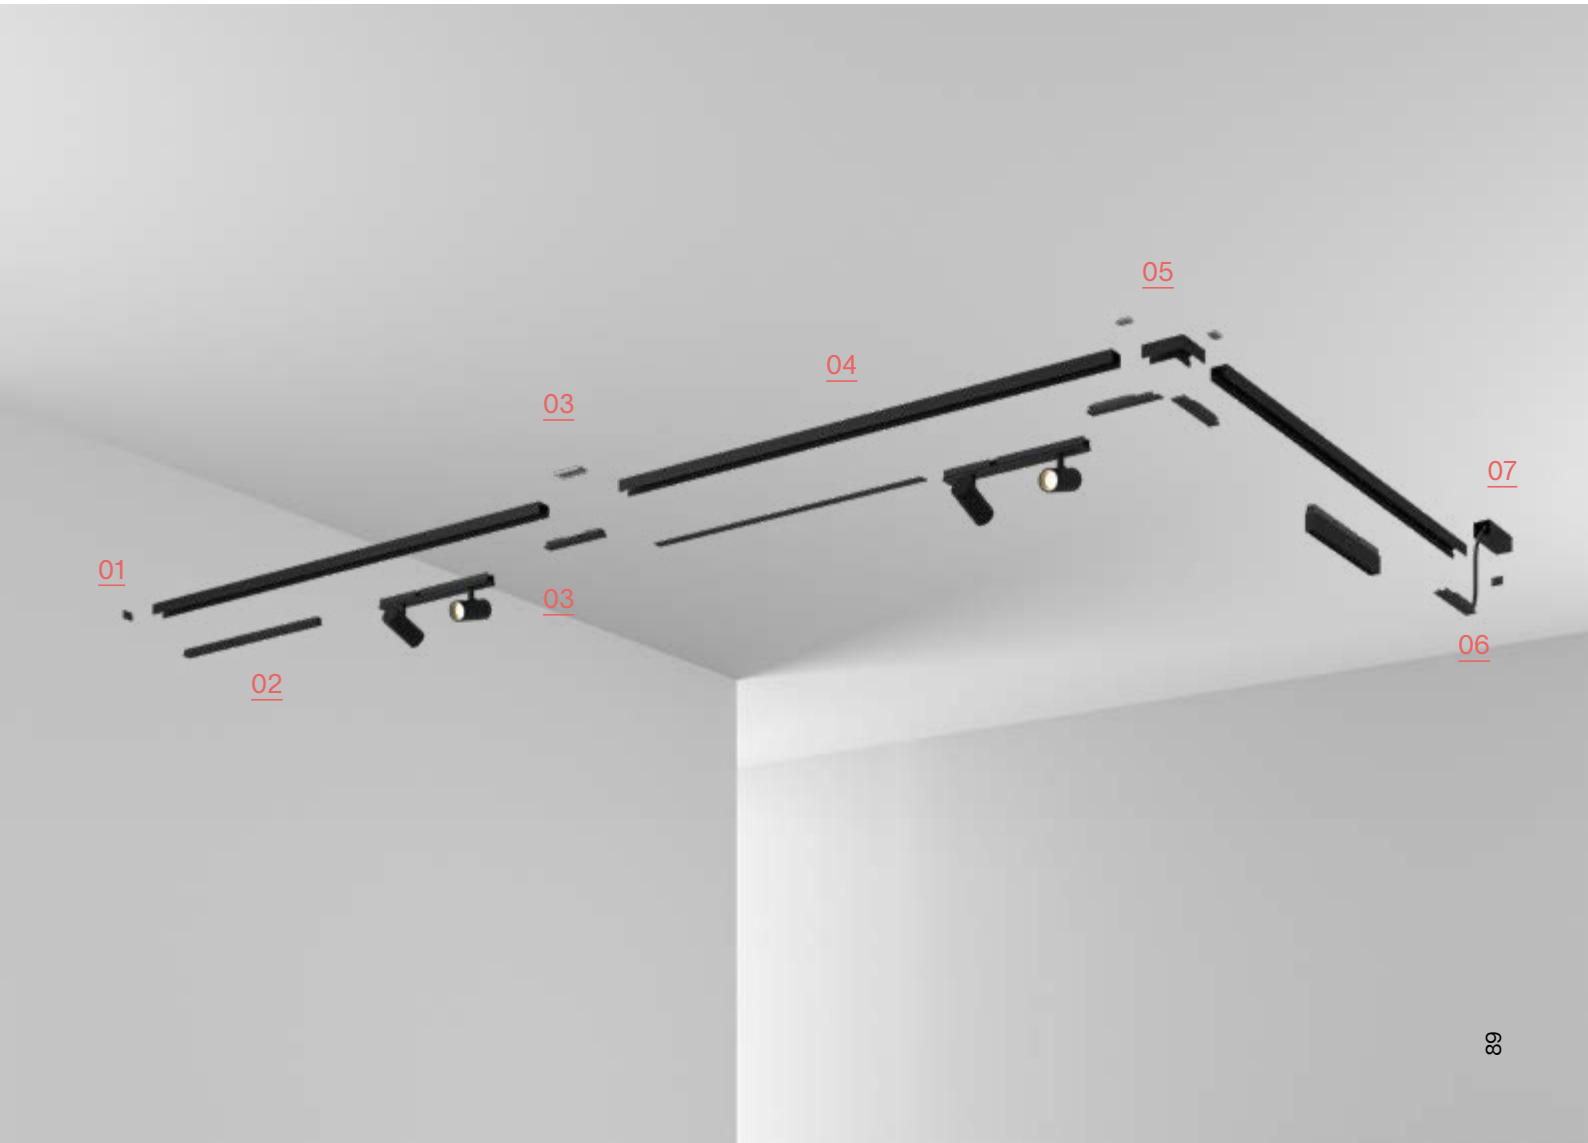

stick recessed

IP20 | TRACK | Kit for profile installation and closing caps included | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	0,400 Kg	0,0017 m³	White	364070	30
1000 mm	0,400 Kg	0,0017 m³	Black	329598	30
2000 mm	0,800 Kg	0,0033 m³	White	370828	60
2000 mm	0,800 Kg	0,0033 m³	Black	329604	60

IP20 | L-JOINT | Optional | Material: Aluminum





Weight	Volume	Finish	Code	€
0,07 Kg	0,0004 m³	White	372730	37
0,07 Kg	0,0004 m³	Black	330365	37


IP20 | BLIND COVER | Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 3 x 15 mm	White	370453	4
No	1000 x 3 x 15 mm	Black	329635	4
No	2000 x 3 x 15 mm	White	370491	6
No	2000 x 3 x 15 mm	Black	329642	6

IP20 | LINEAR JOINT | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Finish	Code	€
0,03 Kg	0,0001 m³	White	370545	15
0,03 Kg	0,0001 m³	Black	329710	15

IP20 | POWER SUPPLY CONNECTOR | Required - 1 Kit x power source max 140W | Material: Aluminum





Weight	Volume	Finish	Code	€
0,08 Kg	0,0003 m³	White	364148	20
0,08 Kg	0,0003 m³	Black	329703	20

REMOTE DIMMABLE DRIVER 1-10V | Required



Power	Output	Measure (L x H x W)	Code	€
150 W	48 Vdc	350x18x30 mm	329673	90

ON-OFF DRIVER ON TRACK | Required - Cable length 300 mm
It replaces Driver + Power supply connector



Cable length 300 mm


Power	Output	Measure (L x H x W)	Finish	Code	€
150 W	48 Vdc	305x32x16 mm	White	364162	80
150 W	48 Vdc	305x32x16 mm	Black	329666	80

stick surface assembly plans

01 End cap
02 Blind cover
03 Linear joint
04 Track Surface 2000 mm
05 L-joint
06 Power supply connector
07 Driver





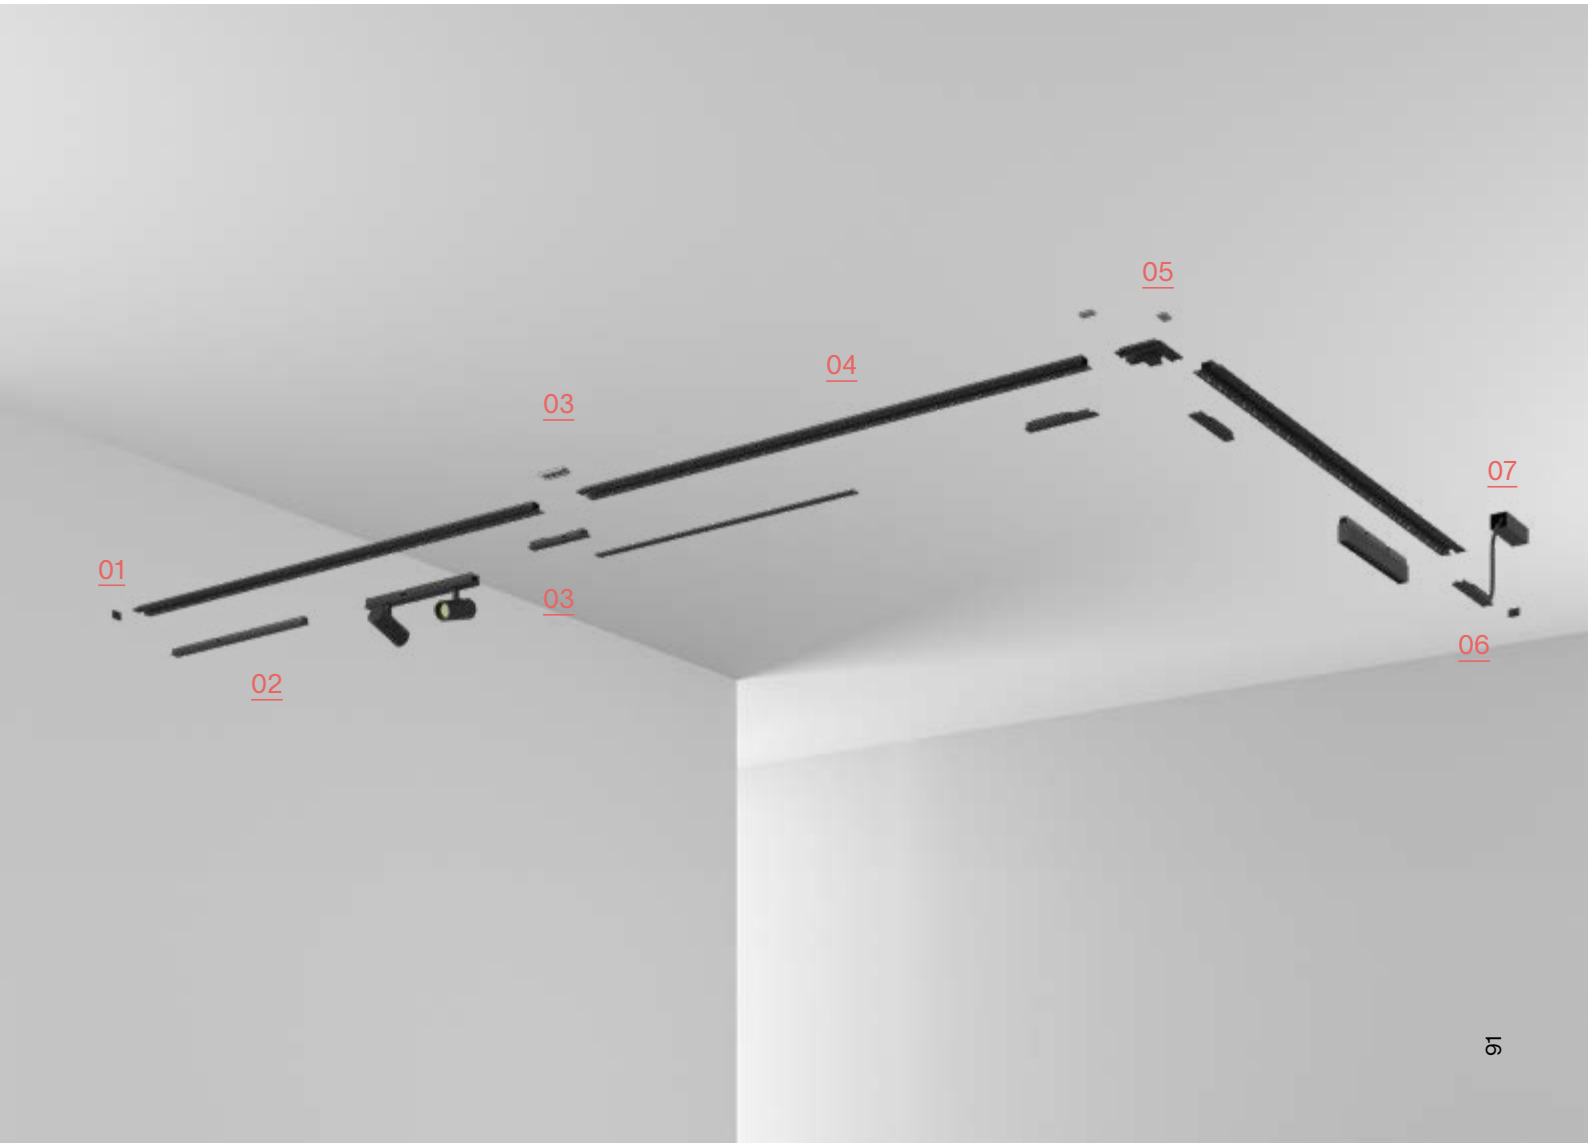

EGO




Ego is the light that adapts with elegance, defining space with extreme flexibility.

ego spot single

IP20 | PRO | MacAdam: SDCM 3 | LED SMD OSRAM | 50.000 h life | light beam: ACCENT | Material: Aluminum






90°	335°	0,151 Kg/0,0018 m³

Power	Installation	Beam	CRI
3W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	250 lm	3000 K	White	282978	82
On-Off	250 lm	3000 K	Black	257617	82
On-Off	300 lm	4000 K	Black	317977	82
1-10V	250 lm	3000 K	White	303673	100
1-10V	250 lm	3000 K	Black	303666	100
DALI	250 lm	3000 K	White	286402	125
DALI	250 lm	3000 K	Black	286396	125

Photometry



m	lx	øm
1	537	0,46
2	134	0,92
3	60	1,40
4	34	1,80
5	21	2,30

Driver

No

HONEYCOMB



LENS

Required	Finish	Code	€
No	Black	260853	5




Required	Beam	Finish	Code	€
No	18°	Clear	332062	5
No	45°	Clear	332079	5

P. 9

ego spot single

IP20 | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 335° | 0,181 Kg/0,0018 m³

Power	Installation	Beam	CRI
8W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	700 lm	2700 K	Black	340388	97
On-Off	850 lm	3000 K	White	282985	97
On-Off	850 lm	3000 K	Black	257631	97
On-Off	1050 lm	4000 K	Black	317984	97
1-10V	850 lm	3000 K	White	303697	110
1-10V	850 lm	3000 K	Black	303680	110
DALI	900 lm	2700 K	Black	340364	135
DALI	850 lm	3000 K	White	286426	135
DALI	850 lm	3000 K	Black	286419	135

Photometry



m	lx	øm
1	2393	0,49
2	598	0,98
3	266	1,50
4	150	2,00
5	96	2,50

Driver

No

HONEYCOMB



LENS

Required	Finish	Code	€
No	Black	260860	5




Required	Beam	Finish	Code	€
No	18°	Clear	332086	5
No	45°	Clear	332093	5

ego spot single

IP20 | PRO | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 335° | 0,300 Kg/0,0017 m³

Power	Installation	Beam	CRI
12W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	2700 K	Black	340425	102
On-Off	1150 lm	3000 K	White	282992	102
On-Off	1150 lm	3000 K	Black	257655	102
On-Off	1200 lm	4000 K	Black	321967	102
1-10V	1150 lm	3000 K	White	303710	110
1-10V	1150 lm	3000 K	Black	303703	110
DALI	1050 lm	2700 K	Black	340401	140
DALI	1150 lm	3000 K	White	286440	140
DALI	1150 lm	3000 K	Black	286433	140

Photometry



m	lx	ø m
1	2877	0,51
2	719	1,00
3	320	1,50
4	180	2,10
5	115	2,60

Driver

No

HONEYCOMB



LENS


Required	Finish	Code	€
No	Black	260860	5



Required	Beam	Finish	Code	€
No	18°	Clear	332086	5
No	45°	Clear	332093	5

ego spot single



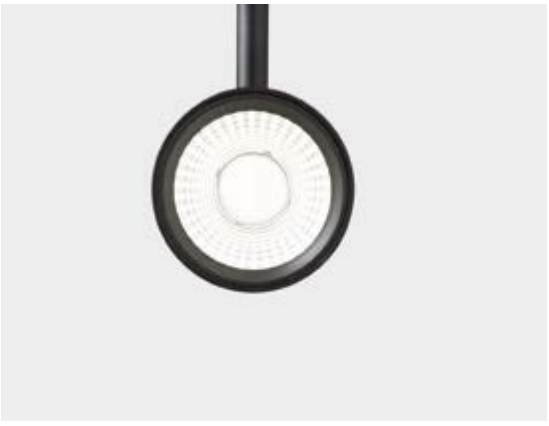



A linear system consisting of an extruded aluminium profile and lighting elements with mechanical safety fastening, offering endless configuration possibilities.



19W
Ø72

12W
Ø40


8W
Ø40

3W
Ø25

ego spot single

IP20 | PRO | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 335° | 0,800 Kg/0,0035 m³

Power	Installation	Beam	CRI
19W	TRACK	35°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2200 lm	3000 K	White	307558	143
On-Off	2200 lm	3000 K	Black	305608	143
On-Off	2650 lm	4000 K	Black	321998	143
1-10V	2200 lm	3000 K	White	307527	155
1-10V	2200 lm	3000 K	Black	307510	155
DALI	2200 lm	3000 K	White	307541	185
DALI	2200 lm	3000 K	Black	307534	185

Photometry




m	lx	øm
1	4476	0,57
2	1119	1,10
3	497	1,70
4	280	2,30
5	179	2,90

Driver

No






90° | 335° | 0,800 Kg/0,0035 m³

Power	Installation	Beam	CRI
26W	TRACK	35°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3050 lm	3000 K	White	307602	155
On-Off	3050 lm	3000 K	Black	305615	155
On-Off	3250 lm	4000 K	Black	317991	155
1-10V	3050 lm	3000 K	White	307572	165
1-10V	3050 lm	3000 K	Black	307565	165
DALI	3050 lm	3000 K	White	307596	185
DALI	3050 lm	3000 K	Black	307589	185

Photometry



m	lx	øm
1	6816	0,56
2	1704	1,10
3	757	1,70
4	426	2,20
5	273	2,80

Driver

No

LENS



Required	Beam	Finish	Code	€
No	20°	Clear	332109	10
No	55°	Clear	332116	10











Available in matt black, matt white or satin-finish anodised brass finishes, Ego can be surface-mounted, suspended, recessed without edge, quick-fit or with an edge for false ceilings.
With modular lighting modules, it is easily adaptable to the needs of any environment, from residential to commercial, and even museum and retail spaces. Perfect where high performance and a lighting quality that blends perfectly with the architecture is required.






1:1 Scale representation
Diameter 25 mm

ego spot double

IP20 | PRO | MacAdam: SDCM 3 | LED SMD OSRAM | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 335° | 0,220 Kg/0,0009 m³

Power	Installation	Beam	CRI
5W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	500 lm	3000 K	White	282947	102
On-Off	500 lm	3000 K	Black	257624	102
On-Off	600 lm	4000 K	Black	321714	102
1-10V	500 lm	3000 K	White	303611	117
1-10V	500 lm	3000 K	Black	303604	117
DALI	500 lm	3000 K	White	286341	148
DALI	500 lm	3000 K	Black	286334	148

Photometry



m	lx	øm
1	508	0,46
2	127	0,92
3	56	1,40
4	32	2,80
5	20	2,30

Driver

No

HONEYCOMB



Required	Finish	Code	€
No	Black	260853	5

LENS



Required	Beam	Finish	Code	€
No	18°	Clear	332062	5
No	45°	Clear	332079	5






ego spot double

IP20 | PRO | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | light beam: ACCENT | Material: Aluminum






90° | 335° | 0,450 Kg/0,0017 m³

Power	Installation	Beam	CRI
16W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	2700 K	Black	340265	138
On-Off	1700 lm	3000 K	White	282954	138
On-Off	1700 lm	3000 K	Black	257648	138
On-Off	2100 lm	4000 K	Black	321806	138
1-10V	1900 lm	3000 K	White	303635	150
1-10V	1900 lm	3000 K	Black	303628	150
DALI	1400 lm	2700 K	Black	340241	180
DALI	1700 lm	3000 K	White	286365	180
DALI	1700 lm	3000 K	Black	286358	180

Photometry




m	lx	αm
1	2451	0,49
2	613	1,98
3	272	1,50
4	153	2,00
5	98	2,50

Driver

No






90° | 335° | 0,330 Kg/0,0028 m³

Power	Installation	Beam	CRI
24W	TRACK	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2300 lm	3000 K	White	282961	148
On-Off	2300 lm	3000 K	Black	257662	148
On-Off	2400 lm	4000 K	Black	321844	148
1-10V	2300 lm	3000 K	White	303659	155
1-10V	2300 lm	3000 K	Black	303642	155
DALI	2300 lm	3000 K	White	286389	185
DALI	2300 lm	3000 K	Black	286372	185

Photometry



m	lx	αm
1	3051	0,51
2	763	1,00
3	339	1,50
4	191	2,10
5	122	2,60

Driver

No

HONEYCOMB



LENS

Required	Finish	Code	€
No	Black	260860	5



Required	Beam	Finish	Code	€
No	18°	Clear	332086	5
No	45°	Clear	332093	5






ego spot zoom

IP20 | PRO | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | light beam: from SPOT to WIDE | Material: Aluminum






0,460 Kg/0,0037 m³

Power	Installation	Beam	CRI
10W	TRACK	20° - 40°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	Black	330730	122
On-Off	1150 lm	4000 K	Black	340197	122
DALI	900 lm	3000 K	Black	330754	178
DALI	1150 lm	4000 K	Black	340180	178

Photometry




m	lx	øm
1	2185	0,67
2	546	1,30
3	243	2,00
4	137	2,70
5	87	3,30

Driver

No



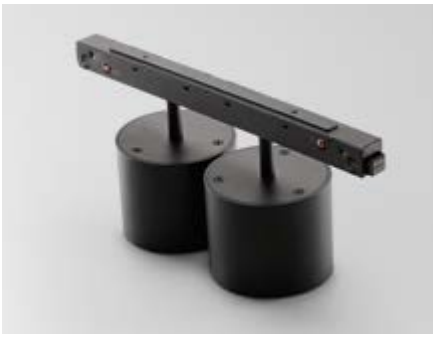




ego spot big

IP20 | PRO | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | UGR UGR<19 | light beam: ACCENT | Material: Aluminum






0,470 Kg/0,0025 m³

Power	Installation	Beam	CRI
10W	TRACK	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1350 lm	3000 K	White	327556	112
On-Off	1350 lm	3000 K	Black	300764	112

Photometry




m	lx	øm
1	1296	0,76
2	324	1,50
3	144	2,30
4	81	3,00
5	52	3,80

Driver

No






0,750 Kg/0,0025 m³

Power	Installation	Beam	CRI
20W	TRACK	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	3000 K	White	327549	194
On-Off	2700 lm	3000 K	Black	316307	194


Photometry



m	lx	øm
1	2964	0,71
2	741	1,40
3	329	2,10
4	185	2,80
5	119	3,60

Driver

No

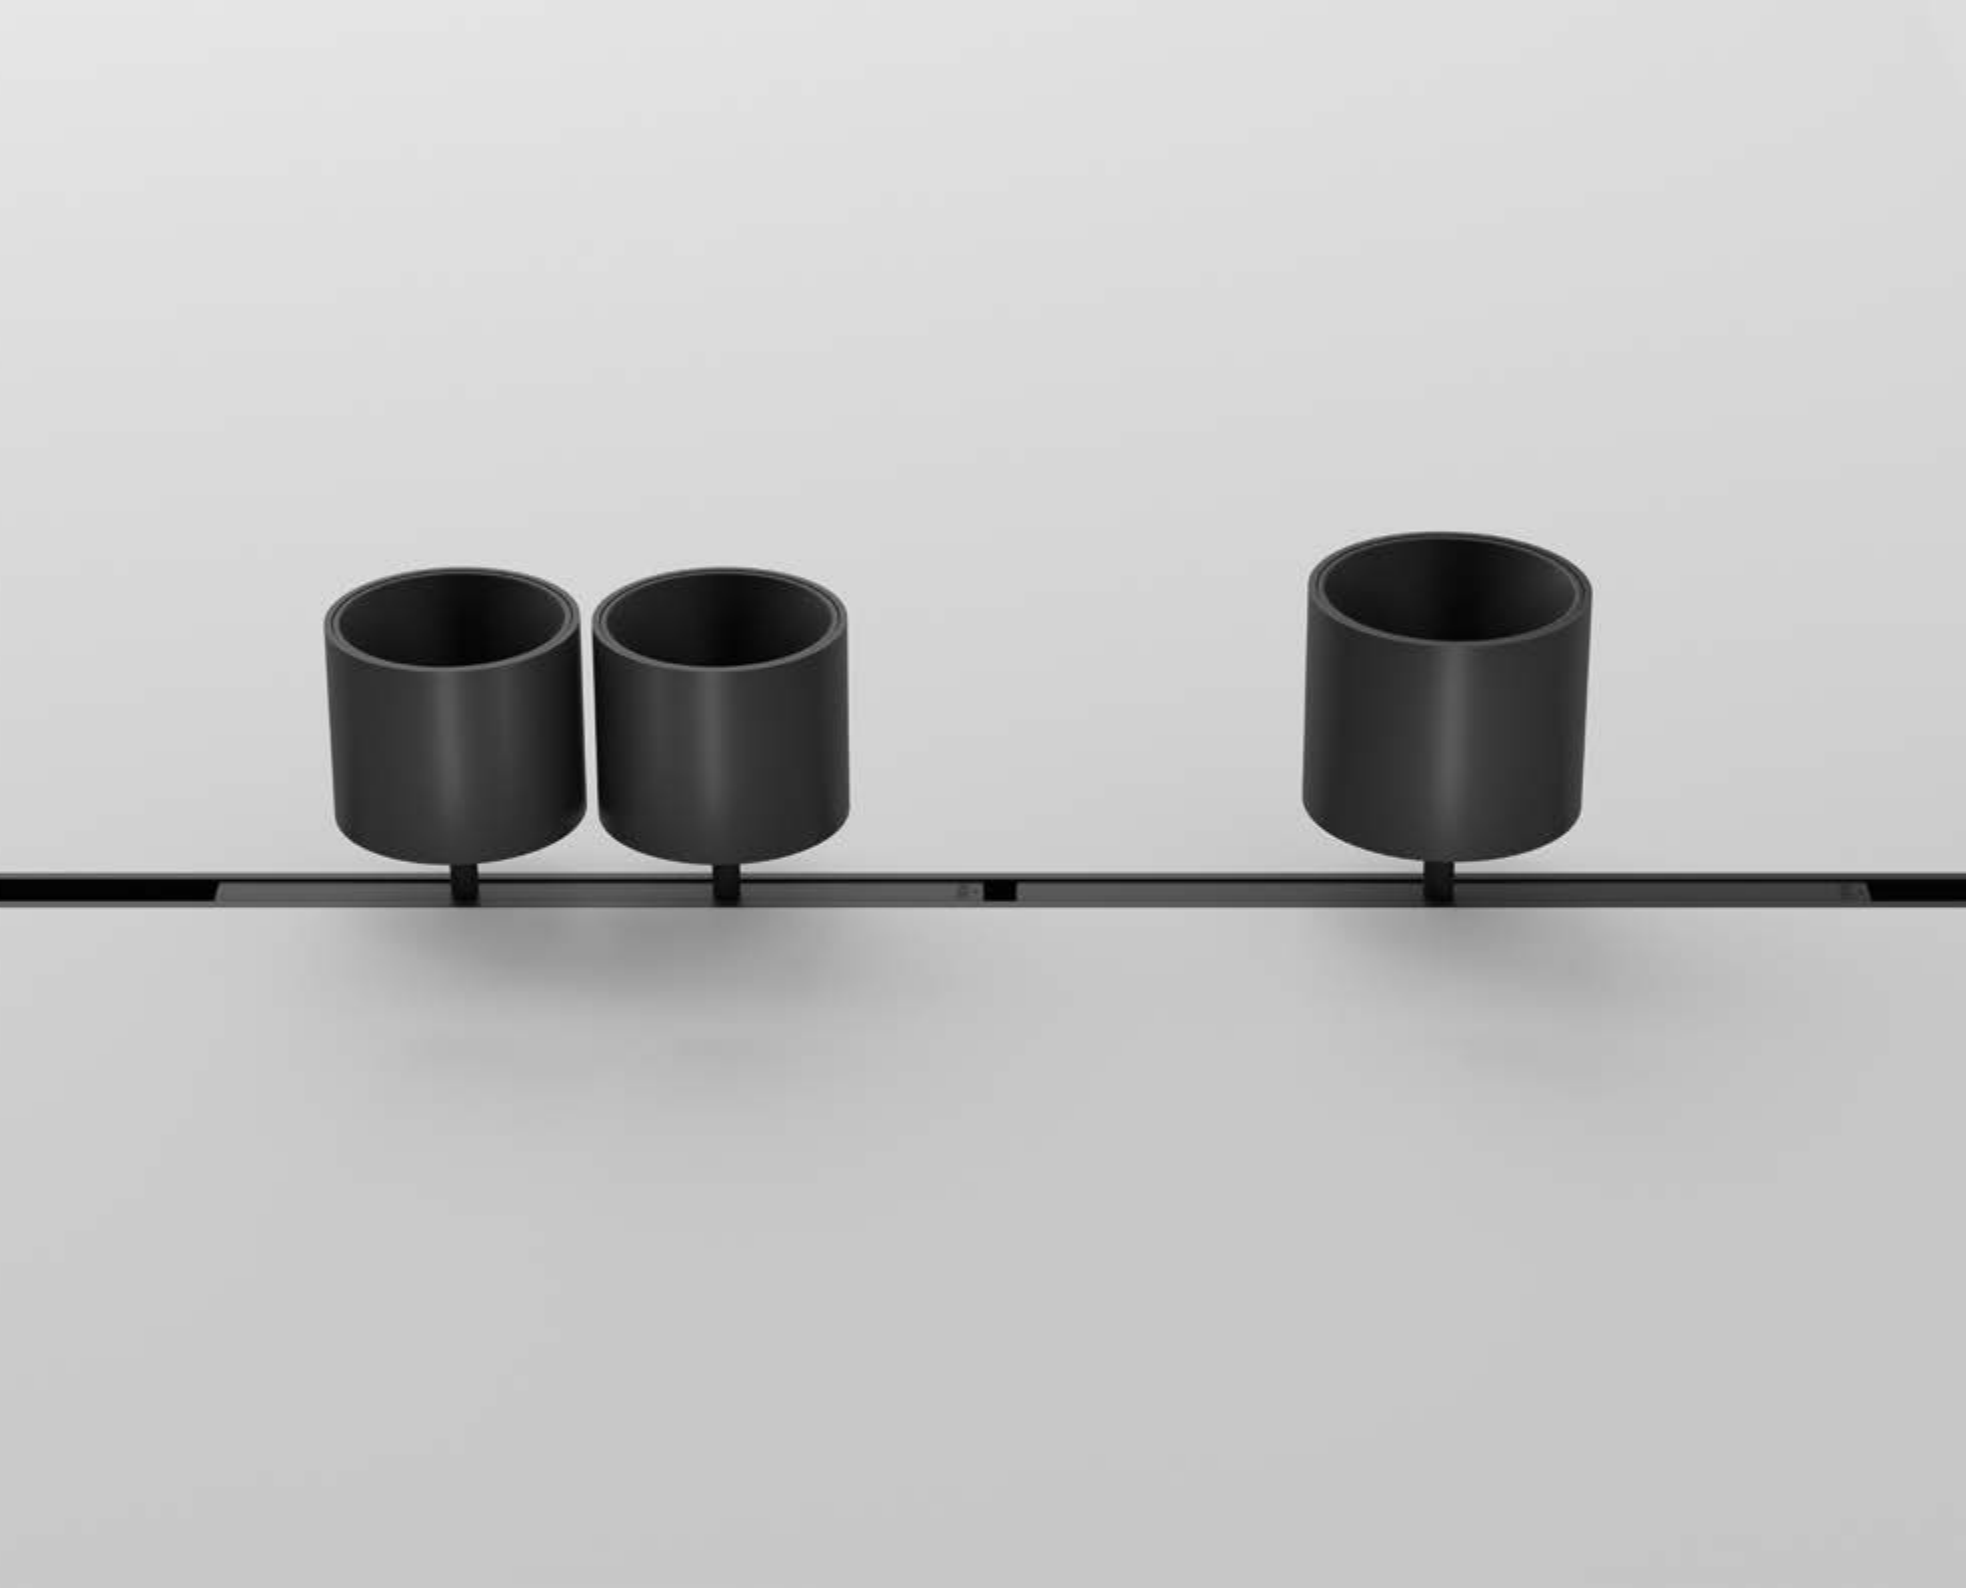




ego spot flat

IP20 | PRO | MacAdam: SDCM 3 | LED COB CITIZEN | 50.000 h life | light beam: ACCENT | Material: Aluminum






90°

0,480 Kg/0,0035 m³

Power	Installation	Beam	CRI
9W	TRACK	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1100 lm	3000 K	White	300504	108
On-Off	1100 lm	3000 K	Black	290614	108
1-10V	1100 lm	3000 K	White	303741	120
1-10V	1100 lm	3000 K	Black	303727	120
DALI	1100 lm	3000 K	White	300535	150
DALI	1100 lm	3000 K	Black	300528	150

Photometry



m	lx	øm
1	2242	0,60
2	560	1,20
3	249	1,80
4	140	2,40
5	90	3,00

Driver

No








ego accent

IP20 | PRO | MacAdam: SDCM 3 | LED SMD OSRAM | 50.000 h life | UGR | UGR<19 | light beam: ACCENT | Material: Aluminum






0,281 Kg/0,0013 m³

Power	Installation	Beam	CRI
7W	TRACK	35°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	630 lm	2700 K	Black	340067	102
On-Off	700 lm	3000 K	White	282633	102
On-Off	700 lm	3000 K	Black	257792	102
On-Off	780 lm	4000 K	Black	323596	102
1-10V	700 lm	3000 K	White	303505	138
1-10V	700 lm	3000 K	Black	303499	138
DALI	630 lm	2700 K	Black	340043	148
DALI	700 lm	3000 K	White	286068	148
DALI	700 lm	3000 K	Black	286051	148

Photometry




m	lx	øm
1	1528	0,61
2	382	1,20
3	170	1,80
4	96	2,40
5	61	3,10

Driver

No






0,330 Kg/0,0011 m³

Power	Installation	Beam	CRI
13W	TRACK	35°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1250 lm	2700 K	Black	340104	142
On-Off	1400 lm	3000 K	White	282640	142
On-Off	1400 lm	3000 K	Black	257686	142
On-Off	1550 lm	4000 K	Black	317953	142
1-10V	1400 lm	3000 K	White	303529	174
1-10V	1400 lm	3000 K	Black	303512	174
DALI	1250 lm	2700 K	Black	340081	204
DALI	1400 lm	3000 K	White	286082	204
DALI	1400 lm	3000 K	Black	286075	204

Photometry



m	lx	øm
1	3121	0,61
2	780	1,20
3	347	1,80
4	195	2,40
5	125	3,00

Driver

No



Ego Accent 284 mm



Ego Accent 192 mm








ego wide

IP20 | PRO | MacAdam: SDCM 3 | LED SMD SAMSUNG | 50.000 h life | light beam: WIDE | Material: Aluminum






0,200 Kg/0,0011 m³

Power	Installation	Beam	CRI
7W	TRACK	110°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	850 lm	3000 K	White	283029	76
On-Off	850 lm	3000 K	Black	257709	76
On-Off	1000 lm	4000 K	Black	317960	76
1-10V	850 lm	3000 K	White	303796	120
1-10V	850 lm	3000 K	Black	303789	120
DALI	850 lm	3000 K	White	286501	125
DALI	850 lm	3000 K	Black	286495	125

Photometry



m	lx	øm
1	232	2,80
2	58	5,70
3	26	8,50
4	15	11,00
5	9,3	14,00

Driver

No





Ego Wide 1120 mm



Ego Wide 560 mm




Ego Wide 284 mm

ego wide

IP20 | PRO | MacAdam: SDCM 3 | LED SMD SAMSUNG | 50.000 h life | light beam: WIDE | Material: Aluminum






0,564 Kg/0,0018 m³

Power	Installation	Beam	CRI
13W	TRACK	110°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1350 lm	2700 K	Black	340586	102
On-Off	1700 lm	3000 K	White	283036	102
On-Off	1700 lm	3000 K	Black	257716	102
On-Off	2000 lm	4000 K	Black	322056	102
1-10V	1700 lm	3000 K	White	303819	130
1-10V	1700 lm	3000 K	Black	303802	130
DALI	1350 lm	2700 K	Black	340562	145
DALI	1700 lm	3000 K	White	286525	145
DALI	1700 lm	3000 K	Black	286518	145

Photometry




m	lx	om
1	482	2,80
2	121	5,70
3	54	8,50
4	30	11,00
5	19	14,00

Driver

No






0,900 Kg/0,0035 m³

Power	Installation	Beam	CRI
26W	TRACK	110°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	2700 K	Black	340623	148
On-Off	3400 lm	3000 K	White	283043	148
On-Off	3400 lm	3000 K	Black	257730	148
On-Off	4000 lm	4000 K	Black	322070	148
1-10V	3400 lm	3000 K	White	303833	160
1-10V	3400 lm	3000 K	Black	303826	160
DALI	2700 lm	2700 K	Black	340609	185
DALI	3400 lm	3000 K	White	286549	185
DALI	3400 lm	3000 K	Black	286532	185

Photometry



m	lx	om
1	619	2,50
2	155	4,90
3	69	7,40
4	39	9,80
5	25	12,00

Driver

No

P. 11
EGO






ego flexible

IP20 | PRO | MacAdam: SDCM 3 | LED SMD OSRAM | 50.000 h life | UGR<19 | light beam: ACCENT | Material: Aluminum






90° | 0,620 Kg/0,0015 m³

Power	Installation	Beam	CRI
13W	TRACK	35°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	White	282718	178
On-Off	1400 lm	3000 K	Black	257846	178
DALI	1400 lm	3000 K	White	286105	215
DALI	1400 lm	3000 K	Black	286099	215

Photometry



m	lx	øm
1	3112	0,61
2	778	1,20
3	346	1,80
4	194	2,40
5	124	3,00

Driver

No

IP20 | MacAdam: SDCM 3 | LED SMD SAMSUNG | 50.000 h life | light beam: WIDE | Material: Aluminum






90° | 0,620 Kg/0,0016 m³

Power	Installation	Beam	CRI
7W	TRACK	110°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	850 lm	3000 K	White	282725	122
On-Off	850 lm	3000 K	Black	257839	122
DALI	850 lm	3000 K	White	286129	160
DALI	850 lm	3000 K	Black	286112	160

Photometry



m	lx	øm
1	231	2,90
2	58	5,80
3	26	8,60
4	14	12,00
5	9	14,00

Driver

No








ego pendant

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR UGR<19 | light beam: ACCENT | Material: Aluminum






0,150 Kg/0,0021 m³

Power	Installation	Beam	CRI	Source
5,5W	TRACK	66°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	520 lm	3000 K	Black	332451	92
1-10V	520 lm	3000 K	Black	344782	110
DALI	520 lm	3000 K	Black	344799	140


Photometry



m	lx	cm
1	305	1,00
2	76	2,00
3	34	3,00
4	19	4,00
5	12	5,00

Driver

No




0,550 Kg/0,0025 m³

Power	Installation	Beam	CRI	Source
12W	TRACK	30°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	1150 lm	3000 K	White	282879	148
On-Off	1150 lm	3000 K	Black	257747	148
On-Off	1250 lm	4000 K	Black	321653	148
1-10V	1150 lm	3000 K	White	303598	158
1-10V	1150 lm	3000 K	Black	303574	158
DALI	1150 lm	3000 K	White	286327	190
DALI	1150 lm	3000 K	Black	286310	190

Photometry



m	lx	cm
1	2877	0,51
2	719	1,00
3	320	1,50
4	180	2,10
5	115	2,60

Driver


No



ego pendant

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | light beam: WIDE | Material: Aluminum






0,900 Kg/0,0108 m³

Power	Installation	CRI	Source
10W	TRACK	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	White	327532	133
On-Off	1050 lm	3000 K	Black	327525	133

Photometry




m	lx	øm
1	305	1,00
2	76	2,00
3	34	3,00
4	19	4,00
5	12	5,00

Driver

No



ego low
assembly plans

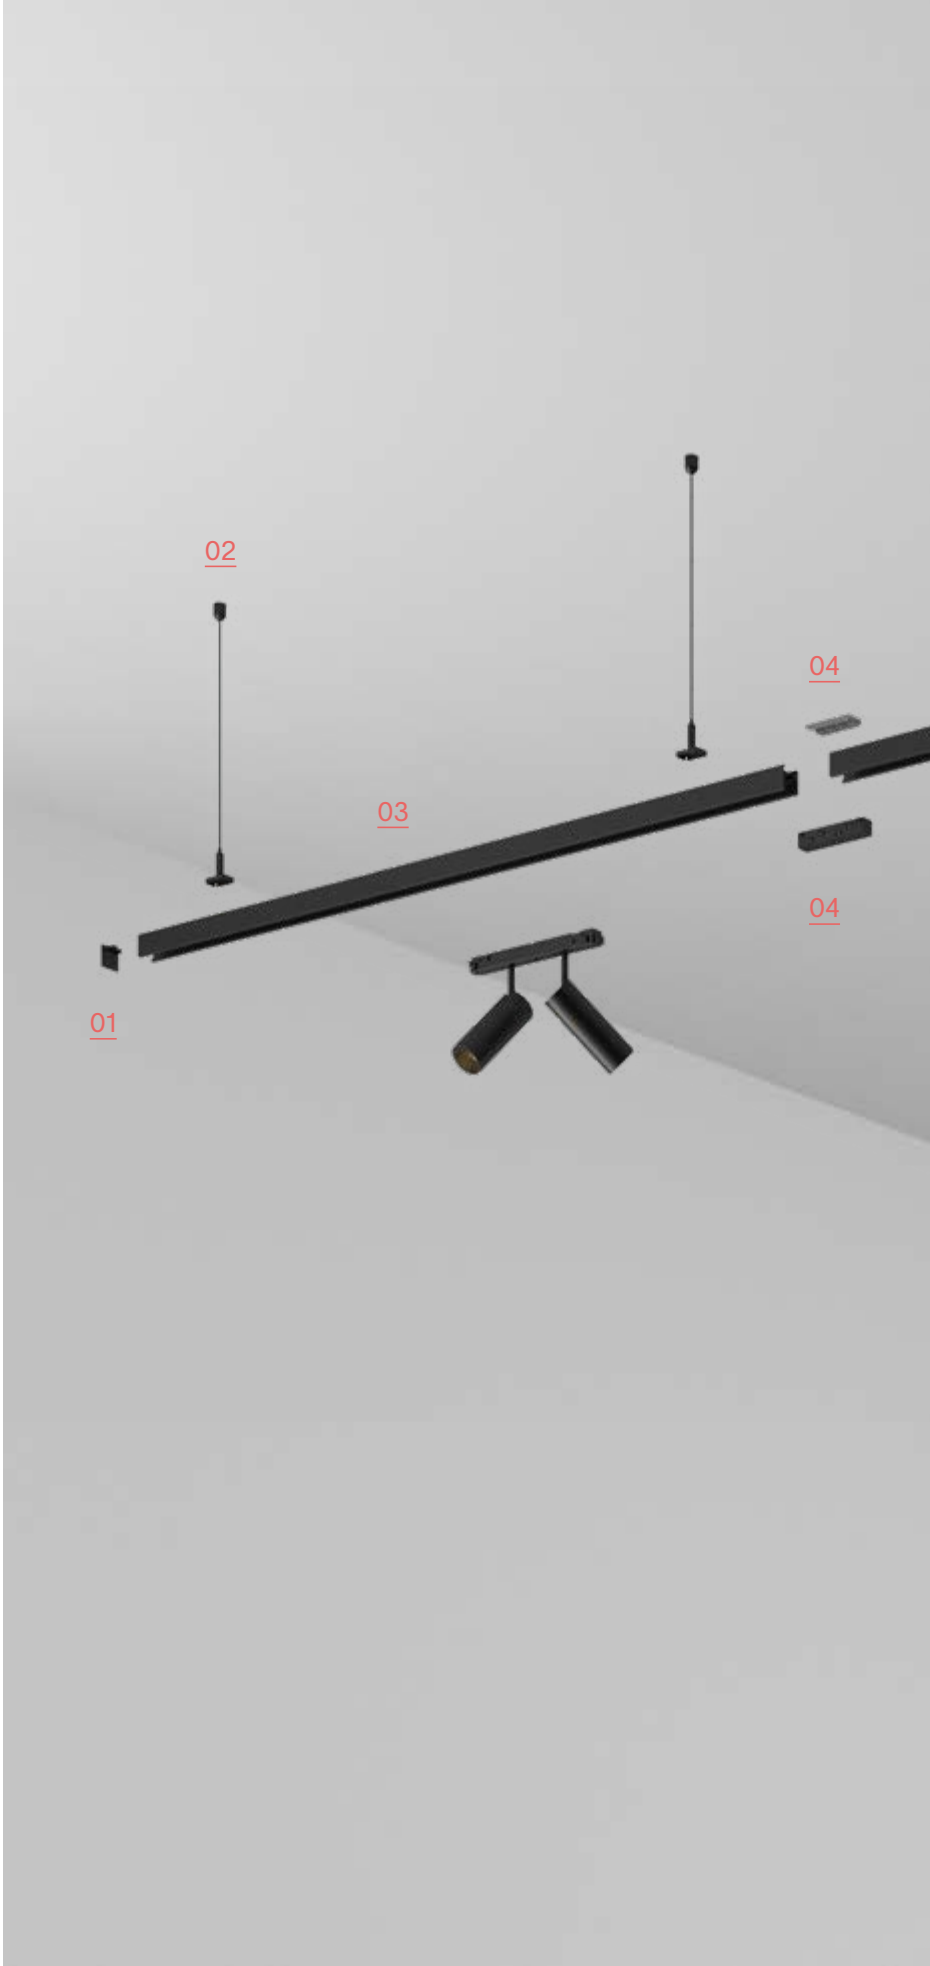

01 End cap no hole
02 Suspension Kit
03 Track Low 2000 mm
04 Linear joint
05 L-joint
06 Power supply connector
07 Ceiling cup with suspension Kit
08 Driver + Driver box
09 End cap no hole


05
07
08
06
09

ego low

IP20 | TRACK | No mounting Kit required, direct ceiling installation. Maximum length per power source: 25 meters | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	0,70 Kg	0,0013 m³	White	282909	48
1000 mm	0,70 Kg	0,0013 m³	Black	257877	48
2000 mm	1,40 Kg	0,0018 m³	White	282916	96
2000 mm	1,40 Kg	0,0018 m³	Black	266121	96

IP20 | L-JOINT | Optional | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,21 Kg	0,0010 m³	On-Off	White	282848	96
0,21 Kg	0,0010 m³	On-Off	Black	257990	96
0,21 Kg	0,0010 m³	1-10V / DALI	White	286266	100
0,21 Kg	0,0010 m³	1-10V / DALI	Black	286259	100

IP20 | LINEAR JOINT | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,04 Kg	0,0001 m³	On-Off 1-10V / DALI	White	285993	40
0,04 Kg	0,0001 m³		Black	283104	40

IP20 | POWER SUPPLY CONNECTOR | Required - 1 Kit x power source max 210W | Material: Aluminum





Cable length 2000 mm

Weight	Volume	Control	Finish	Code	€
0,20 Kg	0,0008 m³	On-Off	White	282862	37
0,20 Kg	0,0008 m³	On-Off	Black	265896	37
0,20 Kg	0,0008 m³	1-10V / DALI	White	286303	50
0,20 Kg	0,0008 m³	1-10V / DALI	Black	286297	50

END CAP NO HOLE | Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 11 x 27 mm	White	282688	6
Yes	26 x 11 x 27 mm	Black	267241	6

END CAP WITH HOLE | Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 11 x 27 mm	White	282671	6
Yes	26 x 11 x 27 mm	Black	267258	6

ego low

CEILING CUP WITH SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x power source max 210W	2000 mm	White	282749	55
	2000 mm	Black	276328	55

SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x 900 mm	2000 mm	White	282756	17
	2000 mm	Black	259376	17

BLIND COVER

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 17 x 18 mm	White	344768	10
No	1000 x 17 x 18 mm	Black	344751	10


BLIND COVER L-JOINT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
No	95 x 18 x 17 mm	Black	337104	10

ego high
assembly plans

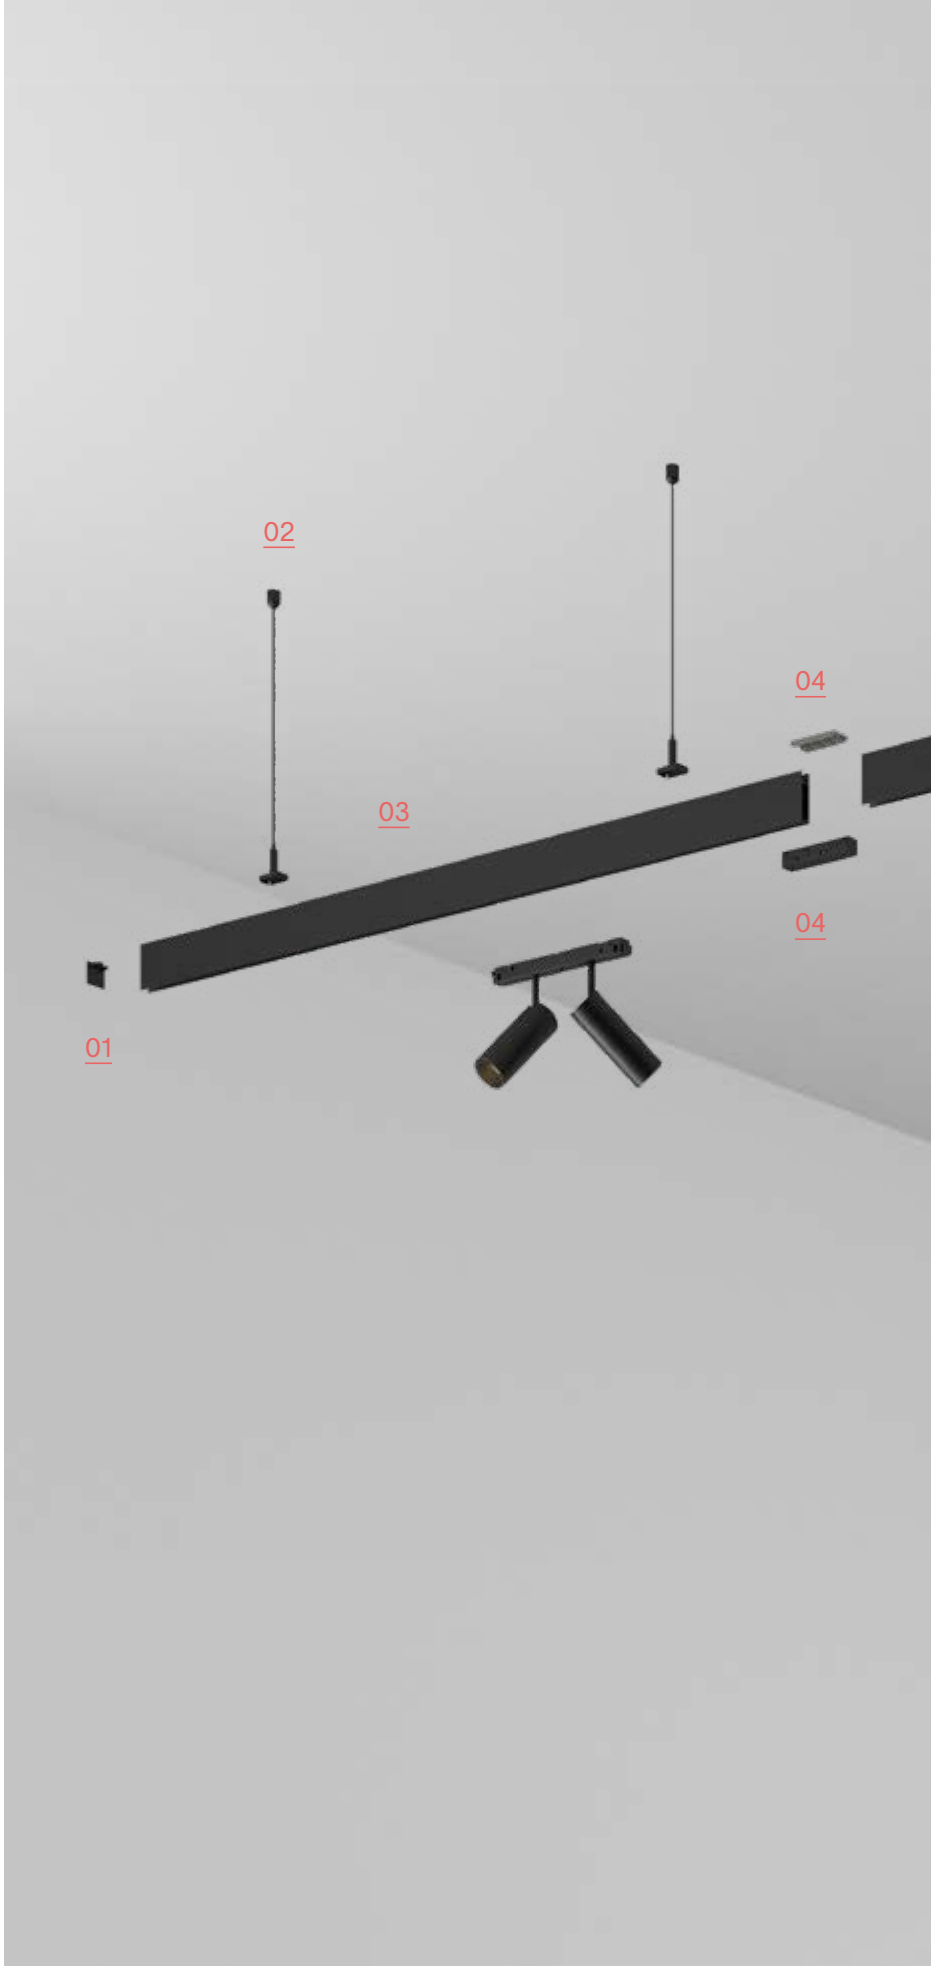


01 End cap no hole
02 Suspension Kit
03 Track High 2000 mm
04 Linear joint
05 L-joint
06 Power supply connector
07 Ceiling cup with suspension Kit
08 Driver + Driver box
09 End cap no hole


05
07
08
06
09

ego high

IP20 | TRACK | No mounting Kit required, direct ceiling installation. Maximum length per power source: 25 meters | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	0,90 Kg	0,0085 m³	White	282886	60
1000 mm	0,90 Kg	0,0085 m³	Black	258027	60
2000 mm	1,80 Kg	0,0096 m³	White	282893	120
2000 mm	1,80 Kg	0,0096 m³	Black	266145	120

IP20 | L-JOINT | Optional | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,26 Kg	0,0013 m³	On-Off	White	282824	92
0,26 Kg	0,0013 m³	On-Off	Black	258140	92
0,26 Kg	0,0013 m³	1-10V / DALI	White	286228	100
0,26 Kg	0,0013 m³	1-10V / DALI	Black	286211	100

IP20 | LINEAR JOINT | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,04 Kg	0,0001 m³	On-Off	White	285993	40
0,04 Kg	0,0001 m³	On-Off	Black	283104	40
0,04 Kg	0,0001 m³	1-10V / DALI	White	285993	40
0,04 Kg	0,0001 m³	1-10V / DALI	Black	283104	40

IP20 | POWER SUPPLY CONNECTOR | Required - 1 Kit x power source max 210W | Material: Aluminum





Cable length 2000 mm

Weight	Volume	Control	Finish	Code	€
0,20 Kg	0,0008 m³	On-Off	White	282862	37
0,20 Kg	0,0008 m³	On-Off	Black	265896	37
0,20 Kg	0,0008 m³	1-10V / DALI	White	286303	50
0,20 Kg	0,0008 m³	1-10V / DALI	Black	286297	50

ego high

END CAP NO HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 11 x 52 mm	White	282664	6
Yes	26 x 11 x 52 mm	Black	267227	6

END CAP WITH HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 11 x 52 mm	White	282657	6
Yes	26 x 11 x 52 mm	Black	267234	6

CEILING CUP WITH SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x power source max 210W	2000 mm	White	282749	55
	2000 mm	Black	276328	55

SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x 900 mm	2000 mm	White	282756	17
	2000 mm	Black	259376	17

BLIND COVER

Material: Aluminum




Required	Measure (L x H x W)	Finitura	Codice	€
Yes	1000 x 5 x 24 mm	White	282770	17
Yes	1000 x 5 x 24 mm	Black	258256	17

ego recessed assembly plans




01 End cap no hole
02 Blind cover
03 Track 1000 mm
04 Linear joint
05 L-joint
06 Power supply connector
07 Driver
08 End cap with hole

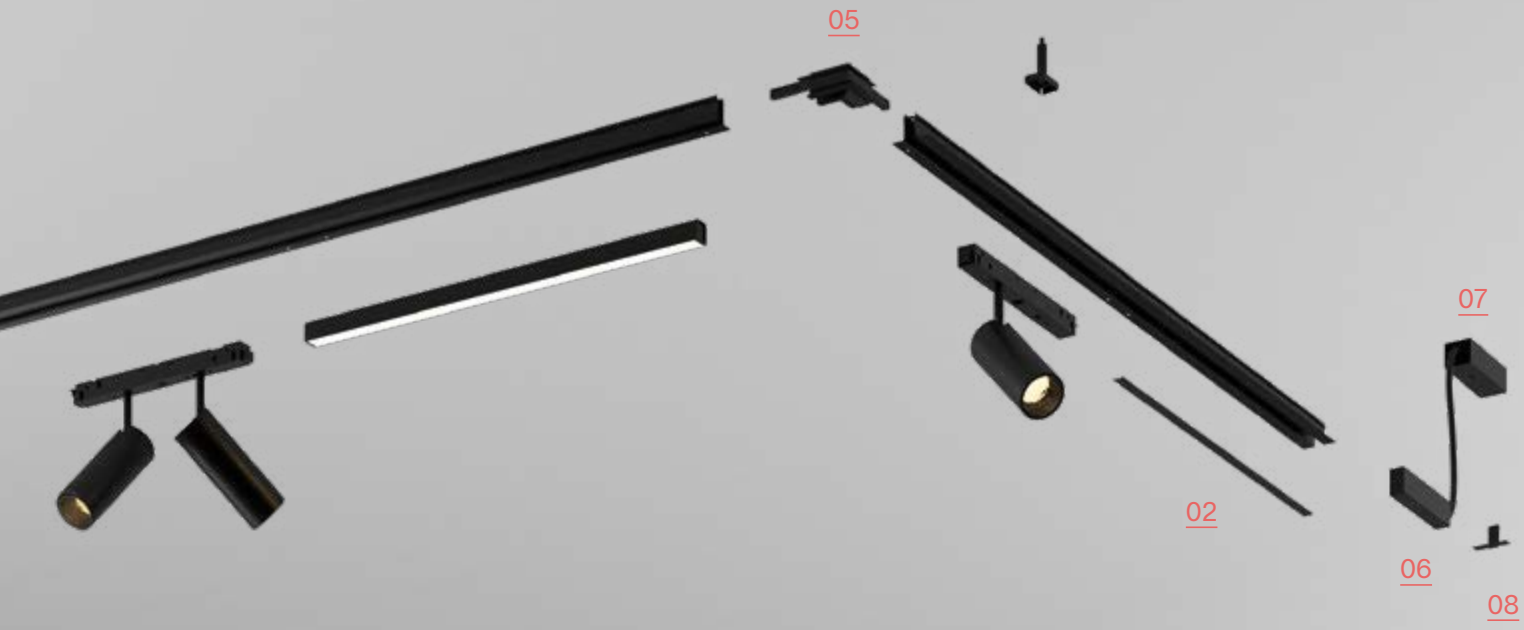
05
07
02
06
08

ego recessed

IP20 | TRACK | Kit for assembly profile included
Maximum length per power source: 25 meters | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	1,52 Kg	0,0085 m³	White	282923	75
1000 mm	1,52 Kg	0,0085 m³	Black	258171	75
2000 mm	2,94 Kg	0,0020 m³	White	282930	150
2000 mm	2,94 Kg	0,0020 m³	Black	266183	150

IP20 | L-JOINT | Optional | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,32 Kg	0,0013 m³	On-Off	White	282787	91
0,32 Kg	0,0013 m³	On-Off	Black	258232	91
0,32 Kg	0,0013 m³	1-10V / DALI	White	286204	125
0,32 Kg	0,0013 m³	1-10V / DALI	Black	286167	125

IP20 | LINEAR JOINT | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,04 Kg	0,0002 m³	On-Off 1-10V / DALI	White	286006	40
0,04 Kg	0,0002 m³		Black	283111	40

IP20 | POWER SUPPLY CONNECTOR | Required - 1 Kit x power source max 210W | Material: Aluminum





Cable length 2000 mm

Weight	Volume	Control	Finish	Code	€
0,20 Kg	0,0008 m³	On-Off	White	282862	37
0,20 Kg	0,0008 m³	On-Off	Black	265896	37
0,20 Kg	0,0008 m³	1-10V / DALI	White	286303	50
0,20 Kg	0,0008 m³	1-10V / DALI	Black	286297	50

ego recessed

END CAP NO HOLE — Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	36 x 4 x 52 mm	White	282701	6
Yes	36 x 4 x 52 mm	Black	267203	6

END CAP WITH HOLE — Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	36 x 4 x 52 mm	White	282695	6
Yes	36 x 4 x 52 mm	Black	267210	6

BLIND COVER — Material: Aluminum




Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 5 x 24 mm	White	282770	17
No	1000 x 5 x 24 mm	Black	258256	17

INSTALLATION TOOL — Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
No		Black	292922	32

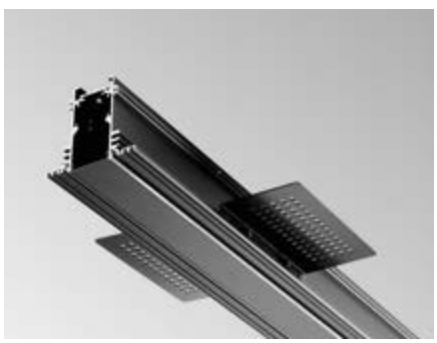



Left: blind cover
Right: installation tool


ego recessed easy

IP20 | TRACK

No mounting Kit required, direct ceiling installation
Maximum length per power source: 25 meters

Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	1,16 Kg	0,0088 m³	White	320489	65
1000 mm	1,16 Kg	0,0088 m³	Black	320472	65
2000 mm	2,40 Kg	0,0088 m³	White	320502	130
2000 mm	2,40 Kg	0,0088 m³	Black	320496	130

IP20 | L-JOINT

Optional

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,30 Kg	0,0013 m³	On-Off	White	320748	117
0,30 Kg	0,0013 m³	On-Off	Black	320731	117
0,30 Kg	0,0013 m³	1-10V / DALI	White	320724	135
0,30 Kg	0,0013 m³	1-10V / DALI	Black	320717	135

IP20 | LINEAR JOINT

Required - 1 Kit x linear connection

Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,04 Kg	0,0002 m³	On-Off 1-10V / DALI	White	286006	40
0,04 Kg	0,0002 m³		Black	283111	40

IP20 | POWER SUPPLY CONNECTOR

Required - 1 Kit x power source max 210W

Material: Aluminum





Cable length 2000 mm

Weight	Volume	Control	Finish	Code	€
0,20 Kg	0,0008 m³	On-Off	White	282862	37
0,20 Kg	0,0008 m³	On-Off	Black	265896	37
0,20 Kg	0,0008 m³	1-10V / DALI	White	286303	50
0,20 Kg	0,0008 m³	1-10V / DALI	Black	286297	50

END CAP NO HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	83 x 52 x 30 mm	White	320564	6
Yes	83 x 52 x 30 mm	Black	320557	6

END CAP WITH HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	83 x 52 x 30 mm	White	320588	6
Yes	83 x 52 x 30 mm	Black	320571	6

BLIND COVER


Material: Aluminum





Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 5 x 24 mm	White	282770	17
No	1000 x 5 x 24 mm	Black	258256	17

ego recessed easy assembly plans

01 End cap no hole
02 Blind cover
03 Track 1000 mm
04 Linear joint
05 L-joint
06 Connettore di alimentazione
07 Driver
08 End cap with hole

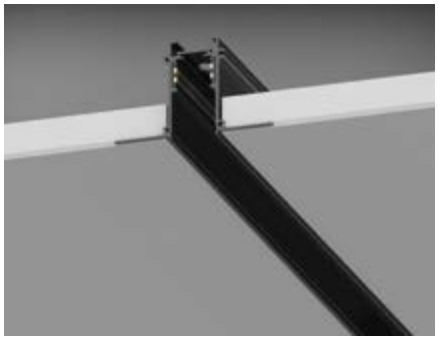

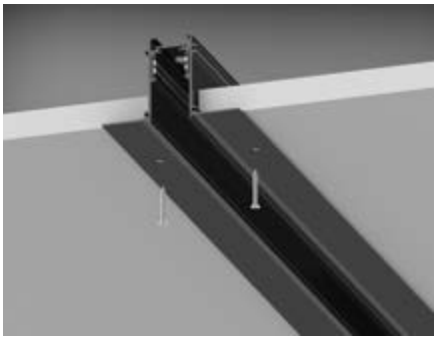


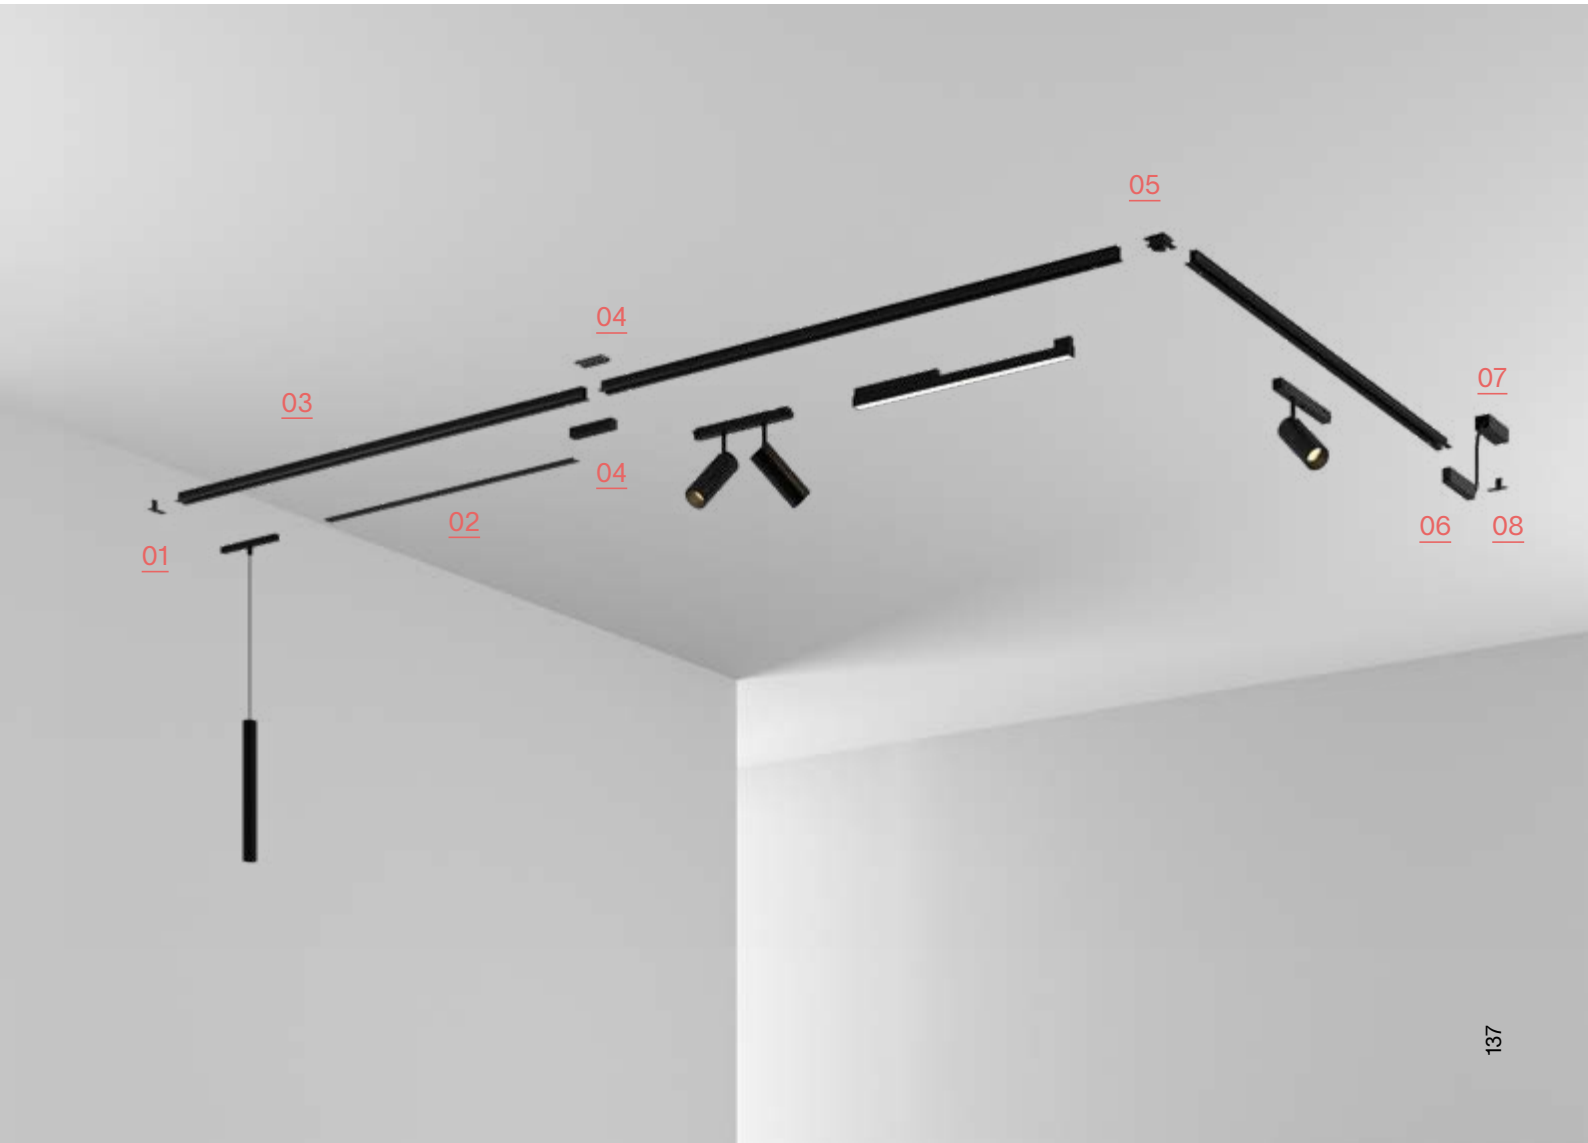

ego recessed trim

IP20 | TRACK | Kit for assembly profile included
Maximum length per power source: 25 meters | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	1,13 Kg	0,0020 m³	White	320441	86
1000 mm	1,13 Kg	0,0020 m³	Black	320434	86
2000 mm	2,25 Kg	0,0040 m³	White	320465	172
2000 mm	2,25 Kg	0,0040 m³	Black	320458	172

IP20 | L-JOINT | Optional | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,30 Kg	0,0013 m³	On-Off	White	320625	128
0,30 Kg	0,0013 m³	On-Off	Black	320618	128
0,30 Kg	0,0013 m³	1-10V / DALI	White	320601	147
0,30 Kg	0,0013 m³	1-10V / DALI	Black	320595	147

IP20 | LINEAR JOINT | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,04 Kg	0,0002 m³	On-Off 1-10V / DALI	White	286006	40
0,04 Kg	0,0002 m³		Black	283111	40

IP20 | POWER SUPPLY CONNECTOR | Required - 1 Kit x power source max 210W | Material: Aluminum





Cable length 2000 mm

Weight	Volume	Control	Finish	Code	€
0,20 Kg	0,0008 m³	On-Off	White	282862	37
0,20 Kg	0,0008 m³	On-Off	Black	265896	37
0,20 Kg	0,0008 m³	1-10V / DALI	White	286303	50
0,20 Kg	0,0008 m³	1-10V / DALI	Black	286297	50

END CAP NO HOLE | Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	38 x 52 x 17 mm	White	320526	6
Yes	38 x 52 x 17 mm	Black	320519	6

END CAP WITH HOLE | Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	38 x 52 x 17 mm	White	320540	6
Yes	38 x 52 x 17 mm	Black	320533	6


BLIND COVER | Material: Aluminum




Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 5 x 24 mm	White	282770	17
No	1000 x 5 x 24 mm	Black	258256	17

ego recessed trim assembly plans


01 End cap no hole
02 Blind cover
03 Track 1000 mm
04 Linear joint
05 L-joint
06 Power supply connector
07 Driver
08 End cap with hole

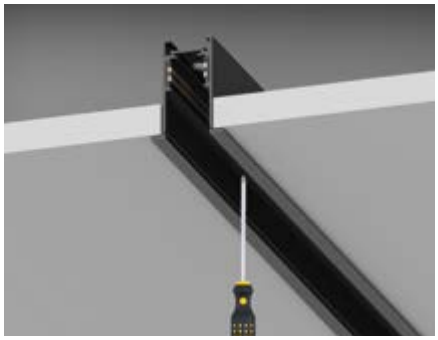

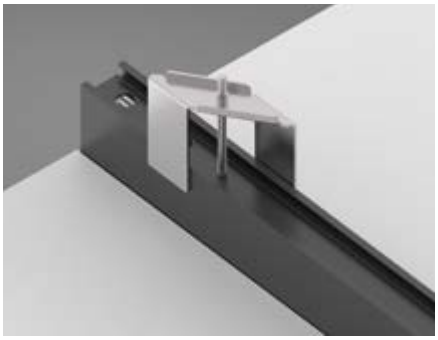




ego bi-emission assembly plans

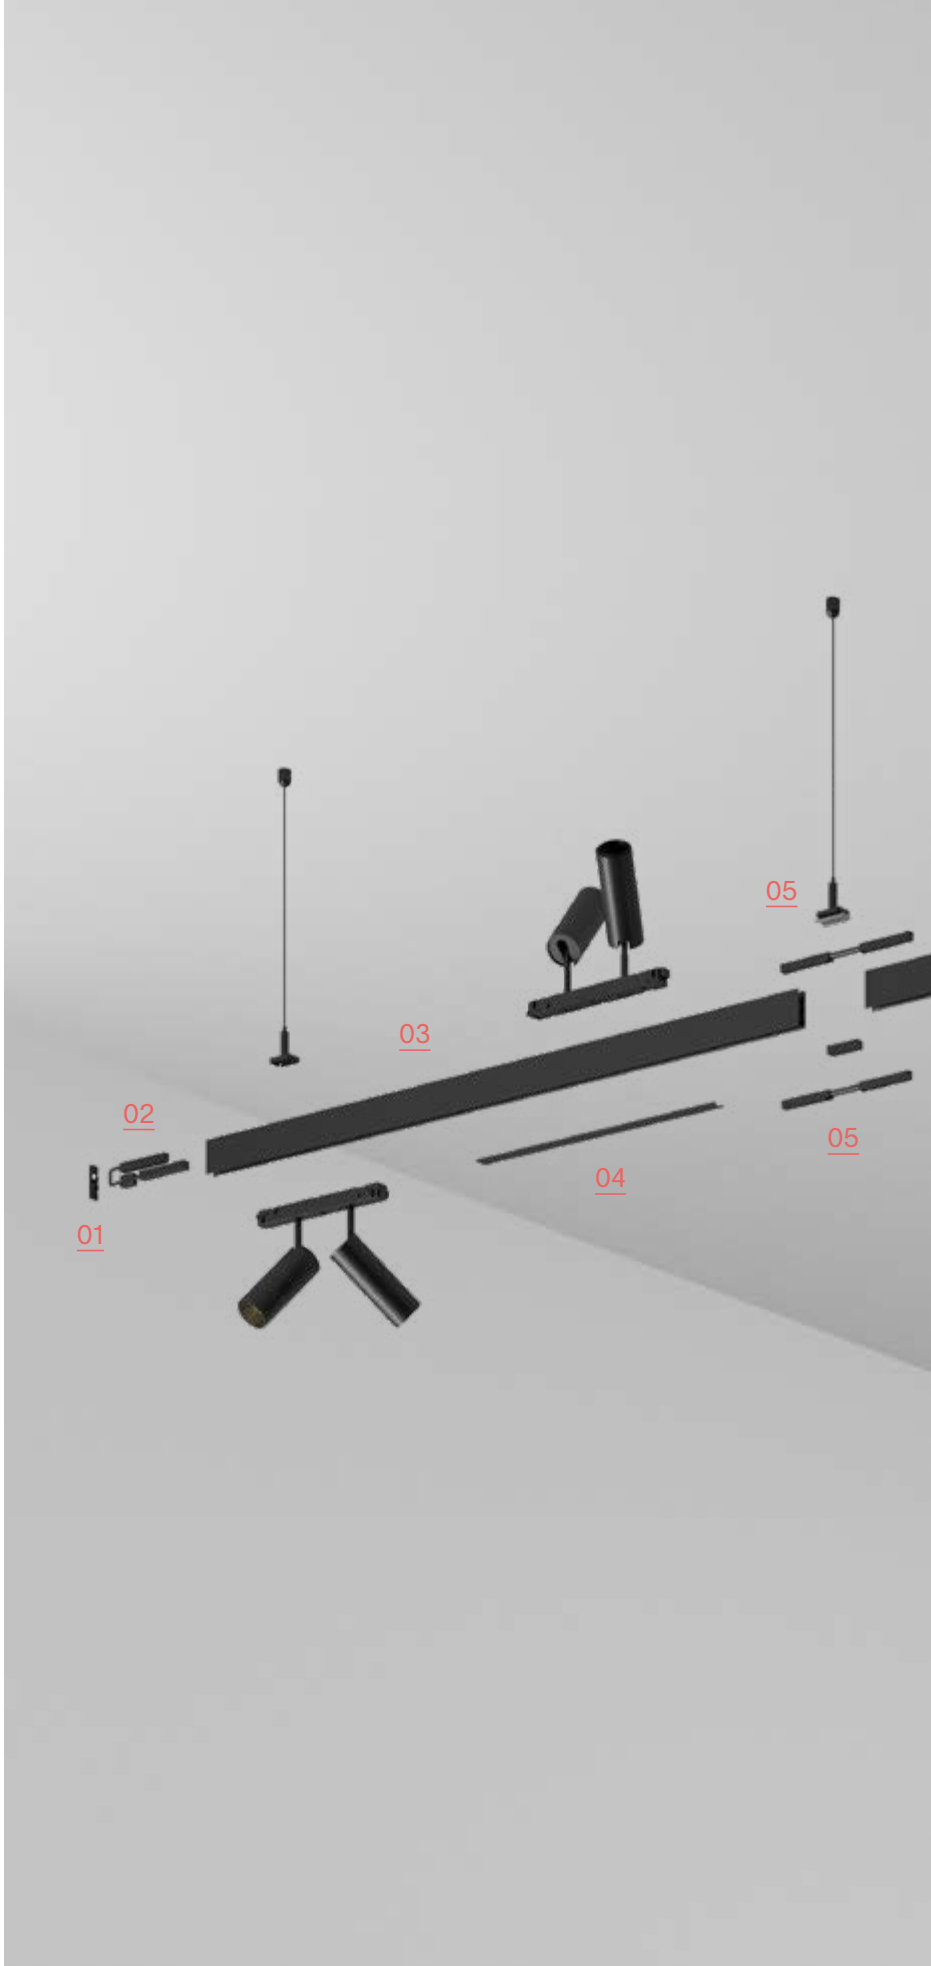


01 End cap no hole
02 Up/down electrical connector
03 Track Bi-emission 1000 mm
04 Blind cover
05 Linear joint with suspension Kit
06 Track Bi-emission 2000 mm
07 Suspension Kit
08 Ceiling cup with suspension Kit
09 Power supply connector
10 End cap with hole

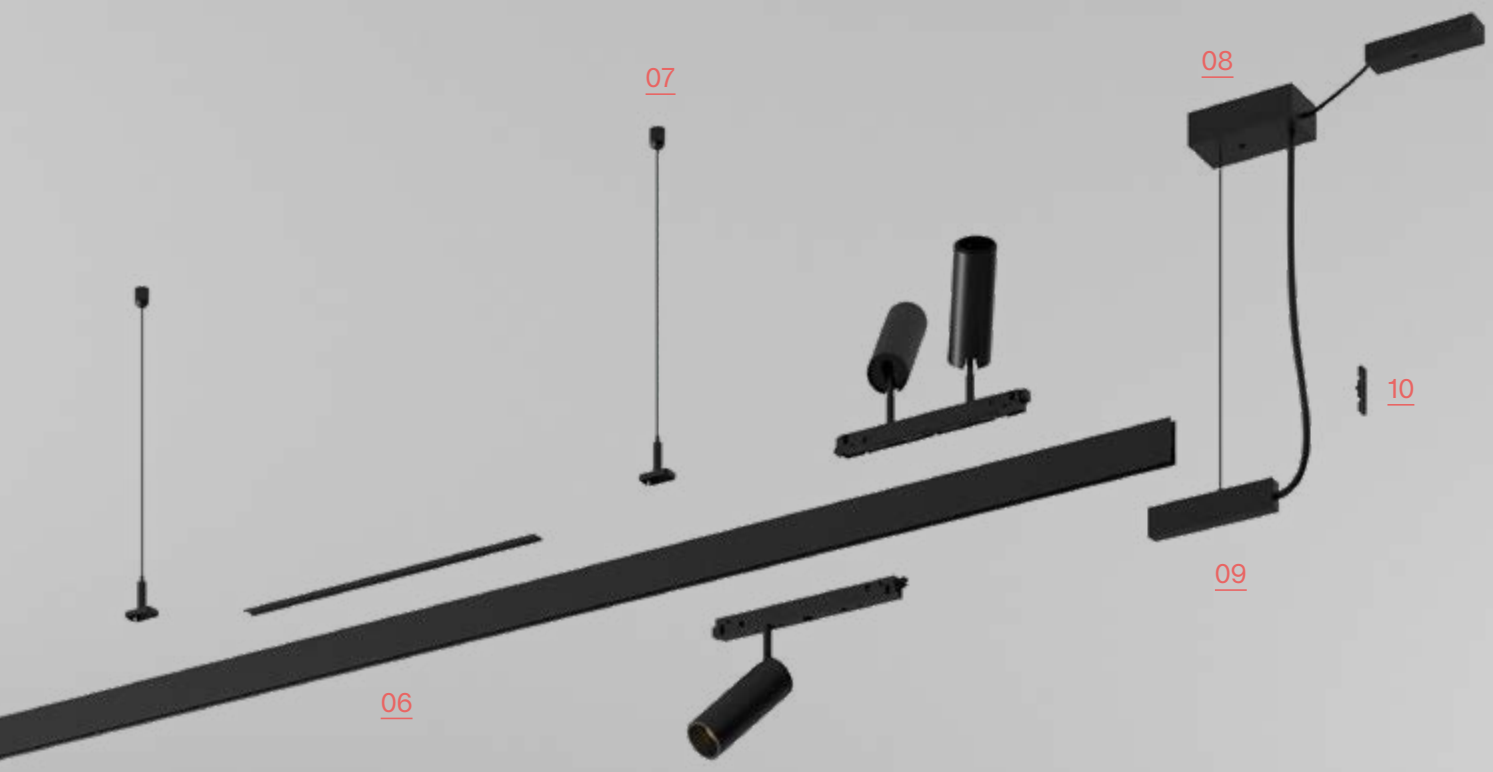
07
08
10
09
06

ego bi-emission

IP20 | TRACK | Maximum length per power source: 13 meters | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
1000 mm	1,40 Kg	0,0026 m³	Black	322513	148
2000 mm	2,90 Kg	0,0045 m³	Black	340647	296

IP20 | LINEAR JOINT WITH SUSPENSION KIT | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,271 Kg	0,0012 m³	On-Off	Black	339863	219
0,271 Kg	0,0012 m³	1-10V / DALI	Black	351346	262

IP20 | UP/DOWN ELECTRICAL CONNECTOR | Required - 1 Kit x linear connection | Material: Aluminum






Weight	Volume	Control	Finish	Code	€
0,100 Kg	0,0002 m³	On-Off	Black	322810	71
0,100 Kg	0,0002 m³	1-10V / DALI	Black	342757	80

IP20 | POWER SUPPLY CONNECTOR | Required - 1 Kit x power source max 210W | Material: Aluminum





Cable length 2000 mm

Weight	Volume	Control	Finish	Code	€
0,20 Kg	0,0008 m³	On-Off	White	282862	37
0,20 Kg	0,0008 m³	On-Off	Black	265896	37
0,20 Kg	0,0008 m³	1-10V / DALI	White	286303	50
0,20 Kg	0,0008 m³	1-10V / DALI	Black	286297	50

ego bi-emission

END CAP NO HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 90 x 2 mm	Black	322841	7

END CAP WITH HOLE

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes	26 x 90 x 2 mm	Black	322858	7

CEILING CUP WITH SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x power source max max 210W	2100 mm	Black	322476	59

SUSPENSION KIT

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
Yes - 1 Kit x 900 mm	2085 mm	Black	322490	37

BLIND COVER

Material: Aluminum



Required	Measure (L x H x W)	Finish	Code	€
No	1000 x 5 x 24 mm	Black	258256	17





ego drivers

DRIVER MEANWELL ON/OFF — Required



Power	Output	Measure (L x H x W)	Driver Box	Code	€
75 W	48 Vdc	171x37x62 mm	255x55x75 mm	223155	143
96 W	48 Vdc	220x37x68 mm	330x60x80 mm	223162	189
150 W	48 Vdc	228x37x68 mm	330x60x80 mm	223179	209
240 W	48 Vdc	244x39x68 mm	330x60x80 mm	224275	235

DRIVER BOX — Optional — Material: Metal



Measure (L x H x W)	Finish	Code	€
255x55x75 mm	White	302379	25
255x55x75 mm	Black	302362	25
330x60x80 mm	White	302355	30
330x60x80 mm	Black	302348	30

ON-OFF DRIVER ON TRACK — Required - Cable length 2000 mm
It replaces Driver + Power supply connector*



Power	Output	Measure (L x H x W)	Code	€
100 W	48 Vdc	297x20x16 mm	296302	92
150 W	48 Vdc	268x43x16 mm	325750	97
250 W	48 Vdc	268x43x16 mm	325767	113

*Codes 325750 and 325767 suggested use with HIGH and RECESSED versions.










FLUO

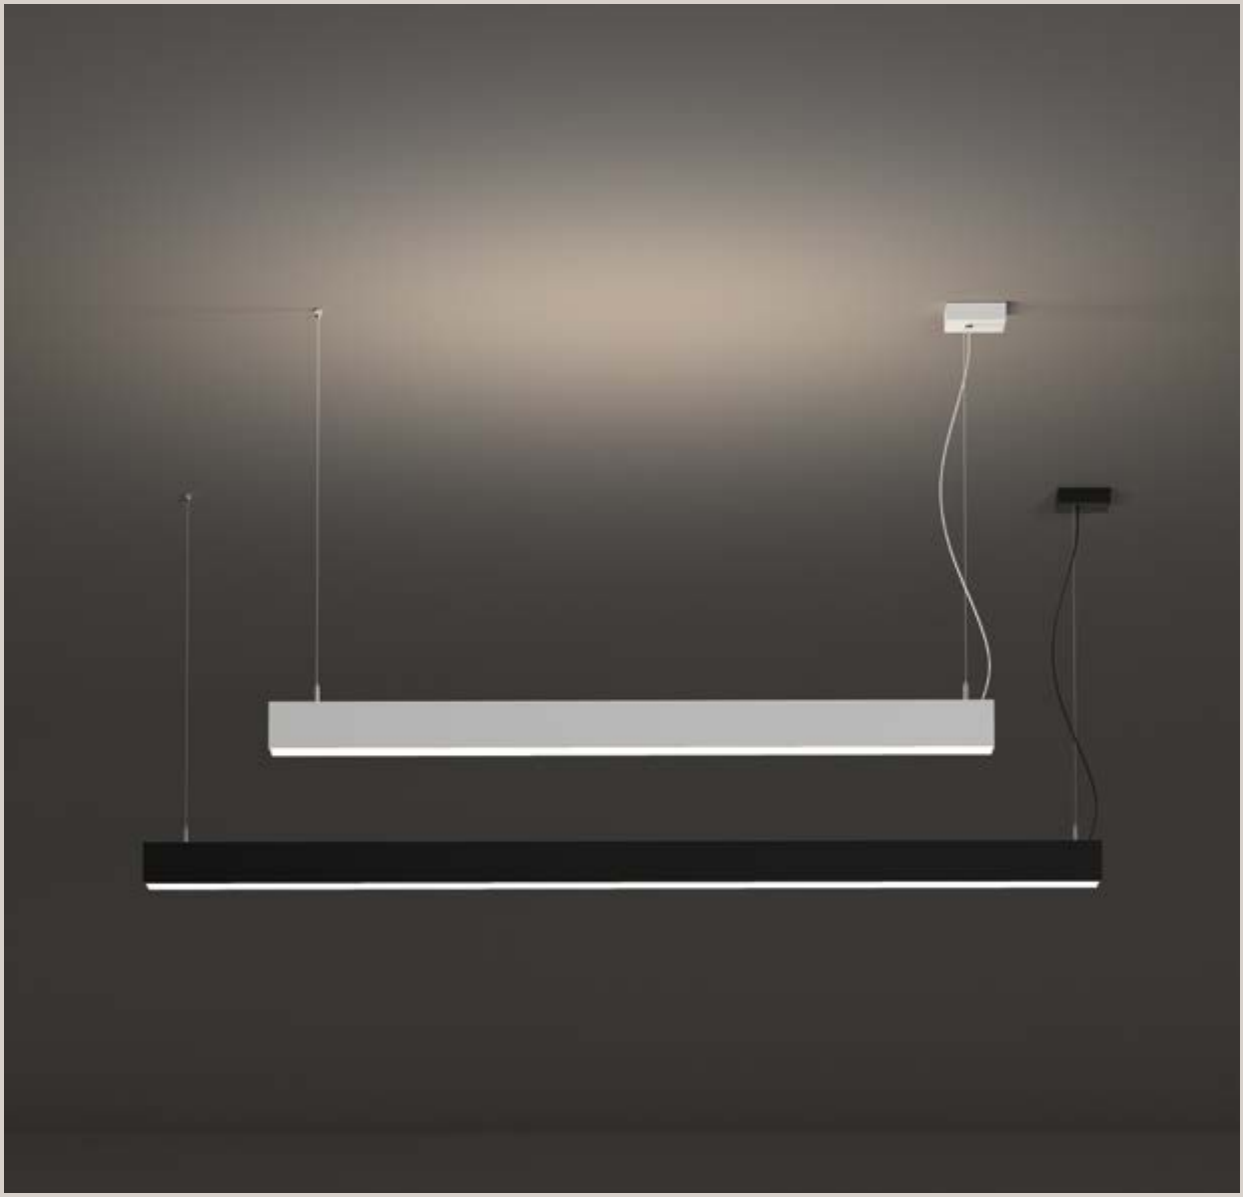

fluo wide

IP20 | MacAdam: SDCM 3 | LED SMD SAMSUNG | 50.000 h life | light beam: WIDE | PRO | Material: Aluminum





Power	Installation	Beam	CRI
27W	Suspension	105°	≥90


Control	Lumen	CCT	Finish	Code	€
On-Off	3250 lm	3000 K	White	192437	330
On-Off	3250 lm	3000 K	Black	191997	330
On-Off	3450 lm	4000 K	White	192482	330
On-Off	3450 lm	4000 K	Black	192505	330

DIMMABLE DRIVER* | Optional

Power	Output	Measure (L x H x W)	Code	€
27 W	500 mA	280x21x30 mm	216287	160

2,890 Kg/0,0206 m³ | Cable length 2150 mm

Photometry



m	lx	øm
1	813	3,00
2	203	6,00
3	90	9,00
4	51	12,00
5	33	15,00

Driver

TRIDONIC ON-OFF included



Power	Installation	Beam	CRI
36W	Suspension	105°	≥90


Control	Lumen	CCT	Finish	Code	€
On-Off	4900 lm	3000 K	White	192550	425
On-Off	4900 lm	3000 K	Black	192567	425
On-Off	5200 lm	4000 K	White	192604	425
On-Off	5200 lm	4000 K	Black	192628	425

DIMMABLE DRIVER* | Optional



Power	Output	Measure (L x H x W)	Code	€
38 W	700 mA	280x21x30 mm	216270	160

Photometry



m	lx	øm
1	1087	3,00
2	272	6,00
3	121	9,00
4	68	12,00
5	43	15,00

Driver

TRIDONIC ON-OFF included


4,420 Kg/0,0403 m³ | Cable length 2150 mm

MOUNTING KIT | Required - page 155


*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.

P. 41

Linear system of lamps with extruded aluminum, 50 mm wide and 80 mm high body. Modules available in two lengths: 1200 mm and 1800 mm, which can be assembled according to the desired arrangement. The system is available in two different arrangements: the WIDE diffusing module and the BI-EMISSION module with component for indirect lighting. The system is available in white and black colors and it is possible to install it in different ways: single or continuous line for ceiling installation; suspended or flush-mounted in plasterboard ceilings. Suitable for locations where professional lighting with minimal design is required, such as COMMERCIAL and RETAIL.

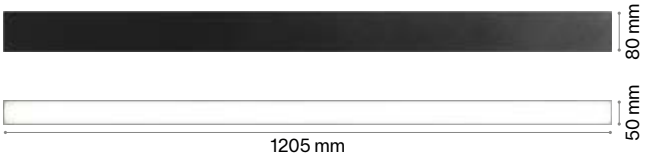

Fluo Wide 1800

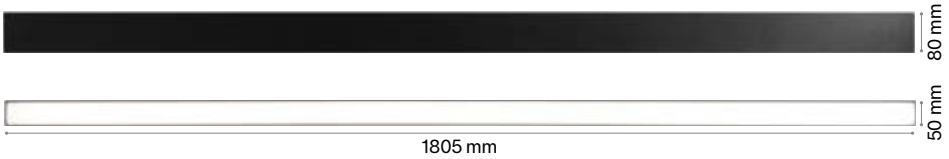

The single final cup is 2.5 mm width.







fluo bi-emission

IP20 | MacAdam: SDCM 3 | 50.000 h life | light beam: BI-EMISSION WIDE | PRO | Material: Aluminum



Power	Installation	Beam	CRI	Source
27W	Suspension	105°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	3250 lm	3000 K	White	192666	425
On-Off	3250 lm	3000 K	Black	192710	425
On-Off	3450 lm	4000 K	White	192741	425
On-Off	3450 lm	4000 K	Black	192758	425

UP LIGHT INFO

Power	Installation	Beam	CRI
13W	Suspension	105°	≥90


	Lumen	CCT
	2250 lm	3000 K
	2450 lm	4000 K



DIMMABLE DRIVERS KIT*

Control	Code	€
DALI/Push	270876	260

Photometry



m	lx	cm
1	771	3,00
2	193	6,00
3	86	9,00
4	48	12,00
5	31	15,00

Driver

TRIDONIC ON-OFF included

2,890 Kg/0,0183 m³	Cable length 2150 mm

MOUNTING KIT	Required - page 155

*Separate switching on of direct and indirect output (available only for on-off versions). Control of the direct and indirect output in synchrony (versions with Push dimming). The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.

fluo bi-emission

IP20 | MacAdam: SDCM 3 | 50.000 h life | light beam: BI-EMISSION WIDE | PRO | Material: Aluminum



Power	Installation	Beam	CRI	Source
36W	Suspension	105°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	4900 lm	3000 K	White	192703	580
On-Off	4900 lm	3000 K	Black	192697	580
On-Off	5200 lm	4000 K	White	192673	580
On-Off	5200 lm	4000 K	Black	192642	580

UP LIGHT INFO

Power	Installation	Beam	CRI
18W	Suspension	105°	≥90


	Lumen	CCT
	3350 lm	3000 K
	3650 lm	4000 K



DIMMABLE DRIVERS KIT*

Control	Code	€
DALI/Push	270937	260

Photometry



m	lx	øm
1	1156	3,00
2	289	6,00
3	128	9,00
4	72	12,00
5	46	15,00

Driver

TRIDONIC ON-OFF included

4,420 Kg/0,0275 m³

Cable length
2150 mm

MOUNTING KIT | Required - page 155

*Separate switching on of direct and indirect output (available only for on-off versions). Control of the direct and indirect output in synchrony (versions with Push dimming). The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.



Fluo Bi-Emission 1200

1205 mm


Fluo Bi-Emission 1800

1805 mm

The single final cup is 2.5 mm width.



fluo assembly plans

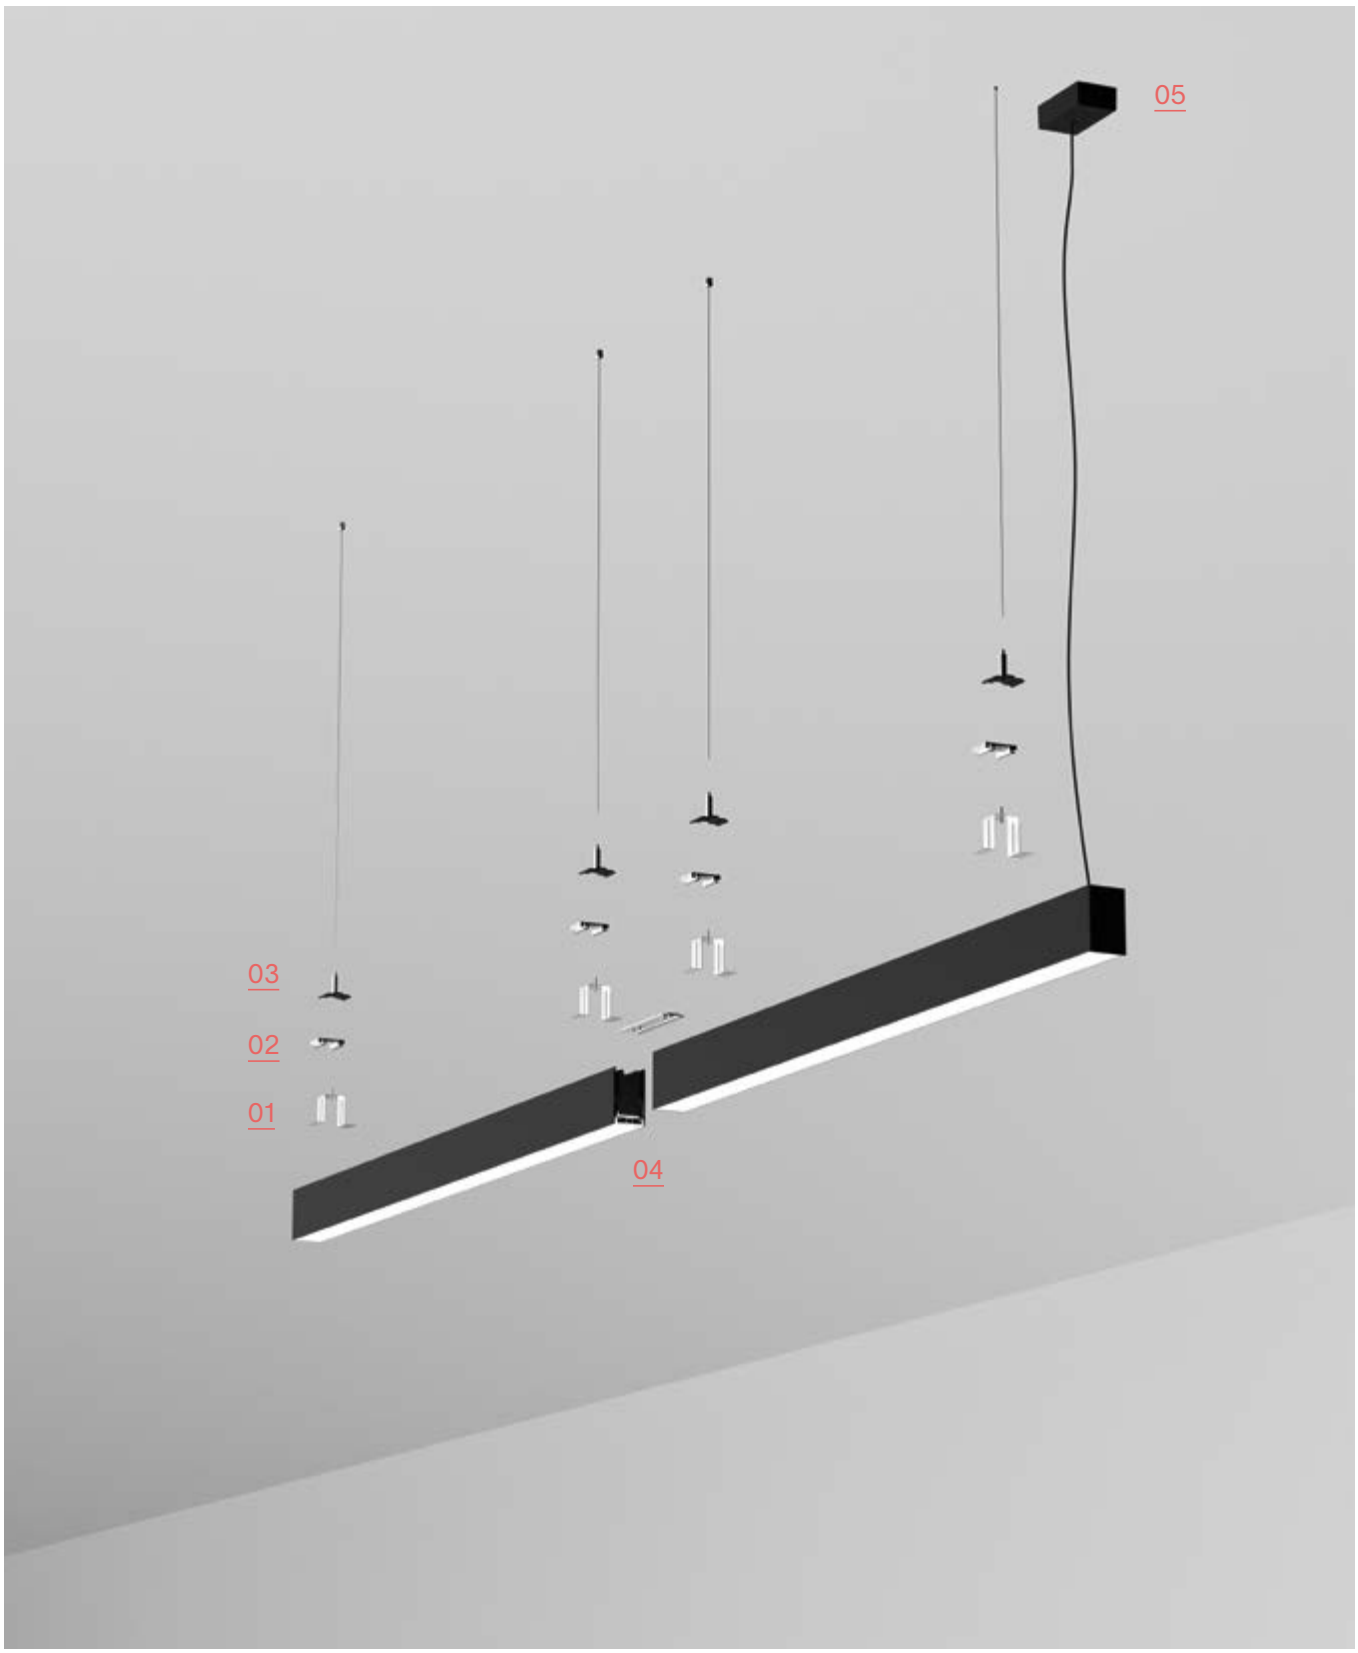

fluo - kit montaggio

CEILING CUP WITH SUSPENSION KIT

Required - Yes - 1 Kit x power source



Cavi	Cables Length	Finish	Code	€
1	2000 mm	White	277929	32
1	2000 mm	Black	277912	32
1	5000 mm	White	276342	43
1	5000 mm	Black	276335	43

SUSPENSION KIT

Required - Yes - 1 Kit x 600 mm



Cavi	Cables Length	Code	€
1	2000 mm	220826	13
1	5000 mm	243665	20

RECESSED MOUNTING KIT

Required - Yes - 1 Kit x 600 mm



Code	€
191188	25

CEILING MOUNTING KIT

Required - Yes - 1 Kit x 600 mm



Code	€
191171	25

MECHANICAL JOINT

Required - Yes - 1 Kit x connection

Maximum length per power source: 30 meters



Code	€
191508	12


01 Kit montaggio incasso
02 Rcessed mounting Kit
03 Ceiling cup with suspension Kit
04 Mechanical joint
05 Suspension Kit

STEEL




Family of linear luminaires with extruded aluminium body, powder coated in white or black finish.

Steel Slim Accent

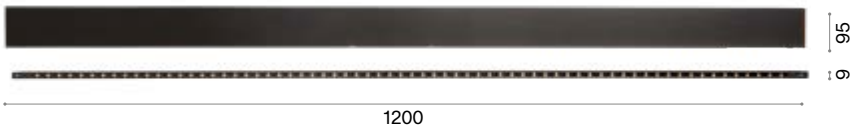




Steel Slim Wide

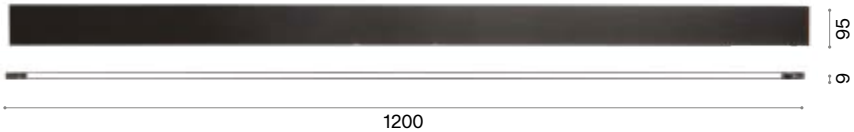



steel d09 - mono-emission


IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR UGR<19 | light beam: WIDE | Material: Aluminum



Power	Installation	Beam	CRI	Source
24W	Suspension	90°	≥90	LED SMD WIDE

Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	3000 K	White	367019	150
On-Off	2700 lm	3000 K	Black	368818	150

Photometry



m	lx	cm
1	809	1,00
2	202	2,10
3	90	3,10
4	51	4,20
5	32	5,20

Driver


ON/OFF included

1,700 Kg/0,0131 m³

Cable length
2000 mm

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR UGR<16 | light beam: ACCENT | Material: Aluminum






Power	Installation	Beam	CRI	Source
24W	Suspension	50°	≥90	LED SMD ACCENT

Control	Lumen	CCT	Finish	Code	€
On-Off	2700 lm	3000 K	White	368795	150
On-Off	2700 lm	3000 K	Black	368771	150

Photometry



m	lx	cm
1	990	0,76
2	247	1,50
3	110	2,30
4	62	3,10
5	40	3,80

Driver

ON/OFF included

1,700 Kg/0,0131 m³


Cable length
2000 mm





steel d09 - bi-emission

IP20 | MacAdam: SDCM 3 | 50.000 h life | UGR<19 | light beam: BI-EMISSION WIDE | Material: Aluminum




Power	Installation	Beam	CRI	Source
35W	Suspension	110°	≥90	LED SMD SAMSUNG WIDE

Control	Lumen	CCT	Finish	Code	€
On-Off	2750 lm	3000 K	White	348407	160
On-Off	2750 lm	3000 K	Black	348384	160

1,800 Kg/0,0144 m³

Cable length
1500 mm

Photometry



m	lx	øm
1	616	2,80
2	154	5,60
3	68	8,50
4	39	11,00
5	25	14,00

Driver


ON/OFF included

UP-LIGHT INFO

Beam	Lumen	CCT
110°	1400 lm	3000 K

IP20 | MacAdam: SDCM 3 | 50.000 h life | UGR<16 | light beam: BI-EMISSION ACCENT | Material: Aluminum






Power	Installation	Beam	CRI	Source
35W	Suspension	70°	≥90	LED SMD SAMSUNG ACCENT

Control	Lumen	CCT	Finish	Code	€
On-Off	3450 lm	3000 K	White	348414	160
On-Off	3450 lm	3000 K	Black	348391	160

1,800 Kg/0,0144 m³

Cable length
1500 mm

Photometry



m	lx	øm
1	937	1,50
2	234	3,10
3	104	4,60
4	59	6,20
5	37	7,70

Driver

ON/OFF included

UP-LIGHT INFO


Beam	Lumen	CCT
110°	650 lm	3000 K



steel d11 - bi-emission

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR | UGR<19 | light beam: BI-EMISSION WIDE | Material: Aluminum






Power	Installation	Beam	CRI	Source
36W	Suspension	110°	≥90	LED SMD SAMSUNG WIDE

Control	Lumen	CCT	Finish	Code	€
On-Off	2750 lm	3000 K	White	336206	140
On-Off	2750 lm	3000 K	Black	336190	140

Photometry



m	lx	cm
1	775	0,93
2	194	1,90
3	86	2,80
4	48	3,70
5	31	4,60

Driver

ON/OFF included

Cable length
2000 mm


1,800 Kg/0,0094 m³

UP-LIGHT INFO

Beam	Lumen	CCT
110°	1400 lm	3000 K

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR | UGR<16 | light beam: BI-EMISSION ACCENT | Material: Aluminum






Power	Installation	Beam	CRI	Source
36W	Suspension	68°	≥90	LED SMD SAMSUNG WIDE

Control	Lumen	CCT	Finish	Code	€
On-Off	3450 lm	3000 K	White	336183	140
On-Off	3450 lm	3000 K	Black	336176	140

Photometry



m	lx	cm
1	1091	0,76
2	273	1,50
3	121	2,30
4	68	3,10
5	44	3,80

Driver

ON/OFF included


Cable length
2000 mm

1,800 Kg/0,0094 m³

UP-LIGHT INFO


Beam	Lumen	CCT
71°	650 lm	3000 K

Steel Slim Accent

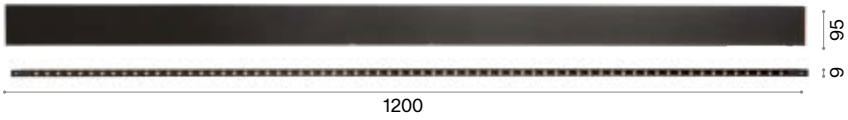



Steel Slim Wide

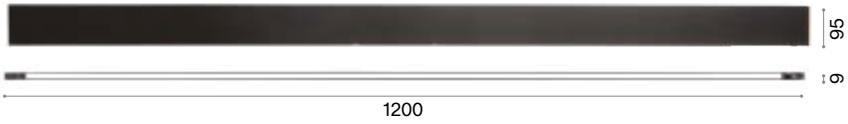




steel d20 - mono-emission

IP20 | MacAdam: SDCM 3 | 50.000 h life | UGR<19 | light beam: WIDE | Material: Aluminum






Power	Installation	Beam	CRI	Source
29W	Suspension	104°	≥90	LED SMD WIDE

Control	Lumen	CCT	Finish	Code	€
1-10V	4500 lm	3000 K	White	369006	200
1-10V	4500 lm	3000 K	Black	367590	200
1-10V	4800 lm	4000 K	White	369044	200
1-10V	4800 lm	4000 K	Black	369020	200

Photometry



m	lx	øm
1	949	2,40
2	237	4,80
3	105	7,10
4	59	9,50
5	38	12,00

Driver


1-10V included

1,750 Kg/0,0122 m³

Cable length 2000 mm

IP20 | MacAdam: SDCM 3 | 50.000 h life | UGR<16 | light beam: ACCENT | Material: Aluminum






Power	Installation	Beam	CRI	Source
30W	Suspension	44°	≥90	LED SMD ACCENT

Control	Lumen	CCT	Finish	Code	€
1-10V	4500 lm	3000 K	White	368955	200
1-10V	4500 lm	3000 K	Black	368931	200
1-10V	4800 lm	4000 K	White	368986	200
1-10V	4800 lm	4000 K	Black	368979	200

Photometry



m	lx	øm
1	6533	0,75
2	1633	1,50
3	726	2,30
4	408	3,00
5	261	3,80

Driver

1-10V included


1,900 Kg/0,0122 m³

Cable length 2000 mm

steel d20 - mono-emission

IP20 | L-JOINT | Optional - Up-light not included | light beam: WIDE | Material: Aluminum






Power	Installation	Beam	CRI
5,5W	Accessory	104°	≥90

Control	Lumen	CCT	Finish	Code	€
1-10V	560 lm	3000 K	White	241999	47
1-10V	560 lm	3000 K	Black	242002	47
1-10V	600 lm	4000 K	White	268149	47
1-10V	600 lm	4000 K	Black	268118	47

0,260 Kg/0,0028 m³

IP20 | BLIND L-JOINT | Optional - Up-light not included | Material: Aluminum





Installation	Finish	Code	€
Accessory	White	370286	47
Accessory	Black	370200	47

0,300 Kg/0,0021 m³

LINEAR JOINT | Material: Aluminum




Required	Code	€
Yes - 1 Kit x connection	241982	6

steel d20 - bi-emission

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR<19 | light beam: BI-EMISSION WIDE | Material: Aluminum






Power	Installation	Beam	CRI	Source
32W	Suspension	104°	≥90	LED SMD WIDE

Control	Lumen	CCT	Finish	Code	€
1-10V	4650 lm	3000 K	White	241968	225
1-10V	4650 lm	3000 K	Black	241975	225
1-10V	5000 lm	4000 K	White	268231	225
1-10V	5000 lm	4000 K	Black	268217	225

Photometry



m	lx	øm
1	495	2,60
2	124	5,10
3	55	7,70
4	31	10,00
5	20	13,00

Driver

1-10V included

2,550 Kg/0,0123 m³


Cable length 2000 mm

UP-LIGHT INFO

Lumen	CCT
2250 lm	3000 K
2400 lm	4000 K

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR<16 | light beam: BI-EMISSION ACCENT | Material: Aluminum






Power	Installation	Beam	CRI	Source
38W	Suspension	44°	≥90	LED SMD ACCENT

Control	Lumen	CCT	Finish	Code	€
1-10V	5700 lm	3000 K	White	368832	225
1-10V	5700 lm	3000 K	Black	367606	225
1-10V	6000 lm	4000 K	White	368863	225
1-10V	6000 lm	4000 K	Black	368849	225

Photometry



m	lx	øm
1	572	2,56
2	143	5,12
3	64	7,68
4	36	10,24
5	23	12,80

Driver

1-10V included

1,850 Kg/0,0122 m³

Cable length 2000 mm


UP-LIGHT INFO

Lumen	CCT
2200 lm	3000 K
2300 lm	4000 K

steel d20 - bi-emission

IP20 | L-JOINT | Optional - Up-light not included | light beam: BI-EMISSION WIDE | Material: Aluminum





Power	Installation	Beam	CRI
5,5W	Accessory	104°	≥90

Control	Lumen	CCT	Finish	Code	€
1-10V	560 lm	3000 K	White	241999	47
1-10V	560 lm	3000 K	Black	242002	47
1-10V	600 lm	4000 K	White	268149	47
1-10V	600 lm	4000 K	Black	268118	47

0,260 Kg/0,0028 m³

IP20 | BLIND L-JOINT | Optional - Up-light not included | Material: Aluminum





Installation	Finish	Code	€
Accessory	White	370286	47
Accessory	Black	370200	47

0,300 Kg/0,0021 m³

LINEAR JOINT | Material: Aluminum




Required	Code	€
Yes - 1 Kit x connection	241982	6





steel d35 - bi-emission


IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR | UGR<19 | light beam: BI-EMISSION WIDE | Material: Aluminum



Power	Installation	Beam	CRI	Source
36W	Suspension/Ceiling	70°	≥90	LED SMD SAMSUNG WIDE

Control	Lumen	CCT	Finish	Code	€
On-Off	4200 lm	3000 K	White	267128	300
On-Off	4200 lm	3000 K	Black	270197	300
On-Off	4500 lm	4000 K	White	270203	300
On-Off	4500 lm	4000 K	Black	267135	300

Photometry



m	lx	øm
1	1112	1,30
2	278	2,70
3	124	4,00
4	70	5,30
5	44	6,70

Driver


ON/OFF included

1,990 Kg/0,0111 m³

Cable length 1800 mm

IP20 | PRO | MacAdam: SDCM 3 | 50.000 h life | UGR | UGR<16 | light beam: BI-EMISSION ACCENT | Material: Aluminum






Power	Installation	Beam	CRI
36W	Suspension/Ceiling	60°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3600 lm	3000 K	White	270180	300
On-Off	3600 lm	3000 K	Black	267142	300
On-Off	3700 lm	4000 K	White	267159	300
On-Off	3700 lm	4000 K	Black	270173	300

Photometry



m	lx	øm
1	1925	1,20
2	481	2,40
3	214	3,60
4	120	4,80
5	77	6,10

Driver

ON/OFF included

1,980 Kg/0,0111 m³

Cable length 1800 mm

UP-LIGHT INFO (inclusa)

Beam	Lumen	CCT
110°	750 lm	3000 K
110°	800 lm	4000 K

steel - accessory

CEILING CUP WITH SUSPENSION KIT



Required - 1 Kit x power source

Material: Aluminum

N° Cavi	Cables Length	Finish	Code	€
1	2000 mm	White	276311	35
1	2000 mm	Black	276304	35

SUSPENSION KIT



Required - 1 Kit x 500 mm

Material: Aluminum

N° Cavi	Cables Length	Code	€
1	2000 mm	271750	13

CEILING MOUNTING KIT



Required - 1 Kit x 1000 mm

Material: Aluminum

N° Cavi	Code	€
1	270210	31


LINEAR JOINT



Required - 1 Kit x connection

Material: Aluminum

N° Cavi	Code	€
1	271712	7

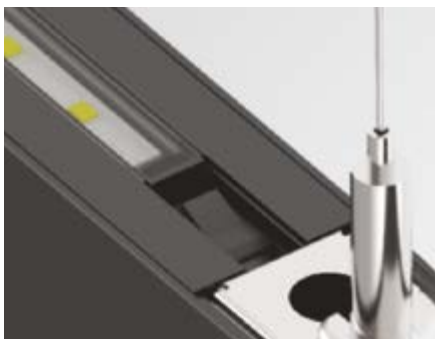

Steel Accent



1070

Steel Wide




1070

steel ap

IP20 | LED SMD | 50.000 h life | light beam: BI-EMISSION WIDE | Material: Aluminum






Power	Installation	CRI
32W	Wall	≥90

Control	Lumen	CCT	Finish	Code	€
1-10V	4650 lm	3000 K	White	233840	210
1-10V	4650 lm	3000 K	Black	242019	210
1-10V	5000 lm	4000 K	White	268095	210
1-10V	5000 lm	4000 K	Black	268071	210

1,250 Kg/0,0140 m³ | Cable length 1800 mm

IP20 | LED SMD | 50.000 h life | light beam: MONO-EMISSION WIDE | Material: Aluminum





Power	Installation	CRI
29W	Wall	≥90

Control	Lumen	CCT	Finish	Code	€
1-10V	4500 lm	3000 K	White	368887	195
1-10V	4500 lm	3000 K	Black	367576	195
1-10V	4800 lm	4000 K	White	368917	195
1-10V	4800 lm	4000 K	Black	368894	195

1,600 Kg/0,0114 m³ | Cable length 1800 mm

Linear aluminum lamp with direct and indirect light for wall installation. White or black finish available. Integrated LED, starting binning ≤ 3-Step MacAdam; available with 3000 K and 4000 K color temperature; CRI ≥ 90. Dimmable power supply 1-10V integrated as standard.




OFFICE



office

IP20 | UGR <19 | LED SMD | 50.000 h life | Light beam: WIDE | Material: Aluminum






Power	Installation	Beam	CRI
30W	Suspension	68°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3900 lm	3000 K	White	369129	180
On-Off	3900 lm	3000 K	Black	369112	180
On-Off	4100 lm	4000 K	White	369150	180
On-Off	4100 lm	4000 K	Black	369136	180

Photometry



m	lx	øm
1	1812	1,40
2	453	2,90
3	201	4,30
4	113	5,70
5	72	7,20


Driver

ON/OFF included

1,800 Kg/0,0039 m³

Cable length
2000 mm

LINEAR JOINT - Required - 1 Kit x linear connection




Required	Control	Finish	Code	€
Si	On-Off	White	373522	5
SI	On-Off	Black	373515	5

0,120 Kg/0,0001 m³

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






Power	Installation	Beam	CRI
30W	Suspension	37°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3350 lm	3000 K	White	271194	180
On-Off	3350 lm	3000 K	Black	271187	180
On-Off	3700 lm	4000 K	White	271217	180
On-Off	3700 lm	4000 K	Black	271200	180

Photometry



m	lx	øm
1	6008	0,72
2	1502	1,40
3	668	2,20
4	376	2,90
5	240	3,60

Driver

ON/OFF included

1,820 Kg/0,0041 m³

Cable length
1500 mm

Not compatible with: 373522, 373515

STRIP LED








strip led

SMD 2835 180 LED/m

MacAdam: SDCM 3 | 50.000 h life

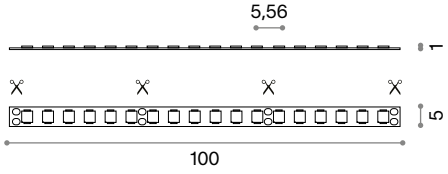

Power	Beam	Vdc	CRI
8 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	670 lm/m	2700 K	5 x 5000mm	345772	50
IP20	700 lm/m	3000 K	5 x 5000mm	345789	50
IP20	750 lm/m	4000 K	5 x 5000mm	345796	50


Power	Beam	CRI
15 W/m	120°	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	1290 lm/m	2700 K	5 x 5000mm	345765	65
IP20	1340 lm/m	3000 K	5 x 5000mm	332239	65
IP20	1380 lm/m	4000 K	5 x 5000mm	332246	65

strip led

SMD 2835 120 LED/m

MacAdam: SDCM 3 | 50.000 h life

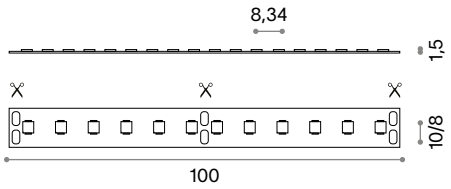

Power	Beam	Vdc	CRI
5 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	470 lm/m	2700 K	8 x 5000mm	346328	50
IP20	490 lm/m	3000 K	8 x 5000mm	346335	50
IP20	510 lm/m	4000 K	8 x 5000mm	346359	50
IP65	460 lm/m	3000 K	8 x 5000mm	346342	60
IP65	500 lm/m	4000 K	8 x 5000mm	346366	60

Power	Beam	Vdc	CRI
10 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	910 lm/m	2700 K	8 x 5000mm	346373	50
IP20	940 lm/m	3000 K	8 x 5000mm	346380	50
IP20	970 lm/m	4000 K	8 x 5000mm	346403	50
IP65	960 lm/m	3000 K	8 x 5000mm	346397	60
IP65	1040 lm/m	4000 K	8 x 5000mm	346410	60


Power	Beam	Vdc	CRI
15 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	1400 lm/m	2700 K	10 x 5000mm	272498	55
IP20	1450 lm/m	3000 K	10 x 5000mm	272481	55
IP20	1600 lm/m	4000 K	10 x 5000mm	272474	55
IP65	1400 lm/m	3000 K	10 x 5000mm	272504	75
IP65	1480 lm/m	4000 K	10 x 5000mm	287959	75

strip led

SMD 2835 240 LED/m

MacAdam: SDCM 3 | 50.000 h life

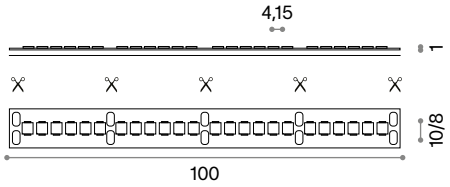

Power	Beam	Vdc	CRI
10 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	990 lm/m	2700 K	8 x 5000mm	346427	65
IP20	1000 lm/m	3000 K	8 x 5000mm	346434	65
IP20	1060 lm/m	4000 K	8 x 5000mm	346458	65
IP65	880 lm/m	3000 K	8 x 5000mm	346441	80
IP65	900 lm/m	4000 K	8 x 5000mm	346465	80

Power	Beam	Vdc	CRI
15 W/m	120°	24	≥90


IP	Lumen	CCT	Measure	Code	€
IP20	1330 lm/m	2700 K	8 x 5000mm	346472	65
IP20	1450 lm/m	3000 K	8 x 5000mm	346489	65
IP20	1510 lm/m	4000 K	8 x 5000mm	346502	65
IP65	1400 lm/m	3000 K	8 x 5000mm	346496	80
IP65	1460 lm/m	4000 K	8 x 5000mm	346519	80

Power	Beam	Vdc	CRI
20.5 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	2000 lm/m	2700 K	10 x 5000mm	272535	90
IP20	2050 lm/m	3000 K	10 x 5000mm	272528	90
IP20	2100 lm/m	4000 K	10 x 5000mm	272511	90
IP65	2000 lm/m	3000 K	10 x 5000mm	272542	105
IP65	2020 lm/m	4000 K	10 x 5000mm	287966	105

SMD 2835 180 LED/m

MacAdam: SDCM 3 | 50.000 h life

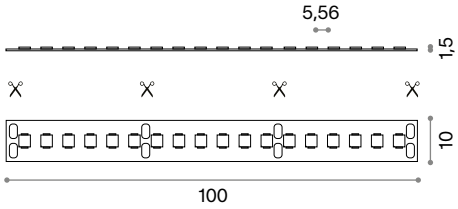


Power	Beam	Vdc	CRI
40 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	4350 lm/m	3000 K	10 x 3000mm	253886	145
IP20	4410 lm/m	4000 K	10 x 3000mm	253893	145

strip led

COB 180 LED/m

MacAdam: SDCM 3 | 50.000 h life

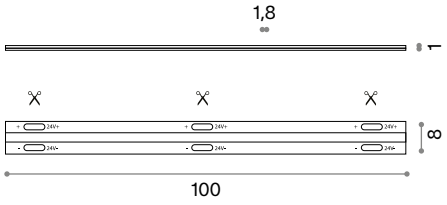

Power	Beam	Vdc	CRI
8 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	760 lm/m	2700 K	8 x 5000mm	325934	60
IP20	790 lm/m	3000 K	8 x 5000mm	325958	60
IP20	820 lm/m	4000 K	8 x 5000mm	325972	60

Power	Beam	Vdc	CRI
15 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	1350 lm/m	2700 K	8 x 5000mm	325941	60
IP20	1470 lm/m	3000 K	8 x 5000mm	325965	60
IP20	1620 lm/m	4000 K	8 x 5000mm	325989	60

POWER SUPPLY CONNECTOR



Required	Code	€
No	292939	2

LINEAR JOINT



Required	Code	€
No	292953	2

DRIVER

Solo per installazione in interni



Class	Control	Power	Output	Measure (L x H x W)	Code	€
□	On-Off	30 W	24 Vdc	140 x 28 x 45 mm	124070	17
□	On-Off	60 W	24 Vdc	186 x 33 x 50 mm	124087	26
⏚	On-Off	150 W	24 Vdc	268 x 31 x 45 mm	124117	46
□	1-10V/Push	36 W	24 Vdc	293 x 30 x 43 mm	244556	47
⏚	1-10V	100 W	24 Vdc	210 x 34 x 67 mm	244570	65
⏚	1-10V	150 W	24 Vdc	210 x 34 x 67 mm	244594	70
□	DALI/Push	36 W	24 Vdc	175 x 30 x 44 mm	244549	57
⏚	DALI/Push	80 W	24 Vdc	295 x 35 x 45 mm	244563	67
⏚	DALI/Push	150 W	24 Vdc	273 x 37 x 57 mm	244587	90

DRIVER BOX

Materiale: Metal




Measure (L x H x W)	Finish	Code	€
255x55x75 mm	White	302379	25
255x55x75 mm	Black	302362	25
330x60x80 mm	White	302355	30
330x60x80 mm	Black	302348	30



TESI

Tesi is an invisible line that draws light with absolute precision. A flexible steel ribbon that drapes from wall to wall to accommodate LED strips, creating essential and refined indirect lighting.

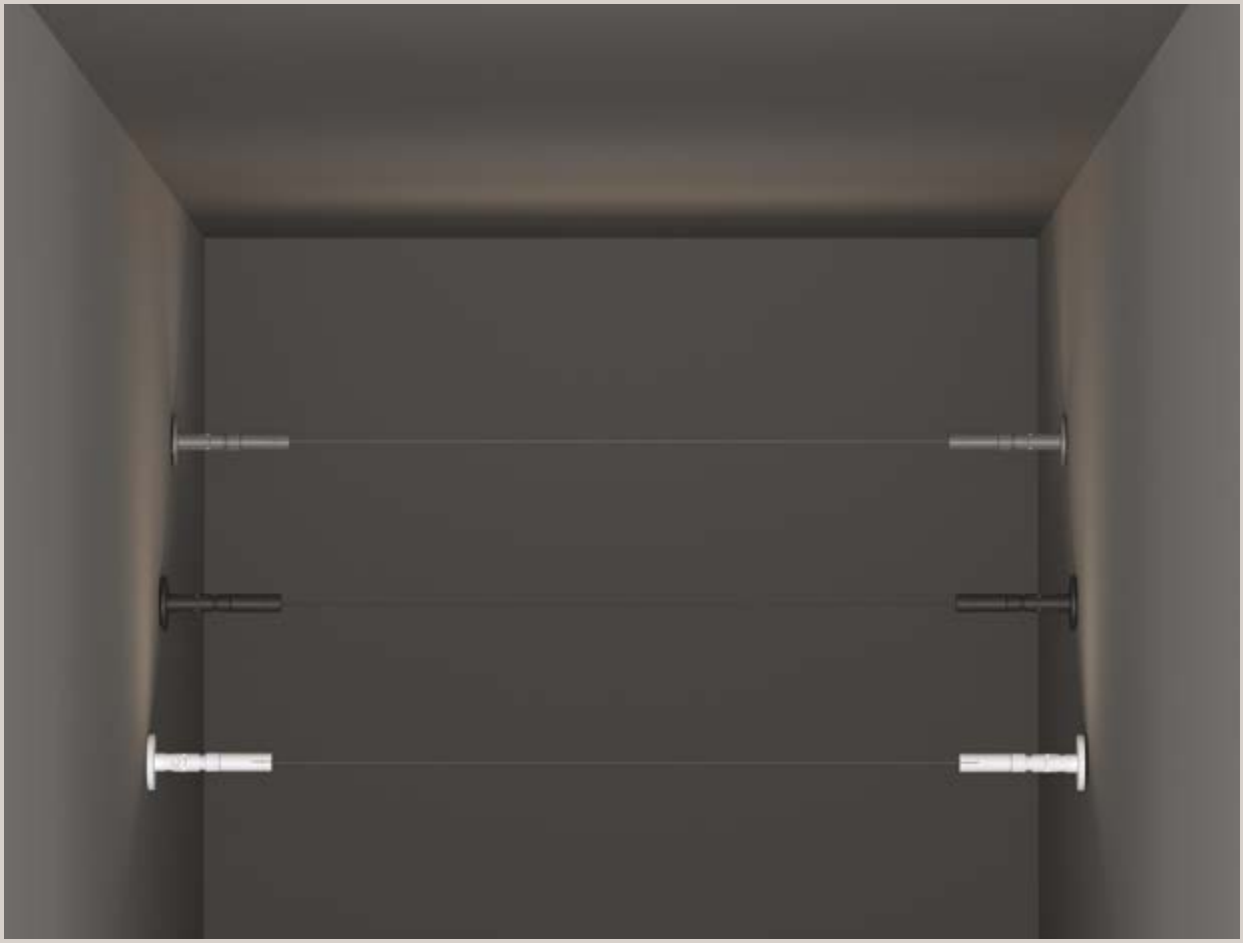


tesi 8mm

STRIP LED SUPPORT

Material: Aluminum





0,060 Kg/0,0032 m³

Length	Larghezza	Finish	Code	€
5000 mm	8 mm	Steel	344935	152
5000 mm	8 mm	White	344928	152
5000 mm	8 mm	Black	344911	152






0,080 Kg/0,0033 m³

Length	Larghezza	Finish	Code	€
10000 mm	8 mm	Steel	344904	168
10000 mm	8 mm	White	344898	168
10000 mm	8 mm	Black	344881	168

RECOMMENDED STRIP LED AND DRIVER

SMD 2835 180 LED/m

MacAdam: SDCM 3 | 50.000 h life

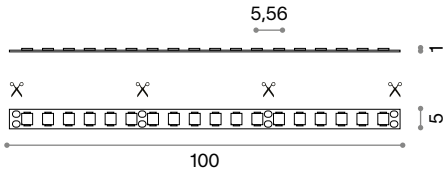

Power	Beam	Vdc	CRI
8 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	670 lm/m	2700 K	5 x 5000mm	345772	50
IP20	700 lm/m	3000 K	5 x 5000mm	345789	50
IP20	750 lm/m	4000 K	5 x 5000mm	345796	50


DRIVER ON/OFF

24 Vdc




Class	Control	Power	Measure (L x H x W)	Driver box	Code	€
⧈	On-Off	30 W	140 x 28 x 45 mm	255 x 55 x 75 mm	124070	17
⧈	On-Off	60 W	186 x 33 x 50 mm	255 x 55 x 75 mm	124087	26
⏚	On-Off	150 W	268 x 31 x 45 mm	330 x 60 x 80 mm	124117	46

P. 23
TESI

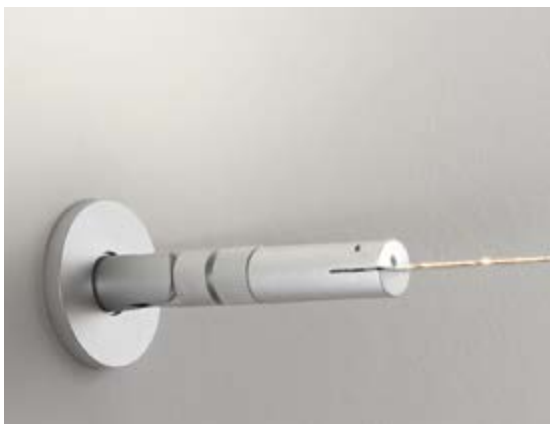

Available in two widths (8 mm and 20 mm) and in sectionable lengths of up to 5 or 10 metres, it integrates discreetly thanks to its minimal, almost imperceptible section. The aluminium supports with locking system and the steel, white or black finishes make it ideal for environments with a strong architectural character, where every detail is designed not to disturb the aesthetic balance but to amplify its beauty.



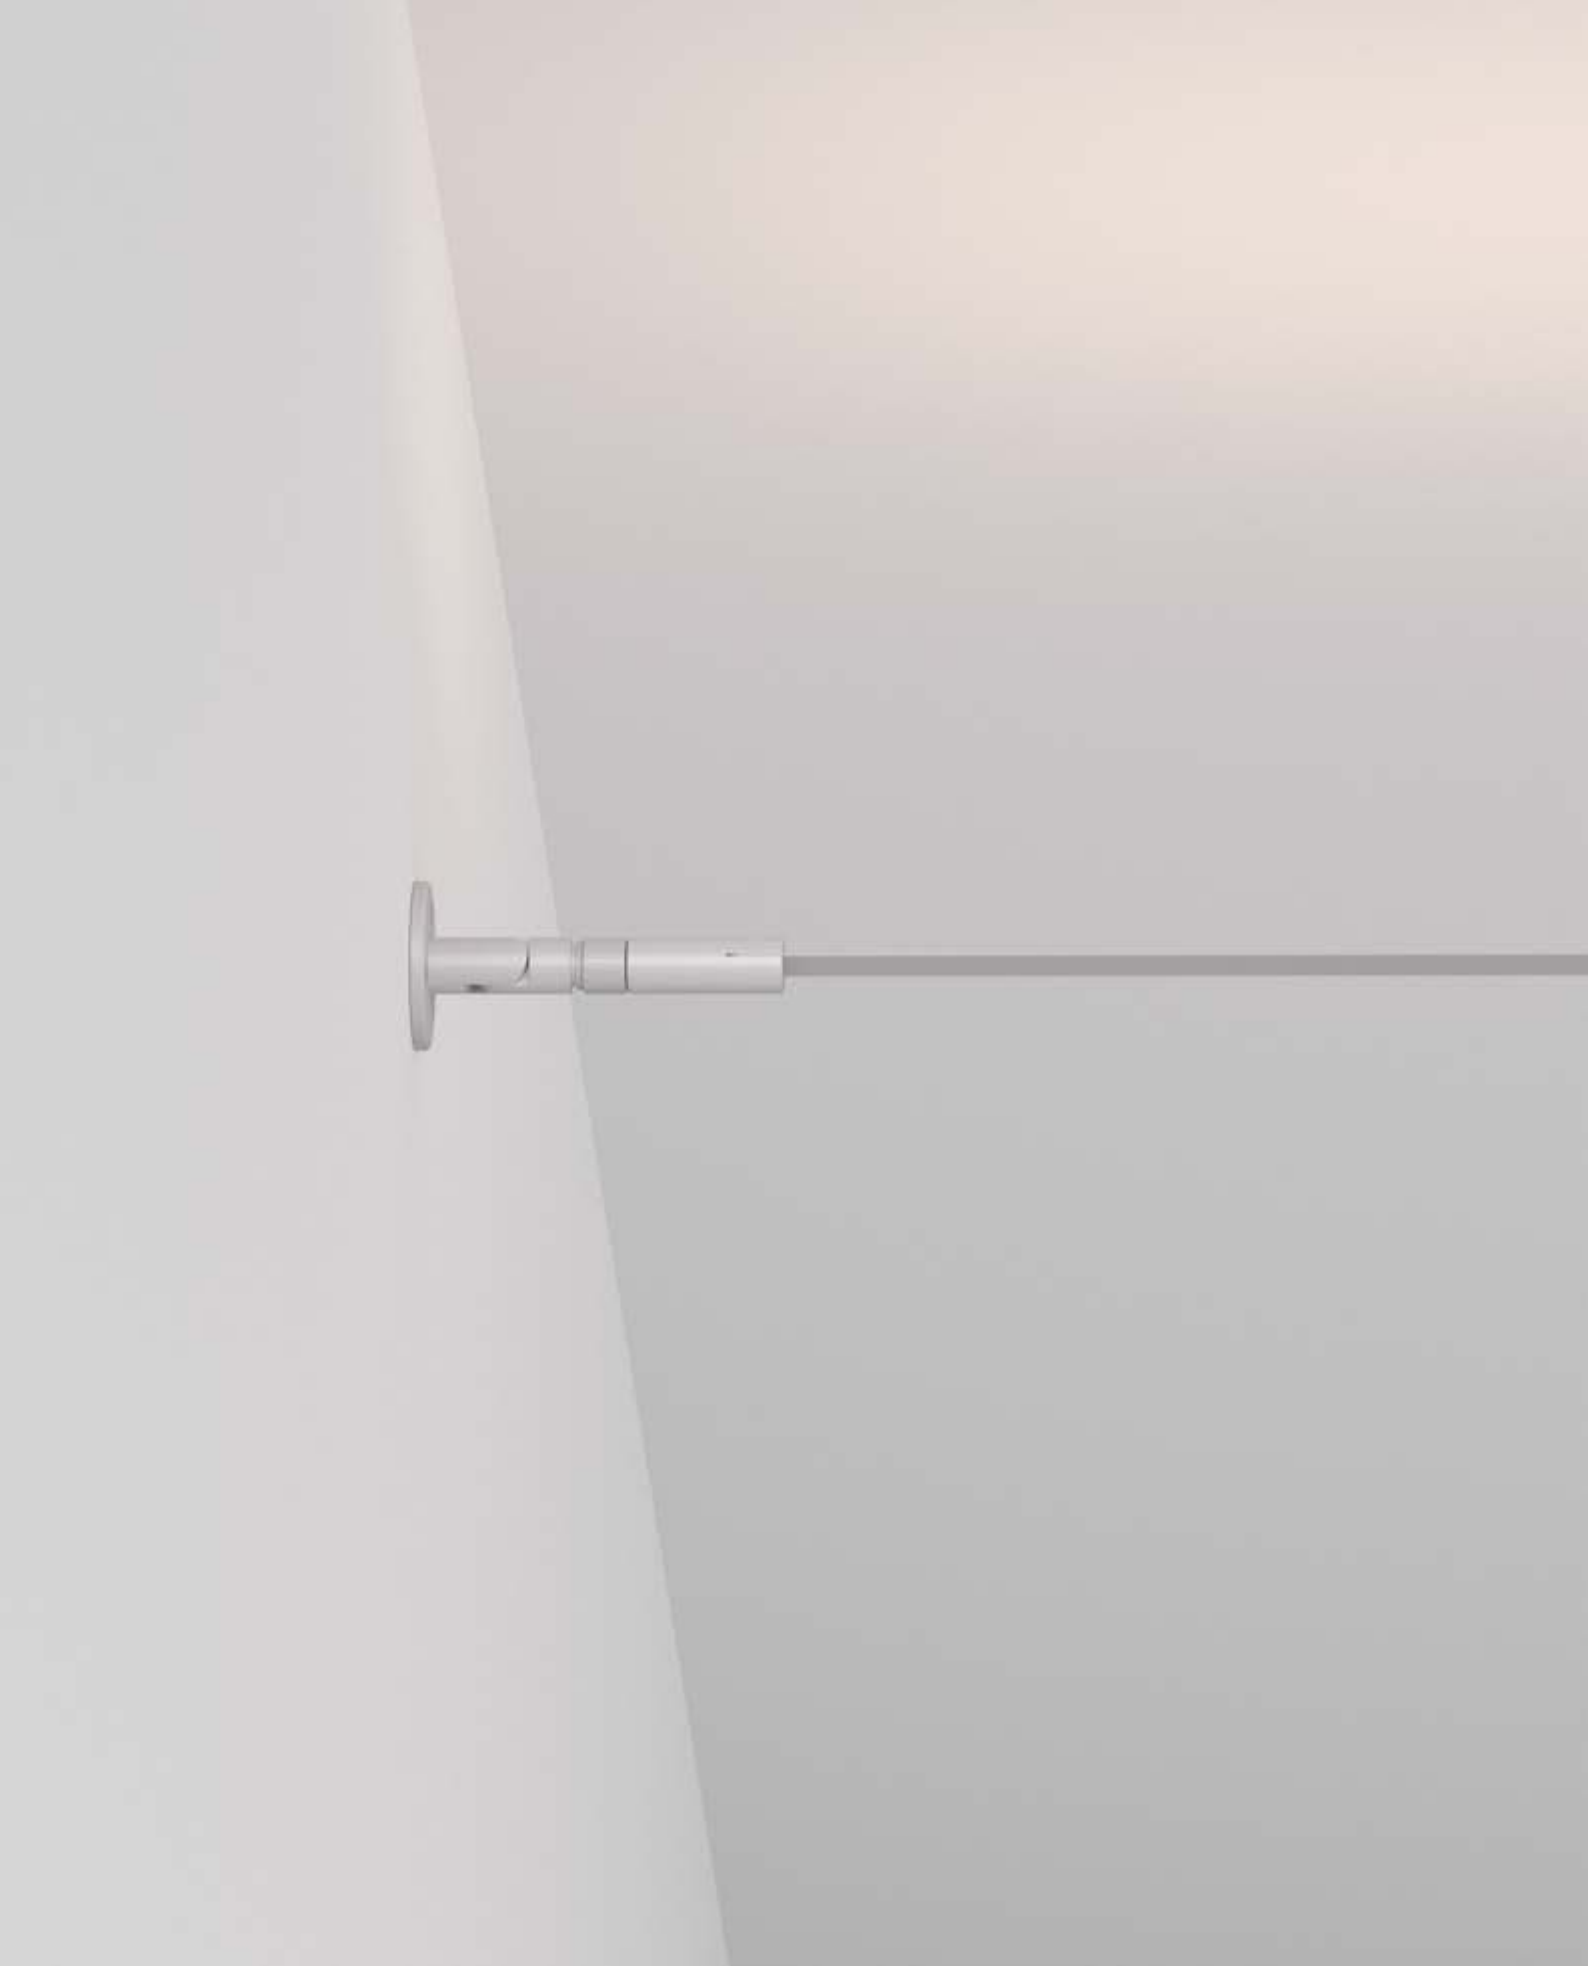


tesi 20mm

STRIP LED SUPPORT

Material: Aluminum






0,350 Kg/0,0032 m³

Length	Larghezza	Finish	Code	€
5000 mm	20 mm	Steel	258300	160
5000 mm	20 mm	White	302256	160
5000 mm	20 mm	Black	302263	160





0,450 Kg/0,0032 m³


Length	Larghezza	Finish	Code	€
10000 mm	20 mm	Steel	302270	178
10000 mm	20 mm	White	302287	178
10000 mm	20 mm	Black	302294	178

tesi 20mm

RECOMMENDED STRIP LED AND DRIVER

SMD 2835 120 LED/m

MacAdam: SDCM 3 | 50.000 h life

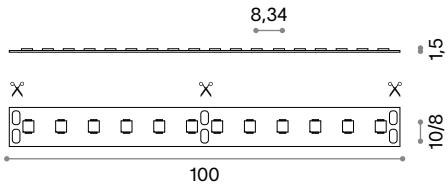

Power	Beam	Vdc	CRI
5 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	470 lm/m	2700 K	8 x 5000mm	346328	50
IP20	490 lm/m	3000 K	8 x 5000mm	346335	50
IP20	510 lm/m	4000 K	8 x 5000mm	346359	50
IP65	460 lm/m	3000 K	8 x 5000mm	346342	60
IP65	500 lm/m	4000 K	8 x 5000mm	346366	60

Power	Beam	Vdc	CRI
10 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	910 lm/m	2700 K	8 x 5000mm	346373	50
IP20	940 lm/m	3000 K	8 x 5000mm	346380	50
IP20	970 lm/m	4000 K	8 x 5000mm	346403	50
IP65	960 lm/m	3000 K	8 x 5000mm	346397	60
IP65	1040 lm/m	4000 K	8 x 5000mm	346410	60

Power	Beam	Vdc	CRI
15 W/m	120°	24	≥90

IP	Lumen	CCT	Measure	Code	€
IP20	1400 lm/m	2700 K	10 x 5000mm	272498	55
IP20	1450 lm/m	3000 K	10 x 5000mm	272481	55
IP20	1600 lm/m	4000 K	10 x 5000mm	272474	55
IP65	1400 lm/m	3000 K	10 x 5000mm	272504	75
IP65	1480 lm/m	4000 K	10 x 5000mm	287959	75

DRIVER ON/OFF

24 Vdc



Class	Control	Power	Measure (L x H x W)	Driver box	Code	€
⧈	On-Off	30 W	140 x 28 x 45 mm	255 x 55 x 75 mm	124070	17
⧈	On-Off	60 W	186 x 33 x 50 mm	255 x 55 x 75 mm	124087	26
⏚	On-Off	150 W	268 x 31 x 45 mm	330 x 60 x 80 mm	124117	46


SLOT



slot recessed trim

PROFILE 6 mm | Recommended Strip LED max 8 W/m | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
2000 mm	0,72 Kg	0,0003 m³	White	346212	9
3000 mm	1,23 Kg	0,0005 m³	White	346229	13

PROFILE 12 mm | Recommended Strip LED max 15 W/m | Material: Aluminum






Length	Weight	Volume	Finish	Code	€
2000 mm	0,33 Kg	0,0007 m³	White	203102	25
3000 mm	0,48 Kg	0,0010 m³	White	204611	40

slot recessed trimless


PROFILE 11 mm | Recommended Strip LED max 8 W/m | Material: Aluminum



Length	Weight	Volume	Finish	Code	€
2000 mm	0,50 Kg	0,0021 m³	White	346274	45
3000 mm	1,45 Kg	0,0021 m³	White	346281	65

PROFILE 21 mm | Recommended Strip LED max 15 W/m | Material: Aluminum





Length	Weight	Volume	Finish	Code	€
2000 mm	0,60 Kg	0,0021 m³	White	346762	60
3000 mm	0,88 Kg	0,0055 m³	White	346779	80


trim 6 mm
trim 12 mm
trimless 11 mm
trimless 21 mm



346212
203102
Mounting Kit included



346762
346779

Extruded aluminium profile with anodised or powder-coated surface, available in white, black and aluminium finishes, with satin-finish PMMA diffuser. Bars are available in different sections and lengths in the RECESSED version for recessed installation in plasterboard ceilings and in the SURFACE version for wall or ceiling installation. The ANGULAR models are designed with an internal angle of inclination of the light source for optimal lighting inside light veils and wall chase. The linear profiles are available in lengths of 2000 and 3000 mm, can be assembled according to the desired design and can be cut to size. LED strips and drivers must be combined to complete the installation.

The accessories included with the profiles are not sold separately.

LINEAR JOINT



Required	Code	€
Yes - 1 Kit x connection	223766	6

L-JOINT




Required	Code	€
Yes - 1 Kit x connection	223759	6

WALL-CEILING JOINT



Required	Code	€
Yes - 1 Kit x connection	223742	6

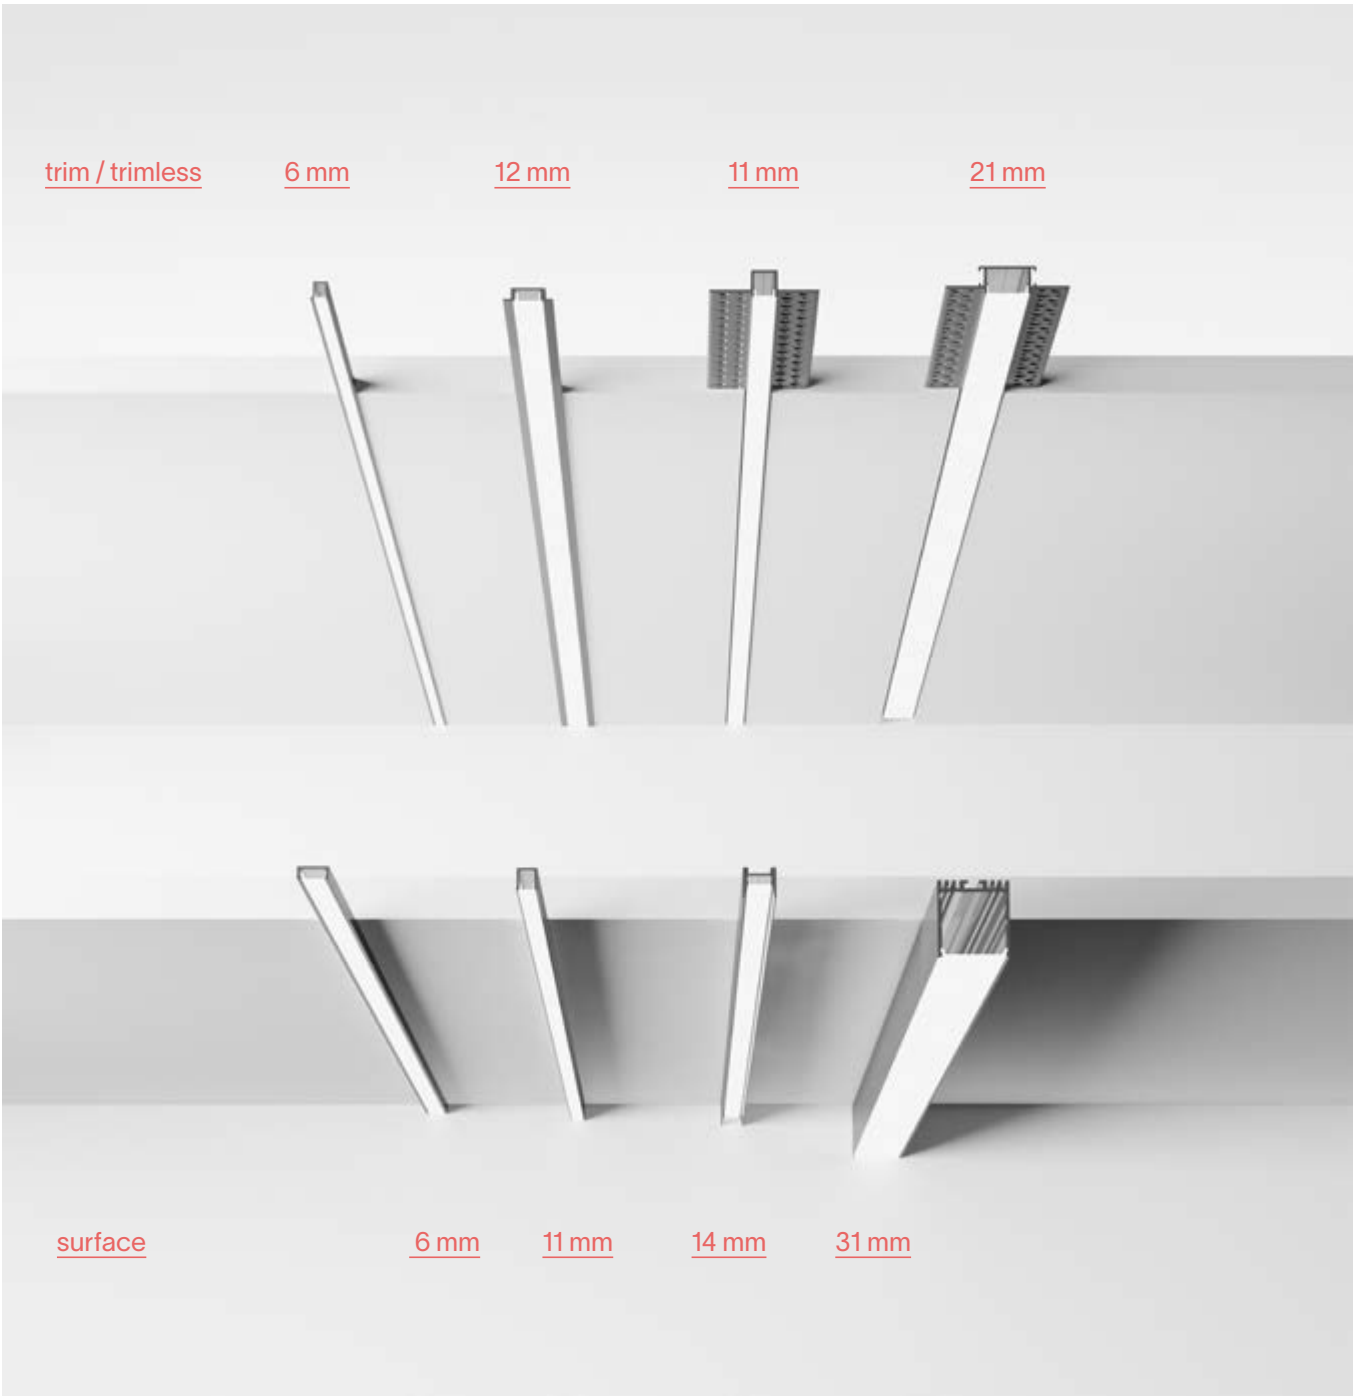



Mounting Kit included



307145




270517

slot surface

PROFILE 6 mm

Recommended Strip LED max 8 W/m






Length	Weight	Volume	Finish	Code	€
2000 mm	0,16 Kg	0,0003 m³	White	346243	8
2000 mm	0,16 Kg	0,0003 m³	Black	346236	8
3000 mm	0,40 Kg	0,0002 m³	White	346267	12
3000 mm	0,40 Kg	0,0002 m³	Black	346250	12

PROFILE 11 mm


Recommended Strip LED max 15 W/m



Length	Weight	Volume	Finish	Code	€
2000 mm	0,22 Kg	0,0022 m³	White	203089	20
2000 mm	0,22 Kg	0,0022 m³	Alluminio	203072	20
3000 mm	0,42 Kg	0,0022 m³	White	204598	30
3000 mm	0,42 Kg	0,0022 m³	Alluminio	204581	30

PROFILE 14 mm

Recommended Strip LED max 15 W/m




Measure	Weight	Volume	Finish	Code	€
2000 x 15 mm	0,42 Kg	0,0008 m³	White	307145	25
2000 x 22 mm	0,51 Kg	0,0012 m³	White	307152	25

PROFILE 31 mm

Recommended Strip LED max 40 W/m





Length	Weight	Volume	Finish	Code	€
2000 mm	1,41 Kg	0,0036 m³	White	270524	75
2000 mm	1,41 Kg	0,0036 m³	Black	270517	75
3000 mm	1,97Kg	0,0047 m³	White	270548	105
3000 mm	1,97 Kg	0,0047 m³	Black	270531	105

SUSPENSION KIT



Required	N Cavi	Cables Length	Code	€
No - 1 Kit x 2000 mm	2	3000 mm	270449	18

MECHANICAL JOINT




Required	Code	€
Yes - 1 Kit x connection	270463	6

slot angular recessed

PROFILE 17 mm

Recommended Strip LED max 15 W/m





Length	Weight	Volume	Finish	Code	€
2000 mm	0,82 Kg	0,0042 m³	White	339788	65
3000 mm	1,05 Kg	0,0052 m³	White	339795	90

LINEAR JOINT



Required	Code	€
Yes - 1 Kit x connection	223766	6

L-JOINT



Required	Code	€
Yes - 1 Kit x connection	223759	6

GIUNTO PARETE-CEILING




Required	Code	€
Yes - 1 Kit x connection	223742	6

slot angular surface

PROFILE 10 mm

Recommended Strip LED max 15 W/m






Length	Weight	Volume	Finish	Code	€
2000 mm	0,16 Kg	0,0003 m³	Bianco	346298	20
3000 mm	0,22 Kg	0,0004 m³	Bianco	346304	30


PROFILE 16 mm

Recommended Strip LED max 15 W/m





Length	Weight	Volume	Finish	Code	€
2000 mm	0,26 Kg	0,0002 m³	White	203126	25
3000 mm	0,41 Kg	0,0013 m³	White	204635	40

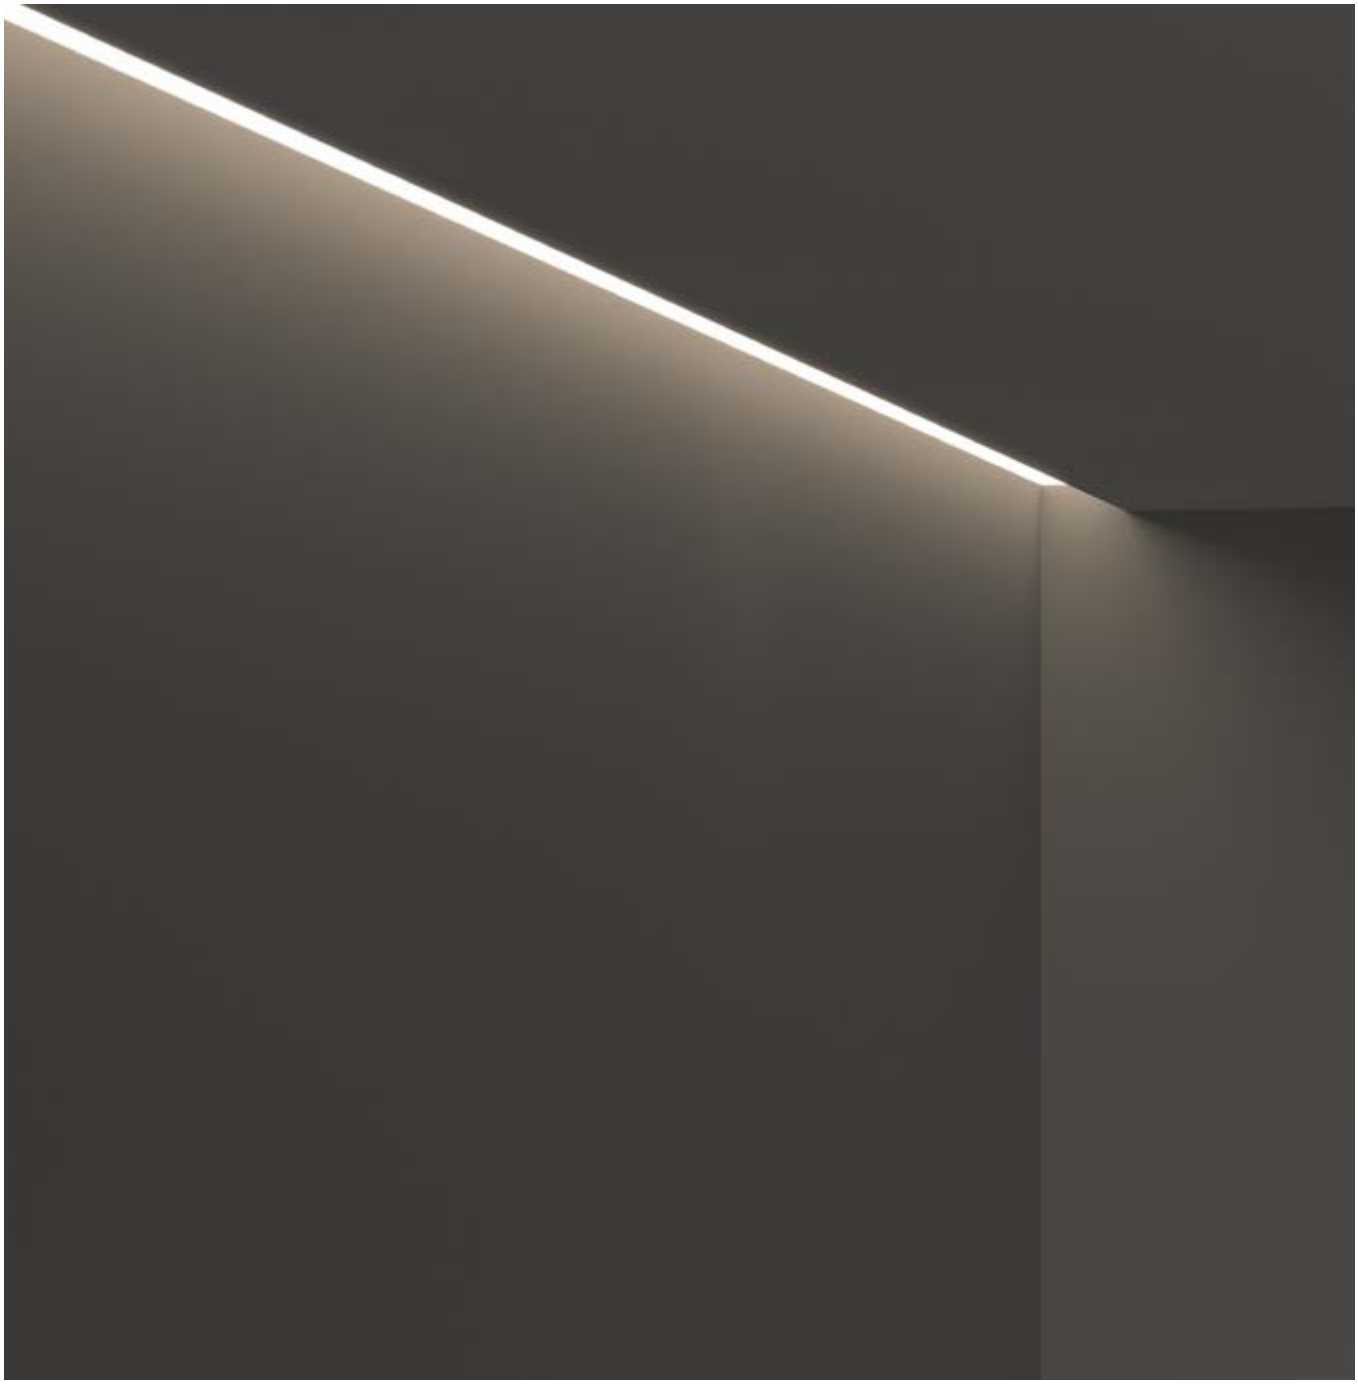



Mounting Kit included



346298
346304



339788
339795

FOX



fox


IP20 | MacAdam: SDCM 3 | LED COB BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum



Power	Installation	Beam
8W	Link 3-Phase	41°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	950 lm	2700 K	White	340845	45
≥90	On-Off	950 lm	2700 K	Black	340838	45
≥90	On-Off	1000 lm	3000 K	White	285368	45
≥90	On-Off	1000 lm	3000 K	Black	285351	45
≥90	On-Off	1050 lm	4000 K	White	322339	45
≥90	On-Off	1050 lm	4000 K	Black	322322	45
≥90	1-10V	1000 lm	3000 K	White	302546	85
≥90	1-10V	1000 lm	3000 K	Black	302539	85
≥80	On-Off	1150 lm	3000 K	White	250410	45
≥80	On-Off	1150 lm	3000 K	Black	250403	45
≥80	On-Off	1150 lm	3000 K	Brass	283920	49
≥80	On-Off	1200 lm	4000 K	White	271453	45
≥80	On-Off	1200 lm	4000 K	Black	271446	45

on-off 1-10V




Power	Installation	Beam
8W	Link 1-Phase	54°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	1000 lm	3000 K	White	371924	35
≥90	On-Off	1000 lm	3000 K	Black	348308	35

90°	350°	0,300 Kg/0,0015 m³

Photometry



m	lx	øm
1	2067	0,77
2	517	1,54
3	230	2,30
4	129	3,07
5	83	3,84

Driver

Included

LENS



Model	Required	Beam	Finish	Code	€
On-Off	No	23°	Clear	349121	5
1-10V	No	23°	Clear	302744	5

CEILING CONNECTION



Required	Control	Finish	Code	€
No	On-Off	White	170145	23
No	On-Off	Black	170152	23

Fox is suitable for installation on LINK series track: Link 3-Phase - Page 232 / Link 1-Phase - Page 227
The optional lens must be ordered in concomitance with the product and will be mounted inside the product as replacement for the default one.

Cylindrical extruded aluminum projector suitable for installation on single-phase and three-phase LINK track. 1-10 V or DALI dimmable versions available. Perfect for lighting the small and medium size environments that require wide flexibility for arrangement, such as COMMERCIAL and RETAIL spaces, and an optimal performance-price ratio.







8W
On-Off

15W
On-Off

25W
On-Off



fox


IP20 | MacAdam: SDCM 3 | LED COB BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum




Power	Installation	Beam
15W	Link 3-Phase	41°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	1550 lm	2700 K	White	340883	50
≥90	On-Off	1550 lm	2700 K	Black	340876	50
≥90	On-Off	1600 lm	3000 K	White	285382	50
≥90	On-Off	1600 lm	3000 K	Black	285375	50
≥90	On-Off	1700 lm	4000 K	White	322360	50
≥90	On-Off	1700 lm	4000 K	Black	322346	50
≥90	1-10V	1600 lm	3000 K	White	302560	80
≥90	1-10V	1600 lm	3000 K	Black	302553	80
≥90	DALI	1600 lm	3000 K	White	302584	110
≥90	DALI	1600 lm	3000 K	Black	302577	110
≥80	On-Off	1900 lm	3000 K	White	250434	50
≥80	On-Off	1900 lm	3000 K	Black	250427	50
≥80	On-Off	1900 lm	3000 K	Brass	283937	55
≥80	On-Off	2000 lm	4000 K	White	267784	50
≥80	On-Off	2000 lm	4000 K	Black	267777	50

on-off




1-10V/DALI



Power	Installation	Beam
15W	Link 1-Phase	39°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	1600 lm	3000 K	Black	348315	40

Photometry



m	lx	øm
1	3204	0,80
2	801	1,60
3	356	2,40
4	200	3,20
5	128	4,00

Driver

Included

90° | 350° | 0,380 Kg/0,0020 m³





LENS

Model	Required	Beam	Finish	Code	€
On-Off	No	15°	Clear	349138	5
1-10V/DALI	No	15°	Clear	302751	5




CEILING CONNECTION

Required	Control	Finish	Code	€
No	On-Off	White	170145	23
No	On-Off	Black	170152	23

Fox is suitable for installation on LINK series track: Link 3-Phase - Page 232 / Link 1-Phase - Page 227
The optional lens must be ordered in concomitance with the product and will be mounted inside the product as replacement for the default one.



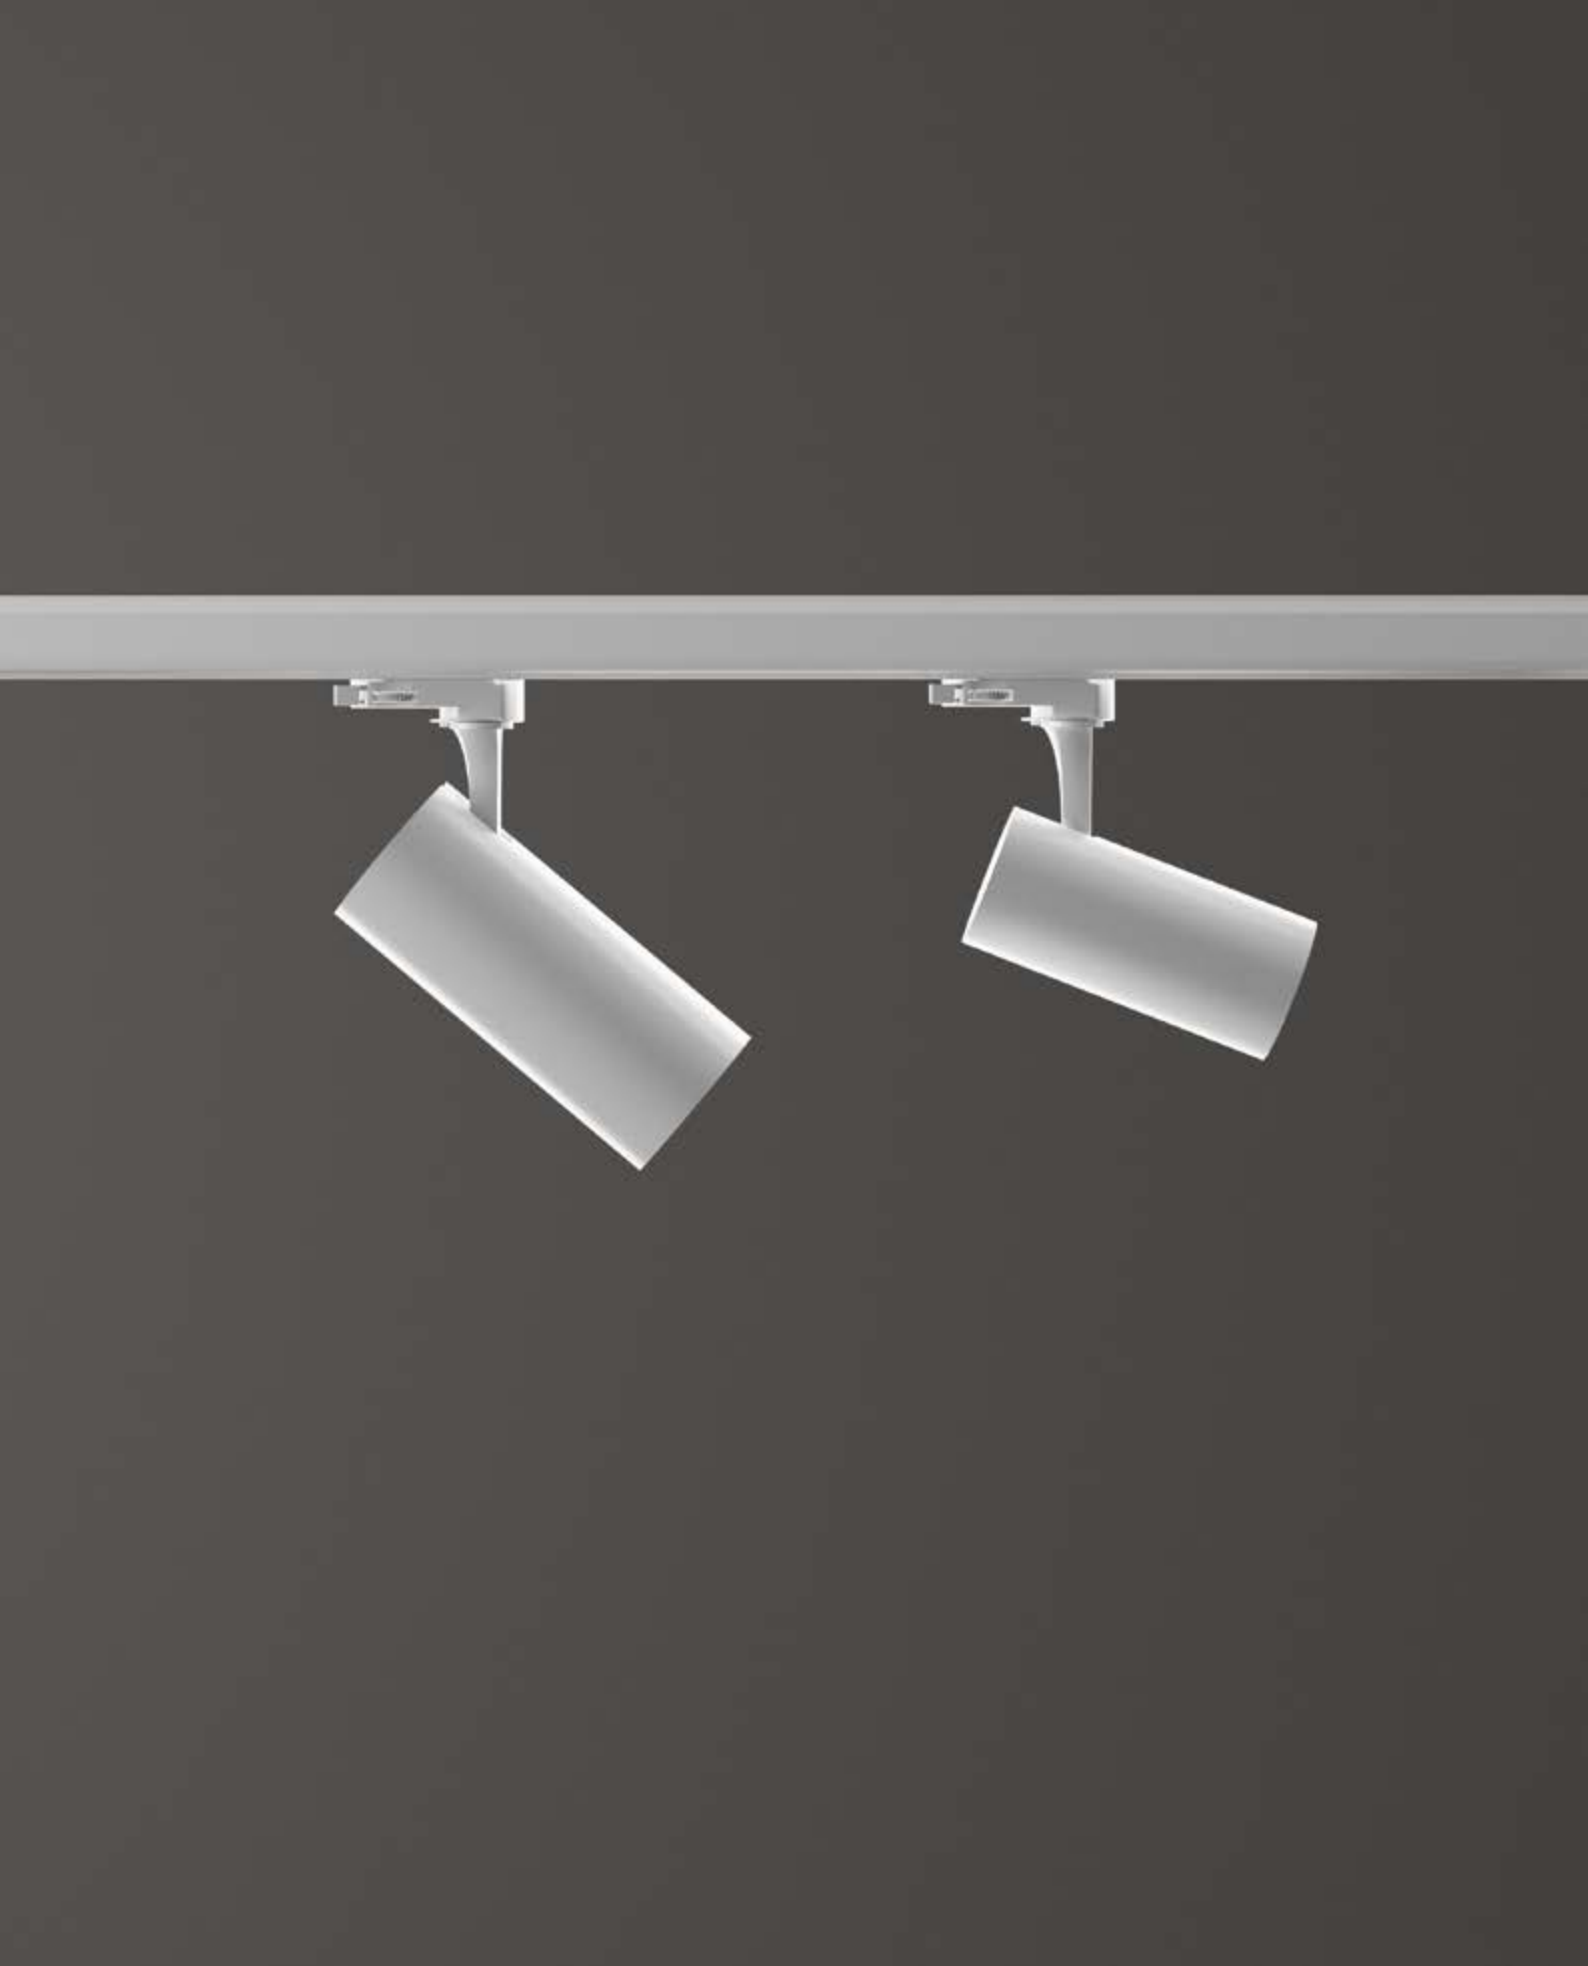

fox


IP20 | MacAdam: SDCM 3 | LED COB BRIDGELUX | 50.000 h life | light beam: ACCENT | Material: Aluminum



Power	Installation	Beam
25W	Link 3-Phase	35°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	2800 lm	2700 K	White	340944	55
≥90	On-Off	2800 lm	2700 K	Black	340937	55
≥90	On-Off	2900 lm	3000 K	White	285405	55
≥90	On-Off	2900 lm	3000 K	Black	285399	55
≥90	On-Off	3050 lm	4000 K	White	322391	55
≥90	On-Off	3050 lm	4000 K	Black	322377	55
≥90	1-10V	2900 lm	3000 K	White	302607	100
≥90	1-10V	2900 lm	3000 K	Black	302591	100
≥90	DALI	2900 lm	3000 K	White	302621	115
≥90	DALI	2900 lm	3000 K	Black	302614	115
≥80	On-Off	3300 lm	3000 K	White	250458	55
≥80	On-Off	3300 lm	3000 K	Black	250441	55
≥80	On-Off	3300 lm	3000 K	Brass	283944	60
≥80	On-Off	3500 lm	4000 K	White	267807	55
≥80	On-Off	3500 lm	4000 K	Black	267791	55


on-off 1-10V/DALI



Power	Installation	Beam
25W	Link 1-Phase	35°

CRI	Control	Lumen	CCT	Finish	Code	€
≥90	On-Off	3000 lm	3000 K	Black	348322	45

Photometry



m	lx	øm
1	8140	0,61
2	2035	1,22
3	904	1,82
4	509	2,43
5	326	3,04

Driver

Included

90° | 350° | 0,540 Kg/0,0027 m³



LENS



Model	Required	Beam	Finish	Code	€
On-Off	No	15°	Clear	349145	5
1-10V/DALI	No	15°	Clear	302768	5

CEILING CONNECTION



Required	Control	Finish	Code	€
No	On-Off	White	170145	23
No	On-Off	Black	170152	23

EOS



eos


IP20 | MacAdam: SDCM 3 | 50.000 h life | light beam: from SPOT to WIDE | Material: Aluminum



Power	Installation	Beam	CRI	Source
15W	Link 3-Phase	20-55°	≥90	LED COB BRIDGELUX

Control	Lumen	CCT	Finish	Code	€
On-Off	1650 lm	2700 K	White	340807	73
On-Off	1650 lm	2700 K	Black	340791	73
On-Off	1700 lm	3000 K	White	286594	73
On-Off	1700 lm	3000 K	Black	276182	73
On-Off	1850 lm	4000 K	White	322094	73
On-Off	1850 lm	4000 K	Black	322087	73
1-10V	1700 lm	3000 K	White	302959	116
1-10V	1700 lm	3000 K	Black	302942	116
DALI	1700 lm	3000 K	White	302997	135
DALI	1700 lm	3000 K	Black	302980	135

on-off 1-10V/DALI




Power	Installation	Beam	CRI
15W	Link 1-Phase	20-55°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1700 lm	3000 K	Black	337579	65

90°	355°	0,710 Kg/0,0038 m³

Photometry



m	lx	cm
1	1774	1,10
2	444	2,20
3	197	3,30
4	111	4,40
5	71	5,50

Driver

Included

CEILING CONNECTION



Model	Required	Control	Finish	Code	€
3-Phase	No	On-Off	White	170145	23
3-Phase	No	On-Off	Black	170152	23

Eos is suitable for installation on LINK series track: Link 3-Phase - Page 232 / Link 1-Phase - Page 227

Extruded aluminum cylindrical tracklight with variable opening beam from narrow to wide, suitable for single-phase or three-phase LINK track installation. Dimmable 1-10 V or DALI versions available. Ideal for installation in big rooms, where great flexibility and high color rendering is required, such as EXHIBITION, MUSEUMS and COMMERCIAL.





15W
1-10V/ DALI

15W
On-Off





eos


IP20 | MacAdam: SDCM 3 | 50.000 h life | light beam: from SPOT to WIDE | Material: Aluminum



Power	Installation	Beam	CRI	Source
25W	Link 3-Phase	20-55°	≥90	LED COB BRIDGELUX

Control	Lumen	CCT	Finish	Code	€
On-Off	2900 lm	2700 K	White	340821	92
On-Off	2900 lm	2700 K	Black	340814	92
On-Off	2950 lm	3000 K	White	286600	92
On-Off	2950 lm	3000 K	Black	276243	92
On-Off	3100 lm	4000 K	White	322124	92
On-Off	3100 lm	4000 K	Black	322100	92
1-10V	2950 lm	3000 K	White	302973	135
1-10V	2950 lm	3000 K	Black	302966	135
DALI	2950 lm	3000 K	White	303017	155
DALI	2950 lm	3000 K	Black	303000	155


on-off 1-10V/DALI



Power	Installation	Beam	CRI
25W	Link 1-Phase	20-55°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2900 lm	3000 K	Black	342740	85

Photometry



m	lx	cm
1	3594	1,10
2	899	2,20
3	399	3,30
4	225	4,40
5	144	5,50

Driver

Included

90° | 355° | 1,100 Kg/0,0051 m³

CEILING CONNECTION



Model	Required	Control	Finish	Code	€
3-Phase	No	On-Off	White	170145	23
3-Phase	No	On-Off	Black	170152	23

Eos is suitable for installation on LINK series track: Link 3-Phase - Page 232 / Link 1-Phase - Page 227


PLAY



play spot

IP20 | MacAdam: SDCM 3 | LED COB | 50.000 h life | Light beam: SPOT | Material: Aluminum






90° | 355° | 0,240Kg / 0,0008 m³

Power	Installation	Beam	CRI
7W	Link 3-Phase	16°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	520 lm	3000 K	White	364698	70
On-Off	520 lm	3000 K	Black	370903	70

Photometry




m	lx	øm
1	4730	0,25
2	1182	0,50
3	526	0,75
4	296	1,00
5	189	1,20

Driver

ON/OFF included






90° | 355° | 0,240Kg / 0,0008 m³

Power	Installation	Beam	CRI
13W	Link 3-Phase	18°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	White	364704	75
On-Off	900 lm	3000 K	Black	370927	75

Photometry



m	lx	øm
1	3163	0,43
2	791	0,86
3	351	1,30
4	198	1,70
5	127	2,10

Driver

ON/OFF included

CEILING CONNECTION



Required	Control	Finish	Code	€
No	On-Off	White	170145	23
No	On-Off	Black	170152	23

Play is suitable for installation on LINK series track: Link 3-Phase - Page 232

DYNAMITE




dynamite spot

IP20

Material: Aluminum





Power	Installation
28W max	Link 1-Phase, Link 3-Phase


	TRACK	Finish	Code	€
	3-Phase	White	274508	36
	3-Phase	Black	274515	36
	1-Phase	White	371443	36
	1-Phase	Black	337524	36

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
540 lm	3000 K	123943	2,50

90°	355°	0,200 Kg/0,0020 m³





Power	Installation
28W max	Link 3-Phase


	TRACK	Finish	Code	€
	3-Phase	White	371450	25
	3-Phase	Black	371474	25

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
280 lm	3000 K	339771	2,50

90°	355°	0,150 Kg/0,0016 m³





Power	Installation
28W max	Link 3-Phase

	TRACK	Finish	Code	€
	3-Phase	White	371498	38
	3-Phase	Black	371528	38

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
540 lm	3000 K	123943	2,50

90°	355°	0,240 Kg/0,0022 m³

CEILING CONNECTION



Model	Required	Beam	Control	Finish	Code	€
3-Phase	No		On-Off	White	170145	23
3-Phase	No		On-Off	Black	170152	23


Dynamite is suitable for installation on LINK series track: Link 3-Phase - Page 232 / Link 1-Phase - Page 227

LOOK



look track

IP20



0,930 Kg/0,0033 m³

Power	Installation
28W max	Link 3-Phase

TRACK	Finish	Code	€
3-Phase	White	231662	80
3-Phase	Black	231631	80

Lampadina inclusa GU10

Lumen	CCT	Code	€
540 lm	3000 K	123943	2,50

CEILING CONNECTION



Required	Control	Finish	Code	€
No	On-Off	White	170145	23
No	On-Off	Black	170152	23

Look is suitable for installation on LINK series track: Link 3-Phase - Page 232


DISPLAY



display accent

IP20 | UGR <16 | MacAdam: SDCM 3 | 50.000 h life | Light beam: ACCENT | PRO Material: Aluminum






0,681 Kg/0,0028 m³

Power	Installation	Beam	CRI	Source
14W	Link 3-Phase	60°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	White	283593	170
On-Off	1400 lm	3000 K	Black	283609	170
On-Off	1550 lm	4000 K	White	283616	170
On-Off	1550 lm	4000 K	Black	283623	170
DALI	1400 lm	3000 K	White	375267	225
DALI	1400 lm	3000 K	Black	375243	225
DALI	1550 lm	4000 K	White	375304	225
DALI	1550 lm	4000 K	Black	375281	225

Photometry




m	lx	em
1	1330	1,20
2	332	2,40
3	148	3,50
4	83	4,70
5	53	5,90

Driver

ON/OFF included






1,120 Kg/0,0072 m³

Power	Installation	Beam	CRI	Source
28W	Link 3-Phase	60°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	2800 lm	3000 K	White	283524	265
On-Off	2800 lm	3000 K	Black	276267	265
On-Off	3100 lm	4000 K	White	283531	265
On-Off	3100 lm	4000 K	Black	283548	265
DALI	2800 lm	3000 K	White	375342	305
DALI	2800 lm	3000 K	Black	375328	305
DALI	3100 lm	4000 K	White	375373	305
DALI	3100 lm	4000 K	Black	375359	305

Photometry



m	lx	em
1	2453	1,30
2	613	2,50
3	273	3,80
4	153	5,00
5	96	6,30


Driver

ON/OFF included

display accent

IP20 | UGR <16 | MacAdam: SDCM 3 | 50.000 h life | Light beam: ACCENT | PRO Material: Aluminum






Power	Installation	Beam	CRI	Source
42W	Link 3-Phase	60°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	4200 lm	3000 K	White	283555	370
On-Off	4200 lm	3000 K	Black	283562	370
On-Off	4650 lm	4000 K	White	283579	370
On-Off	4650 lm	4000 K	Black	283586	370

Photometry



m	lx	øm
1	3598	1,30
2	900	2,50
3	400	3,80
4	225	5,00
5	144	6,30

Driver

ON/OFF included

1,570 Kg/0,0100 m³



Display Accent 535 mm



Display Accent 1065 mm




Display Accent 1595 mm







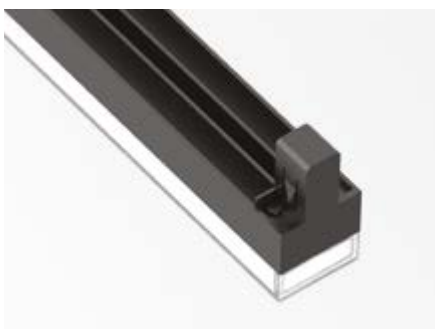

Display Wide 565 mm




Display Wide 1125 mm



display wide

IP20 | MacAdam: SDCM 3 | 50.000 h life | Light beam: WIDE | PRO | Material: Aluminum






0,430 Kg/0,0026 m³

Power	Installation	Beam	CRI	Source
21W	Link 3-Phase	125°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	2550 lm	3000 K	White	283753	140
On-Off	2550 lm	3000 K	Black	283760	140
On-Off	2900 lm	4000 K	White	276274	140
On-Off	2900 lm	4000 K	Black	283777	140
DALI	2550 lm	3000 K	White	375335	190
DALI	2550 lm	3000 K	Black	375311	190
DALI	2900 lm	4000 K	White	375380	190
DALI	2900 lm	4000 K	Black	375366	190

Photometry




m	lx	øm
1	473	5,20
2	118	6,50
3	53	9,70
4	30	13,00
5	19	16,00

Driver

ON/OFF included






0,770 Kg/0,0050 m³

Power	Installation	Beam	CRI	Source
40W	Link 3-Phase	125°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	5500 lm	3000 K	White	283722	215
On-Off	5500 lm	3000 K	Black	283050	215
On-Off	5800 lm	4000 K	White	283739	215
On-Off	5800 lm	4000 K	Black	283746	215
DALI	5500 lm	3000 K	White	375410	260
DALI	5500 lm	3000 K	Black	375403	260
DALI	5800 lm	4000 K	White	375458	260
DALI	5800 lm	4000 K	Black	375434	260

Photometry



m	lx	øm
1	897	3,10
2	224	6,10
3	100	9,20
4	56	12,00
5	36	15,00


Driver

ON/OFF included

display ugr

IP20 | UGR <22 | MacAdam: SDCM 3 | 50.000 h life | Light beam: WIDE | PRO Material: Aluminum






0,650 Kg/0,0028 m³

Power	Installation	Beam	CRI	Source
14W	Link 3-Phase	70°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	1900 lm	3000 K	White	283685	150
On-Off	1900 lm	3000 K	Black	283692	150
On-Off	2000 lm	4000 K	White	283708	150
On-Off	2000 lm	4000 K	Black	283715	150
DALI	1900 lm	3000 K	White	375427	210
DALI	1900 lm	3000 K	Black	375397	210
DALI	2000 lm	4000 K	White	375465	210
DALI	2000 lm	4000 K	Black	375441	210

Photometry




m	lx	øm
1	854	1,40
2	213	2,80
3	95	4,20
4	53	5,70
5	34	7,10

Driver

ON/OFF included






1,120 Kg/0,0050 m³

Power	Installation	Beam	CRI	Source
25W	Link 3-Phase	70°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	3800 lm	3000 K	White	283647	235
On-Off	3800 lm	3000 K	Black	283630	235
On-Off	4000 lm	4000 K	White	276281	235
On-Off	4000 lm	4000 K	Black	283258	235
DALI	3800 lm	3000 K	White	375250	280
DALI	3800 lm	3000 K	Black	375236	280
DALI	4000 lm	4000 K	White	375298	280
DALI	4000 lm	4000 K	Black	375274	280

Photometry



m	lx	øm
1	1636	1,40
2	409	2,80
3	182	4,20
4	102	5,70
5	65	7,10

Driver

ON/OFF included


display ugr

IP20 | UGR <22 | MacAdam: SDCM 3 | 50.000 h life | Light beam: WIDE | PRO Material: Aluminum




Power	Installation	Beam	CRI	Source
40W	Link 3-Phase	70°	≥90	LED SMD SAMSUNG

Control	Lumen	CCT	Finish	Code	€
On-Off	5700 lm	3000 K	White	283654	330
On-Off	5700 lm	3000 K	Black	283067	330
On-Off	6000 lm	4000 K	White	283661	330
On-Off	6000 lm	4000 K	Black	283678	330



1,570 Kg/0,0173 m³

Photometry



m	lx	øm
1	2419	1,40
2	605	2,80
3	269	4,20
4	151	5,70
5	97	7,10

Driver

ON/OFF included



Display UGR 535 mm



Display UGR 1065 mm



Display UGR 1595 mm



LINK








Single-phase and Three-phase electrified track with extruded aluminum profile; black or white powder coated, optimized for standard 3-Phase/1-Phase or equivalent projectors; available in ceiling, suspension or recessed versions with edge for installation on plasterboard ceilings; suitable for continuous lines systems, standard modules of 1000mm, 2000mm or 3000mm modules length. Ideal for installation in big spaces where flexibility and long connection distances are required, for example MUSEUM, COMMERCIAL and RETAIL spaces.

link 1-phase surface on-off assembly plans


01 End cap
02 Track
03 Power supply central joint
04 L-joint
05 Linear joint
06 Power supply end

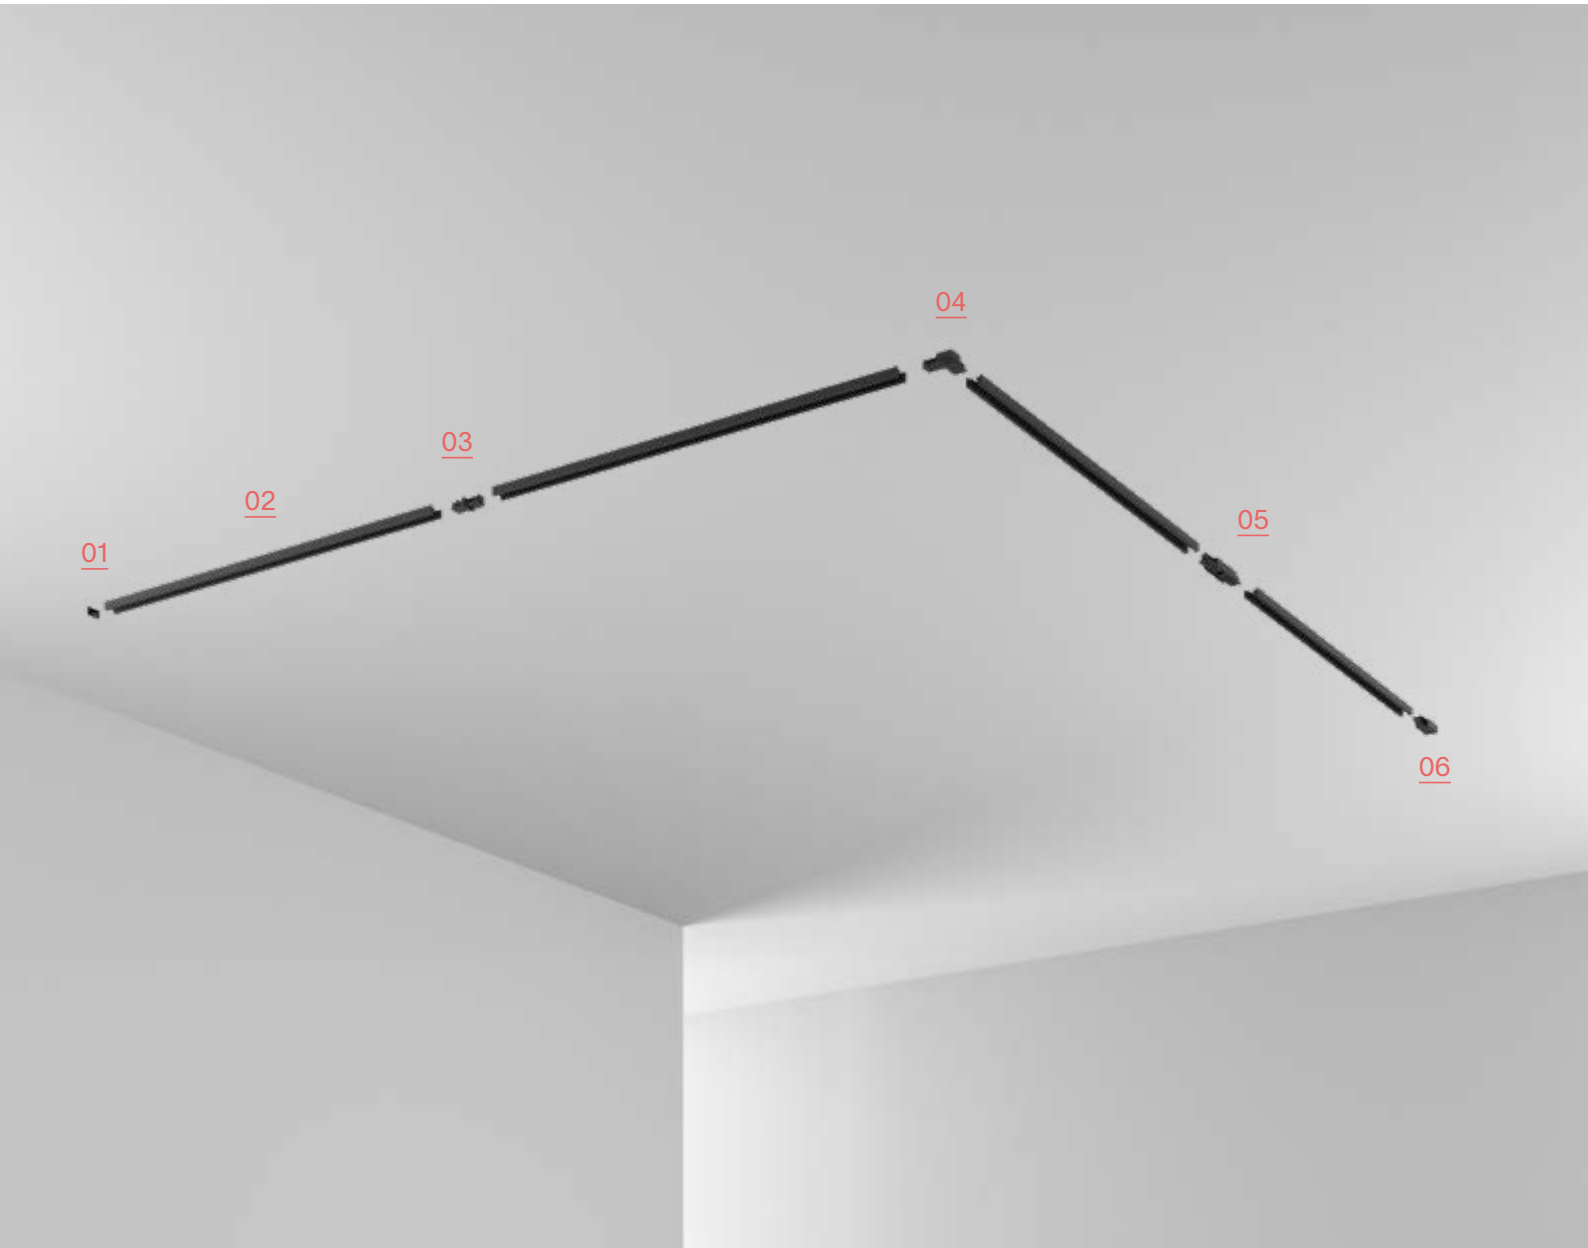

link 1-phase surface on-off

IP20 | TRACK | No mounting Kit required, direct ceiling installation. | Material: Aluminum





Length	Weight	Volume	Finish	Code	€
1000 mm	0,42 Kg	0,0012 m³	Black	337371	13
2000 mm	0,83 Kg	0,0024 m³	Black	342801	24
3000 mm	1,22 Kg	0,0036 m³	Black	344973	35


END CAP | Material: Aluminum



Required	Finish	Code	€
Yes	Black	337395	3

IP20 | POWER SUPPLY END | Material: Aluminum





Weight	Volume	Finish	Code	€
0,060 Kg	0,0001 m³	Black	337388	3

IP20 | POWER SUPPLY CENTRAL JOINT | Material: Aluminum






Weight	Volume	Finish	Code	€
0,070 Kg	0,0001 m³	Black	337425	5

IP20 | LINEAR JOINT | Material: Aluminum






Weight	Volume	Finish	Code	€
0,040 Kg	0,0001 m³	Black	337418	3

IP20 | L-JOINT | Material: Aluminum






Weight	Volume	Finish	Code	€
0,060 Kg	0,0001 m³	Black	337401	3

link 1-phase recessed on-off assembly plans


01 End cap
02 Track
03 Power supply central joint
04 L-joint
05 Linear joint
06 Power supply end

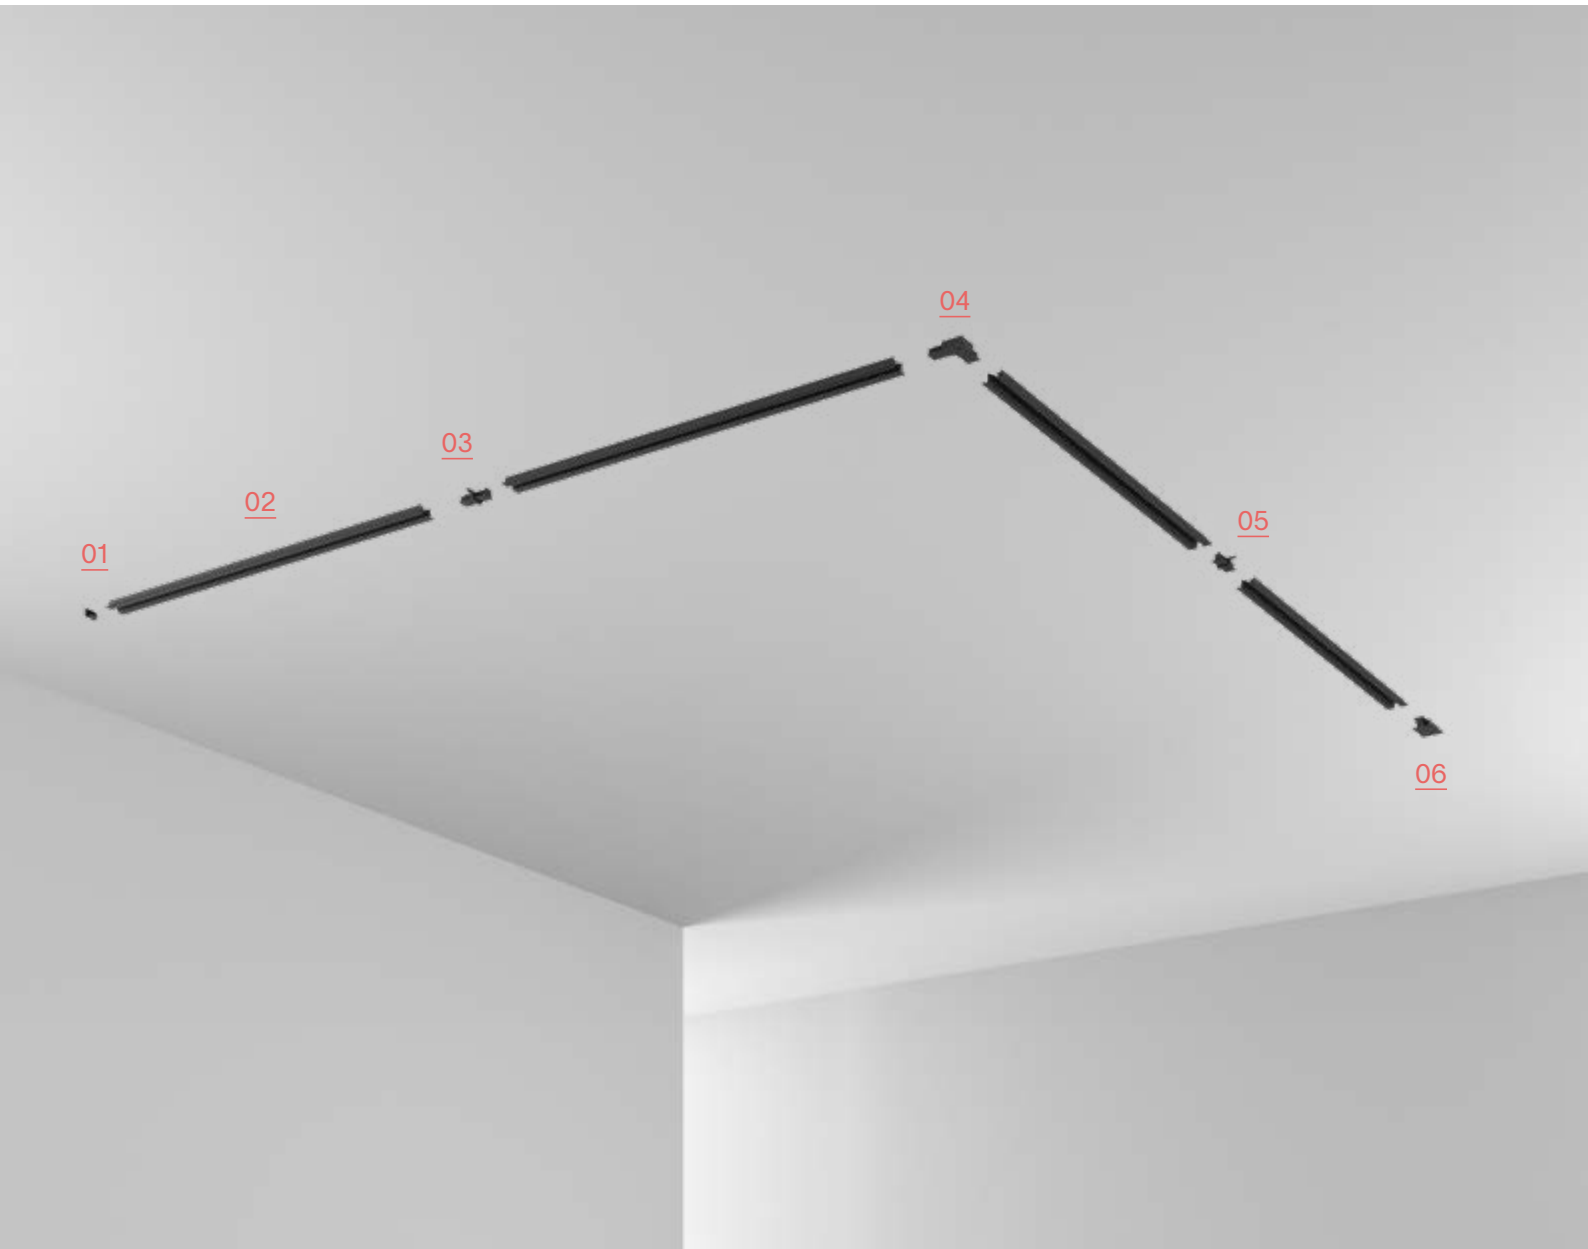

link 1-phase recessed on-off

IP20 | TRACK | Material: Aluminum





Length	Weight	Volume	Finish	Code	€
1000 mm	0,49 Kg	0,0012 m³	Black	342818	14
2000 mm	0,94 Kg	0,0024 m³	Black	342825	28
3000 mm	1,39 Kg	0,0036 m³	Black	344966	42

END CAP | Material: Aluminum



Required	Finish	Code	€
Yes	Black	337395	3


RECESSED MOUNTING KIT | Material: Aluminum



Required	Finish	Code	€
Yes - 1 Kit x 1000 mm	Alluminio	188195	5

IP20 | POWER SUPPLY END | Material: Aluminum






Weight	Volume	Finish	Code	€
0,070 Kg	0,0001 m³	Black	342832	5

IP20 | LINEAR JOINT | Material: Aluminum






Weight	Volume	Finish	Code	€
0,040 Kg	0,0001 m³	Black	342856	3


IP20 | L-JOINT | Material: Aluminum






Weight	Volume	Finish	Code	€
0,100 Kg	0,0003 m³	Black	342849	4

link 3-phase trimless assembly plans

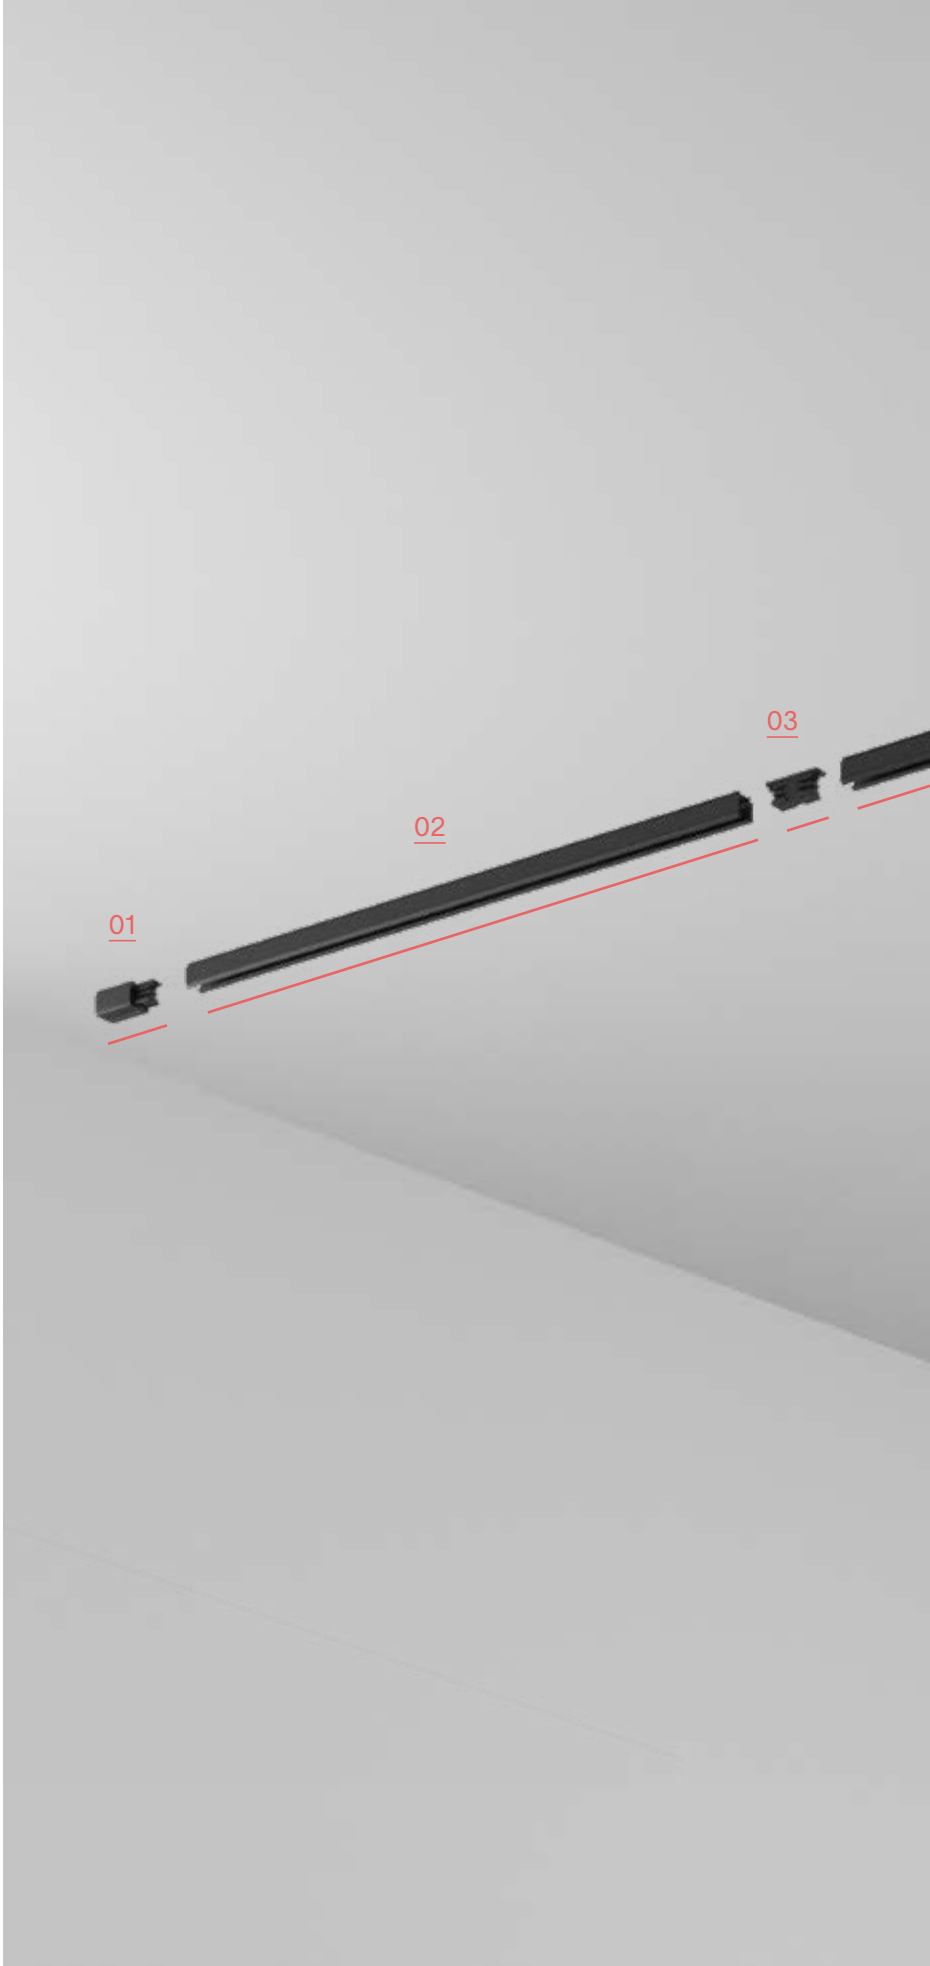


01 Power supply end
02 Track On/Off
03 Power supply central joint
04 L-joint
05 Linear joint
06 End cap

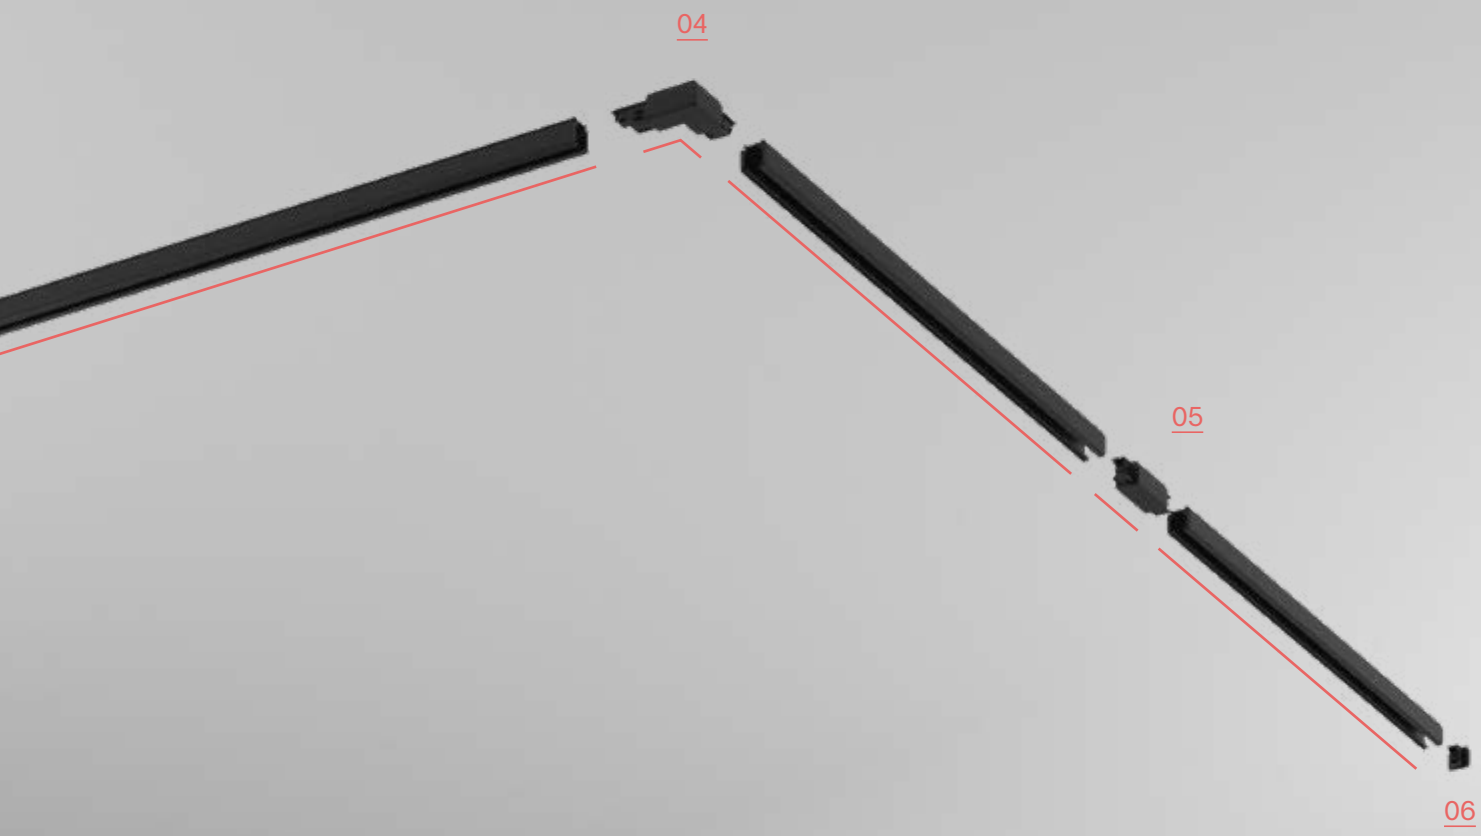
04
05
06

link 3-phase trimless on/off

IP20 | TRACK | Material: Aluminum





Length	Weight	Volume	Finish	Code	€
1000 mm	0,91 Kg	0,0016 m^3	White	243269	30
1000 mm	0,91 Kg	0,0016 m^3	Black	243252	30
2000 mm	1,81 Kg	0,0025 m^3	White	187976	60
2000 mm	1,81 Kg	0,0025 m^3	Black	187983	60
3000 mm	2,71 Kg	0,0037 m^3	White	187990	95
3000 mm	2,71 Kg	0,0037 m^3	Black	188003	95

RECESSED MOUNTING KIT | Material: Aluminum



Required	Finish	Code	€
Yes - 1 Kit x 1000 mm	White	169972	5
Yes - 1 Kit x 1000 mm	Black	169989	5

SUSPENSION KIT | Required - 1 Kit x 1000 mm | Material: Aluminum



N° Cavi	Cables Length	Finish	Code	€
1	3000 mm	White	242705	13
1	3000 mm	Black	243283	13
1	5000 mm	White	243245	15
1	5000 mm	Black	243238	15

END CAP | Material: Aluminum

Required	Finish	Code	€
Yes	White	169613	2
Yes	Black	169620	2

link 3-phase trimless on/off

IP20 | POWER SUPPLY END | Material: Aluminum





	Weight	Volume	Finish	Code	€
L	0,060 Kg	0,0001 m³	White	169583	5
L	0,060 Kg	0,0001 m³	Black	169576	9
R	0,060 Kg	0,0001 m³	White	169590	5
R	0,060 Kg	0,0001 m³	Black	169606	9

IP20 | POWER SUPPLY CENTRAL JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,120 Kg	0,0002 m³	White	227580	12
	0,120 Kg	0,0002 m³	Black	227597	17

IP20 | L-JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
L	0,120 Kg	0,0003 m³	White	169705	12
L	0,120 Kg	0,0003 m³	Black	169712	17
R	0,120 Kg	0,0003 m³	White	169736	12
R	0,120 Kg	0,0003 m³	Black	169729	17

IP20 | LINEAR JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,030 Kg	0,0001 m³	White	169637	7
	0,030 Kg	0,0001 m³	Black	169644	7

IP20 | TRACK ADAPTOR 3 POLES | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,080 Kg	0,0004 m³	White	194257	9
	0,080 Kg	0,0004 m³	Black	194301	9

link 3-phase trimless DALI - 1-10v

IP20 | TRACK | Material: Aluminum





Length	Weight	Volume	Finish	Code	€
1000 mm	0,94 Kg	0,0016 m³	White	246468	38
1000 mm	0,94 Kg	0,0016 m³	Black	246451	38
2000 mm	1,93 Kg	0,0032 m³	White	247007	80
2000 mm	1,93 Kg	0,0032 m³	Black	246901	80
3000 mm	2,87 Kg	0,0048 m³	White	247625	115
3000 mm	2,87 Kg	0,0048 m³	Black	247618	115

RECESSED MOUNTING KIT | Material: Aluminum



Required	Finish	Code	€
Yes - 1 Kit x 1000 mm	White	169972	5
	Black	169989	5

SUSPENSION KIT | Required - 1 Kit x 1000 mm | Material: Aluminum



N° Cavi	Cables Length	Finish	Code	€
1	3000 mm	White	242705	13
1	3000 mm	Black	243283	13
1	5000 mm	White	243245	15
1	5000 mm	Black	243238	15


END CAP | Material: Aluminum

Required	Finish	Code	€
Yes	White	169613	2
Yes	Black	169620	2

link 3-phase trimless DALI - 1-10v

IP20 | POWER SUPPLY END | Material: Aluminum






	Weight	Volume	Finish	Code	€
L	0,080 Kg	0,0003 m³	White	246529	8
L	0,080 Kg	0,0003 m³	Black	246512	13
R	0,080 Kg	0,0003 m³	White	246543	8
R	0,080 Kg	0,0003 m³	Black	246536	13

IP20 | POWER SUPPLY CENTRAL JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,130 Kg	0,0003 m³	White	246581	22
	0,130 Kg	0,0003 m³	Black	246574	25

IP20 | L-JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
L	0,130 Kg	0,0005 m³	White	246604	22
L	0,130 Kg	0,0005 m³	Black	246598	25
R	0,130 Kg	0,0005 m³	White	246628	22
R	0,130 Kg	0,0005 m³	Black	246611	25

IP20 | LINEAR JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,050 Kg	0,0001 m³	White	246567	9
	0,050 Kg	0,0001 m³	Black	246550	9


IP20 | TRACK ADAPTOR 5 POLES | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,070 Kg	0,0002 m³	White	246505	15
	0,070 Kg	0,0002 m³	Black	246499	15

link 3-phase trim assembly plans

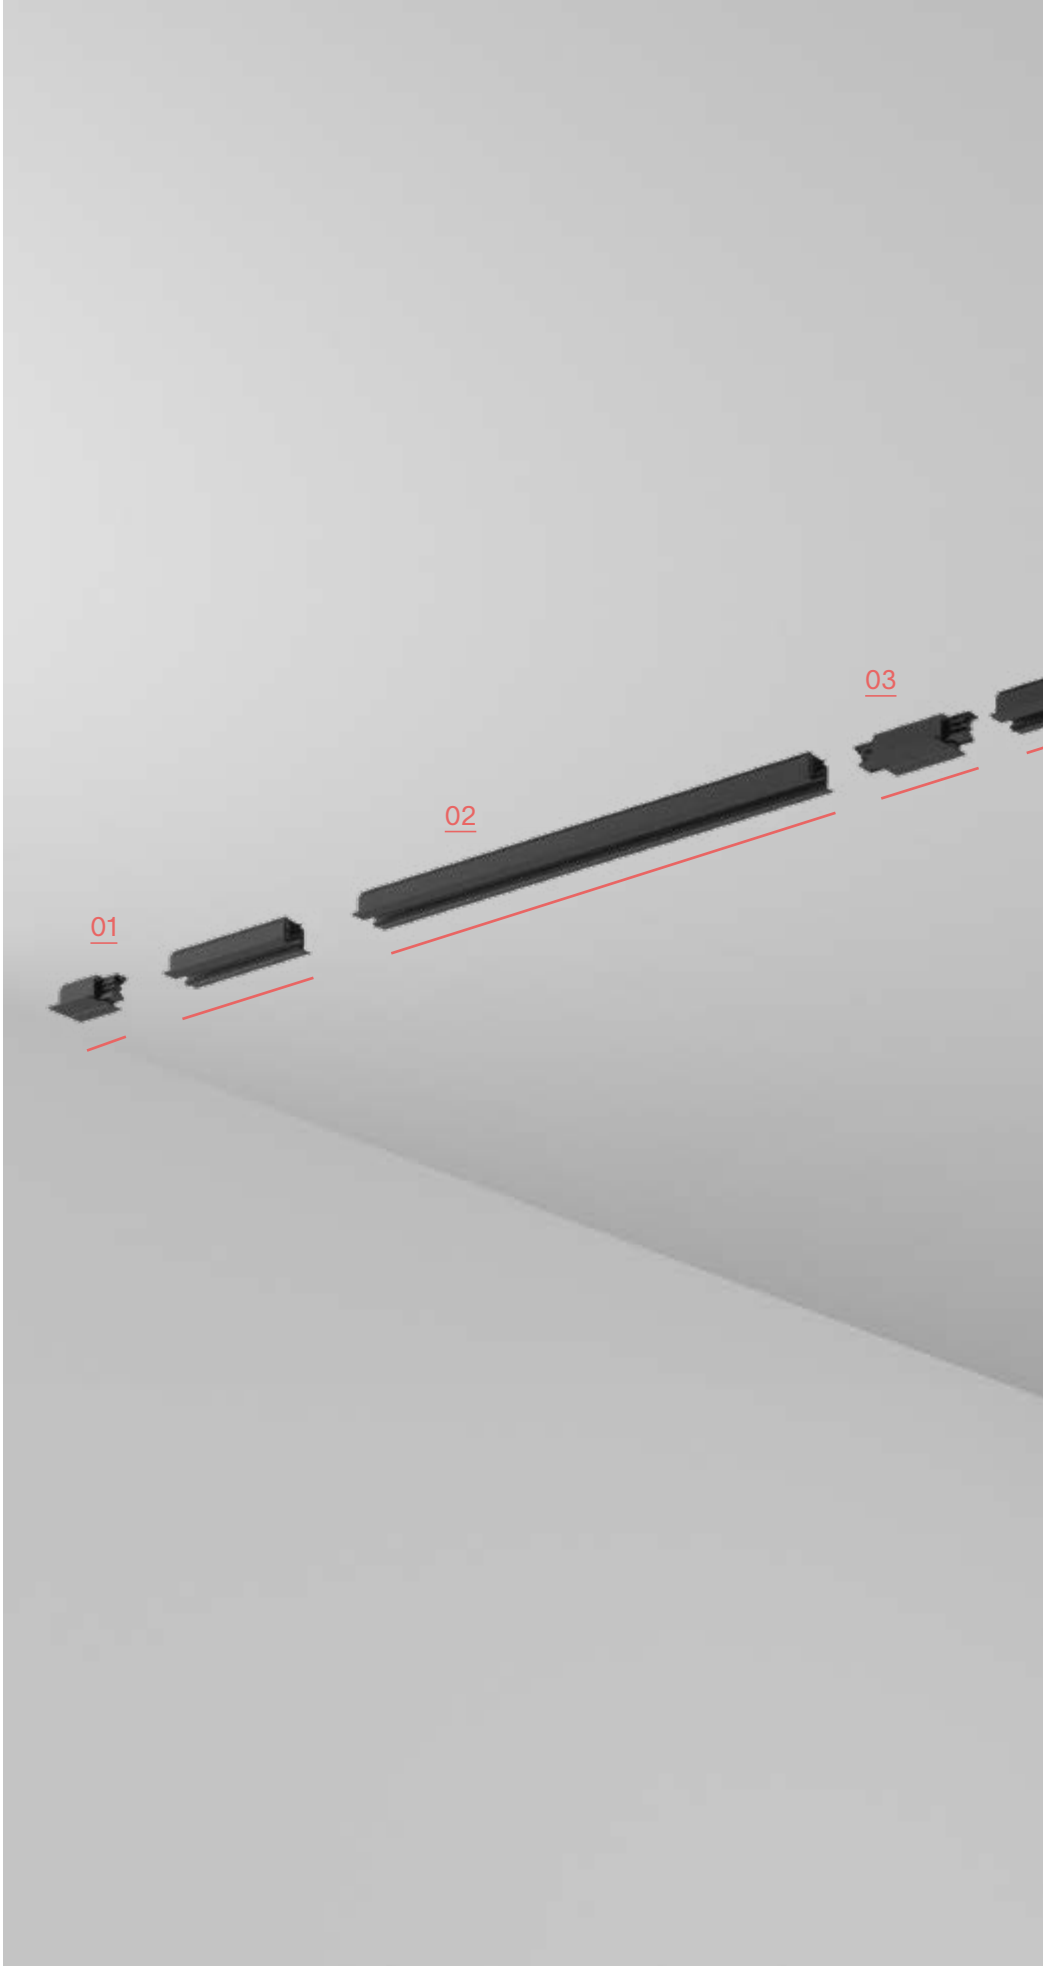


01 Power supply end
02 Track On/Off
03 Power supply central joint
04 L-joint
05 Linear joint
06 End cap

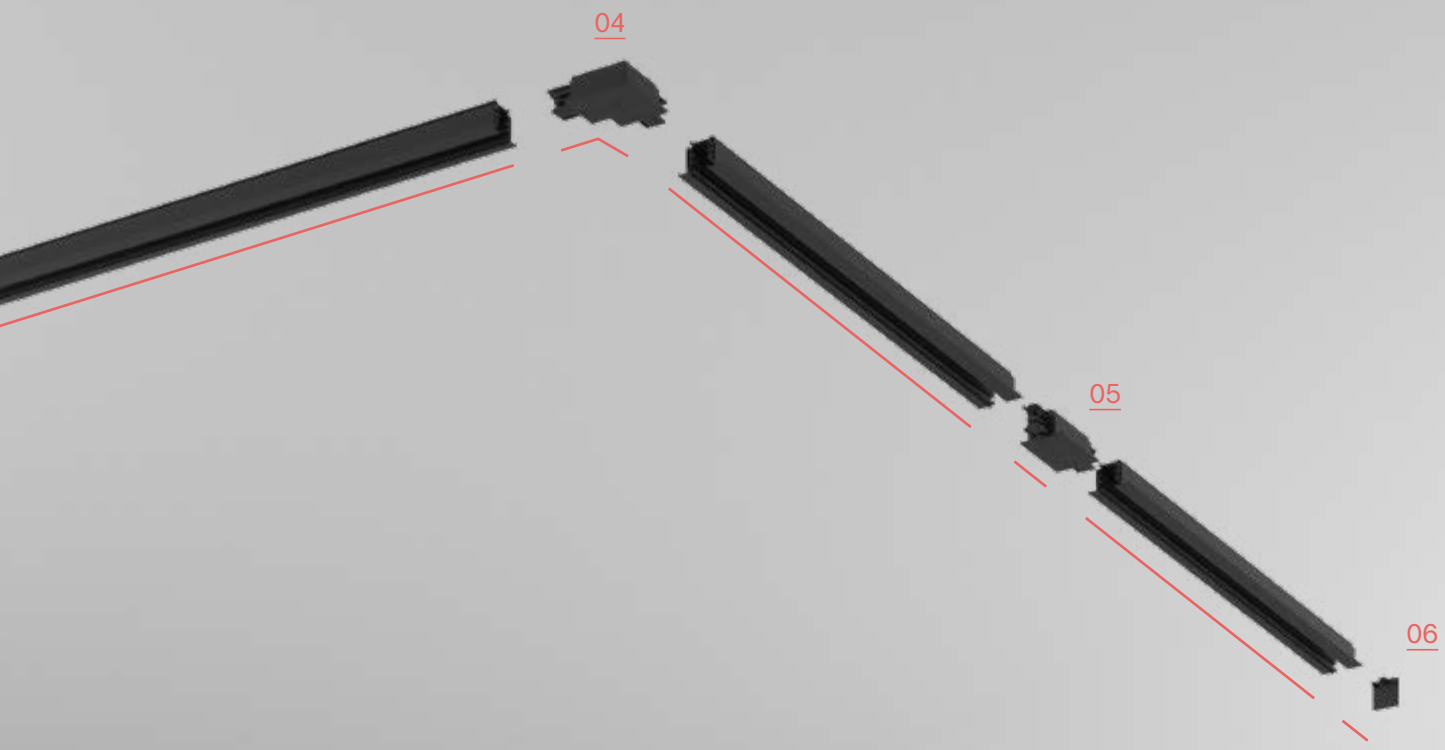
04
05
06

link 3-phase trim on/off

IP20 | TRACK | Material: Aluminum





Length	Weight	Volume	Finish	Code	€
2000 mm	1,92 Kg	0,0050 m³	White	188010	60
2000 mm	1,92 Kg	0,0050 m³	Black	188027	60

RECESSED MOUNTING KIT | Material: Aluminum



Required	Finish	Code	€
Yes - 1 Kit x 1000 mm	Alluminio	188195	5


END CAP | Material: Aluminum

Required	Finish	Code	€
Yes	White	169613	2
Yes	Black	169620	2

link 3-phase trim on/off

IP20 | POWER SUPPLY END | Material: Aluminum






	Weight	Volume	Finish	Code	€
L	0,070 Kg	0,0002 m³	White	188072	7
L	0,070 Kg	0,0002 m³	Black	188089	7
R	0,070 Kg	0,0002 m³	White	188058	7
R	0,070 Kg	0,0002 m³	Black	188065	7

IP20 | POWER SUPPLY CENTRAL JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,220 Kg	0,0005 m³	White	227689	15
	0,220 Kg	0,0005 m³	Black	227672	15

IP20 | L-JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
L	0,130 Kg	0,0006 m³	White	188119	15
L	0,130 Kg	0,0006 m³	Black	188126	15
R	0,130 Kg	0,0006 m³	White	188096	15
R	0,130 Kg	0,0006 m³	Black	188102	15

IP20 | LINEAR JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,030 Kg	0,0001 m³	White	169637	7
	0,030 Kg	0,0001 m³	Black	169644	7

IP20 | TRACK ADAPTOR 3 POLES | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,080 Kg	0,0004 m³	White	194257	9
	0,080 Kg	0,0004 m³	Black	194301	9

link 3-phase trim DALI - 1-10v

IP20 | TRACK | Material: Aluminum





Length	Weight	Volume	Finish	Code	€
2000 mm	2,11 Kg	0,0042 m^3	White	246895	75
2000 mm	2,11 Kg	0,0042 m^3	Black	249629	75

RECESSED MOUNTING KIT | Material: Aluminum



Required	Finish	Code	€
Yes - 1 Kit x 1000 mm	Alluminio	188195	5


END CAP | Material: Aluminum

Required	Finish	Code	€
Yes	White	169613	2
Yes	Black	169620	2

link 3-phase trim DALI - 1-10v

IP20 | POWER SUPPLY END | Material: Aluminum






	Weight	Volume	Finish	Code	€
L	0,090 Kg	0,0003 m³	White	256085	10
L	0,090 Kg	0,0003 m³	Black	256078	10
R	0,090 Kg	0,0003 m³	White	256146	10
R	0,090 Kg	0,0003 m³	Black	256122	10

IP20 | POWER SUPPLY CENTRAL JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,150 Kg	0,0005 m³	White	256115	25
	0,150 Kg	0,0005 m³	Black	256092	25

IP20 | L-JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
L	0,150 Kg	0,0005 m³	White	256030	25
L	0,150 Kg	0,0005 m³	Black	255996	25
R	0,150 Kg	0,0005 m³	White	256061	25
R	0,150 Kg	0,0005 m³	Black	256047	25

IP20 | LINEAR JOINT | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,050 Kg	0,0001 m³	White	246567	9
	0,050 Kg	0,0001 m³	Black	246550	9

IP20 | TRACK ADAPTOR 5 POLES | Material: Aluminum






	Weight	Volume	Finish	Code	€
	0,070 Kg	0,0002 m³	White	246505	15
	0,070 Kg	0,0002 m³	Black	246499	15

ZEUS



zeus source





IP20 | UGR <19 | MacAdam: SDCM 3 | 50.000 h life | Light beam: ACCENT | PRO Material: Aluminum | DIY




Power	Installation	Beam	CRI	Source
13W	Recessed	40°	≥90	LED COB CITIZEN


Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	2700 K	Grey	324807	66
On-Off	1050 lm	3000 K	Grey	324814	66
On-Off	1150 lm	4000 K	Grey	324821	66

DIMMABLE DRIVER* | Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	21 W	350 mA	125x26x45 mm	324906	26
DALI/Push	20 W	350 mA	120x29x51 mm	324913	46



Photometry



m	lx	øm
1	1714	0,76
2	429	1,50
3	190	2,30
4	107	3,10
5	69	3,80

Driver

Required - ON/OFF included

0,300 Kg/0,0015 m³

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. ** Lens 40° included.






IP20 | UGR <19 | MacAdam: SDCM 3 | 50.000 h life | Light beam: ACCENT | PRO | Material: Aluminum | DIY



Power	Installation	Beam	CRI	Source
21W	Recessed	40°	≥90	LED COB CITIZEN


Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	2700 K	Grey	324838	106
On-Off	2100 lm	3000 K	Grey	324845	106
On-Off	2300 lm	4000 K	Grey	324852	106

DIMMABLE DRIVER* | Optional



Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	500 mA	110x22x52 mm	324920	61
DALI/Push	20 W	500 mA	120x29x51 mm	324937	71

Photometry



m	lx	øm
1	3174	0,81
2	794	1,60
3	353	2,40
4	198	3,20
5	127	4,00

Driver

Required - ON/OFF included

0,590 Kg/0,0032 m³

LENS 20°



Required	Model	Finish	Code	€
No	13W	Clear	323688	4
No	21W	Clear	323985	6

HONEYCOMB



Required	Model	Finish	Code	€
No	13W	Black	323671	4
No	21W	Black	323961	6

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. ** Lens 40° included.










Modular system of recessed elements consisting of an adjustable source, reflector and round or square ring, with optional shielding lenses and accessories; white and black finish; ring available in TRIM version with frame or TRIMLESS without frame for installation in plasterboard false ceilings; two different emission angles to choose from. Suitable for installations in indoor environments in the SERVICES and RETAIL sectors.

zeus round

TRIM ROUND FRAME






70 mm

0,100 Kg/0,0002 m³

Model	Installation
13W	Recessed

Finish	Code	€
White	324869	15
Black	323527	15






100 mm

0,130 Kg/0,0005 m³

Model	Installation
21W	Recessed

Finish	Code	€
White	324883	18
Black	324005	18

TRIMLESS ROUND FRAME




73 mm

0,120 Kg/0,0005 m³

Model	Installation
13W	Recessed

Finish	Code	€
White	323541	18



105 mm


0,160 Kg/0,0008 m³

Model	Installation
21W	Recessed

Finish	Code	€
White	323725	35

ROUND REFLECTOR	Required






0,030 Kg/0,0003 m³

Model	Installation
13W	Recessed

Finish	Code	€
White	323589	8
Black	323619	8
Gold	323602	8





0,040 Kg/0,0007 m³

Model	Installation
21W	Recessed


Finish	Code	€
White	323763	12
Black	323770	12
Gold	323794	12





zeus square


TRIM SQUARE FRAME



68X68 mm | 0,100 Kg/0,0003 m³

Model	Installation
13W	Recessed

Finish	Code	€
White	324876	15
Black	323534	15




96X96 mm | 0,140 Kg/0,0010 m³

Model	Installation
21W	Recessed

Finish	Code	€
White	324890	18
Black	323718	18


TRIMLESS SQUARE FRAME



68X68 mm | 0,120 Kg/0,0005 m³

Model	Installation
13W	Recessed

Finish	Code	€
White	323558	18




96X96 mm | 0,160 Kg/0,0008 m³

Model	Installation
21W	Recessed

Finish	Code	€
White	323732	35

SQUARE REFLECTOR | Required






0,030 Kg/0,0003 m³

Model	Installation
13W	Recessed

Finish	Code	€
White	323633	8
Black	323657	8
Gold	323640	8





0,050 Kg/0,0007 m³

Model	Installation
21W	Recessed

Finish	Code	€
White	323800	12
Black	323817	12
Gold	323831	12










GAME



game trim round

IP20 | UGR <19 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum




Power	Installation	Beam	CRI
5W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	650 lm	3000 K	+ White	337142	35
On-Off	650 lm	3000 K	+ Gold	349084	35

50 mm

0,200 Kg/0,0009 m³






Control	Lumen	CCT	Finish	Code	€
On-Off	650 lm	3000 K	+ Black	349060	35
On-Off	650 lm	3000 K	+ Gold	349077	35

50 mm

0,200 Kg/0,0010 m³

Photometry



m	lx	øm
1	1125	0,72
2	281	1,40
3	125	2,20
4	70	2,90
5	45	3,60

Driver

ON/OFF included










game trim round


IP20 | UGR <19 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum

Power	Installation	Beam	CRI
11W	Recessed	36°	≥90



Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	2700 K	+ White	285429	45
On-Off	950 lm	3000 K	+ White	192291	45
On-Off	950 lm	3000 K	+ Black	192277	45
On-Off	950 lm	3000 K	+ Gold	192307	45
On-Off	1100 lm	4000 K	+ White	267975	45
On-Off	1100 lm	4000 K	+ Gold	341361	45


75 mm | 0,350 Kg/0,0016 m³



Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	2700 K	Black + Black	285412	45
On-Off	950 lm	3000 K	Black + White	192338	45
On-Off	950 lm	3000 K	Black + Black	192314	45
On-Off	950 lm	3000 K	Black + Gold	192345	45
On-Off	1100 lm	4000 K	Black + Black	267968	45
On-Off	1100 lm	4000 K	Black + Gold	341354	45

75 mm | 0,350 Kg/0,0016 m³

Photometry



m	lx	øm
1	1545	0,69
2	386	1,38
3	171	2,07
4	96	2,77
5	61	3,46

Driver

ON/OFF included

IP65 | UGR <19 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	+ White	313191	75
On-Off	950 lm	3000 K	Black + Black	327754	75

DIMMABLE DRIVER* - Optional

Model	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	250 mA	111 x 22 x 52 mm	217253	60
DALI/Push	12 W	250 mA	132 x 20 x 30 mm	202396	60


*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



game trim round

IP20 | UGR <19 | LED COB | 50.000 h life | Light beam: SPOT | Material: Aluminum






110 mm | 0,660 Kg/0,0016 m³

Power	Installation	Beam	CRI
20W	Recessed	27°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2250 lm	3000 K	+ White	273174	90
On-Off	2250 lm	3000 K	+ Gold	341422	90






110 mm | 0,660 Kg/0,0016 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	2250 lm	3000 K	+ Black	273167	90
On-Off	2250 lm	3000 K	+ Gold	341415	90

Photometry



m	lx	ø m
1	8645	0,41
2	2161	0,83
3	961	1,20
4	540	1,70
5	346	2,10


Driver

ON/OFF included

game trim square

IP20 | UGR <19 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum


Power	Installation	Beam	CRI
11W	Recessed	36°	≥90



75X75 mm | 0,310 Kg/0,0016 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	192376	50
On-Off	950 lm	3000 K	Black	192352	50






75x75 mm | 0,310 Kg/0,0016 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	192406	50
On-Off	950 lm	3000 K	Black	192383	50

Photometry



m	lx	øm
1	1545	0,69
2	386	1,38
3	171	2,07
4	96	2,77
5	61	3,46

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Model	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	250 mA	111 x 22 x 52 mm	217253	60
DALI/Push	12 W	250 mA	132 x 20 x 30 mm	202396	60

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.










game trimless

IP20 | UGR <19 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum






75 mm | 0,300 Kg/0,0012 m³

Power	Installation	Beam	CRI
11W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	319667	50
On-Off	950 lm	3000 K	Black	319650	50






75X75 mm | 0,300 Kg/0,0012 m³

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	319681	50
On-Off	950 lm	3000 K	Black	319674	50

Photometry



m	lx	øm
1	1609	0,60
2	402	1,20
3	179	1,80
4	101	2,40
5	64	3,00

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Model	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	250 mA	111 x 22 x 52 mm	217253	60
DALI/Push	12 W	250 mA	132 x 20 x 30 mm	202396	60






*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



TAG

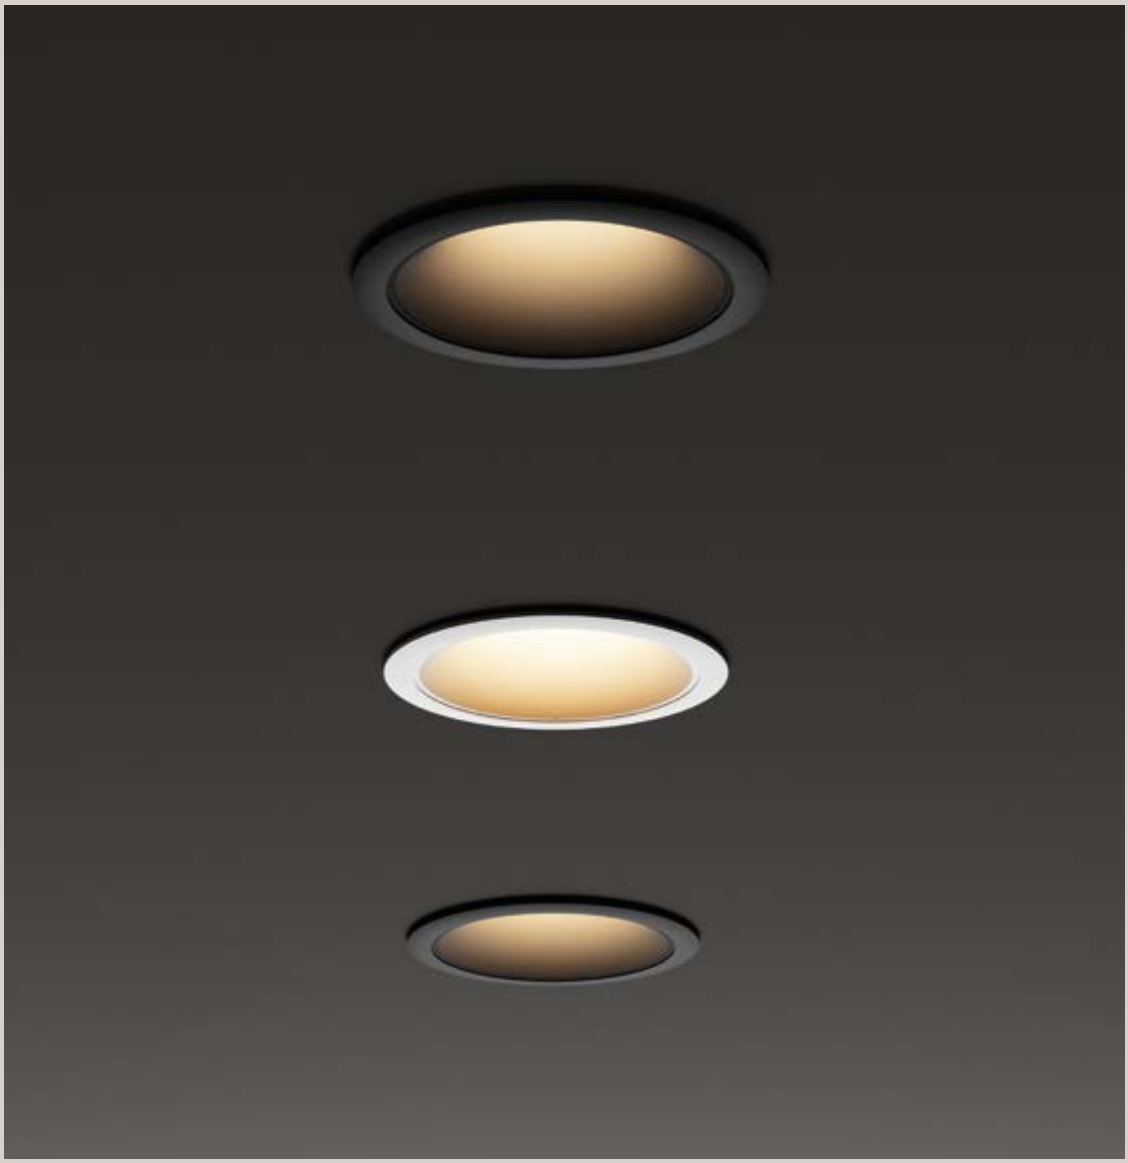

tag

IP20 | LED DOB | 30.000 h life | Light beam: ACCENT | Material: Aluminum








Power	Installation	Beam	CRI
7W	Recessed	50°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	740 lm	2700 K	White	344850	15
On-Off	740 lm	2700 K	Black	344843	15
On-Off	750 lm	3000 K	White	331263	15
On-Off	750 lm	3000 K	Black	331256	15
On-Off	800 lm	4000 K	White	344874	15
On-Off	800 lm	4000 K	Black	344867	15

Photometry



m	lx	øm
1	838	0,98
2	209	2,00
3	93	2,90
4	52	3,90
5	34	4,90

Driver

ON/OFF included

75 mm

0,140 Kg/0,0010 m³








QUARK



quark

IP20 | LED SMD | 50.000 h life | Light beam: SPOT | Material: Aluminum




18 mm | 0,020 Kg/0,0004 m³

Power	Installation	Beam	CRI
2,8W	Recessed	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	160 lm	3000 K	White	327471	30
On-Off	160 lm	3000 K	Black	305844	30


Photometry



m	lx	øm
1	368	0,39
2	92	0,77
3	41	1,20
4	23	1,50
5	15	1,90

Driver

ON/OFF included




25 mm | 0,070 Kg/0,0004 m³

Power	Installation	Beam	CRI
3W	Recessed	25°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	230 lm	3000 K	White	327488	35
On-Off	230 lm	3000 K	Black	305851	35


Photometry



m	lx	øm
1	1220	0,35
2	305	0,70
3	136	1,00
4	76	1,40
5	49	1,70

Driver

ON/OFF included




35 mm | 0,140 Kg/0,0005 m³

Power	Installation	Beam	CRI
5W	Recessed	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	510 lm	3000 K	White	307756	50
On-Off	510 lm	3000 K	Black	327495	50

Photometry



m	lx	øm
1	919	0,49
2	230	0,98
3	102	1,50
4	57	2,00
5	37	2,40


Driver

ON/OFF included








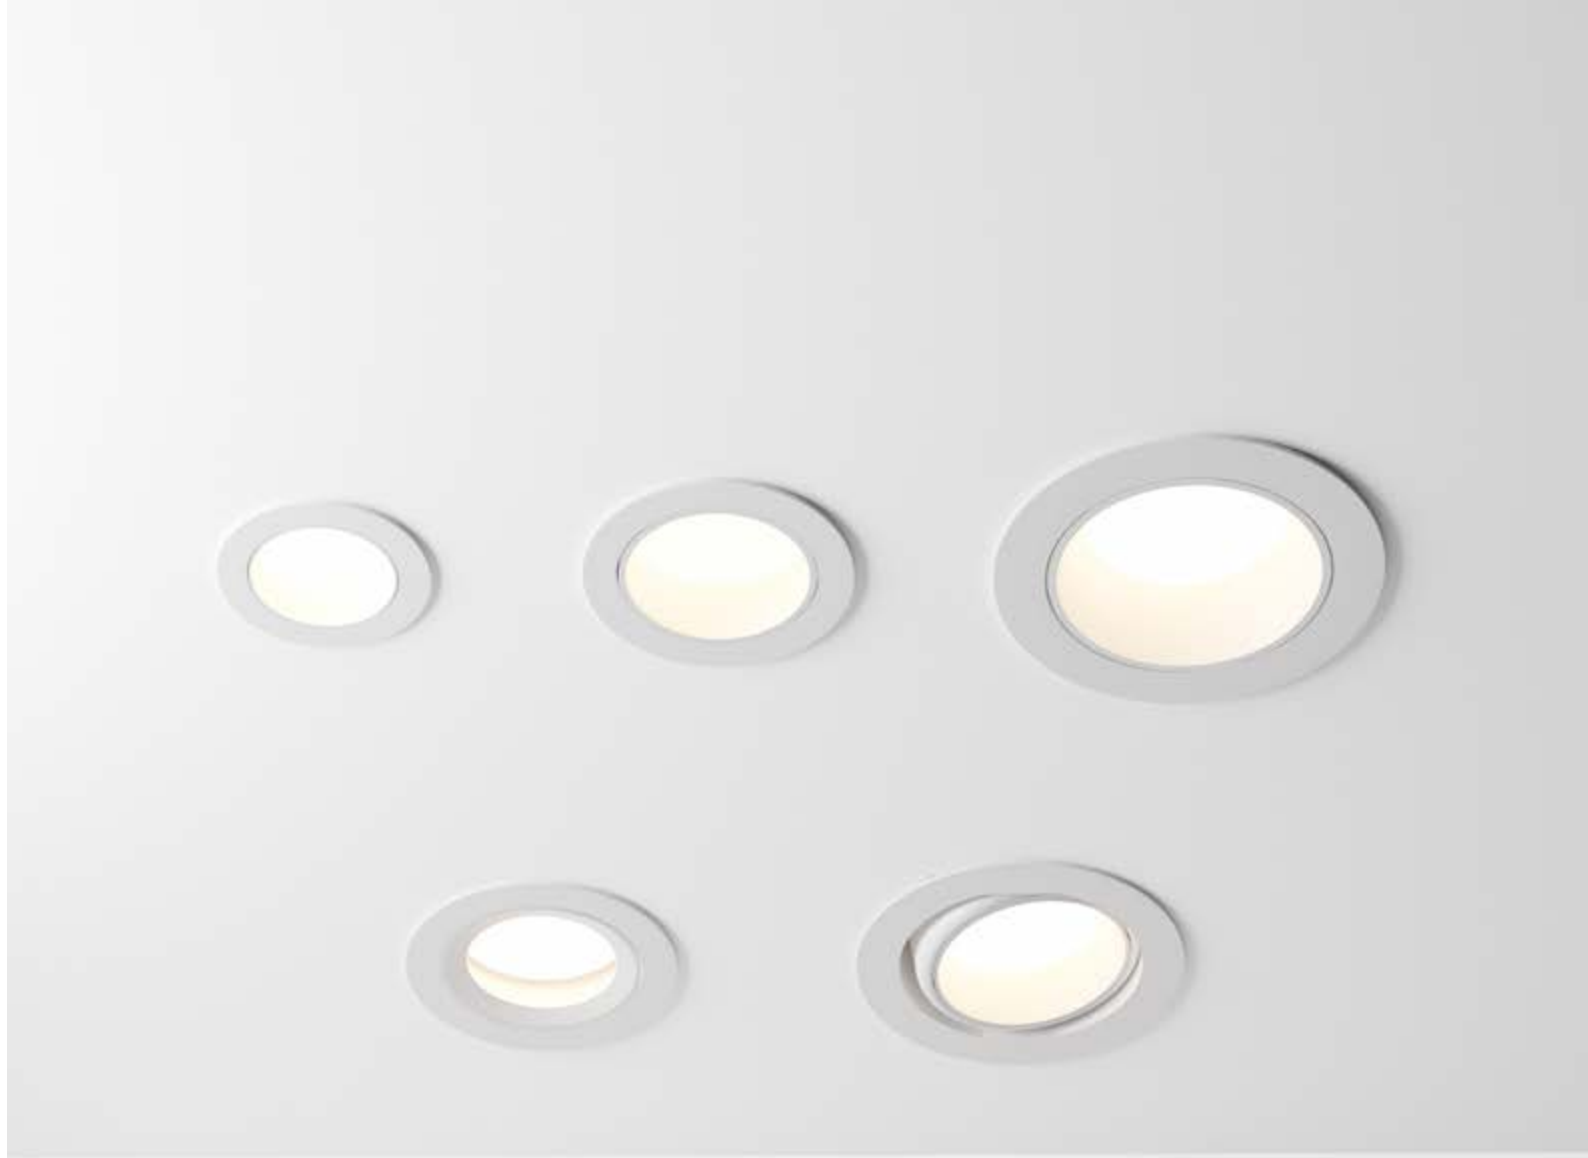

quark

IP20 | LED COB | 50.000 h life | Light beam: SPOT | Material: Aluminum






45 mm

0,190 Kg/0,0009 m³

Power	Installation	Beam	CRI
9W	Recessed	25°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	344836	55
On-Off	950 lm	3000 K	Black	322889	55





20°


52 mm

0,210 Kg/0,0009 m³

Power	Installation	Beam	CRI
9W	Recessed	25°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	344829	60
On-Off	950 lm	3000 K	Black	322971	60

Photometry



m	lx	øm
1	2760	0,48
2	690	0,97
3	306	1,46
4	172	1,95
5	110	2,92

Driver

ON/OFF included






322971

quark


IP20 | LED COB | 50.000 h life | Light beam: SPOT | Material: Aluminum



45 mm | 0,190 Kg/0,0009 m³

Power	Installation	Beam	CRI
12W	Recessed	25°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	White	344812	60
On-Off	1200 lm	3000 K	Black	322919	60




20° | 52 mm | 0,250 Kg/0,0009 m³

Power	Installation	Beam	CRI
12W	Recessed	25°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	White	344805	65
On-Off	1200 lm	3000 K	Black	323008	65

Photometry



m	lx	øm
1	3914	0,48
2	978	0,96
3	434	1,44
4	244	1,92
5	156	2,40

Driver

ON/OFF included

322919




INFINITY





infinity trim

IP20 | LED COB | 50.000 h life | Light beam: SPOT | Material: Aluminum




55 mm | 0,140 Kg/0,0009 m³

Power	Installation	Beam	CRI
7W	Recessed	28°	≥95

Control	Lumen	CCT	Finish	Code	€
On-Off	530 lm	3000 K	White	356105	26
On-Off	530 lm	3000 K	Black	355702	26

Photometry




m	lx	øm
1	1362	0,44
2	340	0,88
3	151	1,30
4	85	1,80
5	54	2,20

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28




75 mm | 0,350 Kg/0,0012 m³

Power	Installation	Beam	CRI
12W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	White	356112	28
On-Off	1050 lm	3000 K	Black	368740	28

Photometry



m	lx	øm
1	2150	0,63
2	538	1,20
3	239	1,80
4	134	2,50
5	86	3,10


Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28




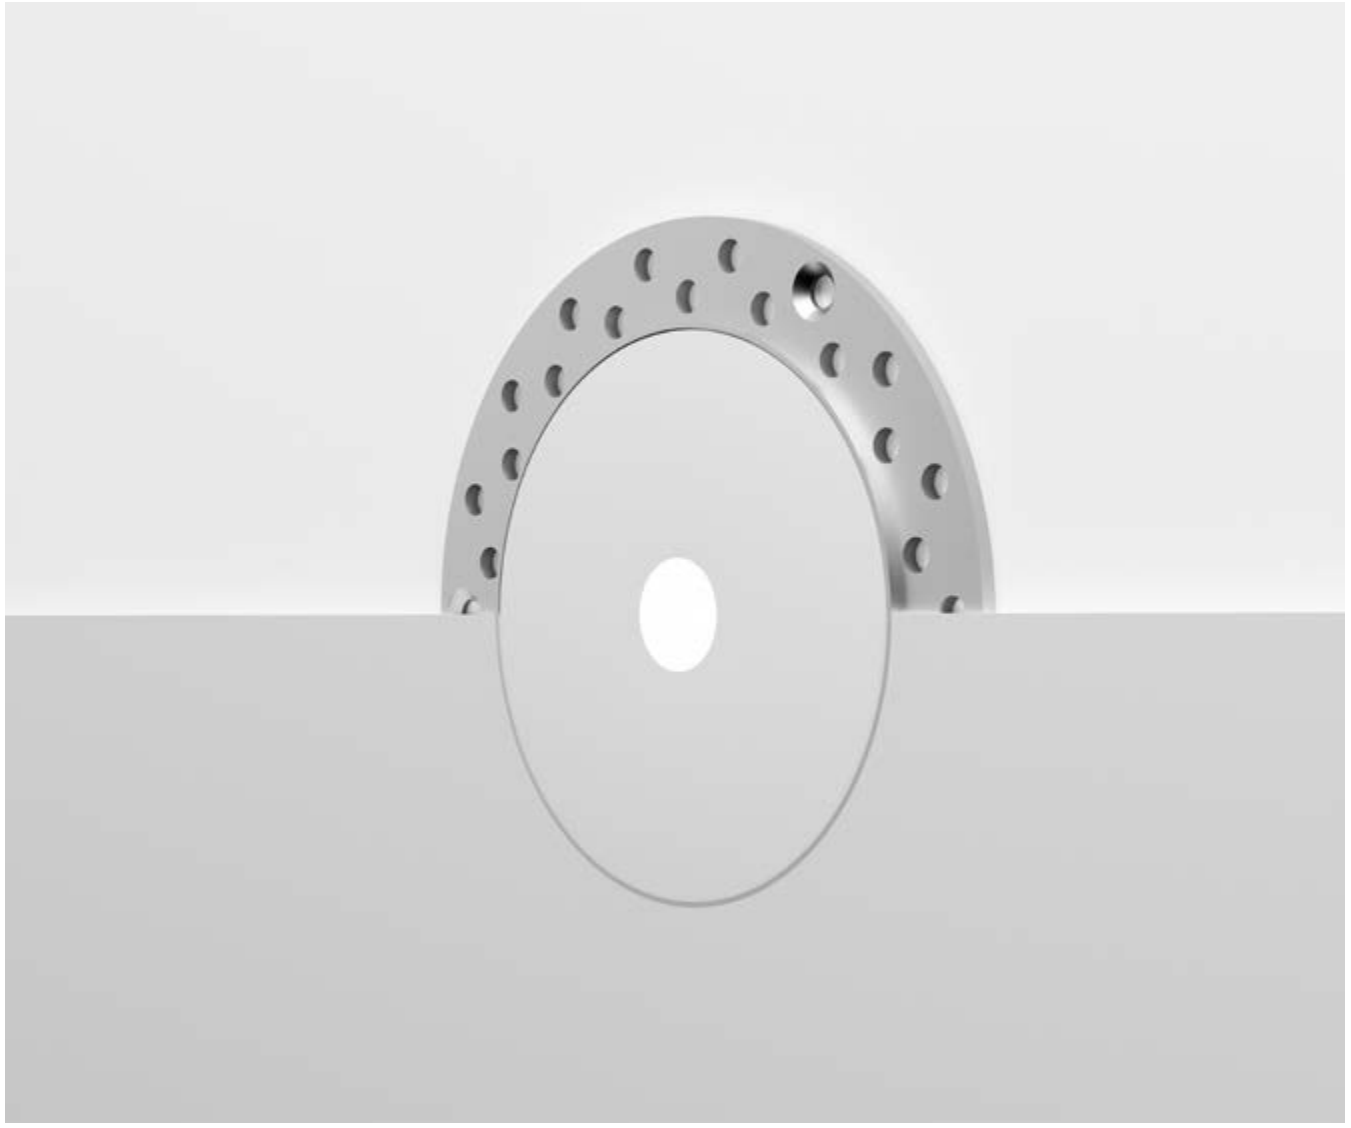

infinity trimless

IP20 | LED COB | 50.000 h life | Light beam: SPOT | Material: Aluminum






60 mm

0,170 Kg/0,0007 m³

Power	Installation	Beam	CRI
7W	Recessed	28°	≥95

Control	Lumen	CCT	Finish	Code	€
On-Off	530 lm	3000 K	White	356136	29
On-Off	530 lm	3000 K	Black	356129	29

Photometry



m	lx	øm
1	1362	0,44
2	340	0,88
3	151	1,30
4	85	1,80
5	54	2,20


Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28






80 mm

0,380 Kg/0,0014 m³

Power	Installation	Beam	CRI
12W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	White	356143	32
On-Off	1050 lm	3000 K	Black	368764	32

Photometry



m	lx	øm
1	2150	0,63
2	538	1,20
3	239	1,80
4	134	2,50
5	86	3,10

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	12 W	150 mA	122 x 25 x 40 mm	370088	22
DALI/Push	20 W	150 mA	40 x 22 x 88 mm	370156	28


OFF



off

IP54 | PRO | UGR <19 | MacAdam: SDCM 3 | 50.000 h life | Light beam: WIDE | Material: Aluminum






Power	Installation	Beam	CRI	Source
15W	Recessed	50°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	1300 lm	3000 K	White	266497	87
On-Off	1300 lm	3000 K	Black	266558	87
On-Off	1400 lm	4000 K	White	266503	87
On-Off	1400 lm	4000 K	Black	266565	87

Photometry




m	lx	øm
1	1688	0,93
2	422	1,90
3	188	2,80
4	105	3,70
5	68	4,60

Driver

ON/OFF included

100 mm | 0,460 Kg/0,0022 m³






Power	Installation	Beam	CRI	Source
28W	Recessed	60°	≥90	LED COB CITIZEN

Control	Lumen	CCT	Finish	Code	€
On-Off	2650 lm	3000 K	White	266510	130
On-Off	2650 lm	3000 K	Black	266572	130
On-Off	3100 lm	4000 K	White	266527	130
On-Off	3100 lm	4000 K	Black	266589	130

Photometry



m	lx	øm
1	2457	1,30
2	614	2,50
3	273	3,80
4	154	5,10
5	98	6,40

Driver

ON/OFF included

150 mm | 0,990 Kg/0,0046 m³








Unmovable aluminum recessed fitting with round ring in three different dimensions, suitable for plasterboard ceilings installation.

Suited for OFFICES and MANAGERIAL environments and in general where computers are present and there is the necessity to guarantee a great glare control. The high color rendering level makes it ideal even for exhibiting spaces and for the enhancement of the products in a showroom and sales area of the RETAIL sector.




DEEP

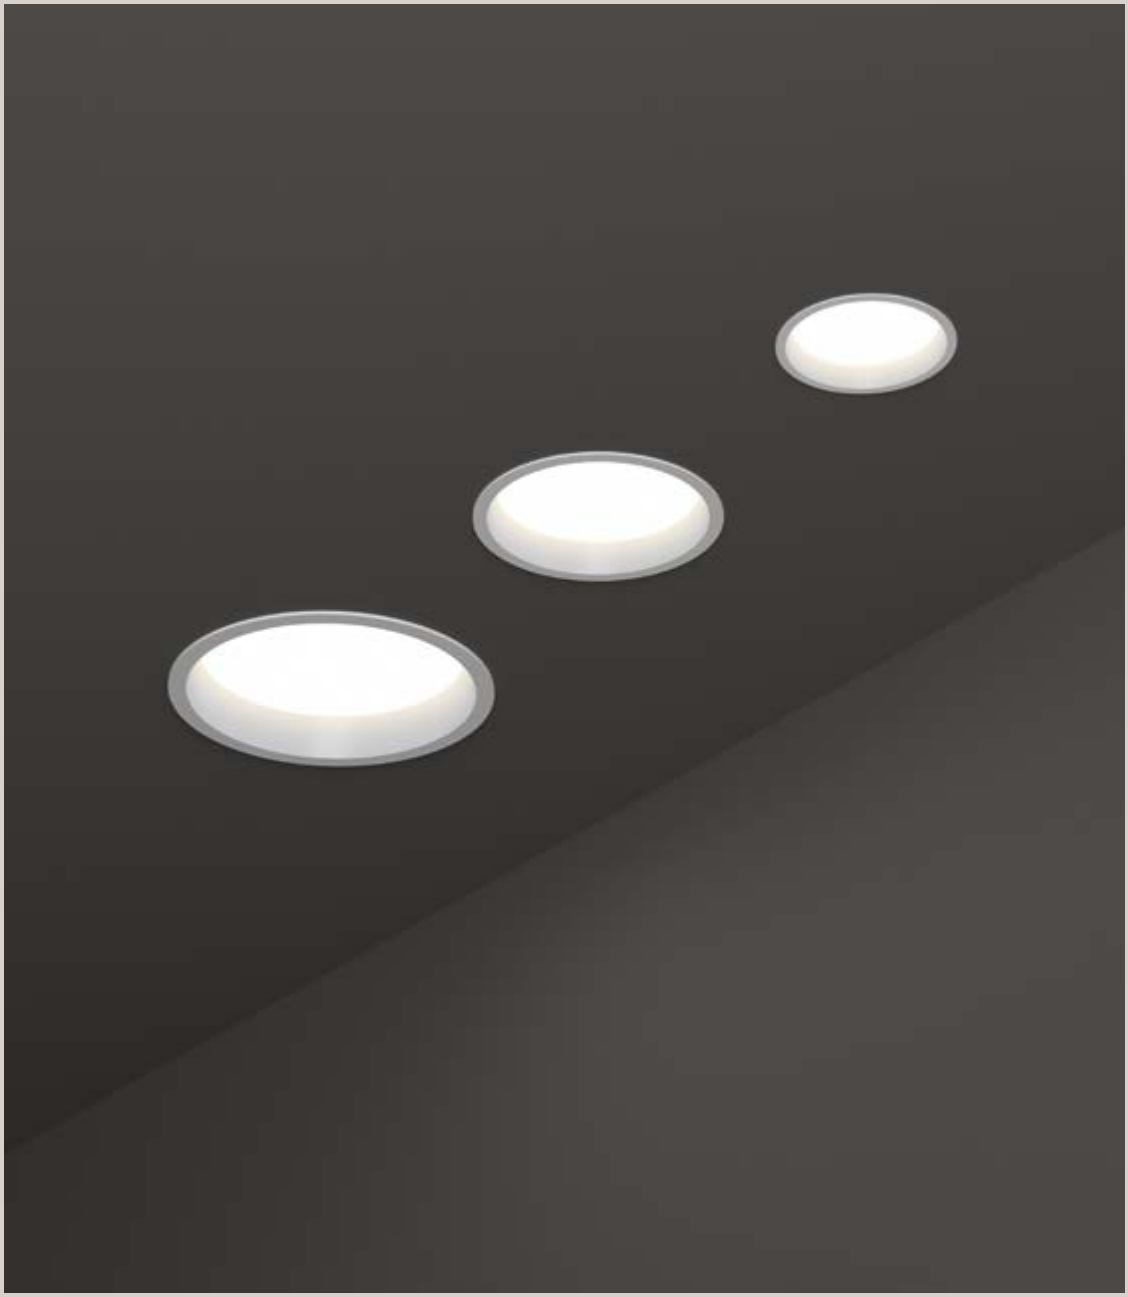

deep

IP20 | LED SMD | 50.000 h life | Light beam: WIDE | Material: Aluminum






Power	Installation	Beam	CRI
10W	Recessed	70°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1450 lm	3000 K	White	249018	35
On-Off	1600 lm	4000 K	White	249025	35

Photometry




m	lx	øm
1	625	1,43
2	156	2,86
3	69	4,30
4	39	5,73
5	25	7,16

Driver

ON/OFF included

90 mm | 0,280 Kg/0,0016 m³






Power	Installation	Beam	CRI
20W	Recessed	77°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3000 lm	3000 K	White	249032	70
On-Off	3300 lm	4000 K	White	249049	70

Photometry




m	lx	øm
1	1056	1,60
2	264	3,20
3	117	4,81
4	66	6,41
5	42	8,01

Driver

ON/OFF included

145 mm | 0,360 Kg/0,0040 m³






Power	Installation	Beam	CRI
30W	Recessed	77°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	4650 lm	3000 K	White	248783	90
On-Off	4850 lm	4000 K	White	248790	90

Photometry



m	lx	øm
1	1644	1,60
2	411	3,20
3	183	4,81
4	103	6,41
5	66	8,01

Driver

ON/OFF included

200 mm | 0,650 Kg/0,0052 m³


BASIC



basic wide

IP44 | MacAdam: SDCM 3 | 30.000 h life | Light beam: WIDE | Material: Aluminum






90 mm | 0,370 Kg/0,0017 m³

Power	Installation	Beam	CRI
10W	Recessed	85°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1100 lm	3000 K	White	193519	65

Photometry




m	lx	øm
1	188	1,84
2	47	3,69
3	20	5,54
4	11	7,39
5	7	9,24

Driver

ON/OFF included






125 mm | 0,630 Kg/0,0027 m³

Power	Installation	Beam	CRI
15W	Recessed	87°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1550 lm	3000 K	White	193526	80

Photometry



m	lx	øm
1	318	1,72
2	79	3,44
3	35	5,17
4	19	6,89
5	12	8,61


Driver

ON/OFF included

Power	Installation	Beam	CRI
20W	Recessed	87°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2150 lm	3000 K	White	193533	85

Photometry



m	lx	øm
1	876	2,00
2	219	3,90
3	97	5,90
4	55	7,80
5	35	9,80

Driver

ON/OFF included

Die-cast aluminum recessed spotlight with round seal. Suitable for the installation on plasterboard ceiling.













basic accent

IP44 | MacAdam: SDCM 3 | 30.000 h life | Light beam: ACCENT | Material: Aluminum




90 mm | 0,400 Kg/0,0017 m³

Power	Installation	Beam	CRI
10,5W	Recessed	45°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	White	193458	68


Photometry



m	lx	øm
1	533	0,81
2	133	1,62
3	59	2,44
4	33	3,25
5	21	4,07

Driver

ON/OFF included




90 mm | 0,400 Kg/0,0017 m³

Power	Installation	Beam	CRI
15W	Recessed	52°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1450 lm	3000 K	White	193465	85

Photometry



m	lx	øm
1	719	0,98
2	179	1,96
3	79	2,95
4	44	3,93
5	28	4,92


Driver

ON/OFF included

Power	Installation	Beam	CRI
20W	Recessed	52°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1950 lm	3000 K	White	193472	90

Photometry




m	lx	øm
1	1779	0,76
2	445	1,50
3	198	2,30
4	111	3,10
5	71	3,80

Driver

ON/OFF included

125 mm | 0,660 Kg/0,0027 m³


GROOVE

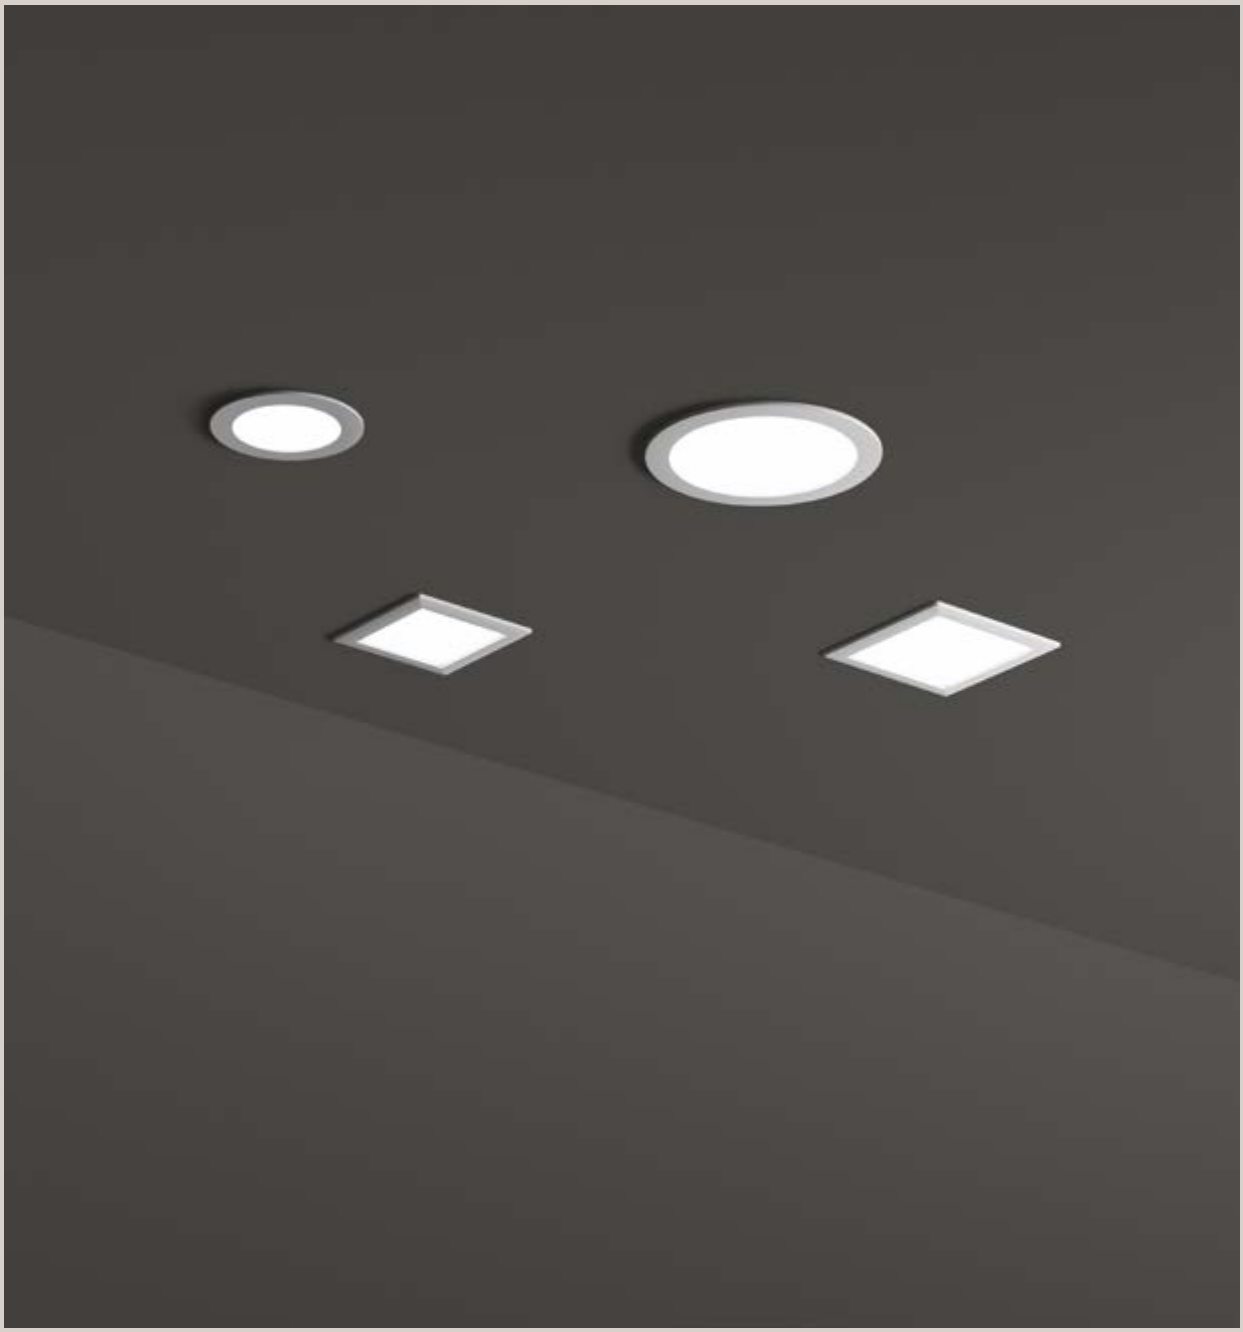

groove

IP40 | 30.000 h life | Light beam: WIDE | Material: Aluminum






100 mm | 0,220 Kg/0,0012 m³

Power	Installation	Beam	CRI	Source
10W	Recessed	110°	≥80	LED SMD

	Lumen	CCT	Finish	Code	€
	1250 lm	3000 K	White	123974	29
	1350 lm	4000 K	White	147666	29

Photometry




m	lx	om
1	247	2,80
2	62	5,60
3	27	8,50
4	15	11,00
5	9,9	14,00

Driver

included






150 mm | 0,410 Kg/0,0024 m³

Power	Installation	Beam	CRI	Source
20W	Recessed	110°	≥80	LED SMD

	Lumen	CCT	Finish	Code	€
	2600 lm	3000 K	White	123998	35
	2700 lm	4000 K	White	147673	35


Photometry



m	lx	om
1	512	2,80
2	128	5,60
3	57	8,50
4	32	11,00
5	20	14,00

Driver

included




205 mm | 0,660 Kg/0,0036 m³

Power	Installation	Beam	CRI	Source
30W	Recessed	110°	≥80	LED SMD

	Lumen	CCT	Finish	Code	€
	3800 lm	3000 K	White	124018	46
	4050 lm	4000 K	White	147680	46

Photometry



m	lx	om
1	802	2,80
2	200	5,60
3	89	8,50
4	50	11,00
5	32	14,00

Driver

included







10W
Ø118



20W
Ø168



30W
Ø227



30W
205



20W
150




10W
100



groove

IP40 | 30.000 h life | Light beam: WIDE | Material: Aluminum




100X100 mm | 0,270 Kg/0,0012 m³

Power	Installation	Beam	CRI	Source
10W	Recessed	110°	≥80	LED SMD

	Lumen	CCT	Finish	Code	€
	1200 lm	3000 K	White	123981	30


Photometry



m	lx	om
1	251	2,80
2	63	5,60
3	28	8,50
4	16	11,00
5	10	14,00

Driver

Included




150X150 mm | 0,540 Kg/0,0022 m³

Power	Installation	Beam	CRI	Source
20W	Recessed	110°	≥80	LED SMD

	Lumen	CCT	Finish	Code	€
	2450 lm	3000 K	Bianco	124001	36


Photometry



m	lx	om
1	530	2,80
2	132	5,60
3	59	8,50
4	33	11,00
5	21	14,00

Driver

Included




205X205 mm | 0,850 Kg/0,0036 m³

Power	Installation	Beam	CRI	Source
30W	Recessed	110°	≥80	LED SMD

	Lumen	CCT	Finish	Code	€
	3900 lm	3000 K	Bianco	124025	49

Photometry



m	lx	om
1	795	2,80
2	199	5,60
3	88	8,50
4	50	11,00
5	32	14,00

Driver

Included


PLAY



play

IP20 | LED COB | 50.000 h life | Light beam: SPOT | Material: Aluminum






Power	Installation	Beam	CRI
7W	Recessed	16°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	520 lm	3000 K	White	258270	61
On-Off	520 lm	3000 K	Black	268088	61
On-Off	560 lm	4000 K	White	364766	61
On-Off	560 lm	4000 K	Black	370835	61

90°	355°	45 mm	0,220 Kg 0,0010 m³

Photometry




m	lx	øm
1	2632	0,31
2	658	0,63
3	292	0,94
4	164	1,30
5	105	1,60

Driver

ON/OFF included






Power	Installation	Beam	CRI
13W	Recessed	18°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	White	364674	64
On-Off	900 lm	3000 K	Black	364667	64
On-Off	1050 lm	4000 K	White	370880	64
On-Off	1050 lm	4000 K	Black	370866	64

90°	355°	45 mm	0,240 Kg 0,0010 m³

Photometry



m	lx	øm
1	7506	0,25
2	1876	0,50
3	834	0,75
4	469	1,00
5	300	1,20

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
DALI/Push	7 W	150 mA	142 x 20 x 22 mm	370736	50
DALI/Push	12 W	300 mA	85 x 21 x 40 mm	370804	55

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.


BEYOND



beyond

IP40 | MacAdam: SDCM 3 | 50.000 h life | Light beam: SPOT | Source: LED COB | Material: Aluminum






30° | 0,070 Kg 0,0004 m³

Power	Installation	Beam	CRI
7W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	700 lm	3000 K	White	355894	65
On-Off	700 lm	3000 K	Black	355887	65

Photometry




m	lx	øm
1	1152	0,66
2	288	1,30
3	128	2,00
4	72	2,60
5	46	3,30

Driver

ON/OFF included


FRAME TRIM - Required



40 mm | 0,080 Kg/0,0017 m³

Finish	Code	€
White	355863	23
Black	355856	23


FRAME TRIMLESS - Required



40 mm | 0,080 Kg/0,0017 m³

Finish	Code	€
White	355849	23

FRAME GYPSUM - Required

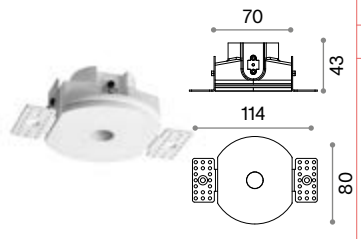

80 mm | 0,150 Kg/0,0031 m³

Finish	Code	€
White	355870	37



355863





355849






355870



beyond

IP40 | MacAdam: SDCM 3 | 50.000 h life | Light beam: SPOT | Source: LED COB | Material: Aluminum






30° | 0,230 Kg 0,0063 m³

Power	Installation	Beam	CRI
10W	Recessed	36°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	950 lm	3000 K	White	355986	111
On-Off	950 lm	3000 K	Black	355979	111

Photometry




m	lx	øm
1	1971	0,65
2	493	1,30
3	219	1,90
4	123	2,60
5	79	3,20

Driver

ON/OFF included


FRAME TRIM SINGLE - Required



75 mm | 0,120 Kg/0,0040 m³

Finish	Code	€
White	370064	29
Black	355900	29


FRAME TRIM TWIN - Required

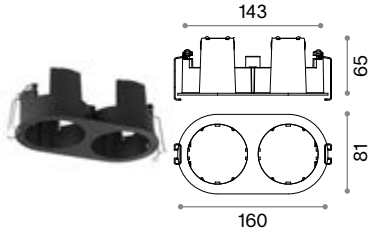

147X75 mm | 0,430 Kg/0,0056 m³

Finish	Code	€
White	355931	57
Black	370026	57

FRAME TRIMLESS - Required



105 mm | 0,240 Kg/0,0044 m³

Finish	Code	€
White	355948	37

NOVA




nova

IP20 | UGR <19 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum

Power	Installation	Beam	CRI
6W	Recessed	28°	≥90






Control	Lumen	CCT	Finish	Code	€
On-Off	530 lm	3000 K	White	364339	80
On-On	530 lm	3000 K	Black	364360	80
On-Off	590 lm	4000 K	White	364353	80
On-Off	590 lm	4000 K	Black	370132	80

90° | 360° | 55 mm | 0,250 Kg 0,0010 m³

Photometry



m	lx	øm
1	1640	0,48
2	410	0,96
3	182	1,40
4	103	1,90
5	66	2,40

Driver

ON/OFF included


DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	12 W	150 mA	135 x 20 x 30 mm	370040	50
DALI/Push	8 W	150 mA	119 x 20 x 22 mm	364384	55

IP20 | UGR <19 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum

Power	Installation	Beam	CRI
12W	Recessed	38°	≥90






Control	Lumen	CCT	Finish	Code	€
On-Off	1300 lm	3000 K	White	248165	85
On-Off	1300 lm	3000 K	Black	248189	85
On-Off	1400 lm	4000 K	White	267937	85
On-Off	1400 lm	4000 K	Black	267920	85

90° | 360° | 90 mm | 0,554 Kg 0,0016 m³

Photometry



m	lx	øm
1	1768	0,66
2	442	1,32
3	196	1,97
4	111	2,63
5	71	3,29

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	15 W	300 mA	111 x 22 x 52 mm	243993	60
DALI/Push	12 W	300 mA	132 x 20 x 30 mm	243986	65

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.












nova

IP20 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum






Power	Installation	Beam	CRI
20W	Recessed	56°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1950 lm	3000 K	White	364407	113
On-Off	1950 lm	3000 K	Black	364438	113
On-Off	2100 lm	4000 K	White	364421	113
On-Off	2100 lm	4000 K	Black	370187	113

90° | 360° | 140 mm | 1,200 Kg 0,0045 m³

Photometry



m	lx	øm
1	3752	0,63
2	938	1,30
3	417	1,90
4	235	2,50
5	150	3,20

Driver


ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	20 W	500 mA	108 x 22 x 52 mm	370101	75
DALI/Push	35 W	500 mA	135 x 20 x 72 mm	364452	80

IP20 | UGR <22 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum






Power	Installation	Beam	CRI
30W	Recessed	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	3000 lm	3000 K	White	248172	125
On-Off	3000 lm	3000 K	Black	248196	125
On-Off	3300 lm	4000 K	White	267951	125
On-Off	3300 lm	4000 K	Black	267944	125

90° | 360° | 140 mm | 1,160 Kg 0,0039 m³

Photometry



m	lx	øm
1	4671	0,64
2	1168	1,28
3	519	1,93
4	292	2,57
5	187	3,21

Driver


ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V/Push	36 W	700 mA	167 x 32 x 41 mm	248370	105
DALI/Push	36 W	700 mA	135 x 24 x 72 mm	248592	110


*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

LED PANEL

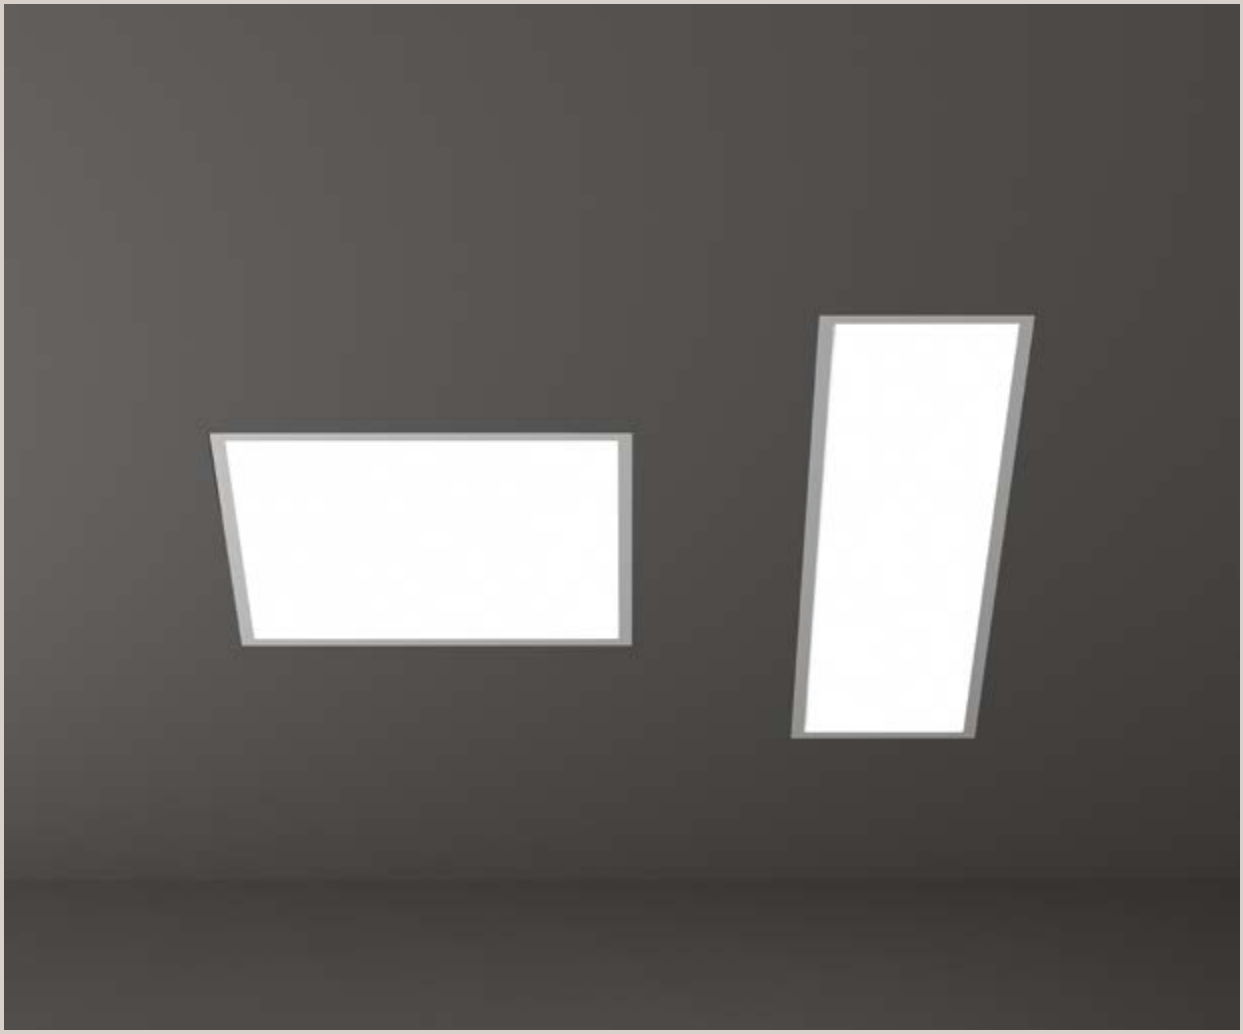

led panel

IP20 | UGR <19 | LED SMD | 30.000 h life | Light beam: WIDE | Material: Aluminum




1,560 Kg/0,0164 m³

Power	Installation	Beam	CRI
31W	Recessed	90°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	4550 lm	3000 K	White	363981	35
On-Off	4750 lm	4000 K	White	363974	35

Photometry



m	lx	øm
1	1632	1,90
2	408	3,90
3	181	5,80
4	102	7,80
5	65	9,70


Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	31 W	750 mA	50 x 30 x 142 mm	364025	28
DALI/Push	31 W	750 mA	70 x 30 x 106 mm	364018	61

IP20 | UGR <19 | LED SMD | 30.000 h life | Light beam: WIDE | Material: Aluminum



2,200 Kg/0,0144 m³


Power	Installation	Min Qty.	Beam	CRI
40W	Recessed	2 pieces	90°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	6000 lm	3000 K	White	246390	37
On-Off	6450 lm	4000 K	White	244181	37

Power	Installation	Min Qty.	Beam	CRI
40W	Recessed	2 pieces	90°	≥80

Control	Lumen	CCT	Finish	Code	€
On-Off	6700 lm	3000 K	White	249711	37
On-Off	7250 lm	4000 K	White	249728	37

Photometry



m	lx	øm
1	1798	2,00
2	450	3,90
3	200	5,90
4	112	7,90
5	72	9,80

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	42 W	1000 mA	125 x 26 x 83 mm	247854	29
DALI/Push	45 W	1000 mA	106 x 28 x 69 mm	247847	72

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

SUSPENSION KIT



Required	Cables	Cables lenght	Code	€
No	4	1000 mm	244198	10

RECESSED MOUNTING KIT



Required	Code	€
No	244204	10

RECESSED FRAME



Required	Code	€
No	267692	20

⓫
607X607 mm










led panel

IP20 | UGR <19 | LED SMD | 50.000 h life | Light beam: WIDE | Material: Aluminum






1,600 Kg/0,0159 m³

Power	Installation	Beam	CRI
40W	Recessed	90°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	6950 lm	3000 K	White	363998	42
On-Off	6700 lm	4000 K	White	364001	42

Photometry



m	lx	øm
1	1769	2,10
2	442	4,30
3	197	6,40
4	111	8,50
5	71	11,00

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	42 W	1000 mA	125 x 26 x 83 mm	247854	29
DALI/Push	45 W	1000 mA	106 x 28 x 69 mm	247847	72

SUSPENSION KIT



Required	Cables	Cables lenght	Code	€
No	4	1000 mm	244198	10

RECESSED MOUNTING KIT



Required	Code	€
No	244204	10

RECESSED FRAME



Required	Code	€
No	377773	23

327X1227 mm




LIKA



lika trim

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






68X37 mm | 0,130 Kg/0,0009 m³

Power	Installation	Beam	CRI
6W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	400 lm	3000 K	+ Black	206196	45
On-Off	460 lm	4000 K	+ Black	267869	45

Photometry




m	lx	øm
1	2331	0,51
2	583	1,00
3	259	1,50
4	146	2,00
5	93	2,50

Driver

ON/OFF included






100X38 mm | 0,250 Kg/0,0129 m³

Power	Installation	Beam	CRI
8W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	500 lm	3000 K	+ Black	367309	58
On-Off	540 lm	4000 K	+ Black	367316	58

Photometry



m	lx	øm
1	1419	0,51
2	355	1,00
3	158	1,50
4	89	2,00
5	57	2,50


Driver

ON/OFF included

lika trim

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






140X37 mm | 0,320 Kg/0,0014 m³

Power	Installation	Beam	CRI
12W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	3000 K	+ Black	206219	70
On-Off	1150 lm	4000 K	+ Black	267876	70

Photometry




m	lx	øm
1	2331	0,51
2	583	1,00
3	259	1,50
4	146	2,00
5	93	2,50

Driver

ON/OFF included






273X37 mm | 0,480 Kg/0,0022 m³

Power	Installation	Beam	CRI
20W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	+ Black	206233	110
On-Off	2250 lm	4000 K	+ Black	267883	110

Photometry



m	lx	øm
1	4696	0,51
2	1174	1,00
3	522	1,50
4	294	2,00
5	188	2,50

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Model	Control	Power	Output	Measure (L x H x W)	Code	€
6/8/12 W	DALI	12 W	700 mA	132 x 20 x 30 mm	267982	56
20 W	DALI/Push	25 W	600 mA	135 x 24 x 72 mm	268002	75

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.










lika trimless

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






75X70 mm | 0,220 Kg/0,0009 m³

Power	Installation	Beam	CRI
6W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	400 lm	3000 K	Black	206202	60
On-Off	460 lm	4000 K	Black	267890	60

Photometry




m	lx	øm
1	946	0,51
2	237	1,00
3	105	1,50
4	59	2,00
5	38	2,50

Driver

ON/OFF included






105X70 mm | 0,360 Kg/0,0129 m³

Power	Installation	Beam	CRI
8W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	500 lm	3000 K	+ Black	367347	75
On-Off	540 lm	4000 K	+ Black	369747	75

Photometry



m	lx	øm
1	1419	0,51
2	355	1,00
3	158	1,50
4	89	2,00
5	57	2,50

Driver

ON/OFF included






lika trimless

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






145X70 mm | 0,390 Kg/0,0014 m³

Power	Installation	Beam	CRI
12W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	3000 K	Black	206226	95
On-Off	1150 lm	4000 K	Black	267906	95

Photometry




m	lx	øm
1	2786	0,58
2	696	1,16
3	309	1,74
4	174	2,32
5	111	2,90

Driver

ON/OFF included






278X70 mm | 0,720 Kg/0,0022 m³

Power	Installation	Beam	CRI
20W	Recessed	29°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	Black	206240	150
On-Off	2250 lm	4000 K	Black	267913	150

Photometry



m	lx	øm
1	4696	0,51
2	1174	1,00
3	522	1,50
4	294	2,00
5	188	2,50

Driver

ON/OFF included

DIMMABLE DRIVER* - Optional


Model	Control	Power	Output	Measure (L x H x W)	Code	€
6/8/12 W	DALI	12 W	700 mA	132 x 20 x 30 mm	267982	56
20 W	DALI/Push	25 W	600 mA	135 x 24 x 72 mm	268002	75

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

lika slim

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






60X60 mm | 0,200 Kg/0,0011 m³

Power	Installation	Beam	CRI
10W	Recessed	32°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	White	367286	98
On-Off	1050 lm	3000 K	Black	369518	98

Photometry




m	lx	øm
1	1958	0,55
2	489	1,10
3	218	1,70
4	122	2,20
5	78	2,80

Driver

ON/OFF included






117X23 mm | 0,180 Kg/0,0014 m³

Power	Installation	Beam	CRI
10W	Recessed	32°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1000 lm	3000 K	White	327501	66
On-Off	1000 lm	3000 K	Black	305813	66

Photometry




m	lx	øm
1	1958	0,55
2	489	1,10
3	218	1,70
4	122	2,20
5	78	2,80

Driver

ON/OFF included






231X23 mm | 0,300 Kg/0,0022 m³

Power	Installation	Beam	CRI
20W	Recessed	32°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	White	327518	110
On-Off	2000 lm	3000 K	Black	305837	110

Photometry



m	lx	øm
1	4174	0,55
2	1043	1,10
3	464	1,70
4	261	2,20
5	167	2,80

Driver

ON/OFF included

Recessed LED spotlight in black or white painted die-cast aluminium, with black polycarbonate reflector. Available in a range from 2 to 10 lights, in TRIMLESS versions with concealed recessed edge for installation on plasterboard ceilings, or in TRIM and SLIM versions with frame for installation on panels or ceilings.



367286



305813






lika wallwasher

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






140X38 mm | 0,310 Kg/0,0129 m³

Power	Installation	Beam	CRI
12,5W	Recessed	-	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	800 lm	3000 K	White	367323	66

Photometry




Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
DALI	10 W	700 mA	132 x 20 x 30 mm	267982	56






273X38 mm | 0,600 Kg/0,0022 m³

Power	Installation	Beam	CRI
21W	Recessed	-	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	White	367330	109

Photometry



Driver

ON/OFF included

DIMMABLE DRIVER* - Optional

Control	Power	Output	Measure (L x H x W)	Code	€
DALI/Push	25 W	600 mA	135 x 24 x 72 mm	268002	75




*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.



lika pl

IP20 | UGR <16 | LED SMD | 50.000 h life | Light beam: ACCENT | Material: Aluminum






0,200 Kg/0,0004 m³

Power	Installation	CRI
6W	Ceiling	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	330 lm	3000 K	White	367354	59
On-Off	330 lm	3000 K	Black	369877	59






0,370 Kg/0,0011 m³

Power	Installation	CRI
12,5W	Ceiling	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	White	248530	90
On-Off	1200 lm	3000 K	Black	244884	90





0,720 Kg/0,0019 m³


Power	Installation	CRI
21W	Ceiling	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1400 lm	3000 K	White	367361	124
On-Off	1400 lm	3000 K	Black	369945	124





Family of rectangular LED modules in die-cast aluminium, painted black or white polycarbonate rellector. Modules available with five lenses. Specially designed to prevent glare, it is best suited for use in OFFICES and COMMERCIAL spaces.

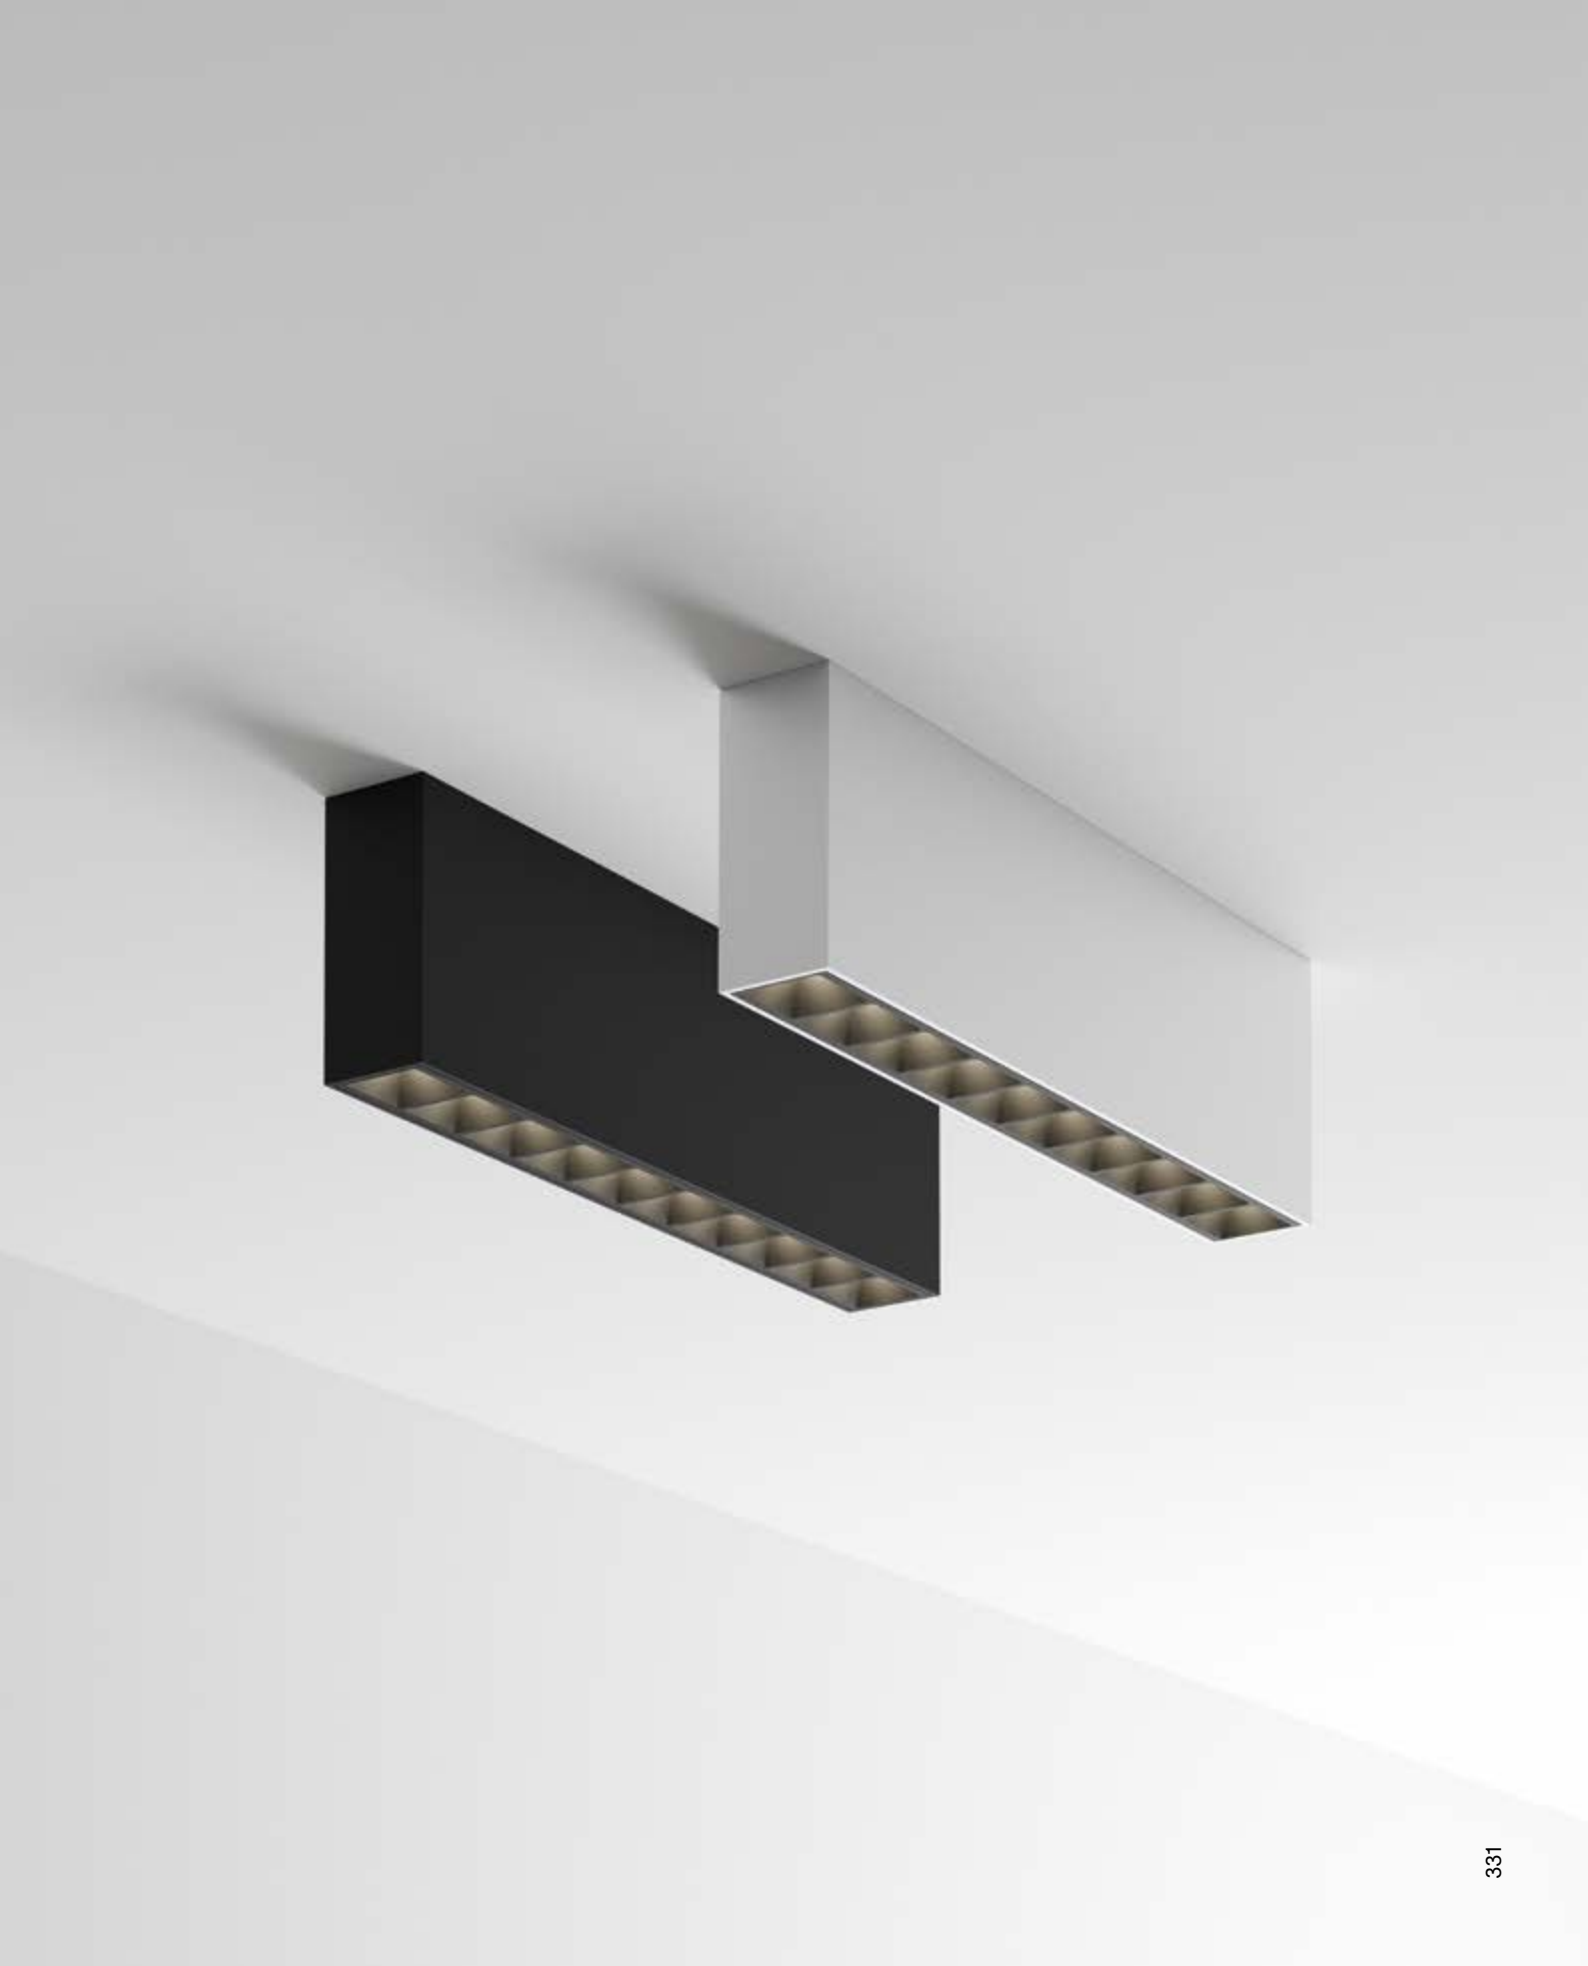


ZEPHYR



zephyr

IP20



123X123 mm

0,880 Kg/0,0023 m³


Power	Installation
35W max	Recessed

	Finish	Code	€
	White	150284	11

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50





20°

110°

207X207 mm

1,350 Kg
0,0063 m³

Power	Installation
35W max	Recessed

	Finish	Code	€
	White	155722	30


Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

155722




331225

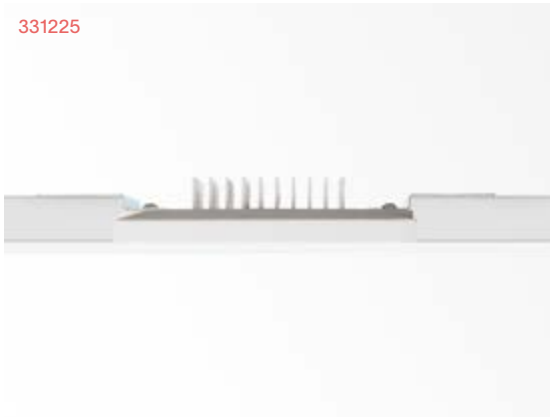

zephyr

IP20 | LED COB | 50.000 h life






141X141 mm | 0,920 Kg/0,0036 m³

Power	Installation	CRI
12W	Recessed	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1200 lm	3000 K	White	331225	75

Photometry




m	lx	øm
1	1596	1,10
2	399	2,20
3	177	3,20
4	100	4,30
5	64	5,40

Driver

ON/OFF included






141X241 mm | 1,180 Kg/0,0063 m³

Power	Installation	CRI
24W	Recessed	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2400 lm	3000 K	White	361307	145

Photometry



m	lx	øm
1	1596	1,10
2	399	2,20
3	177	3,20
4	100	4,30
5	64	5,40

Driver


ON/OFF included

DIMMABLE DRIVER* — Optional

Control	Power	Output	Measure (L x H x W)	Code	€
1-10V	15 W	300 mA	125 x 26 x 45 mm	376820	31
DALI/Push	21 W	300 mA	97 x 33 x 44 mm	376837	59

*The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.


SAMBA

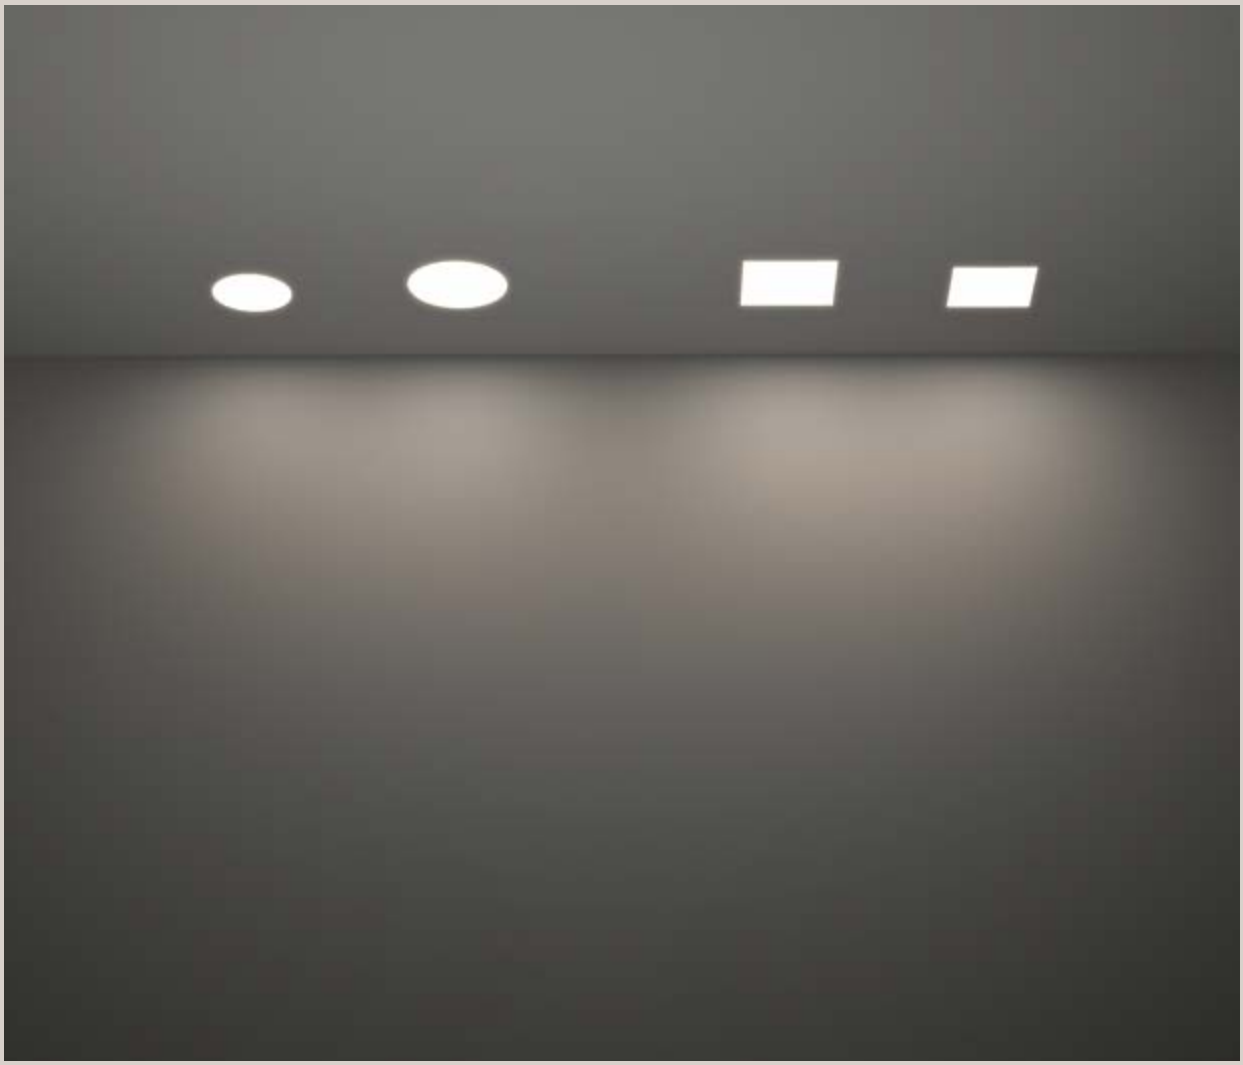

samba

IP20





83X83 mm | 0,360 Kg/0,0016 m³


Power	Installation
35W max	Recessed

	Finish	Code	€
	White	230580	8

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50





103 mm | 0,240 Kg/0,0011 m³


Power	Installation
35W max	Recessed

	Finish	Code	€
	White	150307	9

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50





125 mm | 0,450 Kg/0,0032 m³


Power	Installation
35W max	Recessed

	Finish	Code	€
	White	150130	10

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50






123 mm | 0,420 Kg/0,0017 m³

Power	Installation
50W max	Recessed

	Finish	Code	€
	White	139012	11

Recommended bulb GU10 - not included


Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

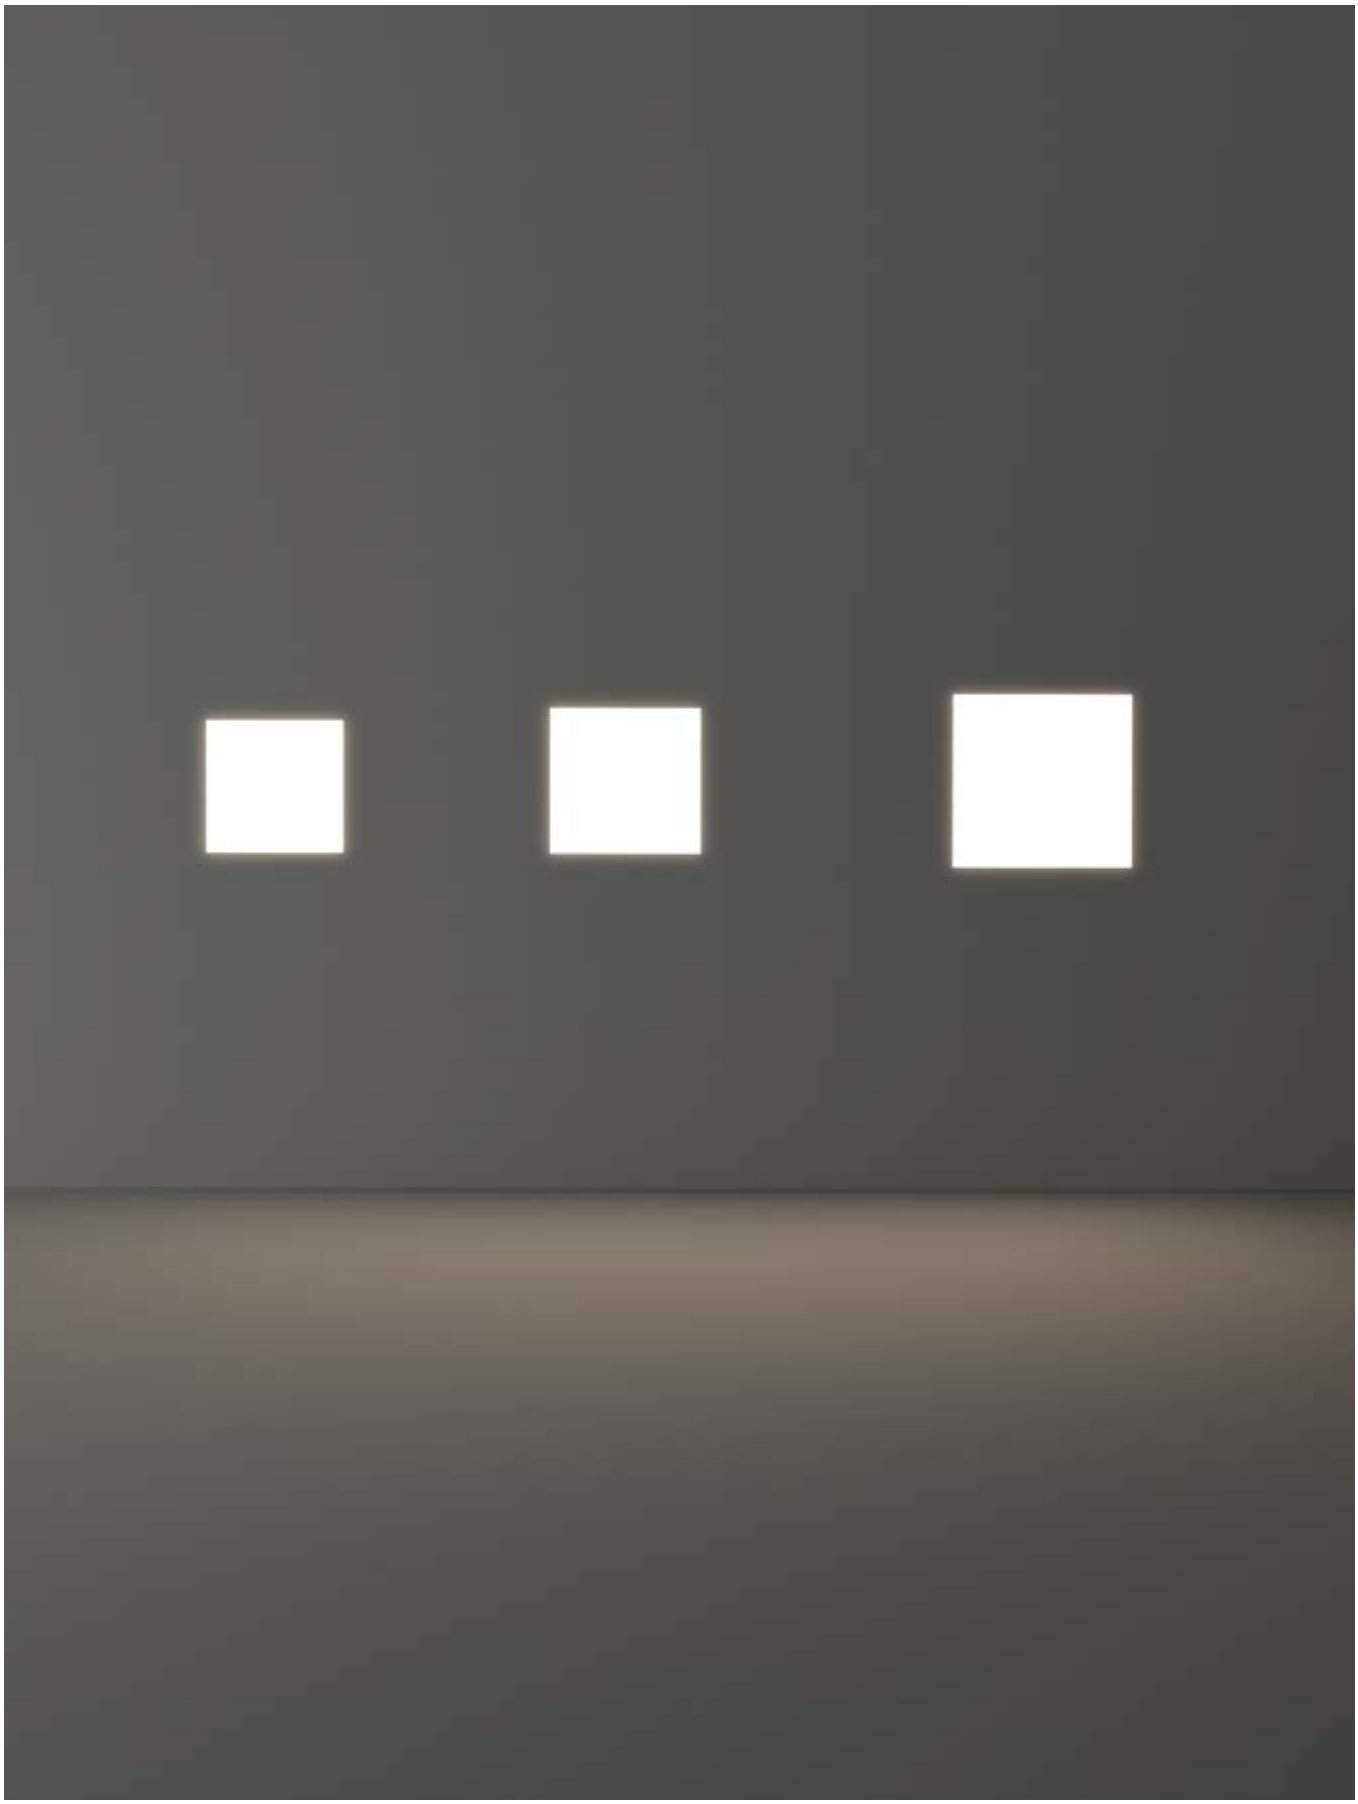

samba

IP20





Power	Installation
35W max	Recessed


	Finish	Code	€
	White	229997	9

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

83X83 mm | 0,330 Kg/0,0018 m³





Power	Installation
35W max	Recessed


	Finish	Code	€
	White	150291	10

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

103X103 mm | 0,330 Kg/0,0020 m³





Power	Installation	Glass diffuser
35W max	Recessed	


	Finish	Code	€
	White	150116	12

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

123X123 mm | 0,600 Kg/0,0017 m³





Power	Installation
50W max	Recessed


	Finish	Code	€
	White	139029	11

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

123X123 mm | 0,430 Kg/0,0017 m³


WALKY

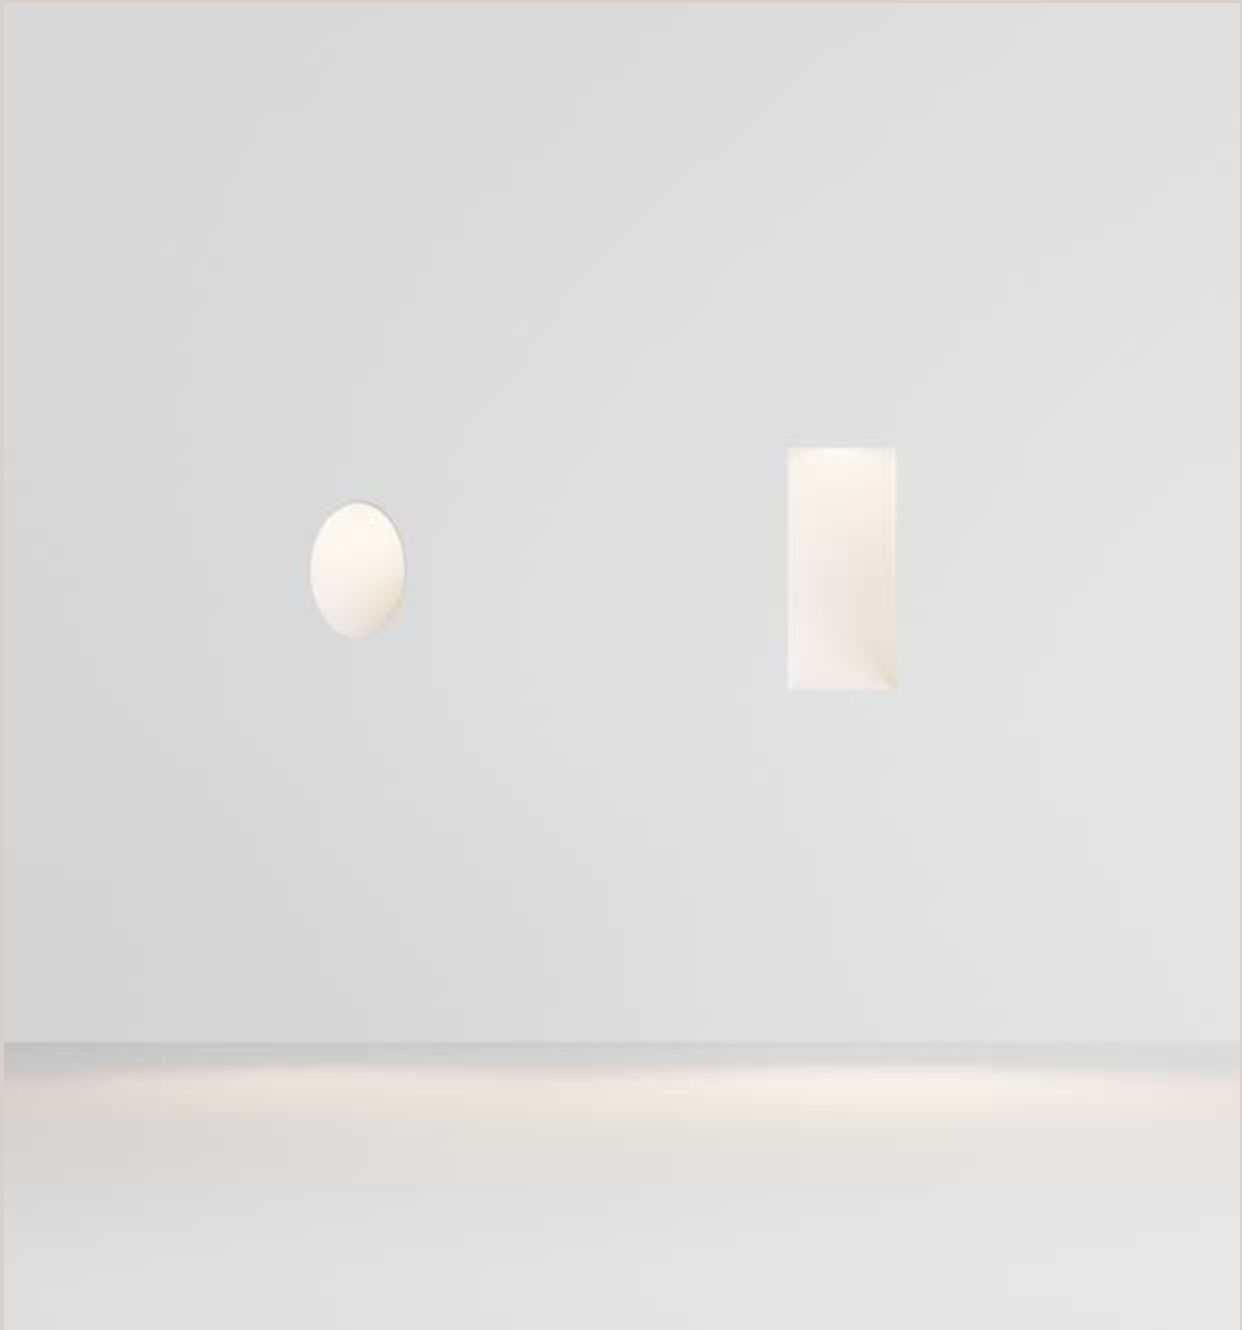

walky

IP20 | LED SMD | 50.000 h life | Light beam: ASYMMETRICAL | Material: Gypsum






100X100 mm | 0,580 Kg/0,0033 m³

Power	Installation	Beam	CRI
1W	Recessed	-	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	55 lm	3000 K	White	249834	47


Photometry



Driver

Included






81X166mm | 0,580 Kg/0,0027 m³

Power	Installation	Beam	CRI
1W	Recessed	-	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	55 lm	3000 K	White	249827	47

Photometry



Driver

Included


JAZZ



jazz

IP20 | Material: Zinc





Power	Installation	Min Qty.
50W max	Recessed	3 pieces

Finish	Code	€
White	083117	7
Ant. Brass	083124	7
Chrome	083070	7
Black	243818	7
Nickel	083087	7

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

60 mm

0,110 Kg/0,0018 m³


SWING



swing

IP20 | Material: Zinc





Power	Installation	Min Qty.
28W max	Recessed	3 pieces

Finish	Code	€
White	083179	10
Ant. Brass	083186	10
Chrome	083131	10
Black	243825	10
Nickel	083148	10

Recommended bulb GU10 - not included

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50

45°	70 mm	0,200 Kg/0,0020 m³

ROOM-65






Glass diffuser

room-65

IP65 | LED COB | 50.000 h life | Light beam: ACCENT | Material: Aluminum




68 mm | 0,220 Kg/0,0013 m³

Power	Installation	Beam	CRI
7,5W	Recessed	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	750 lm	3000 K	White	252025	77
On-Off	750 lm	3000 K	Black	252032	77


Photometry



m	lx	øm
1	1067	0,66
2	267	1,30
3	119	2,00
4	67	2,60
5	43	3,30

Driver

ON/OFF included




68 mm | 0,240 Kg/0,0018 m³

Power	Installation	Beam	CRI
7,5W	Recessed	38°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	750 lm	3000 K	White	252049	77
On-Off	750 lm	3000 K	Black	252056	77

Photometry



m	lx	øm
1	1067	0,66
2	267	1,30
3	119	2,00
4	67	2,60
5	43	3,30


Driver

ON/OFF included

Sole 350, 468
Luna 352, 472
Snow 354, 444
Clio 356, 447, 519
Techo 358
Gun 360, 398
Urano 362
Bubble 364, 442
Mib 366
Fiesta 368
O-Zone 370, 524
Omega 372
Elio 376, 542
Litio 378, 544
Terra 380, 540
Gas 382, 490
Xeno 384
Swipe 386
Style 388, 480
Tronco 390, 506
Etere 392, 512
Snif 394
Keope 396
Punto 400
Toffee 404, 456
Linea 406
Iko 410
Sirio 412, 482, 538
Atom 414
Post-It 418
Up 420
Argo 422
Tetris 424
Twin 428
Andromeda 430
Giove 432
Felix 434
Rex 436
Polar 440
Down 448
Febe 450
Dedra 452
Pure 454
Cute 458
Lolita 462
Twiggy 464
Doris 466
Sasso 474
Agos 476
Titano 484
Kurt 486
Tesla 488
Hub 492
Tifone 494
Vega 496
Jedi 498
Boeing 502
Atena 508
Edo 510
Torre 514
Cosmo 516
Thor 520, 552
Starlight 526
Koala 530
Ulex 534
Inside 546
Bit 548
Wire 550
Floor 554
Taurus 556
Park 560
Way 564
Rocket 568

OUTDOOR


SOLE

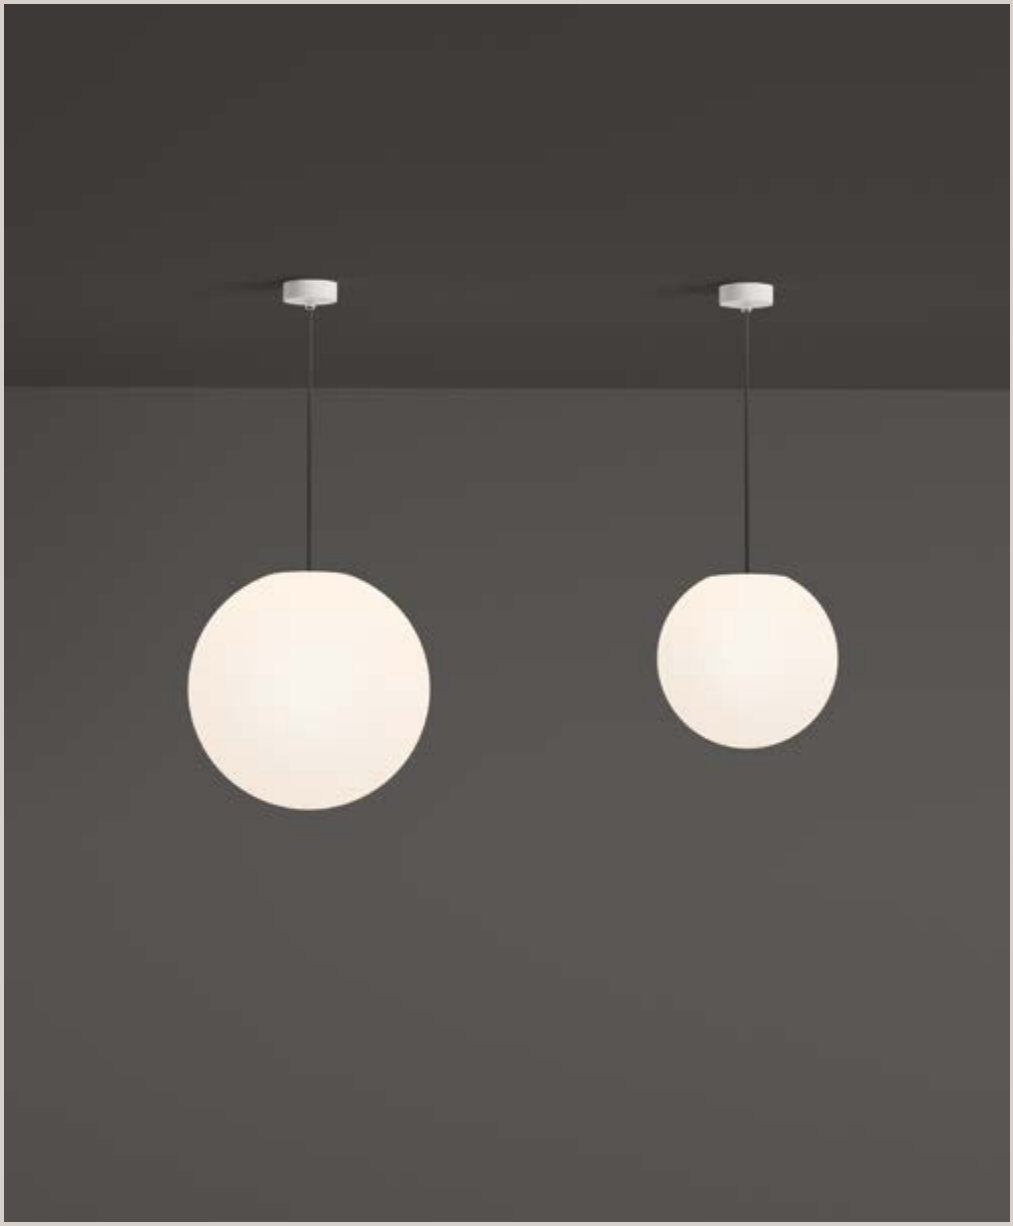

sole

IP44

Installation
Suspension




2,970 Kg / 0,1379 m³

Finish	Code	€
White	136011	180

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2






1,690 Kg / 0,0723 m³

Finish	Code	€
White	136004	110

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




1,360 Kg / 0,0338 m³

Finish	Code	€
White	135991	95

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



1,300 Kg / 0,0101 m³

Finish	Code	€
White	318837	90

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

LUNA




Turned die-cast aluminium body with powder coating. Opal color plastic diffuser.

luna

IP44

Installation
Wall | Ceiling






1,470 Kg / 0,0126 m³

Finish	Code	€
White	213194	115

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



0,400 Kg / 0,0021 m³

Finish	Code	€
White	213200	100

Included bulb LED G9 3W

Lumen	CCT	Code	€
390 lm	4000 K	209036	3,60

Recommended bulb G9 max 1 x 5W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

SNOW




White polycarbonate base
and diffuser. Jointed fixing,
without visible screws.
Color: white.

snow

IP65 | LED 18W | 1950/2050 lm | 50.000 h life





0,790 Kg / 0,0073 m³

Installation

Ceiling

CCT	Finish	Code	€
3000K	White	326238	60
4000K	White	326245	60


CLIO



clio

IP44





0,580 Kg / 0,0021 m³

Installation
Suspension

Finish	Code	€
White	144252	75
Anthracite	136073	75
Black	144245	75
Coffee	326801	75

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

IP44





0,200 Kg / 0,0021 m³


Installation
Ceiling

Finish	Code	€
White	148847	56
Anthracite	148861	56
Black	148878	56
Coffee	326795	56

Recommended bulb E27 max 1 x 42W


Lumen	CCT	Code	€
580 lm	4000 K	151960	2

Diffuser




0,540 Kg / 0,0177 m³

Finish	Code	€
White	145068	40



0,520 Kg / 0,0147 m³


Finish	Code	€
White	116716	40



0,610 Kg / 0,0221 m³

Finish	Code	€
White	145020	40

TECHO

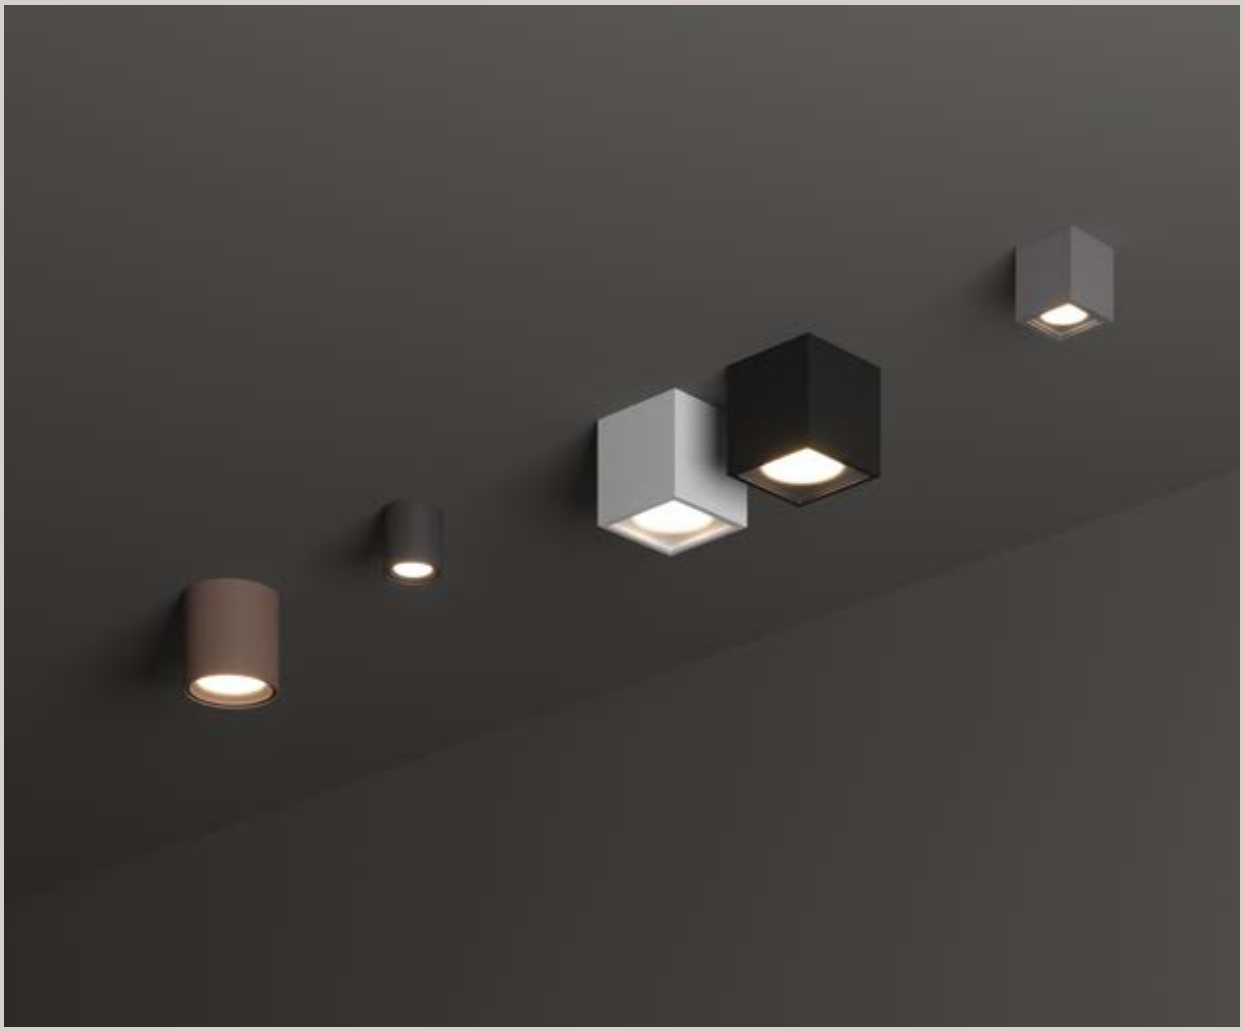


Powder-coated die-cast aluminum body. Frosted clear tempered glass diffuser. Colors: anthracite, white, coffee or black.

techo

IP54





1,700 Kg / 0,0065 m³


Installation
Ceiling

Finish	Code	€
White	251523	115
Grey	326887	115
Anthracite	251516	115
Black	251530	115
Coffee	251547	115

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
780 lm	4000 K	253398	11






1,500 Kg / 0,0065 m³

Finish	Code	€
White	342689	115
Grey	342702	115
Anthracite	318103	115
Black	342719	115
Coffee	342696	115

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
780 lm	4000 K	253398	11






0,600 Kg / 0,0021 m³

Finish	Code	€
White	251561	64
Grey	326894	64
Anthracite	251554	64
Black	251578	64
Coffee	251592	64

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50





0,550 Kg / 0,0019 m³

Finish	Code	€
White	318127	64
Grey	342726	64
Anthracite	318110	64
Black	318141	64
Coffee	318134	64

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

P. 39

GUN




Aluminum body with brushed natural finish or with varnish or various finishes. Pyrex glass diffuser. Up-and-down light emission.

gun

IP55





0,490 Kg / 0,0030 m³

Installation

Ceiling

Finish	Code	€
White	122663	54
Aluminum	092324	54
Grey	163642	54
Anthracite	236865	54
Black	122687	54
Coffee	163666	54

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

URANO




Powder painted turned aluminum body with anthracite or white matt finish. Satin and clear acrylic diffuser.

urano

IP44

Installation
Wall | Ceiling






1,200 Kg / 0,0035 m³

Finish	Code	€
White	168050	95
Anthracite	168135	95

Recommended bulb **GX53 max 1 x 15W**

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5





0,630 Kg / 0,0020 m³

Finish	Code	€
White	168036	70
Anthracite	168111	70

Recommended bulb **GX53 max 1 x 15W**

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

BUBBLE




Turned die-cast aluminum body
with powder coating.
Matt white plastic diffuser.

bubble

IP44





1,730 Kg / 0,0246 m³

Installation

Wall | Ceiling

Finish	Code	€
White	135250	125

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2


MIB



White powder coated aluminum
base. Opal color plastic diffuser.
Integrated LED source.

mib

IP65 | LED 18W | 1850/2150 lm | 35.000 h life




1,620 Kg / 0,0086 m³

Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	269115	150
4000K	White	202945	150

IP65 | LED 18W | 1950/2250 | 35.000 h life



1,820 Kg / 0,0092 m³

Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	269122	150
4000K	White	202921	150

FIESTA




Black plastic electric cable,
bulb socket and grapping eyelets.
Supplied with plug for outdoor.

fiesta

IP44





1,530 Kg / 0,0066 m³


Installation
Ceiling

Finish	Code	€
● Black	246796	100

Recommended bulb E27 max 10 x 15W

Lumen	CCT	Code	€
340 lm	3000 K	101286	2





0,600 Kg / 0,0049 m³


Finish	Code	€
● Black	159836	65

Recommended bulb E27 max 5 x 15W

Lumen	CCT	Code	€
340 lm	3000 K	101286	2

O-ZONE



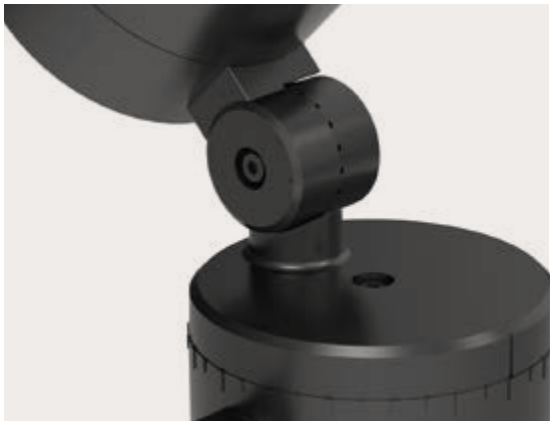


Powder coated die-cast aluminum body. Adjustable diffuser with clear tempered glass diffuser.

o-zone

IP66 | LED 13W | 1100 lm | 50.000 h life.





0,800 Kg / 0,0066 m³

Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	Black	337548	135

OMEGA




Powder painted aluminum body. Reclinable diffuser with glass screen. Available in different finishes.

omega round

IP54 | LED 7W | 560/610 lm | 25.000 h life





0,500 Kg / 0,0012 m³


Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	285474	90
4000K	White	285481	90
3000K	Anthracite	285450	90
4000K	Anthracite	285467	90
4000K	Black	285504	90
4000K	Coffee	285498	90

omega square

IP54 | LED 7W | 610 lm | 25.000 h life





0,600 Kg / 0,0012 m³

Installation
Wall | Ceiling

CCT	Finish	Code	€
4000K	White	285528	90
4000K	Anthracite	285511	90
4000K	Black	285535	90





ELIO




High performance resin body and diffuser: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C. Adjustable diffuser.

elio

IP66 | LED





0,500 Kg / 0,0027 m³

Installation

Wall

Finish	Code	€
White	096483	82
Black	096476	82

Included bulb LED GU10 3,5W

Lumen	CCT	Code	€
-	2700/4000 K	-	-

Recommended bulb LED **GU10 max 1 x 6W**

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

LITIO




High performance resin body and diffuser: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C. Adjustable diffuser.

litio

IP66 | LED





0,690 Kg / 0,0043 m³

Installation

Wall

Finish	Code	€
White	145303	100
Grey	145327	100
Black	145341	100

Included bulb LED GX53 7W

Lumen	CCT	Code	€
-	3000/4000/6500 K	-	-

Recommended bulb GX53 max 1 x 10W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

TERRA




Cast aluminum painted frame. Adjustable body. Transparent Pyrex glass diffuser.

terra

IP65

Installation
Wall






1,140 Kg / 0,0058 m³

Finish	Code	€
Anthracite	046167	85

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2





0,530 Kg / 0,0040 m³

Finish	Code	€
Anthracite	046181	45

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

GAS




Powder coated die-cast aluminum body. Tempered and sandblasted clear glass diffuser. Available finishes: anthracite, white, coffee or black.

gas

IP43





0,320 Kg / 0,0020 m³

Installation

Wall

Finish	Code	€
White	091518	50
Anthracite	091525	50
Black	020228	50
Coffee	213095	50

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

XENO



Aluminum base with matt powder coating. Tempered clear glass adjustable diffusers.

xeno

IP44





0,360 Kg / 0,0014 m³

Installation

Wall

Finish	Code	€
White	129488	40
Grey	129471	40
Black	129464	40

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

SWIPE




Powder-coated aluminium body. Adjustable diffuser with shiny opal color polycarbonate screen. Available with twilight and motion sensor. Available finishes: anthracite, white, grey, coffee or black.

swipe

IP54 | LED 20,5W | 2300 lm | 50.000 h life






1,200 Kg / 0,0057 m³

Installation
Wall

CCT	Finish	Code	€
3000K	White	287690	122
3000K	Grey	326863	122
3000K	Anthracite	287683	122
3000K	Black	287706	122
3000K	Coffee	307169	122

IP54 | LED 21W | 2300 lm | 50.000 h life





1,300 Kg / 0,0057 m³

Installation
Wall

CCT	Finish	Code	€
3000K	White	287720	132
3000K	Grey	326870	132
3000K	Anthracite	287713	132
3000K	Black	287737	132
3000K	Coffee	307176	132

Lamp with presence detector included PIR (Passive InfraRed)

STYLE




Powder coated aluminum body. Opal color plastic shade. Integrated LED source. AP Sensor model with PIR sensor. Available finishes: anthracite, white, coffee, grey or black.

style

IP54 | LED 8,5/9W / 950/1050 lm | 30.000 h life

Installation
Wall






CCT	Finish	Code	€
3000K	White	269139	128
4000K	White	221502	128
3000K	Grey	322650	128
4000K	Grey	322643	128
3000K	Anthracite	246857	128
4000K	Anthracite	209845	128
3000K	Black	322636	128
4000K	Black	322629	128
3000K	Coffee	322704	128
4000K	Coffee	322681	128

0,390 Kg / 0,0019 m³





CCT	Finish	Code	€
3000K	White	269146	157
4000K	White	209852	157
3000K	Anthracite	246864	157
4000K	Anthracite	221519	157

0,400 Kg / 0,0018 m³

Lamp with presence detector included PIR (Passive InfraRed)

TRONCO




Varnished die-cast aluminum body with different finishes: anthracite, white, coffee, grey or black. Pyrex glass diffuser with aluminum elements inside.

tronco

IP44





1,110 Kg / 0,0103 m³

Installation

Wall

Finish	Code	€
White	118659	65
Grey	026978	65
Anthracite	027005	65
Black	004716	65
Coffee	326962	65

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2

ETERE




Powder coated die-cast aluminum body. Satin opal polycarbonate glass diffusers. Black PVC cables. Colors: anthracite, coffee or black.

etere

IP44 | LED 9,5W | 1000/1100 lm | 25.000 h life





0,590 Kg / 0,0027 m³

Installation

Wall

CCT	Finish	Code	€
3000K	Anthracite	246925	90
4000K	Anthracite	172408	90
3000K	Black	322193	90
4000K	Black	322209	90
3000K	Coffee	269153	90
4000K	Coffee	246949	90

SNIF




Varnished die-cast aluminum body. Transparent Pyrex glass up-and-down double diffuser. Available finishes: anthracite, white, grey or black.

snif round

IP54





0,750 Kg / 0,0027 m³

Installation

Wall

Finish	Code	€
White	144283	50
Grey	061474	50
Anthracite	061467	50
Black	061450	50


Recommended bulb G9 max 1 x 40W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

snif square

IP44





0,600 Kg / 0,0023 m³

Installation

Wall

Finish	Code	€
White	144276	50
Grey	118666	50
Anthracite	121963	50
Black	123080	50

Recommended bulb G9 max 1 x 40W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

KEOPE




High performance resin body and diffuser: resistant to corrosion caused by atmospheric agents; colors stabilized during U.V. treatment; thermal shock resistance from -60°C to + 90°C. Transparent satin acrylic diffusers.

keope

IP55 | LED

Installation
Wall





0,450 Kg / 0,0034 m³

Finish	Code	€
White	147772	66
Grey	147796	66
Black	147819	66


Included bulb LED GU10 x 3,5W

Lumen	CCT	Code	€
-	2700/4000 K	-	-

Recommended bulb GU10 max 2 x 6W

Lumen	CCT	Code	€
410 lm	3000 K	108292	2,50





0,350 Kg / 0,0034 m³

Finish	Code	€
White	147765	44

Included bulb LED GU10 x 3,5W

Lumen	CCT	Code	€
-	2700/4000 K	-	-

Recommended bulb GU10 max 2 x 6W

Lumen	CCT	Code	€
410 lm	4000 K	108292	2,50

GUN




Gun is essential, decisive, luminous. The upward and downward emission creates a play of light that sculpts the space, enhancing walls and surfaces with elegance and precision.

Aluminum body with brushed natural finish or with varnish or various finishes. Pyrex glass diffuser. Up-and-down light emission.

gun

IP54
IP44





1,350 Kg / 0,0067 m³

Installation


Wall

Finish	Code	€
White	092300	72
Aluminum	033020	72
Grey	163604	72
Anthracite	236858	72
Black	092317	72
Coffee	163611	72

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2





0,720 Kg / 0,0021 m³


Finish	Code	€
White	100388	65
Aluminum	033013	65
Grey	163628	65
Anthracite	236841	65
Black	100395	65
Coffee	163635	65

Recommended bulb GU10 max 2 x 35W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

P. 35


PUNTO

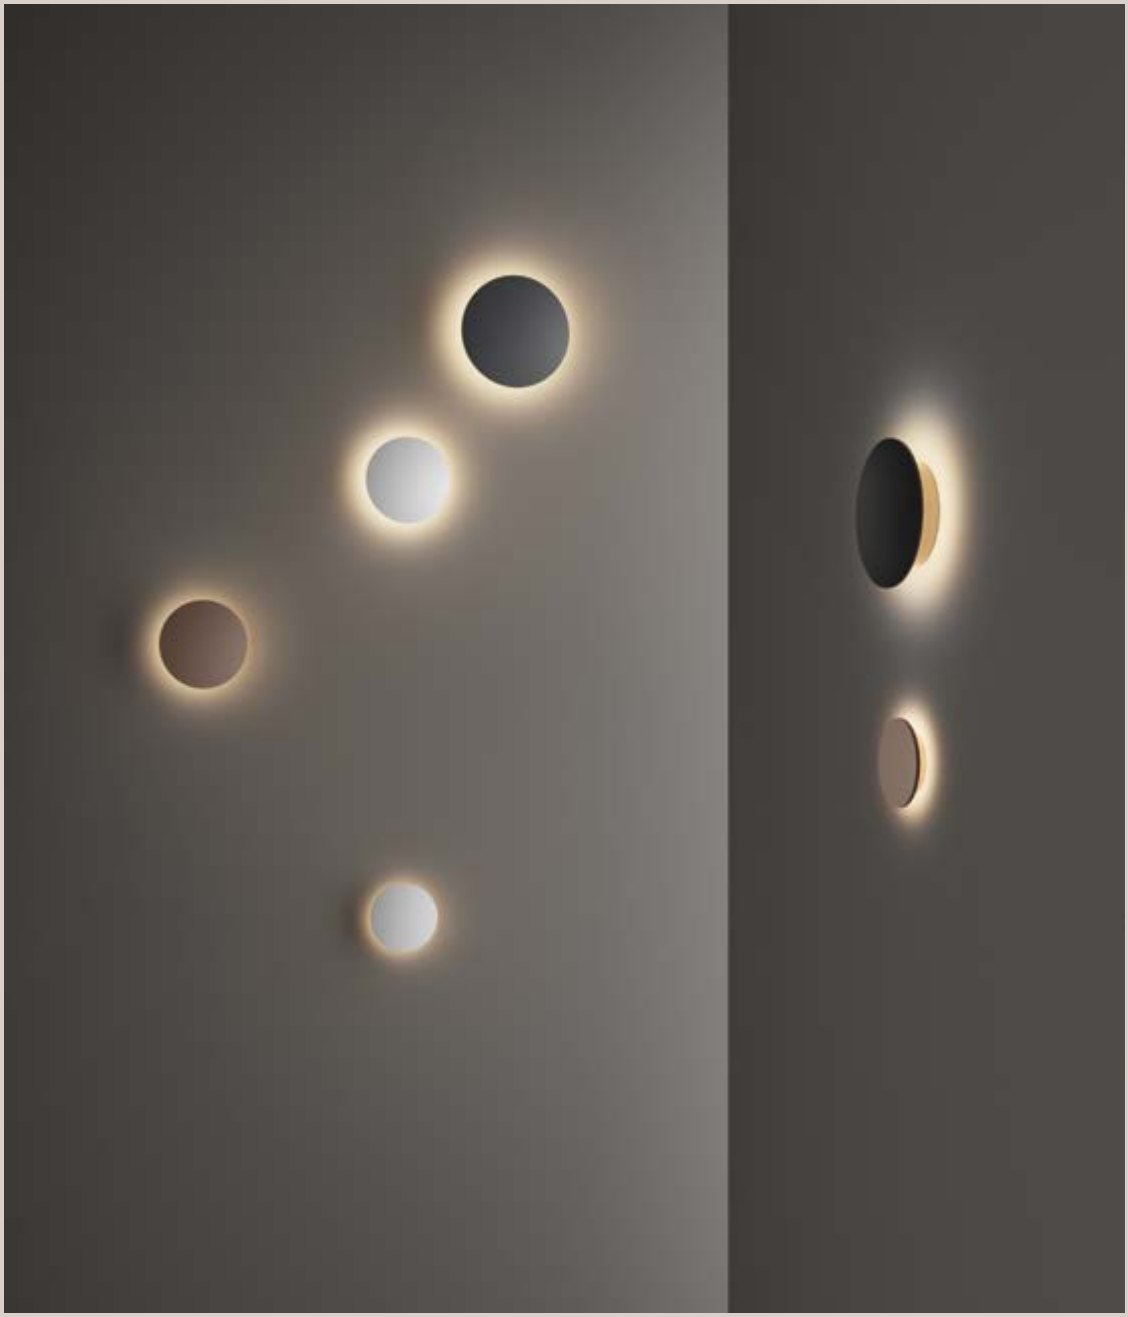

punto

IP54 | LED **16W | 1750 lm |** 30.000 h life






2,090 Kg / 0,0095 m³

Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	328553	152
3000K	Anthracite	313566	152
3000K	Black	328577	152
3000K	Coffee	328560	152

IP54 | LED 12W | 1250 lm | 30.000 h life






1,280 Kg / 0,0049 m³

Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	328522	127
3000K	Anthracite	313559	127
3000K	Black	328546	127
3000K	Coffee	328539	127

IP54 | LED **9W | 950 lm |** 30.000 h life





0,820 Kg / 0,0018 m³


Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	313528	66
3000K	Anthracite	313511	66
3000K	Black	313542	66
3000K	Coffee	313535	66

P. 25



Powder coated aluminum base and body. Glass diffusers. Indirect light emission. Finishes: anthracite, white, coffee, black.

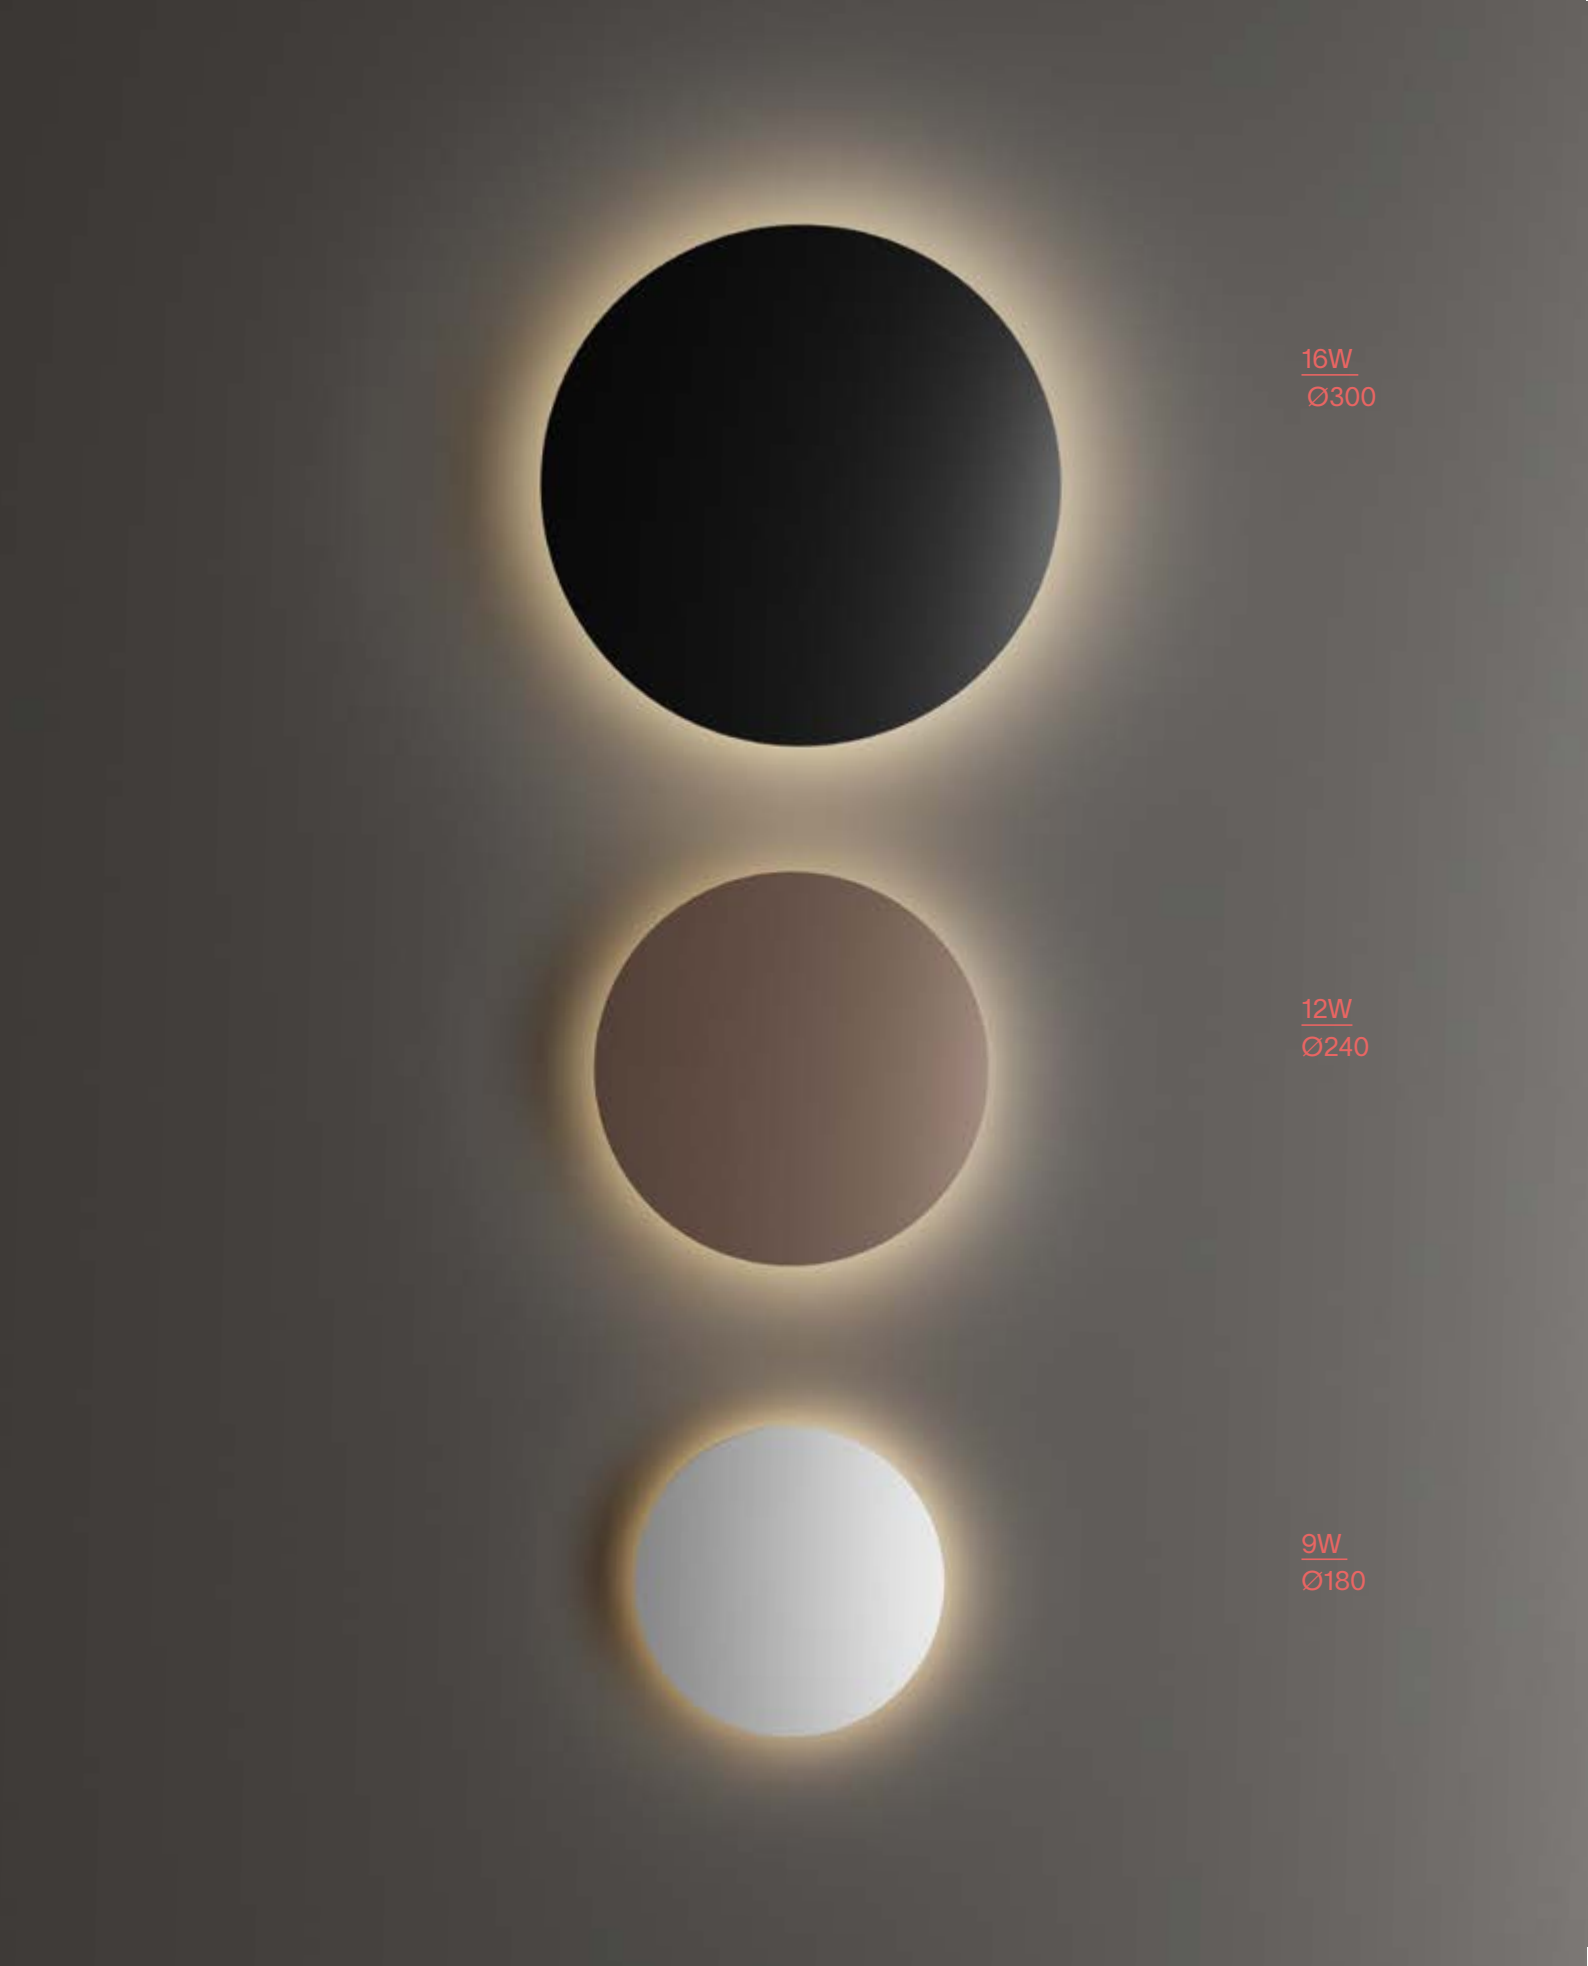


16W
Ø300

12W
Ø240

9W
Ø180

TOFFEE

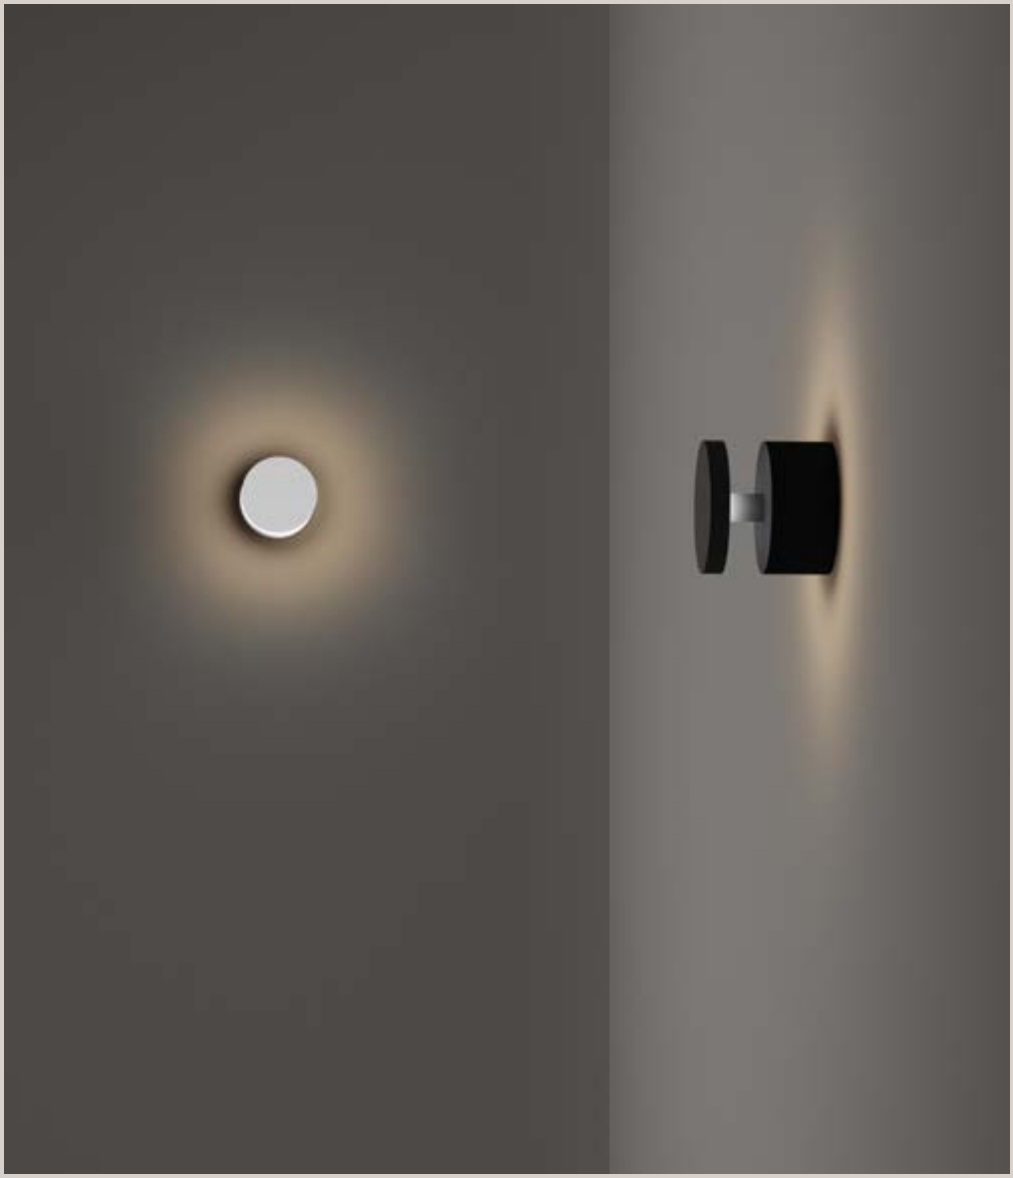


Powder-coated aluminium base and body. Clear tempered glass diffuser. Indirect light emission. Colors: anthracite, white, coffe or black.

toffee

IP65 | LED 8W | 900 lm | 50.000 h life






0,400 Kg / 0,0014 m³

Installation

Wall | Ceiling

CCT	Finish	Code	€
3000K	White	347738	75
3000K	Anthracite	321189	75
3000K	Black	321202	75
3000K	Coffee	321196	75

LINEA

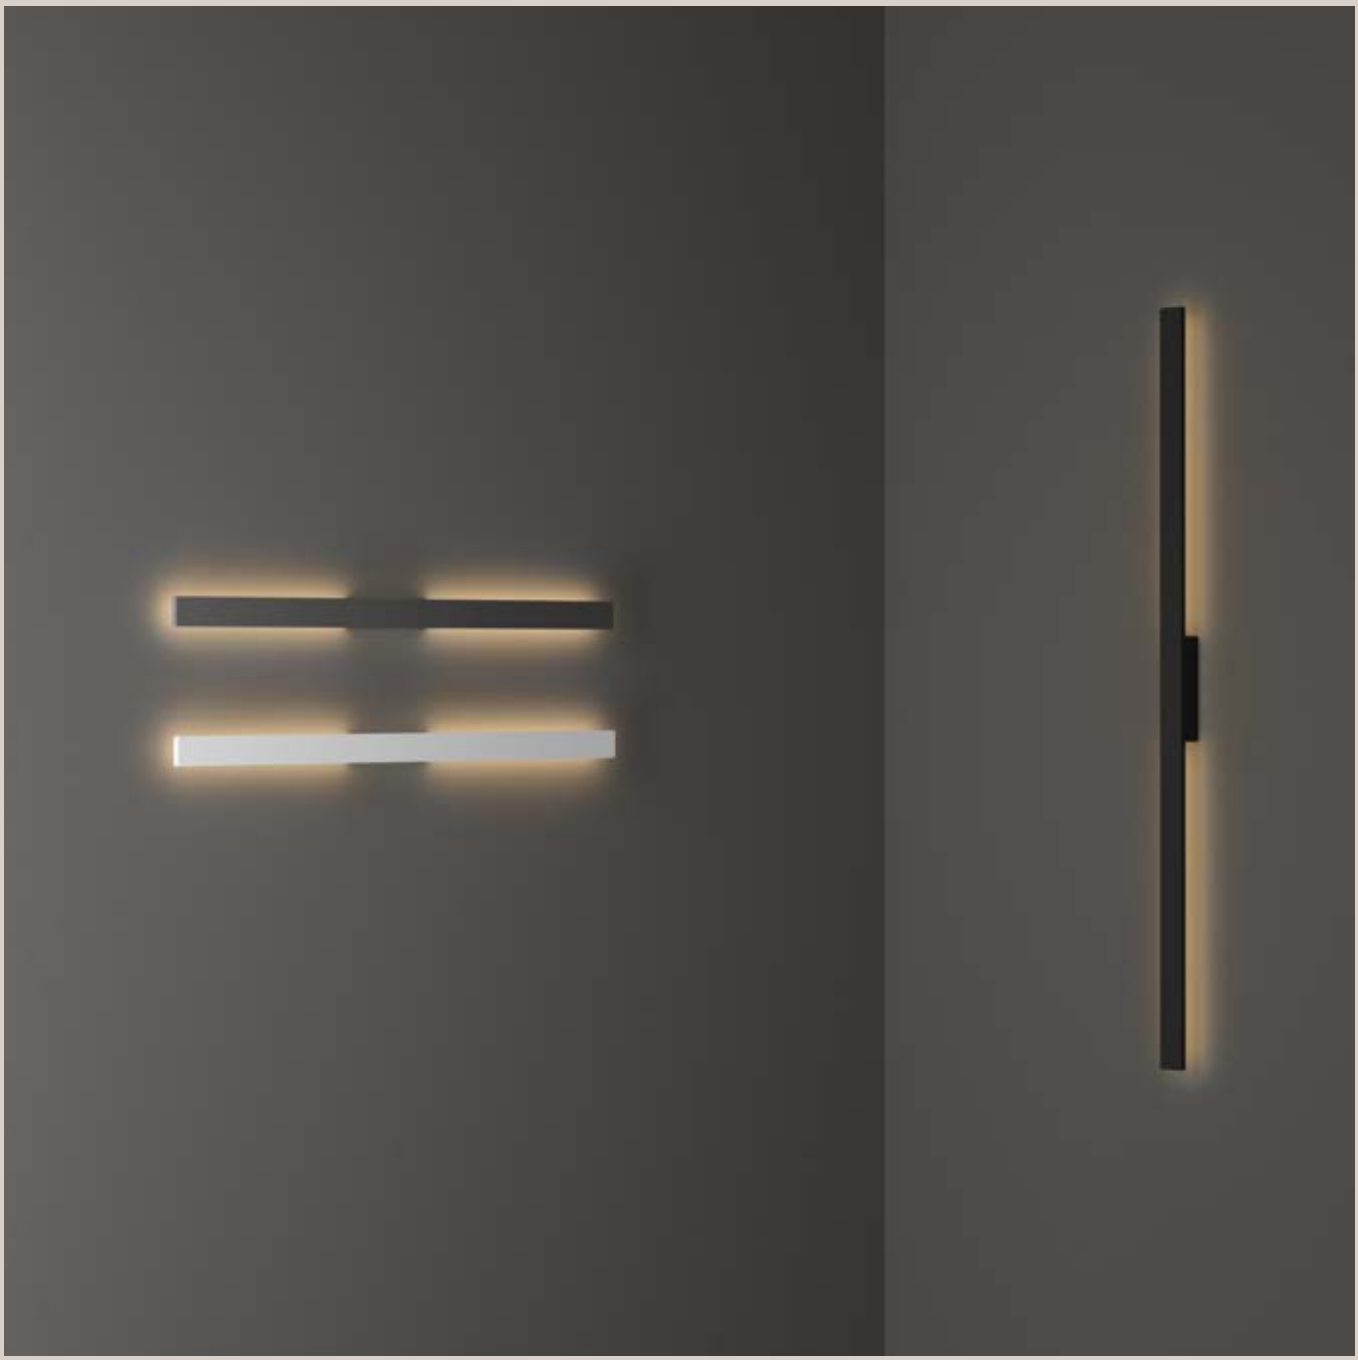

Structure and light body crafted from high-quality powder-coated aluminum, offering a refined and durable finish.
Glass diffusers add a touch of elegance and delicacy, gently spreading a soft, embracing light.
Indirect lighting creates a cozy, atmospheric ambiance.

linea

IP54 | LED 23W | 2400 lm | 30.000 h life



1,750 Kg / 0,0165 m³

Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	328584	188
3000K	Anthracite	313504	188
3000K	Black	328607	188
3000K	Coffee	328591	188

IP54 | LED 20W | 1950 lm | 30.000 h life




1,430 Kg / 0,0088 m³

Installation
Wall | Ceiling

CCT	Finish	Code	€
3000K	White	313474	147
3000K	Anthracite	313467	147
3000K	Black	313498	147
3000K	Coffee	313481	147



Powder coated aluminum base and body. Glass diffusers. Indirect light emission. Finishes: anthracite, white, coffee, black.

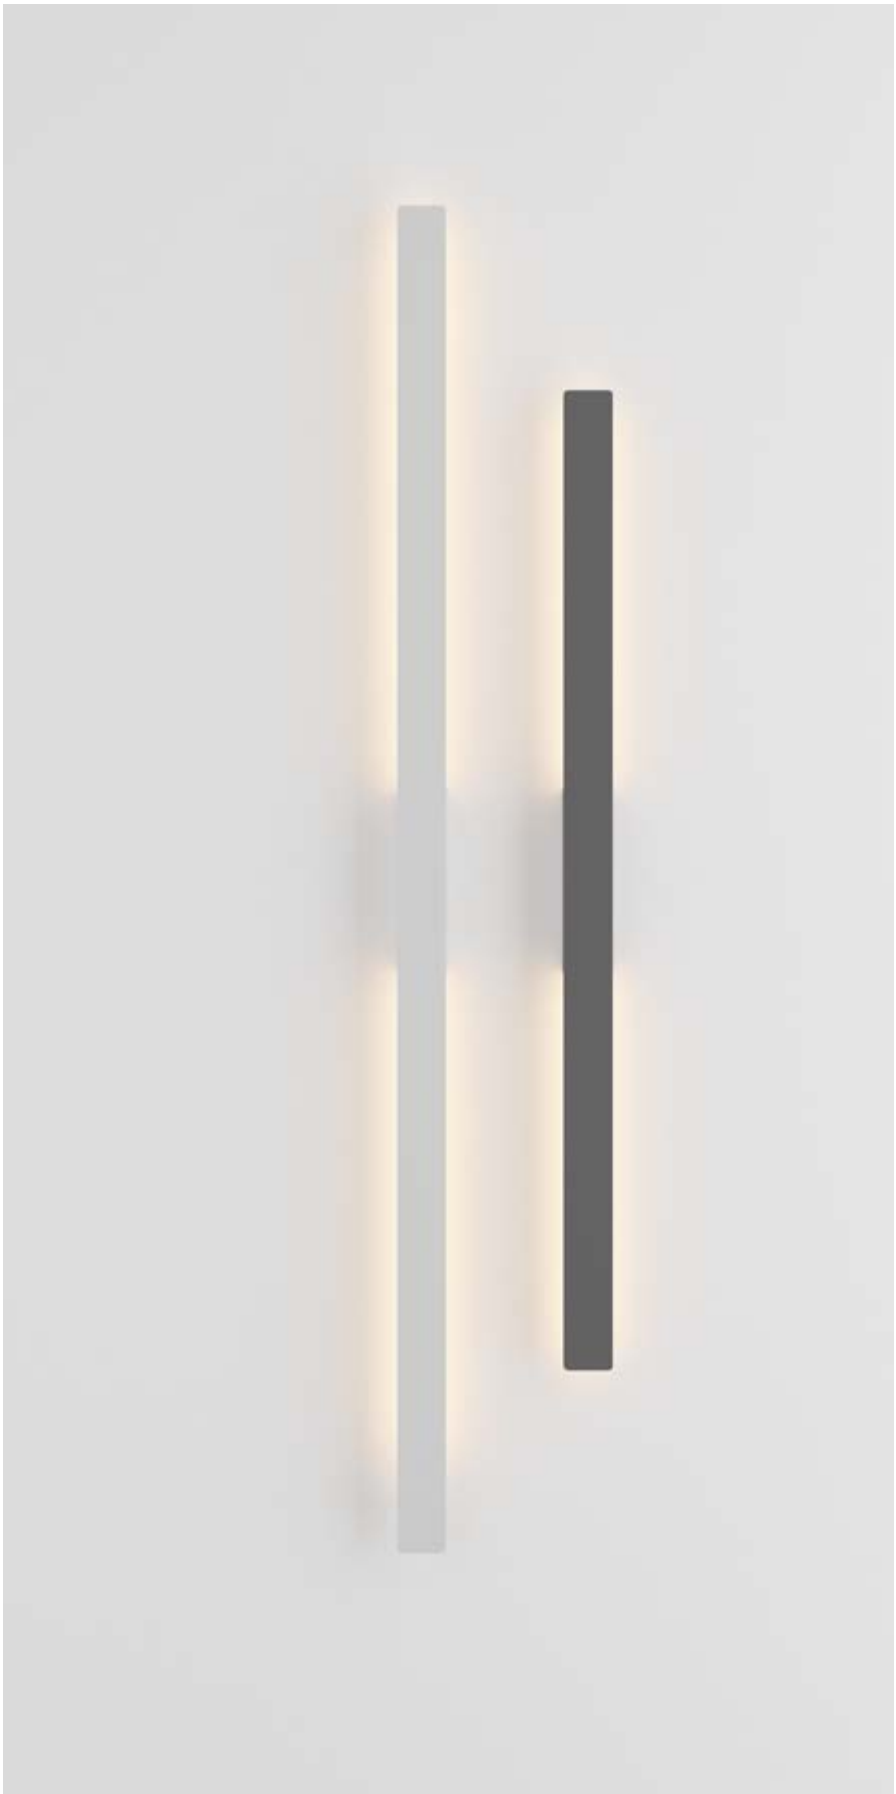

IKO




Powder coated die-cast aluminum body. Tempered and frosted clear glass up-and-down double diffuser. Available finishes: anthracite, white or grey.

iko

IP54





0,600 Kg / 0,0042 m³

Installation

Wall

Finish	Code	€
White	018522	50
Grey	092218	50
Anthracite	018515	50

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

SIRIO




Powder coated die-cast aluminum body. Clear tempered glass diffuser. Colors: anthracite, white, coffee, gray or black.

sirio

IP65





0,820 Kg / 0,0018 m³

Installation

Wall

Finish	Code	€
White	318226	80
Grey	345611	80
Anthracite	318202	80
Black	318219	80
Coffee	318196	80

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

ATOM




Atom is the lamp that designs light with precision. The powder-coated aluminium body houses elegant glass diffusers, while the movable fins allow the width of the double light beam to be carefully adjusted, both upwards and downwards.

atom

IP54 | LED COB | 30.000 h life | Material: Aluminum






Power	CRI	SDCM
12W	≥90	3

Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000K	White	313436	71
On-Off	1050 lm	3000K	Grey	366821	71
On-Off	1050 lm	3000K	Anthracite	313429	71
On-Off	1050 lm	3000K	Black	313450	71
On-Off	1050 lm	3000K	Coffee	313443	71
On-Off	1100 lm	4000K	White	366807	71
On-Off	1100 lm	4000K	Grey	366838	71
On-Off	1100 lm	4000K	Anthracite	366791	71
On-Off	1100 lm	4000K	Black	366845	71
On-Off	1100 lm	4000K	Coffee	366814	71

0,650 Kg / 0,0013 m³

Driver
Included





Power	CRI	SDCM
25W	≥90	3

Control	Lumen	CCT	Finish	Code	€
On-Off	2100 lm	3000K	White	328652	137
On-Off	2100 lm	3000K	Grey	366883	137
On-Off	2100 lm	3000K	Anthracite	313412	137
On-Off	2100 lm	3000K	Black	328676	137
On-Off	2100 lm	3000K	Coffee	328669	137
On-Off	2250 lm	4000K	White	366869	137
On-Off	2250 lm	4000K	Grey	366890	137
On-Off	2250 lm	4000K	Anthracite	366852	137
On-Off	2250 lm	4000K	Black	366906	137
On-Off	2250 lm	4000K	Coffee	366876	137

1,160 Kg / 0,0025 m³

Driver
Included






Powder coated aluminum body. Glass diffusers. Double light beam, up and down with adjustable width and movable wings.



POST-IT

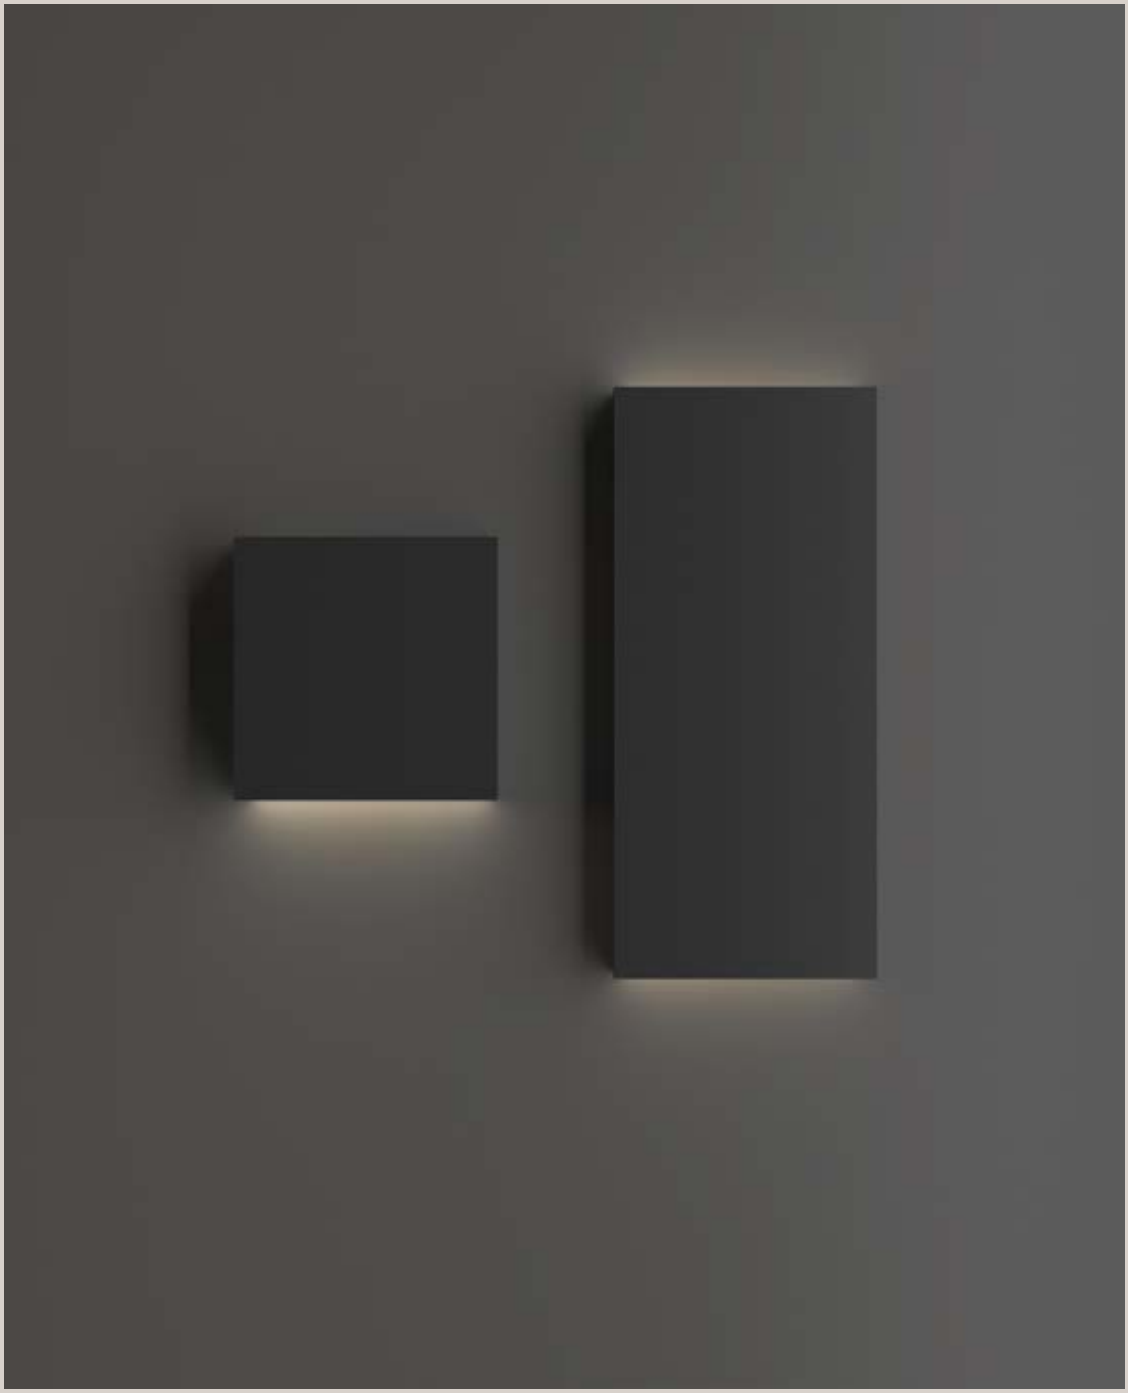




post-it

IP65 | LED 6W | 750 lm 30.000 h life





0,450 kg/0,0009 m³

* 1,400 kg/0,0009 m³


Installation

Wall

Control	Lumen	CCT	Finish	Code	€
On-Off	750 lm	3000 K	White	369372	60
On-Off	750 lm	3000 K	Black	369419	60
On-Off	750 lm	3000 K	Coffee	369396	60
On-Off	750 lm	3000 K	Steel*	369273	130
On-Off	750 lm	3000 K	Brass*	335933	130

IP65 | LED 3W | 370 lm | 30.000 h life





0,200 Kg/0,0005 m³

* 0,500 Kg/0,0005 m³

Installation

Wall

Control	Lumen	CCT	Finish	Code	€
On-Off	370 lm	3000 K	White	335957	40
On-Off	370 lm	3000 K	Black	335919	40
On-Off	370 lm	3000 K	Coffee	335896	40
On-Off	370 lm	3000 K	Steel*	335865	90
On-Off	370 lm	3000 K	Brass*	335926	90

DIMMABLE DRIVER- Not included - Required

Control	Power	Output	Measure (L x H x P)	Code	€
On/Off	18 W	12 Vdc	69 x 35 x 23	369143	30
On/Off	30 W	12 Vdc	95 x 53 x 23	369099	35
On/Off	60 W	12 Vdc	168 x 38 x 30	373041	42

UP




Powder coated die-cast aluminum body. Clear Pyrex glass diffusers. Available finishes: anthracite, white, coffee or black.

up

IP44





0,520 Kg / 0,0019 m³

Installation


Wall

Finish	Code	€
White	115320	40
Anthracite	115337	40
Black	115344	40
Coffee	213354	40

Recommended bulb G9 max 2 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10





0,320 Kg / 0,0011 m³

Finish	Code	€
White	115290	25
Anthracite	115306	25
Black	115313	25
Coffee	213347	25

Recommended bulb G9 max 2 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

ARGO








Powder coated die-cast aluminum body. Clear tempered glass diffuser with white inner reflector. Available in anthracite or white finish.

argo

IP65 | LED 11W | 1000/1150 lm | 30.000 h life

Installation
Wall




CCT	Finish	Code	€
3000K	White	268309	81
4000K	White	268316	81
3000K	Anthracite	250946	81
4000K	Anthracite	268293	81

0,600 Kg / 0,0011 m³

IP65 | LED 6W | 550/570 lm | 30.000 h life

Installation
Wall



CCT	Finish	Code	€
3000K	White	317564	71
4000K	White	321691	71
3000K	Anthracite	321646	71
4000K	Anthracite	317571	71

0,600 Kg / 0,0011 m³

TETRIS




Aluminum body with matt powder coating. Clear tempered glass diffuser. Available finishes: anthracite, white, coffee, grey or black.

tetris-1

IP44





0,390 Kg / 0,0017 m³

Installation
Wall

Finish	Code	€
White	114293	82
Grey	113760	82
Anthracite	113753	82
Black	326955	82
Coffee	213323	82


Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

tetris-2

IP44





0,520 Kg / 0,0011 m³

Installation
Wall

Finish	Code	€
White	269221	91
Anthracite	113791	91

Recommended bulb G9 max 2 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10





TWIN



Anthracite, white, coffee, grey or black powder coated die-cast aluminum body. Double, top and bottom, clear frosted Pyrex glass diffuser.

twin

IP44





0,510 Kg / 0,0029 m³

Installation

Wall

Finish	Code	€
White	115351	55
Grey	326979	55
Anthracite	115368	55
Black	115375	55
Coffee	213330	55

Recommended bulb G9 max 1 x 28W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

ANDROMEDA

Andromeda is the outdoor
wall light that explores space
with elegance. Andromeda is perfect
for those seeking a balance between
contemporary design
and sophisticated luminosity.




Die-cast aluminum body light with varnish finish. Double frosted Pyrex glass, up-and-down. Available finishes: anthracite, white, coffee, grey or black.

andromeda

IP55





1,630 Kg / 0,0052 m³


Installation
Wall

Finish	Code	€
White	100364	85
Grey	163543	85
Anthracite	092355	85
Black	100371	85
Coffee	163550	85

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2





1,000 Kg / 0,0039 m³

Finish	Code	€
White	066868	55
Grey	158822	55
Anthracite	061580	55
Black	061597	55
Coffee	163536	55

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

GIOVE




Powder coated die-cast aluminum body. Double, top and bottom, frosted tempered clear glass diffuser. Available finishes: anthracite, white, coffee or black.

giove

IP54





0,900 Kg / 0,0043 m³

Installation
Wall

Finish	Code	€
White	092195	70
Anthracite	092188	70
Black	092201	70
Coffee	163598	70

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

FELIX




High performance resin body: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C.

felix

IP66 | LED





0,520 Kg / 0,0050 m³

Installation

Wall

Finish	Code	€
White	123745	52


Included bulb LED E27 x 8W

Lumen	CCT	Code	€
-	2700/4000/6500 K	-	-

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2





0,610 Kg / 0,0048 m³

Finish	Code	€
White	123776	35
Grey	123769	35
Black	123783	35

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

REX




Powder coated die-cast aluminum body available in different colors: anthracite, white, coffee, grey or black. White acrylic diffuser.

rex

IP44

Installation
Wall






Finish	Code	€
White	092393	42
Grey	322735	42
Anthracite	092409	42
Black	322728	42
Coffee	213217	42

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

0,600 Kg / 0,0057 m³






Finish	Code	€
White	092416	42
Grey	370965	42
Anthracite	092423	42
Black	118635	42
Coffee	370941	42

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

0,600 Kg / 0,0065 m³





Finish	Code	€
White	092430	42
Grey	370972	42
Anthracite	092447	42
Black	118642	42
Coffee	213224	42

Recommended bulb E27 max 2 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

0,600 Kg / 0,0065 m³







POLAR




High performance resin body
and diffuser: resistant to corrosion
caused by both atmospheric agents
and chemical fertilizers, colors
stabilized during UV rays treatment,
thermal shock resistance
from -60° to +90°C.

polar

IP66





0,800 Kg / 0,0109 m³


Installation
Wall | Ceiling

Finish	Code	€
White	096711	26
Black	096704	26

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2





0,800 Kg / 0,0106 m³


Finish	Code	€
White	096667	37
Black	096674	37

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

IP66





0,800 Kg / 0,0109 m³


Installation
Wall

Finish	Code	€
White	096735	26
Black	096728	26

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2






0,800 Kg / 0,0106 m³

Finish	Code	€
White	096681	37
Black	096698	37

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

BUBBLE

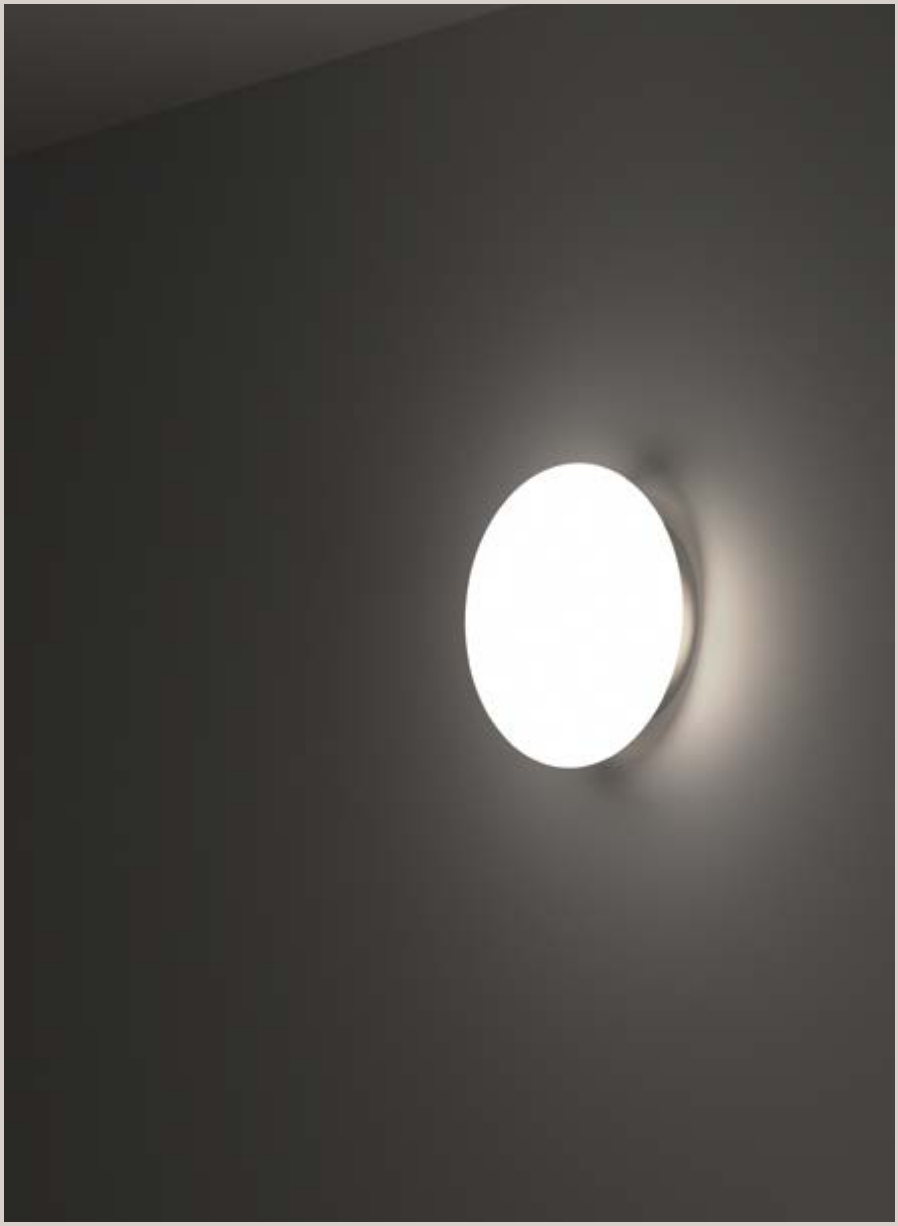


Turned die-cast aluminum body with powder coating. Matt white plastic diffuser.

bubble

IP54





0,480 Kg / 0,0036 m³

Installation

Wall | Ceiling

Finish	Code	€
White	158907	72

Recommended bulb **G9 max 2 x 15W**

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

SNOW




White polycarbonate base and diffuser. Jointed fixing, without visible screws. Color: white.

snow

IP65 | LED 6W | 600/660 lm | 50.000 h life





0,170 Kg / 0,0013 m³

Installation

Wall

CCT	Finish	Code	€
3000K	White	326214	27
4000K	White	326221	27

CLIO



Modular fitting with turned
die-cast aluminum frame, finished
with anthracite, white, black
and coffee powder coating.
Plastic diffuser with matt white finish.

clio

IP44





0,680 Kg / 0,0035 m³

Installation


Wall

Finish	Code	€
White	146775	80
Anthracite	145228	80
Black	146799	80
Coffee	326788	80

Recommended bulb E27 max 1 x 42W


Lumen	CCT	Code	€
580 lm	4000 K	151960	2

Diffuser




0,540 Kg / 0,0177 m³

Finish	Code	€
White	145068	40



0,520 Kg / 0,0144 m³

Finish	Code	€
White	116716	40



0,610 Kg / 0,0221 m³

Finish	Code	€
White	145020	40

DOWN




Die-cast aluminum body light with anthracite or white powder coat finish. Acrylic diffuser.

down

IP44





0,270 Kg / 0,0012 m³

Installation

Wall

Finish	Code	€
White	115382	30
Anthracite	122045	30

Recommended bulb G9 max 1 x 28W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

FEBE




Surface-mounted luminaire with powder-coated die-cast aluminum body. Clear tempered glass diffuser.

febe

IP65 | LED 6W | 550 lm | 30.000 h life

Installation
Wall






0,760 Kg / 0,0012 m³

CCT	Finish	Code	€
3000K	Anthracite	250854	76






0,760 Kg / 0,0013 m³

CCT	Finish	Code	€
3000K	Anthracite	268354	76

DEDRA

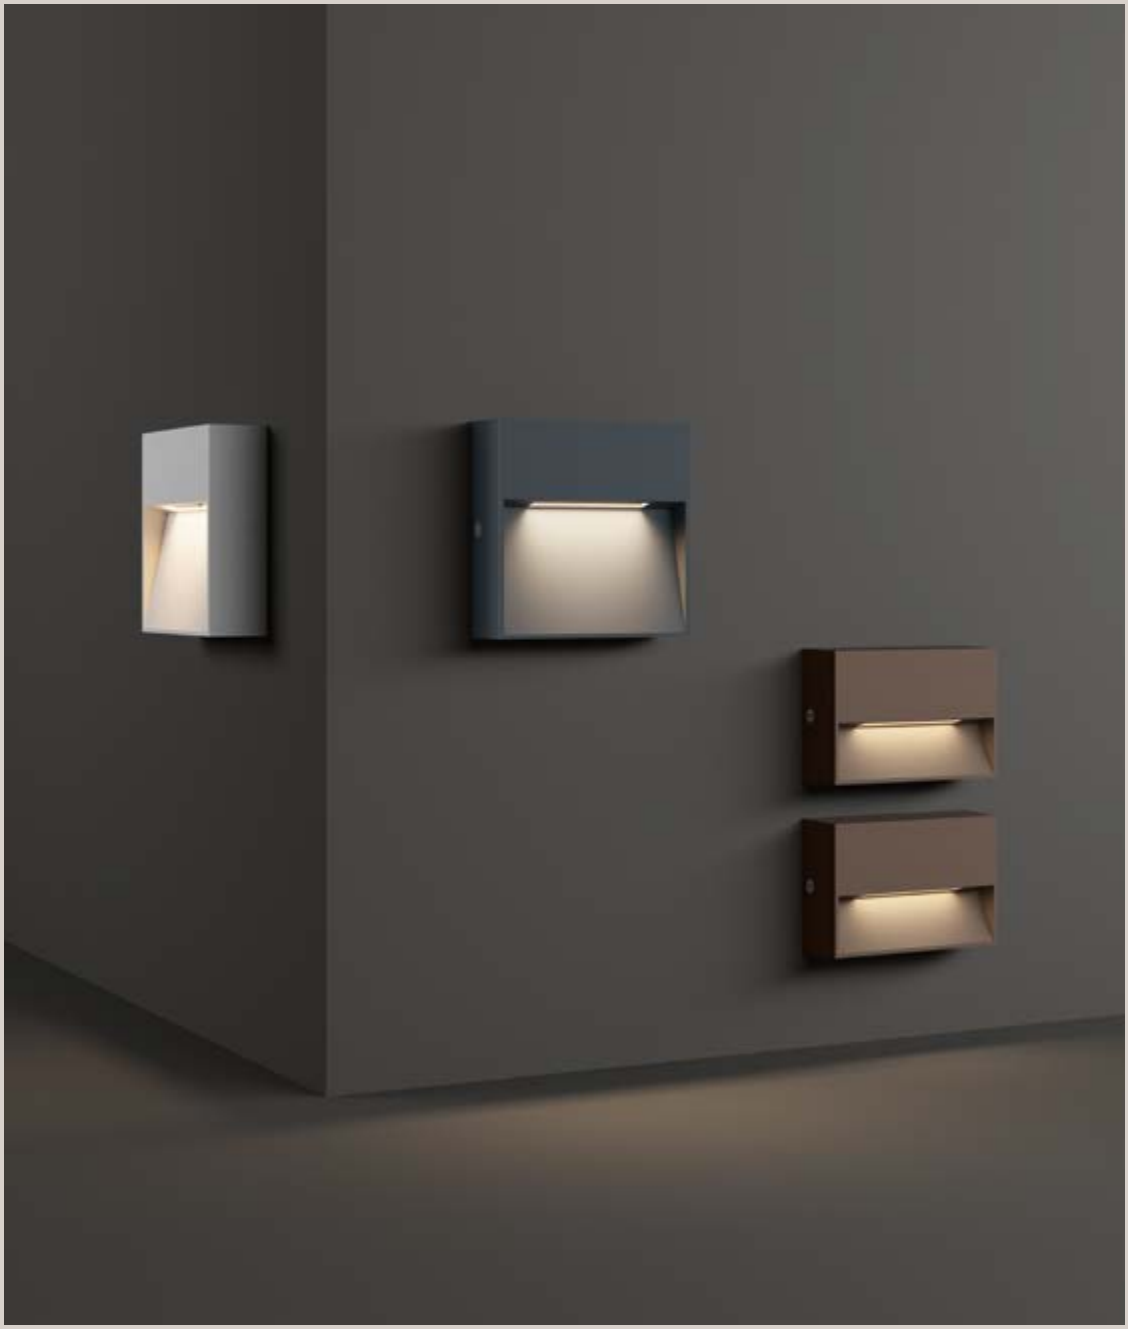


Powder coated die-cast aluminum body. Clear acrylic diffuser. Indirect light emission. Finishes: white, anthracite, coffee.

dedra

IP65 | LED 1,5W | 160 lm | 20.000 h life

Installation
Wall






0,200 Kg / 0,0005 m³

Finish	Code	€
White	328638	48
Anthracite	316871	48
Coffee	328621	48





0,170 Kg / 0,007 m³

Finish	Code	€
White	316901	44
Anthracite	328645	44
Coffee	316895	44

PURE




Pure is the portable lamp that combines essentiality and freedom.
Pure recharges fully in 6 hours and is ready to accompany every moment, without space constraints.

Matt varnished metal base, stem and shade. Acrylic diffuser.
Table lamp with rechargeable battery and integrated touch switch.
Finishes: white, coffee, black.
Battery charging time 5 hours.

pure

IP54 | LED 1,5W | 220 lm 30.000 h life





Installation
Bollard


CCT	Finish	Code	€
3000K	White	311708	117
3000K	Black	328515	117
3000K	Coffee	328508	117

1,580 Kg / 0,0058 m³

Lamp with rechargeable battery included. 6 hours life

IP54 | LED 1,5W | 220 lm 30.000 h life





Installation
Table

CCT	Finish	Code	€
3000K	White	311685	86
3000K	Black	311678	86
3000K	Coffee	311661	86

0,840 Kg / 0,0056 m³

Lamp with rechargeable battery included. 6 hours life

TOFFEE




Rechargeable battery-operated table lamp. Powder coated aluminum body. Acrylic diffuser.

toffee

IP54 | LED 2W | 320 lm | 20.000 h life

Installation
Table





CCT	Finish	Code	€
3000K	White	311715	90
3000K	Black	328614	90
3000K	Coffee	347868	90


0,460 Kg / 0,0051 m³

Lamp with rechargeable battery included. 8 hours life.

IP65 | LED 11W | 1200 lm | 20.000 h life

Installation
Bollard






CCT	Finish	Code	€
3000K	Anthracite	347837	106
3000K	Black	347851	106
3000K	Coffee	347844	106

1,400 Kg / 0,0263 m³





CCT	Finish	Code	€
3000K	Anthracite	347806	102
3000K	Black	347820	102
3000K	Coffee	347813	102

1,220 Kg / 0,0394 m³

IP65 | LED 8W | 900 lm | 20.000 h life

Installation
Bollard






CCT	Finish	Code	€
3000K	Anthracite	347776	84
3000K	Black	347790	84
3000K	Coffee	347783	84

0,950 Kg / 0,0240 m³





CCT	Finish	Code	€
3000K	Anthracite	347745	80
3000K	Black	347769	80
3000K	Coffee	347752	80

0,830 Kg / 0,0153 m³

CUTE



Rechargeable lamp with a refill base. Powder coated metal frame. Acrylic diffuser with downward light emission. Colors: white, black, coffee, chrome and gold.

cute


IP65 | LED 2,5W | 220 lm 50.000 h life.

Installation

Table

CCT	Finish	Code	€
2200/2700 K	White	346892	86
2200/2700 K	Black	346908	86
2200/2700 K	Coffee	346915	86
2200/2700 K	Oro	346939	86





0,440 Kg / 0,0026 m³


Lamp with rechargeable battery included. 9,5 hours life.

IP20

Charging base

Finish	Code	€
Black	348377	183






1,920 Kg / 0,0092 m³

cute



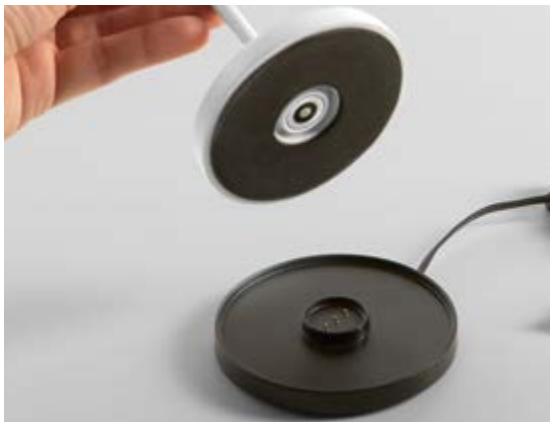





LOLITA








Table lamp with rechargeable battery with white, grey, black or coffee finish. Plastic base. Metal frame. Plastic diffuser. The table lamp has 8 hours autonomy. Battery charging time 4 hours.

P. 33

lolita

IP54 | LED 1,8W | 200 lm 25.000 h life





Installation

Table

CCT	Finish	Code	€
3000K	White	286723	56
3000K	Grey	286730	56
3000K	Black	286716	56
3000K	Coffee	286747	56

0,550 Kg / 0,0080 m³

Lamp with rechargeable battery included. 8 hours life.

TWIGGY




Powder coated aluminum frame. Satin acrylic diffuser. Equipped with spike. Colors: black and coffee.

twiggy

IP65 | LED 1,5W / 110 lm | 30.000 h life

Installation
Bollard

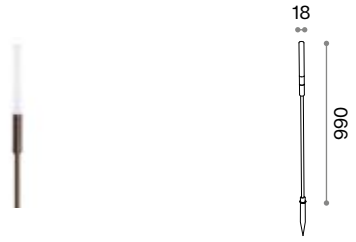

0,290 Kg / 0,0031 m³

CCT	Finish	Code	€
3000K	Black	348346	52
3000K	Coffee	348339	52




0,031 Kg / 0,0033 m³

CCT	Finish	Code	€
3000K	Black	348360	63
3000K	Coffee	348353	63



0,210 Kg / 0,0033 m³


CCT	Finish	Code	€
3000K	Black	347882	47
3000K	Coffee	347875	47

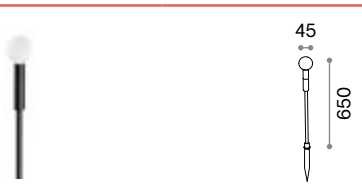

0,230 Kg / 0,0020 m³

CCT	Finish	Code	€
3000K	Black	347905	58
3000K	Coffee	347899	58

Driver



Not included	Code	€
Required	276205	12

DORIS




Multi-greys plastic diffuser with granite effect. Supplied with plug and spike for ground installation.

doris

IP44

Installation
Bollard




7,600 Kg / 0,5447 m³

Finish	Code	€
White	195506	545

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




4,050 Kg / 0,2422 m³

Finish	Code	€
White	195490	325

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




3,000 Kg / 0,1339 m³

Finish	Code	€
White	195483	215

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



1,210 Kg / 0,0327 m³

Finish	Code	€
White	214009	127

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

SOLE




Opal color plastic diffuser.
Supplied with cable, plug and picket
for the installation on the ground.

sole

IP44

Installation
Bollard




4,500 Kg / 0,1379 m³

Finish	Code	€
White	191614	225

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2




3,900 Kg / 0,0741 m³

Finish	Code	€
White	191621	150

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2






2,700 Kg / 0,0371 m³

Finish	Code	€
White	191638	120

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



1,200 Kg / 0,0144 m³

Finish	Code	€
White	318820	110

Recommended bulb E27 max 1 x 60W


Lumen	CCT	Code	€
1020 lm	4000 K	151991	2



Ø500 Ø400 Ø300 Ø200



LUNA

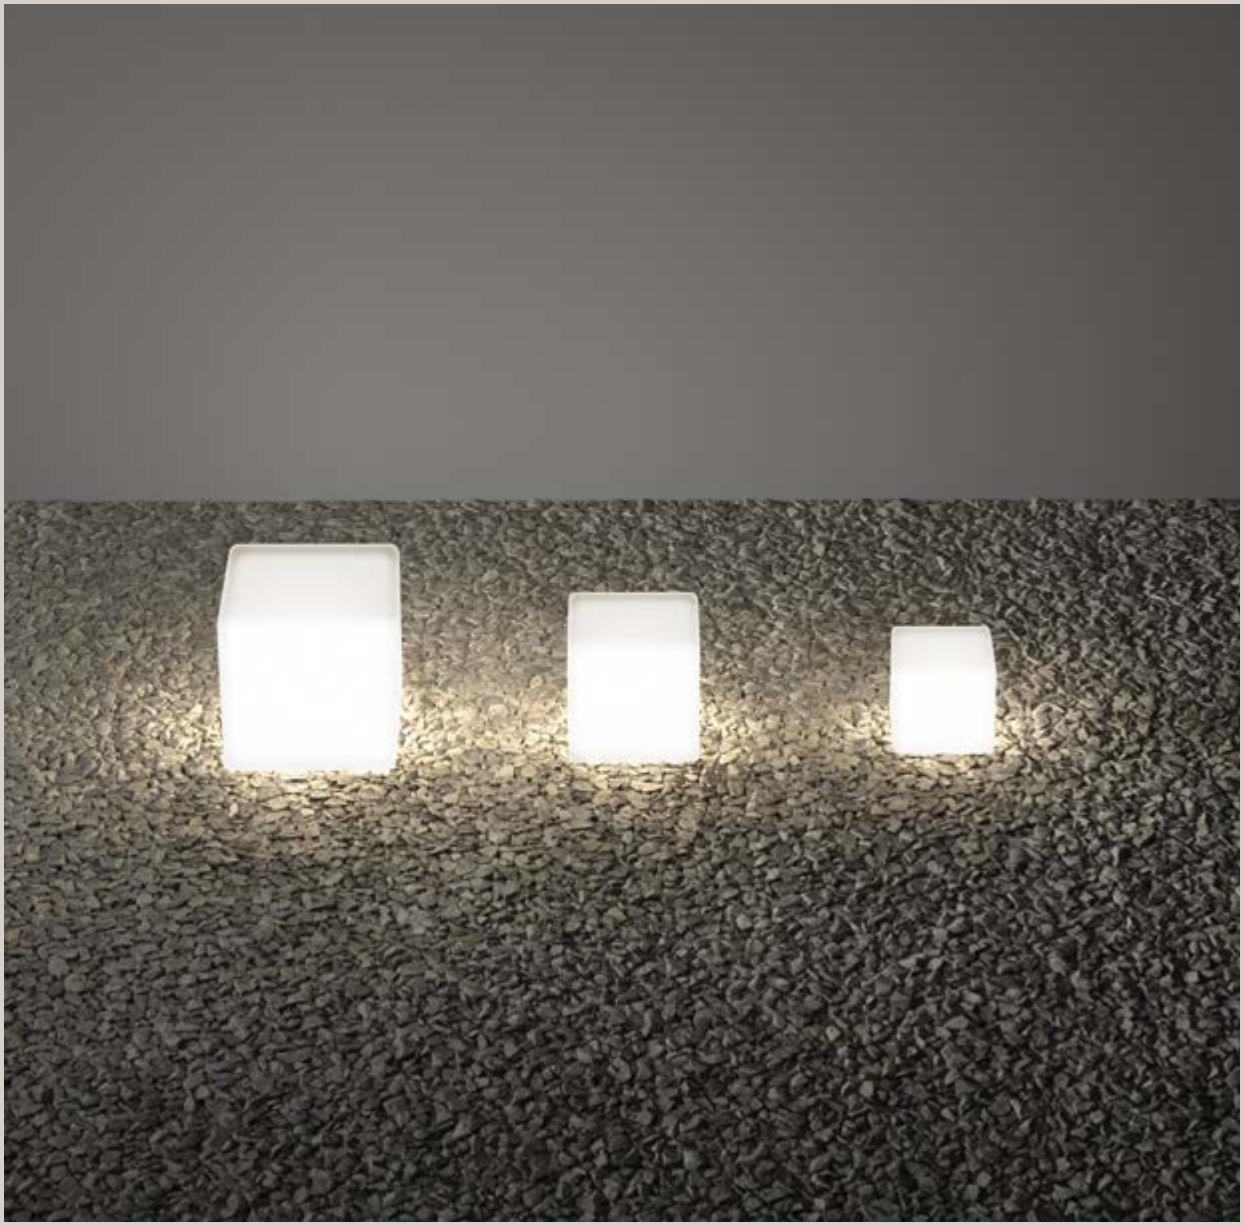


Opal colour plastic frame-diffuser.
Supplied with power cable,
plug and picket for installation
on the ground.

IP44

Installation
Bollard






6,700 Kg / 0,1639 m³

Finish	Code	€
White	191607	290

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2






4,700 Kg / 0,1005 m³

Finish	Code	€
White	191584	210

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2





2,700 Kg / 0,0416 m³

Finish	Code	€
White	191577	150

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

SASSO




Opal color plastic diffuser. Supplied with power cable, plug and picket for installation on the ground.

sasso

IP44

Installation
Bollard






Finish	Code	€
White	161778	205

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

1,500 Kg / 0,0444 m³





Finish	Code	€
White	161761	145

Recommended bulb E27 max 1 x 60W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

0,900 Kg / 0,0209 m³



Finish	Code	€
White	161754	105

Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

0,710 Kg / 0,0134 m³

AGOS




Powder coated die-cast aluminum body. Satin clear acrylic diffuser. Anthracite, coffee or black color.

agos

IP54 | LED 6,5W | 670 lm | 25.000 h life

Installation
Bollard






1,100 Kg / 0,0179 m³

CCT	Finish	Code	€
3000 K	Anthracite	254319	102
3000 K	Black	326733	102
3000 K	Coffee	326726	102





0,950 Kg / 0,0127 m³

CCT	Finish	Code	€
3000 K	Anthracite	254388	81
3000 K	Black	326696	81
3000 K	Coffee	326689	81





STYLE




Powder coated aluminum body.
Opal color plastic shade. Integrated LED source. Available finishes: anthracite, white, coffee, grey or black.

style

IP54 | LED 8,5W | 950/1050 lm | 30.000 h life

Installation
Bollard






CCT	Finish	Code	€
3000K	White	318707	180
4000K	White	322483	180
3000K	Grey	322384	180
4000K	Grey	322353	180
3000K	Anthracite	246871	180
4000K	Anthracite	209906	180
3000K	Black	322230	180
4000K	Black	322216	180
3000K	Coffee	322452	180
4000K	Coffee	322438	180

1,680 Kg / 0,0241 m³






CCT	Finish	Code	€
3000K	White	318691	138
4000K	White	322582	138
3000K	Grey	322551	138
4000K	Grey	322544	138
3000K	Anthracite	322612	138
4000K	Anthracite	322599	138
3000K	Black	322537	138
4000K	Black	322506	138
3000K	Coffee	322575	138
4000K	Coffee	322568	138

1,200 Kg / 0,0122 m³





CCT	Finish	Code	€
3000K	White	369594	129
3000K	Grey	369648	129
3000K	Anthracite	364841	129
3000K	Black	369662	129
3000K	Coffee	369624	129

0,620 Kg / 0,0074 m³

SIRIO




Powder painted aluminum body. Clear tempered glass diffuser for the integrated LED version, sandblasted for the model with bulb.

sirio

IP65





1,880 Kg / 0,0179 m³


Installation
Bollard

Finish	Code	€
White	115085	150
Grey	246963	150
Anthracite	115061	150
Black	115108	150
Coffee	213262	150

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5






1,550 Kg / 0,0136 m³

Finish	Code	€
White	115092	130
Grey	246970	130
Anthracite	115078	130
Black	115115	130
Coffee	213279	130

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5





0,400 Kg / 0,0066 m³


Finish	Code	€
White	365671	100
Grey	369891	100
Anthracite	369860	100
Black	369914	100
Coffee	369884	100

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

IP65 | LED 13W | 1100 lm | 30.000 h life






2,300 Kg / 0,0170 m³

Installation
Bollard

Finish	Code	€
White	365404	200
Grey	365411	200
Anthracite	339634	200
Black	365398	200
Coffee	365428	200





1,760 Kg / 0,0128 m³

Finish	Code	€
White	365367	190
Grey	365374	190
Anthracite	339627	190
Black	365350	190
Coffee	365381	190

TITANO





Porous resin body. Matt black varnished metal base and diffuser's detail. Downward light emission. Integrated LED source.


titano

IP55 | LED 8,5W | 560/580 lm | 50.000 h life

Installation

Bollard






9,220 Kg / 0,0540 m³

CCT	Finish	Code	€
3000K	Granite	246987	350
4000K	Granite	187327	350





6,800 Kg / 0,0363 m³

CCT	Finish	Code	€
3000K	Granite	246994	275
4000K	Granite	157856	275

KURT



Powder-coated aluminum base and body. Clear tempered glass diffuser. Downward lights emission. Colors: anthracite, white, coffee or black.

kurt

IP54 | LED 11W | 1050/1100 lm | 30.000 h life.





1,930 Kg / 0,0066 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	White	306841	127
4000K	White	294049	127
3000K	Anthracite	306834	127
4000K	Anthracite	294025	127
3000K	Black	306872	127
4000K	Black	293172	127
3000K	Coffee	306858	127
4000K	Coffee	294001	127

TESLA




Tesla is luminous essentiality with a strong, contemporary character. An ideal solution for those seeking functionality and style in a single lighting gesture.

Powder painted aluminum body.
White plastic screen diffuser.
Downward light emission.
Available finishes: anthracite,
white, coffee or black.

tesla

IP44





3,000 Kg / 0,0366 m³


Installation
Bollard

Finish	Code	€
White	153179	155
Anthracite	153162	155
Black	316055	155
Coffee	326924	155

Recommended bulb G9 max 4 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10





2,560 Kg / 0,0278 m³

Finish	Code	€
White	153209	145
Anthracite	153193	145
Black	326917	145
Coffee	316048	145

Recommended bulb G9 max 4 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

GAS




Powder coated die-cast aluminum body. Tempered and sandblasted clear glass diffuser. Available finishes: anthracite, white, coffee, grey or black.

gas

IP43





1,790 Kg / 0,0214 m³

Installation

Bollard

Finish	Code	€
Anthracite	139470	116
Black	322421	116
Coffee	213101	116

Recommended bulb GU10 max 1 x 35W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

HUB




Powder coated aluminum base, pole and body. Orientable diffuser with clear tempered glass screen. Supplied with picket for installation on the ground. Available finish: anthracite.

hub

IP54 | LED 4,5W | 390 lm **3000 K | 30.000 h life**






0,850 Kg / 0,0065 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	Anthracite	251257	134





0,720 Kg / 0,0076 m³

CCT	Finish	Code	€
3000K	Anthracite	251226	122

Base



Not included

Optional

Finish	Code	€
Anthracite	251295	32

TIFONE




Powder coated die-cast aluminum base and frame with anthracite finish. Clear tempered glass diffuser. Downward light emission.

tifone

IP65 | LED 8,5W | 710 lm | 20.000 h life

Installation
Bollard






1,250 Kg / 0,0066 m³

CCT	Finish	Code	€
3000K	Anthracite	250953	124





1,010 Kg / 0,0029 m³

CCT	Finish	Code	€
3000K	Anthracite	250977	106

VEGA




Aluminum body with matt powder coating. Clear tempered glass diffuser. Available finishes: anthracite, white, coffee, grey or black.

vega

IP44





1,150 Kg / 0,0098 m³

Installation

Bollard

Finish	Code	€
White	136035	180
Grey	136042	180
Anthracite	136028	180
Black	136059	180
Coffee	213361	180

Recommended bulb **G9 max 1 x 15W**

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

JEDI




Jedi is the outdoor light that guides with discretion and elegance. Available in sophisticated anthracite or black finishes, it is the ideal choice for enhancing gardens, pathways and relaxation areas with a touch of contemporary design.

Powder-coated aluminium base and body. Shiny opal color polycarbonate diffuser. Supplied with piquet for ground installation. Available finishes: anthracite, black, coffee.

jedi

IP65 | LED 25W | 2600 lm | 50.000 h life



1,280 Kg / 0,0065 m³

Installation
Bollard

CCT	Finish	Code	€
3000K	Anthracite	306803	163
3000K	Black	293202	163
3000K	Coffee	372297	163

IP65 | LED 19W | 2050 lm | 50.000 h life



1,030 Kg / 0,0050 m³

Installation
Bollard

CCT	Finish	Code	€
3000K	Anthracite	306797	131
3000K	Black	293196	131
3000K	Coffee	372280	131


IP65 | LED 12W | 1250 lm | 50.000 h life



0,760 Kg / 0,0036 m³

Installation
Bollard


CCT	Finish	Code	€
3000K	Anthracite	306780	95
3000K	Black	293189	95
3000K	Coffee	372273	95

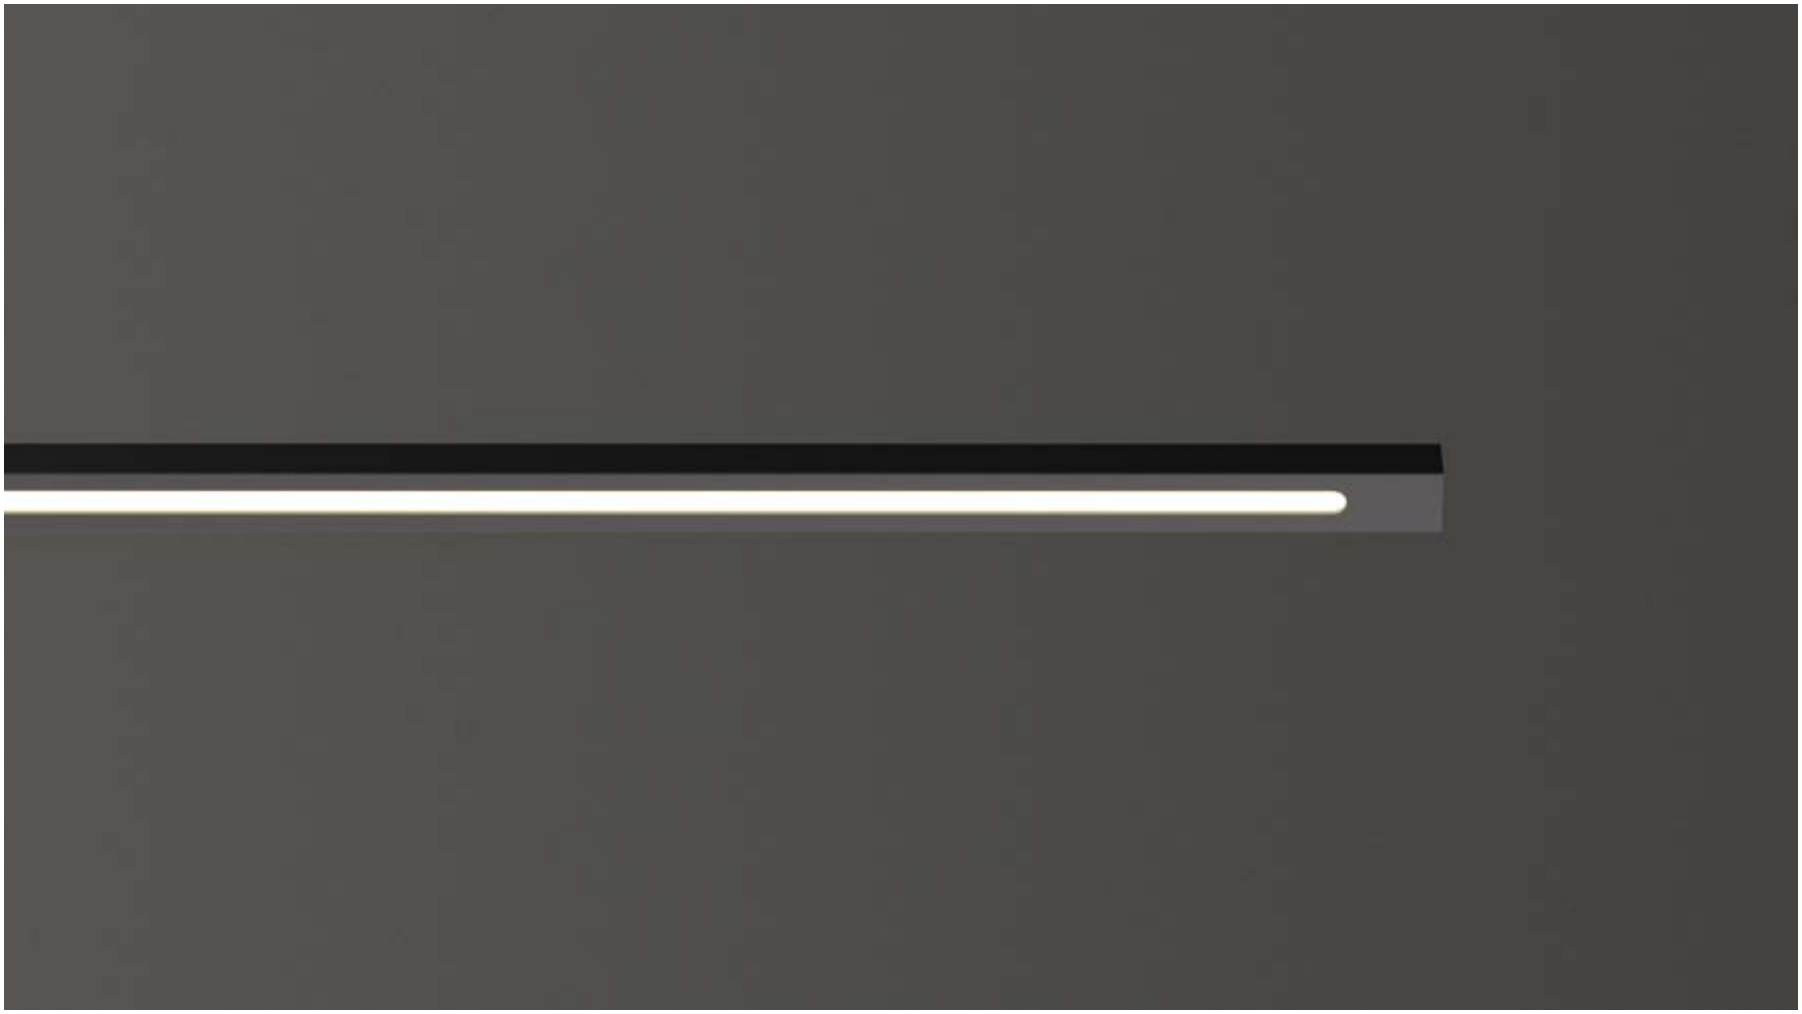

jedi

IP65 | LED 7W | 720 lm | 50.000 h life





0,440 Kg / 0,0022 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	Anthracite	363721	74
3000K	Black	372266	74
3000K	Coffee	372259	74

Base





Not included

Optional

Finish	Code	€
Anthracite	308227	13
Black	308234	13
Coffee	372242	13

BOEING



Powder coated die-cast aluminum body. Diffuser made of an external smoked clear polycarbonate protection and satin opal acrylic inner element which orientate the light downward.
Colors: anthracite, coffee, black.

boeing

IP65 | LED 14W | 1700 lm | 50.000 h life.

Installation
Bollard






4,000 Kg / 0,0203 m³

CCT	Finish	Code	€
3000K	Anthracite	327266	210
3000K	Black	346731	210
3000K	Coffee	346724	210






3,100 Kg / 0,0164 m³

CCT	Finish	Code	€
3000K	Anthracite	327259	180
3000K	Black	346717	180
3000K	Coffee	346700	180





2,200 Kg / 0,0090 m³

CCT	Finish	Code	€
3000K	Anthracite	327242	160
3000K	Black	346694	160
3000K	Coffee	346687	160






1,350 Kg / 0,0037 m³

CCT	Finish	Code	€
3000K	Anthracite	346656	140
3000K	Black	346670	140
3000K	Coffee	346663	140

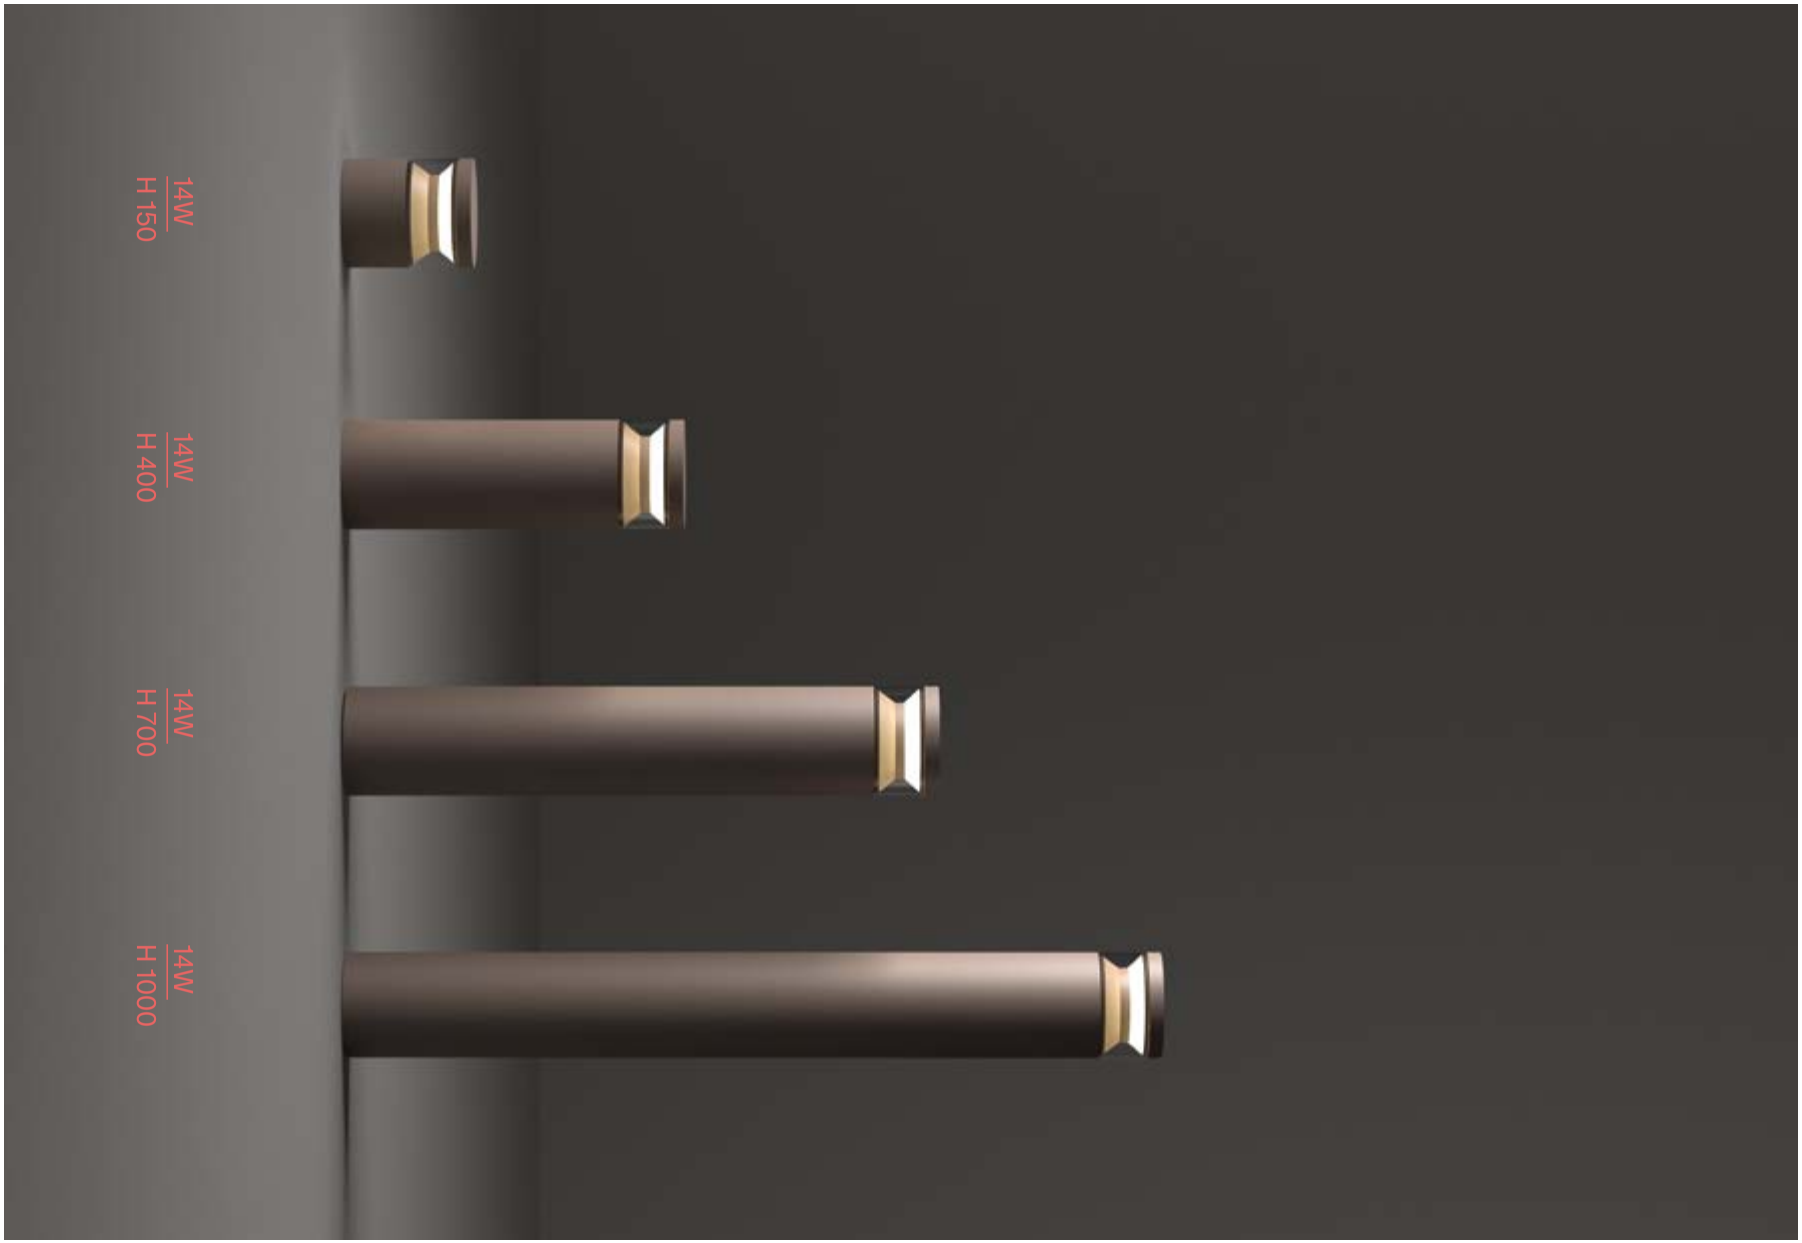


14W
H 150
14W
H 400
14W
H 700
14W
H 1000

TRONCO




Varnished die-cast aluminum body with different finishes: anthracite, white, coffee, grey or black. Pyrex glass diffuser with aluminum elements inside.

tronco

IP65





2,490 Kg / 0,0254 m³

Installation
Bollard

Finish	Code	€
White	109138	160
Grey	026961	160
Anthracite	026992	160
Black	004723	160
Coffee	163741	160

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2






1,970 Kg / 0,0185 m³

Finish	Code	€
White	109145	138
Grey	026954	138
Anthracite	026985	138
Black	004730	138
Coffee	163758	138

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2





0,590 Kg / 0,0124 m³

Finish	Code	€
White	248264	125
Grey	248288	125
Anthracite	248257	125
Black	248295	125
Coffee	248271	125

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2





1,200 Kg / 0,0078 m³

Finish	Code	€
White	366050	109
Grey	369815	109
Anthracite	369761	109
Black	369846	109
Coffee	369792	109

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
490 lm	4000 K	153957	2

ATENA




High performance resin body and diffuser: resistant to corrosion, colors stabilized during U.V. rays treatment, resistant to temperatures between -60° C and +90° C.

atena

IP55 | LED





1,070 Kg / 0,0220 m³

Installation

Bollard

Finish	Code	€
White	198644	87
Grey	198637	87
Black	198620	87

Included bulb LED E27 8W Goccia

Lumen	CCT	Code	€
-	2700/4000/ 6500 K	-	-

Recommended bulb E27 max 1 x 23W

Lumen	CCT	Code	€
1020 lm	4000 K	151991	2

EDO




Die-cast aluminum structure
finished with anthracite, white
or coffee powder coating.
White polycarbonate diffuser.

edo

IP65





1,600 Kg / 0,0257 m³

Installation


Bollard

Finish	Code	€
White	135755	139
Anthracite	138510	139
Coffee	213071	139

Recommended bulb **GX53 max 1 x 15W**

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5





2,670 Kg / 0,0243 m³

Finish	Code	€
White	142999	139
Anthracite	135762	139
Coffee	213088	139

Recommended bulb **GX53 max 1 x 15W**

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

ETERE



Powder coated die-cast aluminum body. Satin opal polycarbonate glass diffusers. Black PVC cables. Colors: anthracite, coffee or black.

etere

IP44 | LED 9,5W | 1000/1100 lm | 25.000 h life





1,100 Kg / 0,0099 m³

Installation

Bollard

CCT	Finish	Code	€
3000K	Anthracite	246932	121
4000K	Anthracite	172439	121
3000K	Black	322261	121
4000K	Black	322278	121
3000K	Coffee	269160	121
4000K	Coffee	246956	121

TORRE




Turned powder painted aluminum body with anthracite, white, coffee, grey or black. Plastic diffuser with opal effect.

torre

IP65





2,600 Kg / 0,0306 m³


Installation
Bollard

Finish	Code	€
Grey	321851	180
Anthracite	321882	180
Black	321639	180
Coffee	321868	180

Recommended bulb E27 max 1 x 15W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2






2,100 Kg / 0,0242 m³

Finish	Code	€
Grey	321905	168
Anthracite	162492	168
Black	186955	168
Coffee	321929	168

Recommended bulb E27 max 1 x 15W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2





0,870 Kg / 0,0056 m³

Finish	Code	€
Grey	321950	144
Anthracite	158891	144
Black	186979	144
Coffee	321981	144

Recommended bulb E27 max 1 x 15W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2

COSMO



Resin body resistant to corrosion, UV and temperature between -60° and +90° C. Anti-yellowing transparent diffuser.

cosmo

IP55 | LED





2,150 Kg / 0,0220 m³

Installation

Bollard

Finish	Code	€
White	187877	121
Grey	187884	121
Black	187891	121

Included bulb LED GX53 10W

Lumen	CCT	Code	€
-	300/4000/ 6500 K	-	-

Recommended bulb GX53 max 1 x 10W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

CLIO




clio

IP44

Installation

Bollard






1,360 Kg / 0,0081 m³

Finish	Code	€
White	249469	95
Anthracite	249452	95
Black	249483	95
Coffee	328829	95

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2






7,250 Kg / 0,0403m³

Finish	Code	€
White	249506	285
Anthracite	249490	285
Black	249520	285
Coffee	328836	285

Recommended bulb E27 max 1 x 42W


Lumen	CCT	Code	€
580 lm	4000 K	151960	2

Diffuser




0,540 Kg / 0,0177 m³

Finish	Code	€
White	145068	40



0,520 Kg / 0,0147 m³


Finish	Code	€
White	116716	40



0,610 Kg / 0,0221 m³

Finish	Code	€
White	145020	40


THOR

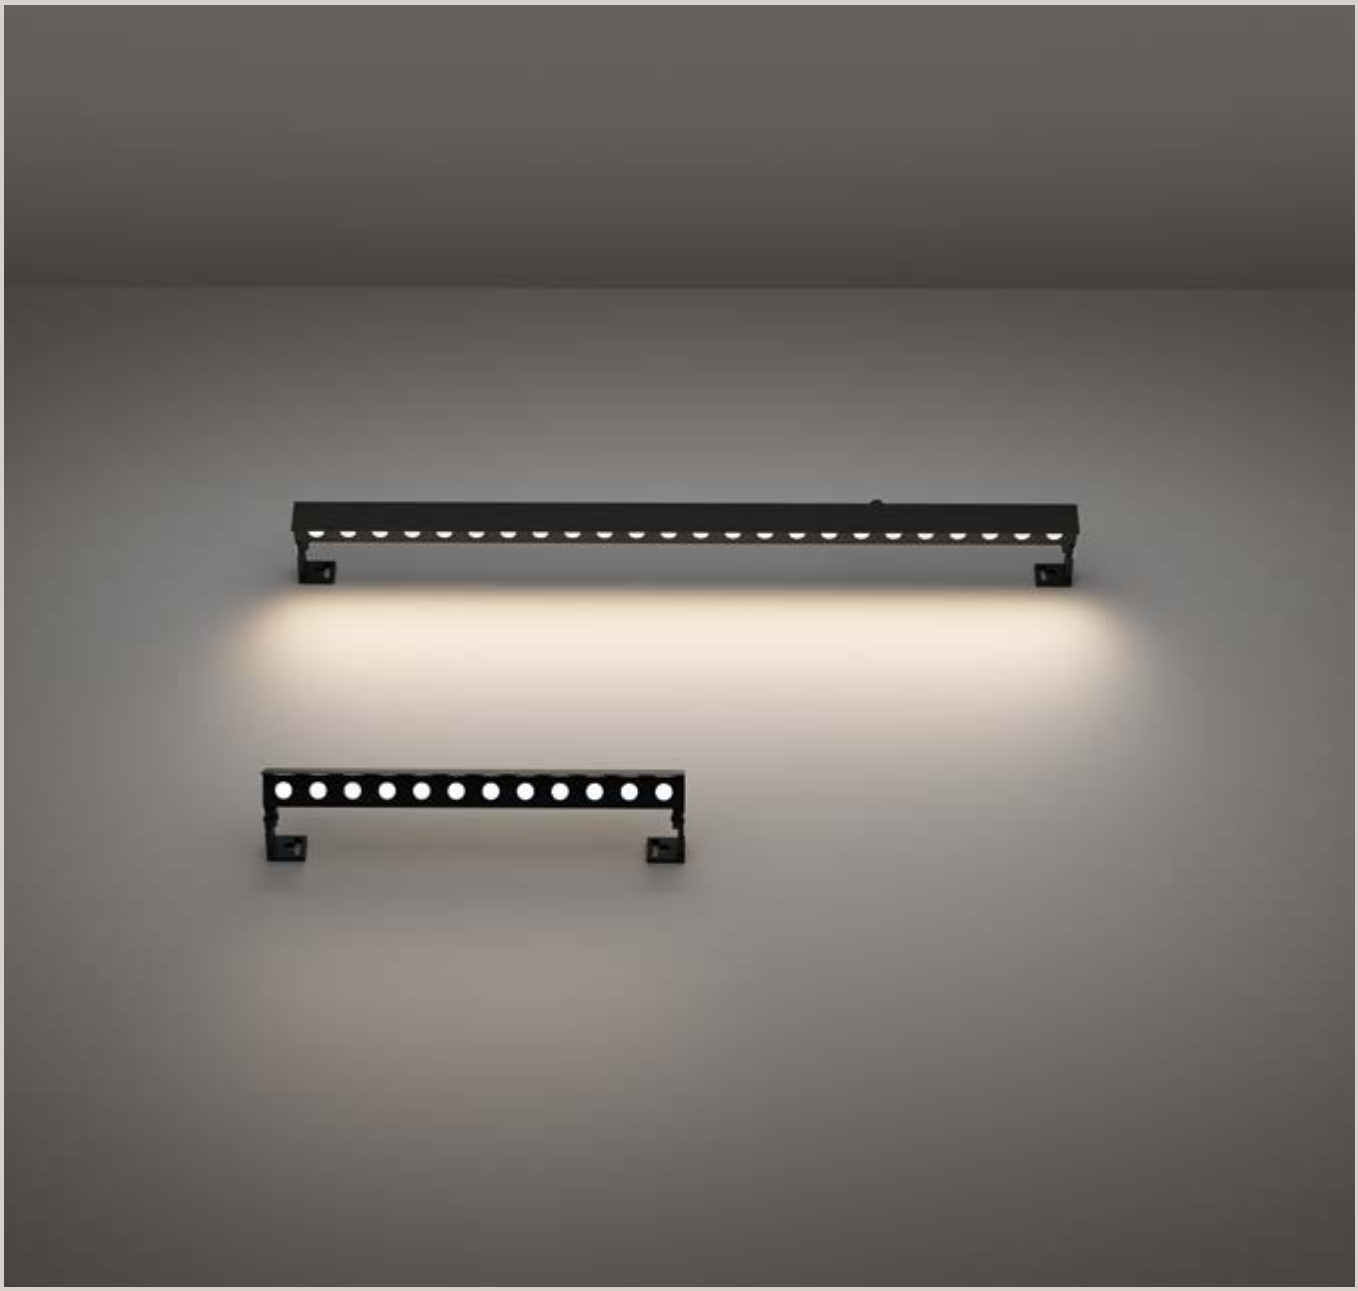

Adjustable linear projector
for surface installation
with oblique light effect.

thor

IP65 | LED SMD | 50.000 h life | Material: Aluminum




Power	Installation	Beam	CRI	SDCM
20W	Wall | Ceiling | Floor	28°	≥90	3

Control	Lumen	CCT	Finish	Code	€
On-Off	2100 lm	3000 K	Anthracite	261331	218

Cable lenght	Driver
500 mm	Separate - not included

1,490 Kg/0,0088 m³



Power	Installation	Beam	CRI	SDCM
40W	Wall | Ceiling | Floor	28°	≥90	3

Control	Lumen	CCT	Finish	Code	€
On-Off	4200 lm	3000 K	Anthracite	261355	330

Cable lenght	Driver
500 mm	Separate - not included

2,460 Kg/0,0176 m³

Visor



Model	Optional	Finish	Code	€
20W	Not included	Anthracite	261362	18
40W	Not included	Anthracite	261379	30

Driver ON/OFF | Not included - Required

Power	Output	Measure	Code	€
40W	24 Vdc	171 x 37 x 61 mm	272108	100
100W	24 Vdc	220 x 39 x 68 mm	226200	190
185W	24 Vdc	220 x 39 x 68 mm	226217	210

Adjustable linear projector for surface installation with oblique light effect. Die-cast aluminum body, clear glass diffuser, 24 Vdc power supply DC, IP65 protection index, IK06 impact resistance. SMD LED technology; CCT 3000 K, CRI ≥ 90, SDCM ≤ 3; LED useful life 50.000 h L70B50. Optionally available with anti-glare visor.










O-ZONE



o-zone

IP66 | LED 19W | 1700 lm | 50.000 h life.





1,200 Kg / 0,0058 m³


Installation

Floor

CCT	Finish	Code	€
3000K	● Black	337531	203

IP66 | LED 13W | 1100 lm | 50.000 h life.





0,800 Kg / 0,0060 m³

Installation

Floor

CCT	Finish	Code	€
3000K	● Black	325019	137



0,090 Kg / 0,0013 m³

Peg

Not included

Optional

Finish	Code	€
● Black	345673	10

STARLIGHT




Aluminum adjustable tracklight with ceiling or peg installation; dark gray anodized and powder coated surface.

starlight

IP67 | LED COB | 50.000 h life | PRO | Material: Aluminum





Power	Installation	Beam	CRI	SDCM
5,5W	Wall | Ceiling | Floor	30°	≥90	3


Control	Lumen	CCT	Finish	Code	€
On-Off	470 lm	3000 K	Dark gray	248394	122
On-Off	560 lm	4000 K	Dark gray	245041	122

Driver
Not included

0,280 Kg/0,0011 m³

IP67 | LED COB | 50.000 h life | PRO | Material: Aluminum





Power	Installation	Beam	CRI	SDCM
10W	Wall | Ceiling | Floor	30°	≥90	3


Control	Lumen	CCT	Finish	Code	€
On-Off	1050 lm	3000 K	Dark gray	248387	254
On-Off	1250 lm	4000 K	Dark gray	245072	254

Driver
Not included

0,950 Kg/0,0019 m³

P. 51



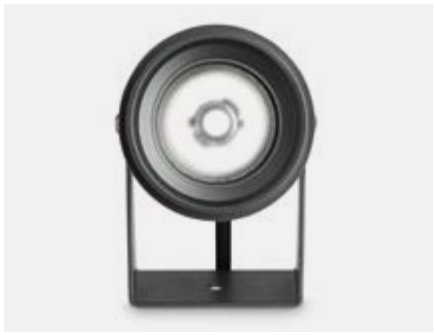





Visor



Model	Optional	Finish	Code	€
5,5W	Not included	Dark gray	245096	35
10W	Not included	Dark gray	245102	35

Peg



Model	Optional	Finish	Code	€
5,5W	Not included	Dark gray	245089	18
10W	Not included	Dark gray	245089	18

On-Off Driver | Not included - Required

Power	Output	Measure	Code	€
20 W	24 Vdc	118 x 26 x 35 mm	226187	75
40W	24 Vdc	148 x 30 x 40 mm	226194	80
100W	24 Vdc	220 x 39 x 68 mm	226200	190
185W	24 Vdc	220 x 39 x 68 mm	226217	210


KOALA



koala

IP65 | LED 7 W | 630 lm | 35.000 h life






0,640 Kg / 0,0014 m³

Installation
Wall

CCT	Finish	Code	€
3000K	● Black	345666	81

IP65 | LED 3 W | 250 lm | 35.000 h life






0,520 Kg / 0,0014 m³

Installation
Wall

CCT	Finish	Code	€
3000K	● Black	331355	66

IP65 | LED 7 W | 630 lm | 35.000 h life






0,600 Kg / 0,0014 m³

Installation
Floor

CCT	Finish	Code	€
3000K	● Black	331386	76

IP65 | LED 7 W / 630 lm | 35.000 h life





0,600 Kg / 0,0014 m³

Installation
Floor

CCT	Finish	Code	€
3000K	● Black	349596	76

On-Off Driver | Not included - Required

Power	Output	Measure	Code	€
20 W	24 Vdc	118 x 26 x 35 mm	226187	75
40W	24 Vdc	148 x 30 x 40 mm	226194	80
100W	24 Vdc	220 x 39 x 68 mm	226200	190
185W	24 Vdc	220 x 39 x 68 mm	226217	210



Powder coated die-cast aluminum body.
Clear tempered glass diffuser. Available with base for wall and floor fixing and with strap for trees and poles fixing.




ULEX



ulex

IP65 | LED SMD OSRAM | 50.000 h life | Material: Aluminum






Power	Installation	Beam	CRI
8,5W	Wall | Ceiling | Floor	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	550 lm	3000 K	Anthracite	261287	147

Cable lenght	Driver
2000 mm	ON/OFF Included

0,660 Kg/0,0030 m³





Power	Installation	Beam	CRI
15W	Wall | Ceiling | Floor	30°	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1150 lm	3000 K	Anthracite	261294	223

Cable lenght	Driver
2000 mm	ON/OFF included

1,190 Kg/0,0036 m³

Peg



Optional	Power	Finish	Code	€
Not included	8,5W	Anthracite	268163	14
Not included	15W	Anthracite	268194	17

Visor



Optional	Power	Finish	Code	€
Not included	8,5W	Anthracite	268170	17
Not included	15W	Anthracite	268200	25





Orientable projector
for surface installation,
suited for a general
or accent outdoor lighting.
Die-cast aluminum body,
clear glass diffuser.
Optionally available
with wiring base, piquet
for ground installation
and anti-glare installation.





SIRIO




Adjustable powder-coated die-cast aluminum body. Clear tempered glass diffuser.

sirio

IP65





1,070 Kg / 0,0025 m³

Installation

Wall | Floor

Finish	Code	€
White	345628	100
Grey	345642	100
Anthracite	318233	100
Black	345659	100
Coffee	345635	100

Recommended bulb GX53 max 1 x 9W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

TERRA




Cast aluminum painted frame. Adjustable body. Transparent Pyrex glass diffuser.

terra

IP65





1,230 Kg / 0,0094 m³

Installation


Floor

Finish	Code	€
Anthracite	033044	96
Coffee	321622	96

Recommended bulb E27 max 1 x 42W

Lumen	CCT	Code	€
580 lm	4000 K	151960	2





0,520 Kg / 0,0042 m³

Finish	Code	€
White	106205	59
Anthracite	033037	59
Black	046211	59
Coffee	163727	59

Recommended bulb GU10 max 1 x 28W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

ELIO




High performance resin body and diffuser: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C. Adjustable diffuser.

elio

IP66 | LED





0,360 Kg / 0,0027 m³

Installation

Floor

Finish	Code	€
White	120218	82
Black	120201	82

Included bulb LED GU10 3,5W

Lumen	CCT	Code	€
-	2700/4000 K	-	-

Recommended bulb LED **GU10 max 1 x 6W**

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

LITIO




High performance resin body and diffuser: resistant to corrosion caused by both atmospheric agents and chemical fertilizers, colors stabilized during UV rays treatment, thermal shock resistance from -60° to +90°C. Adjustable diffuser.

litio

IP66 | LED





0,730 Kg / 0,0046 m³

Installation

Floor

Finish	Code	€
White	145310	94
Grey	145334	94
Black	145358	94

Included bulb GX53 10W

Lumen	CCT	Code	€
-	3000/4000/6500 K	-	-

Recommended bulb GX53 max 1 x 10W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5

INSIDE




Powder coated cast aluminum frame with anthracite, coffee or grey finish. Adjustable body. Clear Pyrex glass diffuser. Provided with peg to plant in the ground.

inside

IP54





0,370 Kg / 0,0019 m³

Installation

Floor

Finish	Code	€
Anthracite	115412	40
Black	115429	40
Coffee	247045	40

Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10




3.1.4

Recessed body made of powder coated die-cast aluminum.
Clear tempered glass diffuser.

bit

IP65 | LED 3W | 450 lm 3000 K | 35.000 h life






0,300 Kg / 0,0006 m³

Installation

Recessed lights

Finish	Code	€
White	269023	55
Anthracite	269009	55

Driver | Not included - Required



Code	€
276205	12

WIRE




Recessed body made of powder coated die-cast aluminum.
Clear tempered glass diffuser.

wire

IP65 | LED 4W | 180 lm | 20.000 h life






0,460 Kg / 0,0018 m³

Installation
Recessed lights

CCT	Finish	Code	€
3000K	White	268989	57
3000K	Anthracite	255514	57

IP65 | LED 1,5W | 90 lm | 20.000 h life






0,220 Kg / 0,0009 m³

Installation
Recessed lights

CCT	Finish	Code	€
3000K	White	268996	39
3000K	Anthracite	255521	39

THOR

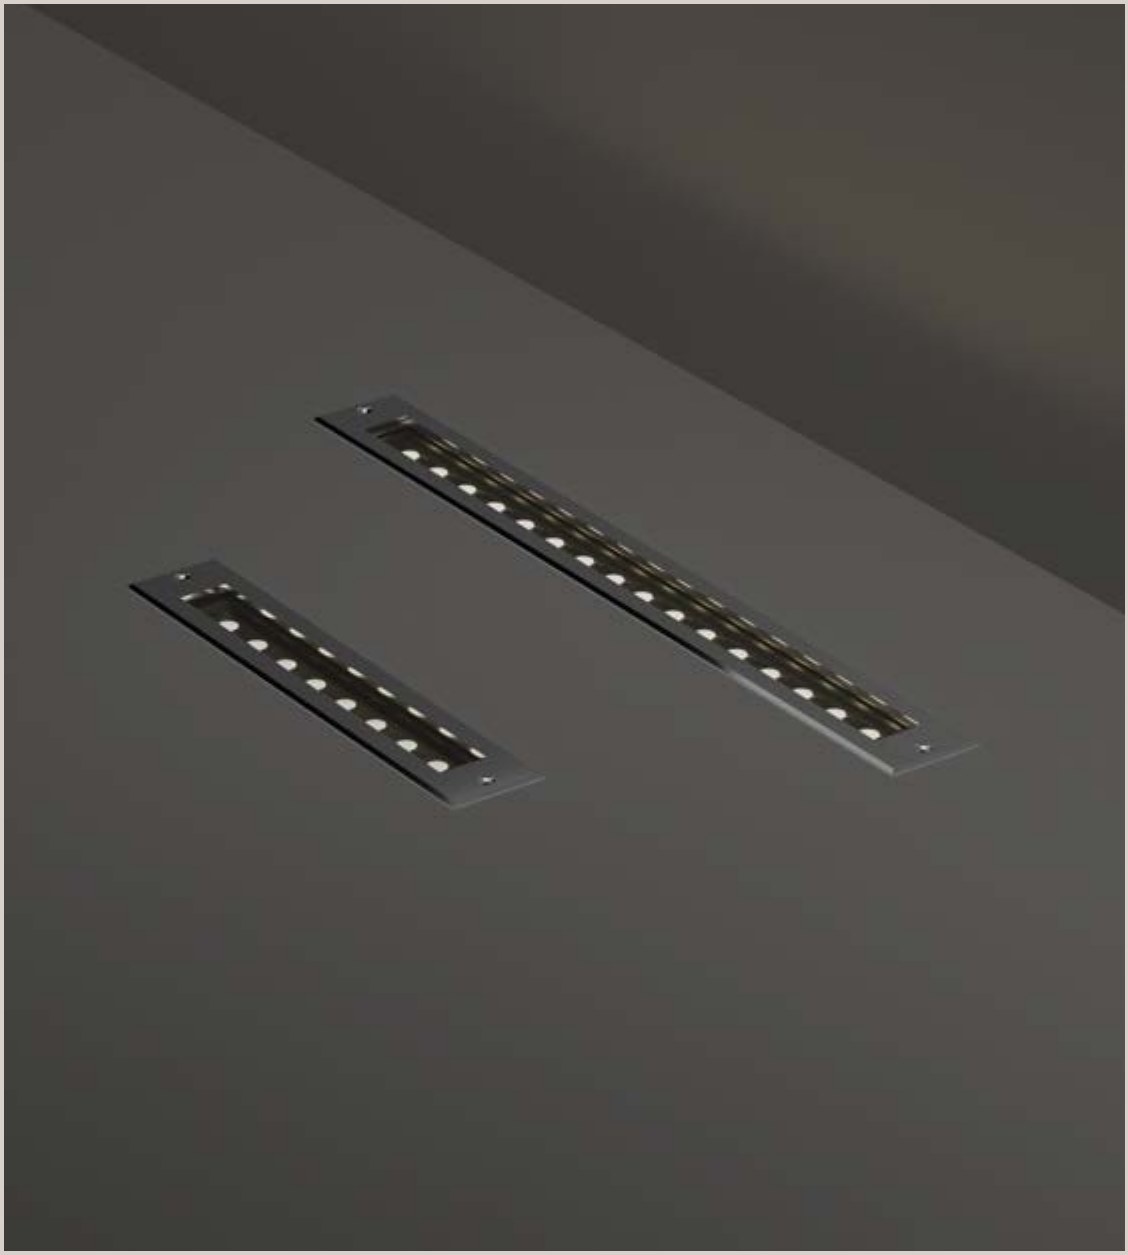


Linear projector for floor recessed installation.
Die-cast aluminum body, 316L stainless steel ring, glass diffuser, IP67 protection index, IK08 impact resistance, formwork included.
Optical block adjustable by +/- 20° for asymmetric light effect.

thor

IP67 | LED SMD | 50.000 h life | Item made of stainless steel 316 | Material: Aluminum






3,100 Kg / 0,0144 m³

Power	Installation	CRI	SDCM
19W	Recessed lights	≥90	3

Control	Lumen	CCT	Finish	Code	€
On-Off	1700 lm	3000 K	Steel	351285	415





2,000 Kg/0,0072 m³

Power	Installation	CRI	SDCM
10W	Recessed lights	≥90	3

Control	Lumen	CCT	Finish	Code	€
On-Off	850 lm	3000 K	Steel	351278	250

FLOOR




Outdoor unmovable recessed fitting made of die cast aluminum with round ring available in three dimensions. Suitable for ground and floor installation. Anodized aluminum finish with extra-clear tempered glass diffuser. Integrated LED passively cooled with 30° optics; available color temperature of 3000 k and CRI ≥ 80; protection degree IP 67; IK10.

floor

IP67 | LED 12W | 1340 Lm | 25.000 h life






0,960 Kg / 0,0049 m³

Installation
Recessed lights

CCT	Finish	Code	€
3000K	Steel	255682	106

IP67 | LED 6W | 670 Lm | 25.000 h life






0,640 Kg / 0,0025 m³

Installation
Recessed lights

CCT	Finish	Code	€
3000K	Steel	255668	73

IP67 | LED 3,5W | 330 Lm | 25.000 h life





0,390 Kg / 0,0016 m³

Installation
Recessed lights

CCT	Finish	Code	€
3000K	Steel	255651	55

TAURUS


Taurus is the recessed projector
designed for floor, wall or ceiling installation,
designed for applications requiring
strength, precision and versatility.



taurus

IP67 | LED SMD | 50.000 h life | Item made of stainless steel 316 | Material: Aluminum






1,460 Kg/0,0067 m³

Power	Installation	CRI
6W	Recessed lights	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	450 lm	3000 K	Steel	277004	210

Driver
ON/OFF Included






1,980 Kg/0,0082 m³

Power	Installation	CRI
11W	Recessed lights	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	900 lm	3000 K	Steel	277011	320

Driver
ON/OFF Included






3,250 Kg/0,0142 m³

Power	Installation	CRI
12W	Recessed lights	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	1350 lm	3000 K	Steel	277028	405

Driver
ON/OFF Included





3,500 Kg/0,0169 m³

Power	Installation	CRI
20W	Recessed lights	≥90

Control	Lumen	CCT	Finish	Code	€
On-Off	2000 lm	3000 K	Steel	277035	530

Driver
ON/OFF Included

P. 37

Die-cast aluminum body, 316L stainless steel ring, glass diffuser, walkable (IP67, IK10), formwork included. Light modules individually adjustable +/- 30° using an external pin to narrow or direct the light beam.









PARK



Recessed spotlight. PVC external body. Aluminum reflecting parabola. Glazed steel glass-setting frame. Clear glass. Walkable.


park

IP67

Installation

Recessed lights






Finish	Code	€
Steel	032825	85

Recommended bulb E27 max 1 x 28W

1,210 Kg / 0,0064 m³

Lumen	CCT	Code	€
980 lm	4000 K	153964	3,50






Finish	Code	€
Steel	032832	57

Recommended bulb GU10 max 1 x 20W

0,580 Kg / 0,0026 m³

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50





Finish	Code	€
Steel	351780	51

Recommended bulb GU10 max 1 x 20W


0,600 Kg / 0,0022 m³

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50

park

IP54





0,900 Kg / 0,0031 m³

Installation

Recessed lights


Finish	Code	€
Steel	117881	80

Recommended bulb G9 max 1 x 15W

Lumen	CCT	Code	€
530 lm	4000 K	307879	6,10

IP67





0,650 Kg / 0,0022 m³

Installation

Recessed lights

Finish	Code	€
Steel	351797	59

Recommended bulb GU10 max 1 x 20W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50




WAY



Family of recessed floor projectors for outdoor use, walkable or driveable, suitable for harsh environmental conditions. Body and diffuser in high-performance, anti-corrosion and UV-stabilised resin. Resistance to temperature changes from -60 °C to +90 °C; class II, IP67.

way

IP67 | LED



Installation

Recessed lights


Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,10 Kg	0,0006 m³	Black	269726	32
	Single	0,08 Kg	0,0005 m³	Black	269504	32
	Double	0,08 Kg	0,0006 m³	Black	269702	32
Square	Wide	0,08 Kg	0,0006 m³	Black	351513	32

Included bulb G9 1,7W

Lumen	CCT	Code	€
-	3000 K	-	-

Recommended bulb G9 max 1 x 2W

Lumen	CCT	Code	€
150 lm	3000 K	270104	6,50
160 lm	4000 K	270111	6,50



Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,27 Kg	0,0019 m³	Black	120249	65
	Double	0,26 Kg	0,0018 m³	Black	120287	65
	Triple	0,27 Kg	0,0019 m³	Black	351575	65
Square	Wide	0,27 Kg	0,0018 m³	Black	120317	65

Included bulb GU10 max 3,5W

Lumen	CCT	Code	€
-	Settable	-	-

Recommended bulb GU10 max 1 x 6W

Lumen	CCT	Code	€
430 lm	4000 K	253497	2,50










From above: wide, single, double and triple.

way

IP67 | LED



Installation

Recessed lights


Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,37 Kg	0,0023 m³	Black	351544	72
	Double	0,35 Kg	0,0022 m³	Black	351551	72
	Triple	0,37 Kg	0,0022 m³	Black	351582	72
Square	Wide	0,36 Kg	0,0022 m³	Black	351537	72

Included bulb GX53 max 10W

Lumen	CCT	Code	€
-	Settable	-	-

Recommended bulb GX53 max 1 x 3W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5



Shape	Optics	Weight	Volume	Finish	Code	€
Round	Wide	0,67 Kg	0,0044 m³	Black	120324	95
	Double	0,75 Kg	0,0044 m³	Black	351568	115
	Triple	0,74 Kg	0,0042 m³	Black	120362	115
Square	Wide	0,70 Kg	0,0042 m³	Black	120386	95

Included bulb GX53 max 10W

Lumen	CCT	Code	€
-	Settable	-	-

Recommended bulb GX53 max 1 x 10W

Lumen	CCT	Code	€
1000 lm	4000 K	154008	5


ROCKET



Light body in steel (diameters 92 and 55)
or aluminum (diameters 40 and 28).
Diffuser in tempered glass. Walkable.

rocket

IP67 | LED SMD/COB | 30.000 h life | Material: Aluminum




Power	Installation	CRI	SDCM
1,3W	Recessed lights	≥90	3

Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	100 lm	3000 K	Steel	325132	45
On-Off	Wide	110 lm	4000 K	Steel	371061	45

0,210 Kg/0,0006 m³

Driver
Not included




Power	Installation	CRI	SDCM
2,5W	Recessed lights	≥90	3

Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	180 lm	3000 K	Steel	325156	65
On-Off	Wide	200 lm	4000 K	Steel	371085	65

0,210 Kg/0,0006 m³

Driver
Not included




Power	Installation	CRI	SDCM
2W	Recessed lights	≥90	3

Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	130 lm	3000 K	Steel	370989	100
On-Off	Wide	160 lm	4000 K	Steel	212647	100
On-Off	Single	130 lm	3000 K	Steel	371016	130
On-Off	Single	160 lm	4000 K	Steel	222820	130
On-Off	Double	130 lm	3000 K	Steel	371047	150
On-Off	Double	160 lm	4000 K	Steel	222837	150

wide 0,360 Kg / 0,0008 m³
single 0,400 Kg / 0,0008 m³
double 0,380 Kg / 0,0008 m³

Driver
Not included

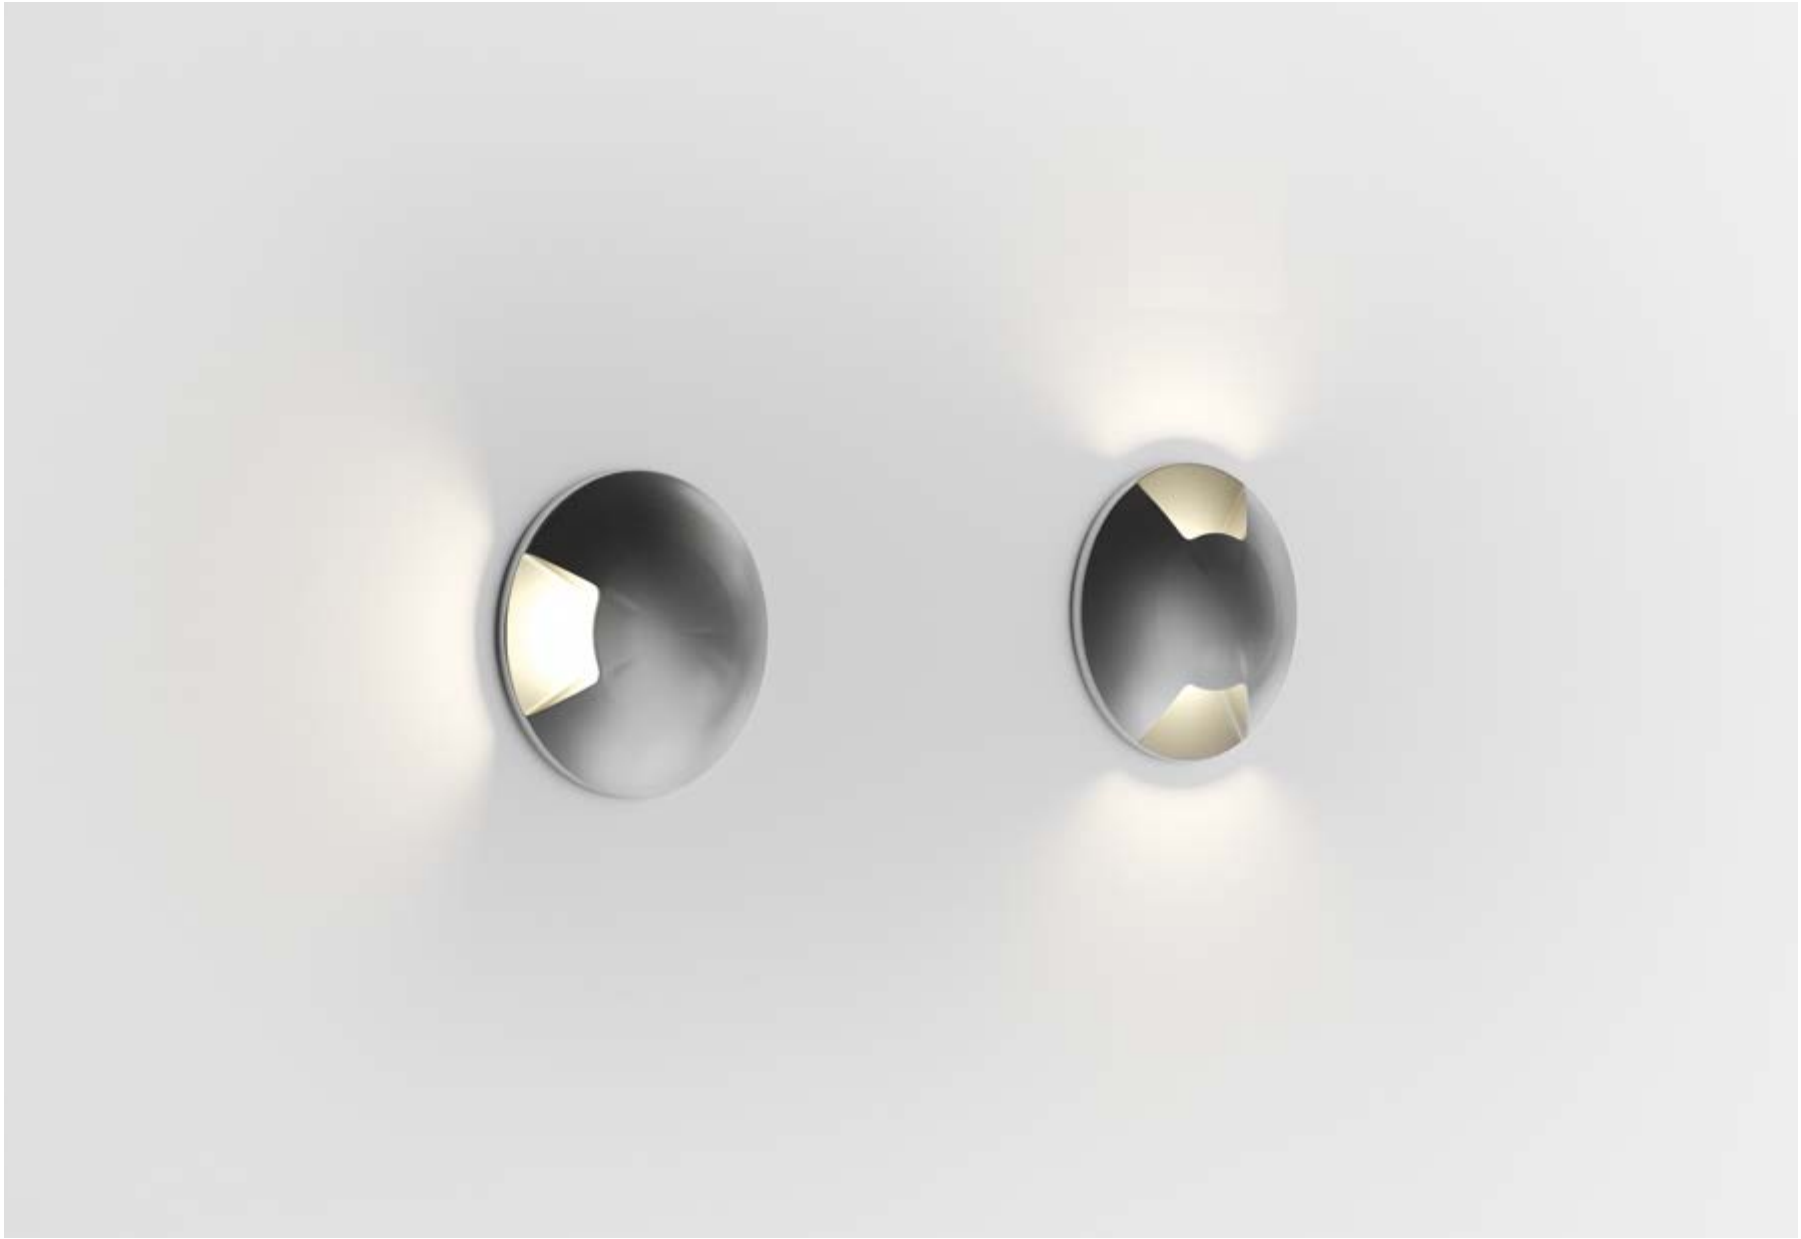




rocket

IP67 | LED SMD/COB | 30.000 h life | Material: Aluminum

Power	Installation	CRI	SDCM
3W	Recessed lights	≥90	3



Control	Optics	Lumen	CCT	Finish	Code	€
On-Off	Wide	900 lm	3000 K	Steel	370996	150
On-Off	Wide	930 lm	4000 K	Steel	371009	150
On-Off	Single	260 lm	3000 K	Steel	247144	153
On-Off	Single	280 lm	4000 K	Steel	122014	153
On-Off	Double	260 lm	3000 K	Steel	247151	158
On-Off	Double	280 lm	4000 K	Steel	122021	158

wide 1,250 Kg / 0,0038 m³
single 0,560 Kg / 0,0034 m³
double 0,560 Kg / 0,0034 m³

Driver

Not included in the models 370996 and 371009

Driver | Not included - Required










Power	Output	Measure	Code	€
3 W	24 Vdc	47 x 23 x 21 mm	325163	10
3,5 W	24 Vdc	45 x 21 x 23mm	276205	12
20 W	24 Vdc	118 x 26 x 35 mm	226187	75
40 W	24 Vdc	48 x 30 x 40 mm	226194	80
100 W	24 Vdc	220 x 39 x 68 mm	226200	190
185 W	24 Vdc	220 x 39 x 68 mm	226217	210

E14 576
E27 578
G4 584
G9 585
GX53 586
R7s 587
GU10 588
Kit emergency 590






LAMPADINE



Lampadine E14

	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 	4 W	480 lm	3000 K	80		25.000 h	10	101200	2,00
	4 W	400 lm	3000 K	80	TRIAC	15.000 h	10	188935	2,50
	4 W	520 lm	4000 K	80		25.000 h	10	153926	2,00
	4 W	440 lm	3000 K	90		25.000 h	10	271620	2,00
 	4 W	340 lm	2200 K	80		15.000 h	10	151656	2,00
 	4 W	410 lm	3000 K	80		25.000 h	10	101217	2,00
	4 W	340 lm	3000 K	80	TRIAC	25.000 h	10	289229	2,50
	4 W	480 lm	4000 K	80		25.000 h	10	253411	2,00
	4 W	340 lm	3000 K	90		25.000 h	10	289212	2,00
 	6 W	550 lm	3000 K	80		25.000 h	10	151731	2,00
	6 W	580 lm	4000 K	80		25.000 h	10	151946	2,00
 	4 W	370 lm	3000 K	80		25.000 h	10	101262	2,00
 	4 W	350 lm	3000 K	80		25.000 h	10	101255	2,50
 	4 W	470 lm	3000 K	80		25.000 h	10	101248	**2,00**
	4 W	420 lm	3000 K	80	TRIAC	15.000 h	10	188911	**2,50**
	4 W	490 lm	4000 K	80		25.000 h	10	153940	**2,00**
 	4 W	400 lm	2200 K	80		15.000 h	10	151663	2,00
	4 W	440 lm	3000 K	80		25.000 h	10	151793	2,00

Lampadine E14

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		4 W	470 lm	2700 K	80		25.000 h	10	270944	2,00
		4 W	480 lm	3000 K	80		25.000 h	10	101224	2,00
		4 W	440 lm	3000 K	90		25.000 h	10	271644	2,00
		4 W	320 lm	3000 K	80	TRIAC	15.000 h	10	188928	2,50
		4 W	490 lm	4000 K	80		25.000 h	10	153933	2,00
		4 W	400 lm	2200 K	80		15.000 h	10	151649	2,00
		4 W	440 lm	3000 K	80		25.000 h	10	101231	2,00
		4 W	430 lm	3000 K	80		15.000 h	10	326610	2,00
		6 W	540 lm	3000 K	80		25.000 h	10	151748	2,00
		6 W	560 lm	4000 K	80		25.000 h	10	151953	2,00



Glass 101217











Glass satin 326610











Spot 101255








Lampadine E27

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		4 W	470 lm	2700 K	80		25.000 h	10	271637	**2,00**
		4 W	470 lm	3000 K	80		25.000 h	10	101279	**2,00**
		4 W	400 lm	3000 K	80	TRIAC	15.000 h	10	188942	**2,50**
		4 W	490 lm	4000 K	80		25.000 h	10	153957	**2,00**
		4 W	340 lm	2200 K	80		15.000 h	10	151861	2,50
		4 W	400 lm	3000 K	80		25.000 h	10	101286	2,00
		6 W	550 lm	3000 K	80		25.000 h	10	151755	2,00
		6 W	580 lm	4000 K	80		25.000 h	10	151960	2,00
		4 W	490 lm	3000 K	80		25.000 h	10	101293	**2,00**
		4W	520 lm	4000 K	80		25.000 h	10	253428	**2,00**
		8 W	1060 lm	2700 K	80		25.000 h	10	270951	**3,50**
		8 W	1080 lm	3000 K	80		25.000 h	10	119571	**3,50**
		8 W	710 lm	3000 K	80	TRIAC	15.000 h	10	188973	**5,00**
		8 W	980 lm	4000 K	80		25.000 h	10	153964	**3,50**
		8 W	880 lm	3000 K	90		25.000 h	10	271613	**3,50**
		10 W	1350 lm	3000 K	80		25.000 h	10	256528	**4,50**
		10 W	1400 lm	4000 K	80		25.000 h	10	270920	**4,50**
		10 W	1200 lm	2700 K	90		25.000 h	10	342870	**4,50**
		4 W	500 lm	3000 K	80		25.000 h	10	335261	2,50
		4 W	370 lm	2200 K	80		15.000 h	10	151687	2,50
		8 W	820 lm	3000 K	80		25.000 h	10	123899	**3,50**
		8 W	820 lm	3000 K	80	TRIAC	25.000 h	10	252209	**5,00**
		8 W	840 lm	4000 K	80		25.000 h	10	253459	**3,50**









Lampadine E27

	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
	9 W	970 lm	3000 K	80		25.000 h	10	151762	**2,00**
	9 W	1020 lm	4000 K	80		25.000 h	10	151991	**2,00**
	8 W	920 lm	3000 K	80		25.000 h	10	305622	**5,00**
	10 W	1200 lm	3000 K	80		25.000 h	10	305639	**4,50**
	8 W	810 lm	3000 K	80		25.000 h	10	123882	**3,50**
	14 W	1450 lm	2700 K	90		25.000 h	10	345857	**15,50**
	14 W	1650 lm	3000 K	90		25.000 h	10	337135	**15,50**
	14 W	1750 lm	4000 K	90		25.000 h	10	345864	**15,50**
	8 W	1100 lm	3000 K	80		25.000 h	10	101323	4,50
	8 W	1050 lm	3000 K	90		25.000 h	10	271606	4,50
	8W	710 lm	3000 K	80	TRIAC	15.000 h	10	188966	6,50
	8 W	1150 lm	4000 K	80		25.000 h	10	153971	4,50
	4 W	550 lm	3000 K	80		25.000 h	10	345840	6,00
	4 W	400 lm	2200 K	80		15.000 h	10	151717	5,00
	4 W	330 lm	2200 K	80	TRIAC	15.000 h	10	223933	6,00
	8 W	950 lm	3000 K	80		25.000 h	10	101330	4,50
	8 W	860 lm	3000 K	80	TRIAC	25.000 h	10	252186	7,00
	8 W	1060 lm	4000 K	80		25.000 h	10	253442	4,50







Lampadine E27

	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 	14 W	1630 lm	3000 K	80		25.000 h	10	151779	4,00
	14 W	1820 lm	4000 K	80		25.000 h	10	151977	4,00
 	8 W	900 lm	3000 K	80	TRIAC	15.000 h	10	277790	8,00
 	8 W	1100 lm	3000 K	80		25.000 h	10	157597	8,00
 	8 W	930 lm	3000 K	80		25.000 h	10	135526	6,00
 	8 W	950 lm	2700 K	90		25.000 h	10	342863	7,00
	8 W	1100 lm	3000 K	80		25.000 h	10	101347	6,00
	8 W	860 lm	3000 K	90		25.000 h	10	271590	6,00
	8 W	680 lm	3000 K	80	TRIAC	15.000 h	10	188959	7,00
	8 W	1150 lm	4000 K	80		25.000 h	10	153988	6,00
 	4 W	480 lm	2200 K	80		15.000 h	10	151724	6,00
	4 W	330 lm	2200 K	80	TRIAC	15.000 h	10	223926	7,00
 	18 W	2210 lm	3000 K	80		25.000 h	10	151786	6,00
	18 W	2300 lm	4000 K	80		25.000 h	10	152004	6,00

Lampadine E27

	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
 	8 W	900 lm	3000 K	80	TRIAC	15.000 h	10	277813	10,00
 	8 W	1050 lm	3000 K	80		25.000 h	10	157580	10,00
 	4 W	330 lm	2200 K	80		15.000 h	10	151700	**4,00**
 	4 W	440 lm	2200 K	80		15.000 h	10	151694	4,00
	4W	330 lm	2200 K	80	TRIAC	15.000 h	10	223919	5,00
 	4 W	360 lm	1800 K	80		15.000 h	10	201283	**5,00**
 	4 W	360 lm	1800 K	80		15.000 h	10	201269	9,50
 	4 W	360 lm	1800 K	80		15.000 h	10	201290	10,00
 	4 W	360 lm	1800 K	80		15.000 h	10	201276	10,00

Lampadine E27

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		6 W	450 lm	1800 K	80		15.000 h	10	201252	11,00
		4 W	320 lm	1800 K	80		15.000 h	1	130170	33,00
		4 W	320 lm	1800 K	80		15.000 h	1	129877	33,00
		4 W	330 lm	2200 K	80	TRIAC	15.000 h	1	223940	33,00
		4 W	400 lm	2200 K	80		25.000 h	1	130187	25,00
		4 W	330 lm	2200 K	80	TRIAC	15.000 h	1	223834	30,00
		4 W	320 lm	2200 K	80		25.000 h	1	237251	22,50
		8 W	800 lm	2200 K	80		25.000 h	1	130163	25,00



Glass satin 135526



Glass 101354



Glass 101323



Glass 345840



Glass 335261



Glass 101286



151694





201252



237251

Lampadine G4

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		1,5 W	160 lm	3000 K	80		15.000 h	20	188980	4,50
		2 W	200 lm	3000 K	80		20.000 h	20	222257	4,00
		2 W	200 lm	3000 K	80	Phase-cut	20.000 h	20	266282	5,00





188980



222257

Lampadine G9



	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
	1,7 W	150 lm	3000 K	80		15.000 h	20	270104	6,50
	1,7 W	160 lm	4000 K	80		15.000 h	20	270111	6,50
	2,5 W	170 lm	3000 K	80		25.000 h	20	122168	3,60
	2,5 W	180 lm	4000 K	80		25.000 h	20	253381	3,60
	3 W	350 lm	2700 K	80		15.000 h	20	270968	3,60
	3 W	370 lm	3000 K	80		15.000 h	20	209043	3,60
	3 W	350 lm	3000 K	80	TRIAC	25.000 h	20	288215	5,10
	3 W	390 lm	4000 K	80		15.000 h	20	209036	3,60
	3,5 W	310 lm	3000 K	90		15.000 h	20	288208	3,60
	4 W	500 lm	2700 K	90		15.000 h	20	342887	6,10
	4 W	510 lm	3000 K	80		15.000 h	20	305486	6,10
	3,5 W	420 lm	3000 K	80	TRIAC	15.000 h	20	305431	8,60
	4 W	530 lm	4000 K	80		15.000 h	20	307879	6,10
	3,5 W	440 lm	4000 K	80	TRIAC	15.000 h	20	307886	8,60


270104


209043


122168

Lampadine GX53

		Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
		7 W	730 lm	3000 K	80		25.000 h	10	101385	5,00
		7 W	760 lm	4000 K	80		25.000 h	10	253404	5,00
		9 W	910 lm	3000 K	80		25.000 h	10	123936	5,00
		9 W	890 lm	3000 K	80	TRIAC	25.000 h	10	252551	9,00
		9 W	1000 lm	4000 K	80		25.000 h	10	154008	5,00
		9 W	900 lm	4000 K	80	TRIAC	25.000 h	10	252568	9,00
		9 W	800 lm	2700 K	90		25.000 h	10	342900	5,00
		9 W	940 lm	3000 K	90		25.000 h	10	288383	5,00






101385



123936






Lampadine R7s

	Power	Flux	CCT	CRI	Dimmable	Life	Min Qty.	Code	€
	5W	560 lm	3000 K	80		20.000 h	10	189109	11,00
	6 W	450 lm	3000 K	80	TRIAC	20.000 h	10	266770	12,00
	7 W	580 lm	4000 K	80		20.000 h	10	272375	11,00
	6 W	480 lm	4000 K	80	TRIAC	20.000 h	10	272382	12,00
	13 W	760 lm	3000 K	80		20.000 h	10	189093	14,00
	8 W	580 lm	3000 K	80	TRIAC	20.000 h	10	266763	15,00
	13 W	830 lm	4000 K	80		20.000 h	10	253480	14,00
	8 W	640 lm	4000 K	80	TRIAC	20.000 h	10	266756	15,00
	14 W	1700 lm	3000 K	80		15.000 h	10	307862	11,00
	14 W	21000 lm	3000 K	80	TRIAC	15.000 h	10	307855	11,00
	14 W	1700 lm	4000 K	80		15.000 h	10	296869	11,00
	14 W	2450 lm	4000 K	80	TRIAC	15.000 h	10	296876	11,00


189109


307862

Lampadine GU10

	Power	Flux	CCT	CRI	Beam	Dimmable	Life	Min Qty.	Code	€
	4 W	250 lm	3000 K	90	38°	TRIAC	15.000 h	10	356532	4,50
	4 W	280 lm	3000 K	90	60°		25.000 h	10	339771	2,50
 	6 W	430 lm	3000 K	90	50°	TRIAC	25.000 h	10	266251	4,50
	5 W	430 lm	4000 K	90	50°		25.000 h	10	253497	2,50
	6 W	450 lm	4000 K	90	50°	TRIAC	25.000 h	10	285566	4,50
	7 W	540 lm	3000 K	90	50°		25.000 h	10	123943	2,50
	7 W	460 lm	3000 K	90	50°	TRIAC	25.000 h	10	288239	4,50
 	7 W	620 lm	3000 K	90	108°		25.000 h	10	101378	2,50
	7 W	650 lm	4000 K	90	108°		25.000 h	10	117652	2,50
	8 W	580 lm	3000 K	90	56°		25.000 h	10	189062	3,00
	8 W	620 lm	4000 K	90	56°		25.000 h	10	270975	3,00
 	5 W	380 lm	2700 K	95	50°		25.000 h	10	307619	2,50
	5 W	410 lm	3000 K	90	50°		25.000 h	10	108292	2,50
	7 W	540 lm	4000 K	90	50°		25.000 h	10	224367	2,50
	7 W	600 lm	2700 K	95	108°		25.000 h	10	307626	2,50



108292






307619



307626

Lampadine GU10

	Power	Flux	CCT	CRI	Beam	Dimmable	Life	Min Qty.	Code	€
 	12 W	1030 lm	3000 K	90	40°		25.000 h	10	327037	11,00
	12 W	790 lm	3000 K	90	22°	TRIAC	25.000 h	10	326290	12,00
	12 W	970 lm	4000 K	90	20°		25.000 h	10	327051	11,00
 	12 W	1050 lm	2700 K	90	40°		25.000 h	10	342894	11,00
	12 W	1050 lm	3000 K	90	40°		25.000 h	10	327044	11,00
	12 W	1000 lm	3000 K	90	40°	TRIAC	25.000 h	10	327075	12,00
	12 W	1120 lm	4000 K	90	40°		25.000 h	10	327068	11,00
 	10 W	750 lm	3000 K	80	22°		15.000 h	10	189031	11,00
	10 W	720 lm	3000 K	80	22°	TRIAC	15.000 h	10	288543	12,00
	10 W	780 lm	4000 K	80	22°		15.000 h	10	253398	11,00


327037


183794


189031

Kit emergency

Kit luce d'emergenza per moduli LED. Include inverter e batteria. Autonomia da due a tre ore con un tempo di ricarica rispettivamente di 12 e 24 ore.


Funzionamento in sola emergenza o in luce continua (luce continua in abbinamento con alimentatori elettronici e alimentatori elettronici dimmerabili). Protetto in classe II.

Per ulteriori informazioni, si prega di contattare l'ufficio tecnico.

IP20

65mm Group battery

52mm Inverter

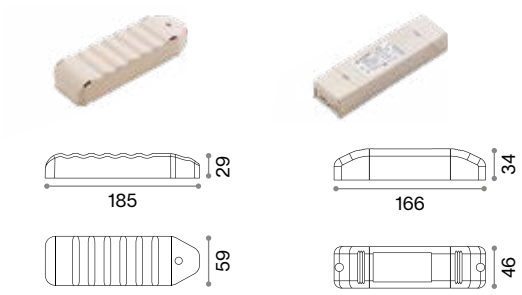

Finitura	Codice	€
Bianco	221595	135

0,305 Kg / 0,0010 m³

0,185 Kg / 0,0009 m³




Elenco finiture

TRASPARENTE

BIANCO


CROMO SFUMATO


ACCIAIO


ARGENTO


CROMO


ALLUMINIO


GRIGIO


NICKEL


FUMÈ



ANTRACITE



NERO

AMBRA


BEIGE



TORTORA


ORO


OTTONE


RAME


COFFEE


BRUNITO

NOTE: Le finiture rappresentate hanno scopo illustrativo. Le tonalità sono soggette a variazioni dettate dal tipo di materiale impiegato e dalla sua lavorazione che possono alterarne la resa, di conseguenza articoli catalogati con medesima finitura potranno presentare delle differenze nella percezione del colore.

Legenda icone

Icone tecniche

Classe I Sicurezza elettrica garantita dall'isolamento principale e da un conduttore di protezione (messa a terra) collegato alla struttura metallica della lampada. Messa a terra obbligatoria.

Classe II Sicurezza elettrica garantita dall'isolamento principale e da un doppio isolamento o da un isolamento rinforzato. Non deve avere messa a terra.

Classe III Sicurezza elettrica garantita dall'alimentazione a bassissima tensione (inferiore a 50 Volt). Non deve avere messa a terra.

Marchio di conformità alle direttive comunitarie europee di sicurezza.

Simboli

Articoli con lampade a LED: consumo estremamente ridotto, luce chiara e concentrata, robustezza e lunga durata.

Interruttore integrato nel corpo luce.

Apparecchio dotato di interruttore touch: si accende e si regola l'intensità col tocco di un dito sul corpo luce.

Lampada con rilevazione di presenza inclusa PIR (Passive InfraRed).

Prodotto ad alto contenuto tecnologico, elevata qualità dei materiali, destinato ad uso professionale.

Apparecchio fornito con variatore di potenza.

Lampada con presa USB integrata.

Lampada con batteria ricaricabile inclusa.

Articolo in acciaio inox 316.

Prodotto componibile

Note

- I prezzi indicati sono riferiti al pubblico IVA esclusa.
- Ideal lux s.r.l. si riserva il diritto di apportare, in qualunque momento e senza preavviso, tutte le modifiche necessarie a migliorare la qualità degli articoli illustrati nel presente catalogo. Per verificare le caratteristiche più aggiornate, consultare la documentazione nel sito web (www.ideal-lux.com).
- I nostri prodotti in classe I e II si alimentano con tensione nominale di 220-240 vac 50/60 hz. Tutti i nostri prodotti sono conformi alle direttive CE.
- Qualora acquistato separatamente come "optional", il driver dimmerabile sarà già incluso nel prodotto in sostituzione del driver standard on-off: verrà fornito un solo driver.
- I Watt indicati a catalogo esprimono la potenza NOMINALE dell'articolo comprensivo di sorgente e driver, quando inclusi. I valori riferiti ai lm relativi alle lampade con sorgenti integrate a LED, sono da considerarsi NOMINALI, riferiti cioè alla sorgente. Per i lm effettivi dei singoli apparecchi illuminanti si prega gentilmente di consultare le fotometrie.
- Il valore UGR non è una caratteristica dell'apparecchio, ma dell'installazione. Gli UGR riportati in questo catalogo sono stati calcolati tenendo conto di un'installazione ideale e sono raggruppati nei blocchi <10 <13 <16 <19 <22. Si consiglia di calcolare l'UGR specifico secondo la propria installazione.
- La durata di vita utile delle sorgenti LED di tutti gli articoli presenti a catalogo è riferita al valore L70B50, quando non dichiarato altrimenti.

FSC
www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C008309

Pag. 6 - 27 / 30 - 43 Fotografie: Tiziano Sartorio - tizianosartorio.com, Setup & styling: Alessandro Pasinelli - alessandropasinelli.com
Render: Zonelab Studio - zonelab.it | Art direction e progetto grafico: jekyll & hyde - jeh.it

Agos, Andromeda, Argo, Atena, Atom, Basic, Beyond, Bit, Boeing, Bubble, Clio , Cosmo, Cute, Dedra, Deep, Deva, Display, Doris, Down, Dynamite, Edo, Ego, Elio, Eos, Etere, Febe, Felix, Fiesta, Floor, Fluo, Fox, Game, Gas, Giove, Groove, Gun, Hub, Iko, Infinity, Inside, Jazz, Jedi, Keope, Koala, Kurt, Led Panel, Lika, Linea, Link, Litio, Lolita, Look, Luna, Mib, Nova, O-Zone, Off, Office, Omega, Park, Play, Polar, Post-It, Punto, Pure, Quark, Rex, Rocket, Room-65, Samba, Sasso, Sirio, Slot, Snif , Snow, Sole, Starlight, Steel, Stick, Strip Led, Style, Swing, Swipe, Tag, Taurus, Techo, Terra, Tesi, Tesla, Tetris, Thor, Tifone, Titano, Toffee, Torre, Tronco, Twiggy, Twin, Ulex, Up, Urano, Vega, Walky, Way, Wire, Xeno, Zephyr, Zeus.

LED Zona®
ОСВЕТИТЕЛНИ РЕШЕНИЯ

Харесахте ли нещо от каталога?

Разгледайте и поръчайте продукти на Ideal Lux онлайн
на led-zona.bg – с актуални цени и наличности.

Продуктите на Ideal Lux

Сканирайте или кликнете

Разгледайте продуктите →

Каталози на Ideal Lux

Сканирайте или кликнете

Още каталози →

www.led-zona.bg

T: 0888 065 970 | E: sales@led-zona.bg

Сфера Лайт ООД · гр. София, ж.к. Банишора, ул. Опълченска, бл. 54 (до 7-ма поликлиника)