The precision in space.

Lighting for Projects and Architecture



MAYTONI

Architectural 2026

Architectural 2026

The Precision in Space

Architecture begins with a clear idea, light makes it visible. The Precision in Space is our 2026 theme for the Architectural range, created for applications that demand accuracy and scalability. We shape light that guides lines, reveals materials, layers atmosphere. Not louder, more precise. Every component follows one simple question: how does space become a reliable, efficient experience?

What matters is the interplay. Architectural lighting as a system, logical, modular, consistent in light quality. Precision means every detail works and still opens options. Track systems as unobtrusive infrastructure, optics that direct light with intent, high colour fidelity and consistent glare control. This is how contours are drawn like with a pencil, from concept to operation.

Our design language is reduced and architectural, tactile in effect, technically dependable. Surfaces remain calm, technology is integrated, the space stays in focus. You feel it in planning and in use, ease of installation, modular logic, clear documentation. Modules click into place, accessories are intuitive, maintenance stays predictable. On site every minute counts, in operation every lumen per watt. With finely tuned optics and controls, zones, sightlines and vertical hierarchies emerge. Systems grow with requirements and scale. They are scalable and consistent. Developed in Germany is our mindset, precise engineering, robust results. Fewer compromises, more control – so budgets, timelines and quality goals can be met.

The Precision in Space is a promise to professional partners. We provide the tools, you define the spaces. Clear in selection, precise in performance, efficient in operation. Together we create light infrastructures that endure and simply work.

Connect with your Maytoni Sales Manager to explore the new track luminaires, optics and controls. We support you from early planning to commissioning, including training and after-sales service.

2021 WINNER LIGHTING DESIGN AWARDS

DESIGN AWARD 2024

A'DESIGN AWARD & COMPETITION WINNER 2024 GOLD

reddot award

archiproducts DESIGN AWARDS





Index

02 Editorial

08 Contents: lamps by type

22 Lighting systems
22 Holity — modular magnetic system
32 Tenity — 10mm magnetic track system
52 Exility — smart magnetic track system
120 Flarity — magnetic modular track system
152 Radity — ultra slim magnetic track system
170 Unity — single-phase track system
222 Trinity — three-phase track system

234 Downlights

326 Ceiling luminaires

392 Smart home

400 Alphabetical index
406 Explication

Interior
Lighting for Homes and Interiors

Our Interior range brings a layered selection of luminaires designed to shape atmosphere with clarity and ease. Calm silhouettes, balanced proportions and tactile finishes create a coherent language across rooms and styles. Core categories include Chandeliers, Pendant Lamps, Ceiling Lamps, Wall Lamps, Floor Lamps and Table Lamps, complemented by Backlights and selected Accessories for a seamless finish. From soft ambient light to defined accents, pieces can be combined to compose scenes that feel natural and refined. Each product is intentional, versatile and simple to integrate, so assortments stay clear and projects remain effortless. The result is light that elevates daily rituals, reveals materials and lets spaces breathe.



Outdoor
Lighting for Gardens, Terraces and Pathways

Outdoor lighting extends the Maytoni experience beyond the threshold. Durable materials, weather-ready construction and consistent light quality ensure a reliable presence in changing conditions. Subtle forms, controlled glare and precise optics define paths, frame greenery and welcome guests without overpowering the setting. Collections are conceived to complement Interior families, so transitions from inside to outside feel seamless. The focus is on atmosphere, orientation and long-lasting performance.



Architectural
Lighting for Projects and Architecture

Our Architectural portfolio provides system-driven solutions for professional environments. Logical, modular components, consistent colour rendering and effectiveglare control enable clear planning and confident execution. Track luminaires, downlights and controls work together as unobtrusive infrastructure, shaping zones, sightlines and vertical emphasis. Installation is straightforward, documentation is clear, maintenance is predictable. For detailed insights, explore our dedicated Architectural catalogue, "The Precision in Space", which presents the full range of tools and systems for shaping space with control and consistency.





STUDIO

A CURATED DESIGN COLLECTION BY MAYTONI

Studio Collection
New voices in light

The Studio Collection expands our Interior range with a clear mission, to reach new audiences and develop progressive, original designs with emerging designers from Germany and across Europe. It is a platform for new perspectives, where material, proportion and atmosphere come together. We start with Table Luminaires. Portable or plugged, petite or sculptural, each piece shapes intimate zones, highlights textures and adds warmth to daily rituals. Calm silhouettes, precise details, a distinct character. Every lamp stands on its own, yet feels part of a coherent narrative.

Personality matters. In Studio, the designer's voice and standards are part of the process, informing decisions from concept to finish. We are excited to begin with our first designers, and we will continue to grow the collection across further categories, guided by clarity, versatility and a human-centred approach to light. Explore the first Studio Table Lamps and curate your selection. **Contact your Maytoni Sales Manager to find the right designs for your assortment.**

Holity — modular magnetic system

LED

M

30-50°

FOCUS LED 24



FOCUS LED 25



FOCUS LED 26



POINTS 27



MELI 29



WW

>80°

BASIS 28



LUNA 30



ACCESSORIES 31



Tenity — 10 mm magnetic track system

MOUNTING

TRACK 34



ACCESSORIES 34



POWER SUPPLIES 38



LED

M

30-50°

FOCUS LED 41



ALFA 42



ALFA 43



W

50-80°

COSMO 48



WW

>80°

BASIS 40



BIANCA 45



KEILA 49



WW

>80°

BUBBLE 44



CALIPSO 50



BIANCA 51



Exility — smart magnetic track system

MOUNTING

TRACK 54



ACCESSORIES 54



CONNECTORS 62



POWER SUPPLIES 64



S



FOCUS LED 84



GALA 94



POINTS S 115



M



ALFA 68



M



ALFA S 69



ARTISAN 70



ELTI 80



ELTI DUO 82



FOCUS LED 84



M



FOCUS LED 92



FOCUS T 93



POINTS 112



POINT ROT 114



W



LENS 96



WW



BASIS 72



BASIS 76



BASIS 77



WW



BASIS ROT 78



OUTLINE 104



PARETE 106



PLATO 108



RELAX 116



WW >80°
RADO 118



F 360°
LARC 98


LUNA 102


LUNA 103


Flarity — magnetic modular track system

MOUNTING

TRACK 122


ACCESSORIES 124


POWER SUPPLIES 134


LED

M 30-50°
POINTS 142


W 50-80°
FOCUS LED 136


FOCUS LED 136


SKIM 138


WW >80°
BASIS 140


BUBBLE 144


LUNA 146


KEILA 147


BIANCA 148


WW

>80°

PLATO 150



PLATO 152



F

360°

ZERO 154



Radity — ultra slim magnetic track system

MOUNTING

TRACK 158



ACCESSORIES 160



POWER SUPPLIES 162



LED

M

30-50°

FOCUS LED 168



POINTS 169



W

50-80°

BASIS GRIG 167



WW

>80°

BASIS 166



Unity — single-phase track system

MOUNTING

TRACK 172



ACCESSORIES 174



BASE

GU10

ARTISAN 180



CALIPSO 181



FOCUS 184



FOCUS S 190



LIPARI 194



VIRAR 211



FOCUS MINI 212



FOCUS MINI 213

ELTI 214



FOCUS DESIGN 216



BASE

GX53

POLAR 202



LED

S-M

30-50°

FOCUS ZOOM 192



S

15-30°

VUORO 204



YIN 208



M

30-50°

POINTS ROT 200



FOCUS DUAL 186



FOCUS LED 188



WW

>80°

BASIS ROT 182



ONDA 196



ZON 210



ORLO 218




RIM 220



Trinity — three-phase track system

MOUNTING

TRACK 224



ACCESSORIES 226



BASE

GU10

FOCUS 228



LED

S-M

30-50°

CALIPSO 232



VUORO PRO 233



M

30-50°

VUORO 230



Downlights

BASE

GU10

ATOM 250



ATOM 250



ATOM 252



ATOM 252



ATOM 253



BASE

GU10

DOT 254



DOT 254



DOT 255



DOT 255



DOT 256



METAL MODERN 264



METAL MODERN 264



REIF 280



REIF 281



SHARE 288



SHARE 289



SHARE 290



LIPARI 291



SLIM 292



SLIM 293



STARK 294



STARK 294



YIN 302



ZOOM 304



ZOOM 305



ZOOM 305



BASE

GX53

HOOP 250



HOOP 251



HOOP 252



ORLO 277



LED

S

15-30°

HIDDEN 258



HIDDEN 259



METAL MODERN 265



METAL MODERN 265



MINOR 266



MAGNUM 263



M

30-50°

DIP 236



DIP 237



ALFA LED 244



M

30-50°

ALFA LED 246



ALFA LED 248



WISE 298



W

50-80°

LENS 242



ROUND 282



ROUND 286



YIN 303



ZOOM 308



LED

WW

>80°

OKNO 268



OKNO 272



ONDA 276



PHANTON 278



PHANTON 279



STOCKTON 296



Recessed spots

BASE

GU10

ARTISAN 312



CALIPSO 314



FOCUS S 324



FOCUS 322



LED

M

30-50°

FOCUS LED 316



FOCUS T 318



FOCUS T 320



FOCUS T 322



Ceiling luminaires

BASE

GU10

ARTISAN 328



ARTISAN 329



ATOM 330



ATOM 331



CALIPSO 332



CALIPSO 334



ELTI 335



ELTI 335



FOCUS 338



FOCUS 340



FOCUS S 346



FOCUS S 346



FOCUS S 348



FOCUS S 349



LIPARI 358



SLIM 366



SLIM 366



SLIM 367



SLIM 367



ZOOM 381



GU10

ZOOM 380



ZOOM 381



FOCUS DESIGN 389



GX53

HOOP 356



HOOP 356



PAULINE 362



POLAR 364



LED

S-M

FOCUS ZOOM 354



S

YIN 370



M

DAFNE 336



FOCUS LED 342



FOCUS LED 344



FOCUS T 350



FOCUS T 351



FOCUS T 352



ALFA LED 386



ALFA LED 387



ALFA LED 388



W

50-80°

LENS 382



LENS 382



WW

>80°

HYDRA 357



ONDA 360



VEGA 363



PLANET 368



ZON 372



ORLO 390



Smart home

MAYTONI SMART HUB 395



REMOTES 396



POWER SUPPLIES DALI 397




POWER SUPPLIES TRIAC 399





FOCUS LED	24	**BASIS**	28	**LUNA**	30
POINTS	27	**MEIL**	29	**ACCESSORIES**	31

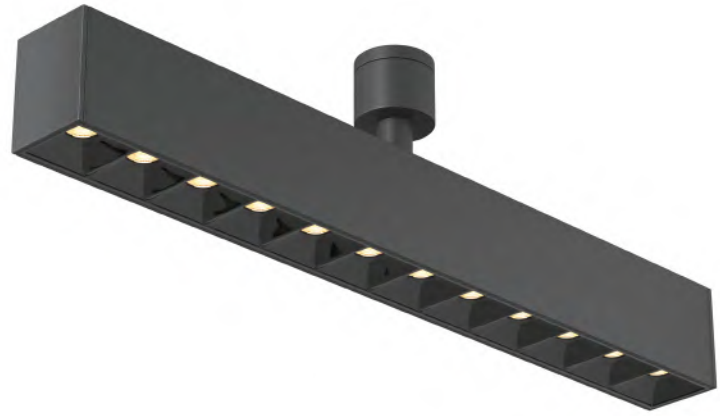

POINTS
C153CL-12W3K-B

Focus LED


[EN] Powerful adjustable spotlight for precise accent lighting within the Holity magnetic system; 3-second, tool-free swap, safe 48 V, trimless/recessed/surface options (3000 K, 13 W).
[DE] Leistungsstarker, verstellbarer Strahler für präzise Akzente im Holity-Magnetsystem; werkzeugloser 3-Sekunden-Tausch, sichere 48 V, randlos/Einbau/Aufbau (3000 K, 13 W).
[IT] Proiettore regolabile ad alte prestazioni per accenti precisi nel sistema magnetico Holity; sostituzione in 3 secondi senza attrezzi, 48 V sicuri, trimless/incasso/superficie (3000 K, 13 W).
[FR] Projecteur réglable performant pour accents précis dans le système magnétique Holity; remplacement en 3 secondes sans outils, 48 V sûrs, sans rebord/encastré/saillie (3000 K, 13 W).

Read more
on the website

B | LED | CRI >90 | DC 48 V | 38°

LEDS CREE





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C150CL-13W3K-B	13 W	950 LM	NO	IP 20

Focus LED


EN Powerful adjustable spotlight for precise accent lighting within the Holity magnetic system; 3-second, tool-free swap, safe 48 V, trimless/recessed/surface options (3000 K, 13 W).
DE Leistungsstarker, verstellbarer Strahler für präzise Akzente im Holity-Magnetsystem; werkzeugloser 3-Sekunden-Tausch, sichere 48 V, randlos/Einbau/Aufbau (3000 K, 13 W).
IT Proiettore regolabile ad alte prestazioni per accenti precisi nel sistema magnetico Holity; sostituzione in 3 secondi senza attrezzi, 48 V sicuri, trimless/incasso/superficie (3000 K, 13 W).
FR Projecteur réglable performant pour accents précis dans le système magnétique Holity; remplacement en 3 secondes sans outils, 48 V sûrs, sans rebord/encastré/saillie (3000 K, 13 W).

Read more
on the website

B | LED | CRI >90 | DC 48 V | 38°

LEDS CREE





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C151CL-13W3K-B	13 W	960 LM	NO	IP 20

Focus LED


[EN] Powerful adjustable spotlight for precise accent lighting within the Holity magnetic system; 3-second, tool-free swap, safe 48 V, trimless/recessed/surface options (3000 K, 13 W).
[DE] Leistungsstarker, verstellbarer Strahler für präzise Akzente im Holity-Magnetsystem; werkzeugloser 3-Sekunden-Tausch, sichere 48 V, randlos/Einbau/Aufbau (3000 K, 13 W).
[IT] Proiettore regolabile ad alte prestazioni per accenti precisi nel sistema magnetico Holity; sostituzione in 3 secondi senza attrezzi, 48 V sicuri, trimless/incasso/superficie (3000 K, 13 W).
[FR] Projecteur réglable performant pour accents précis dans le système magnétique Holity; remplacement en 3 secondes sans outils, 48 V sûrs, sans rebord/encastré/saillie (3000 K, 13 W).

Read more
on the website

B | LED | CRI >90 | DC 48 V | 38°

LEDS CREE





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C152PL-13W3K-B	13 W	960 LM	NO	IP 20

Points


[EN] Minimal spotlight for discreet, effective accents in the Holity magnetic system; 3-second, tool-free swap, safe 48 V, trimless/recessed/surface (3000 K, 13 W).
[DE] Minimalistischer Strahler für dezente, wirkungsvolle Akzente im Holity-Magnetsystem; 3-Sekunden-Tausch ohne Werkzeug, 48 V, randlos/Einbau/Aufbau (3000 K, 13 W).
[IT] Spotlight minimal per accenti discreti ed efficaci nel sistema Holity; sostituzione in 3 secondi senza attrezzi, 48 V, trimless/incasso/superficie (3000 K, 13 W).
[FR] Spot minimal pour accents discrets et efficaces dans le système Holity; remplacement en 3 secondes sans outils, 48 V, sans rebord/encastré/saillie (3000 K, 13 W).

Read more
on the website

B | LED | CRI >90 | DC 48 V | 40°

LEDS OSRAM3030





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C153CL-13W3K-B	13 W	990 LM	NO	IP 20

Basis


[EN] Reliable luminaire for uniform general lighting in the Holity magnetic system; 3-second, tool-free swap, safe 48 V, trimless/recessed/surface (3000 K, 13 W).
[DE] Zuverlässige Leuchte für gleichmäßige Allgemeinbeleuchtung im Holity-Magnetsystem; 3-Sekunden-Tausch ohne Werkzeug, 48 V, randlos/Einbau/Aufbau (3000 K, 13 W).
[IT] Apparecchio affidabile per illuminazione generale uniforme nel sistema Holity; sostituzione in 3 secondi, 48 V, trimless/incasso/superficie (3000 K, 13 W).
[FR] Luminaire fiable pour éclairage général homogène dans le système Holity; remplacement en 3 secondes, 48 V, sans rebord/encastré/saillie (3000 K, 13 W).

Read more on the website

B | LED | CRI >90 | DC 48 V | 120°

LEDS OSRAM 2835





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C154CL-13W3K-B	13 W	560 LM	NO	IP 20

Meli


[EN] Modern luminaire delivering soft, comfortable light in the Holity system; 3-second, tool-free swap, 48 V, trimless/recessed/surface (3000 K, 11 W).
[DE] Moderne Leuchte mit weichem, komfortablem Licht im Holity-System; werkzeugloser 3-Sekunden-Tausch, 48 V, randlos/Einbau/Aufbau (3000 K, 11 W).
[IT] Apparecchio moderno con luce morbida e confortevole nel sistema Holity; sostituzione in 3 secondi, 48 V, trimless/incasso/superficie (3000 K, 11 W).
[FR] Luminaire moderne à lumière douce et confortable dans le système Holity; remplacement en 3 secondes, 48 V, sans rebord/encastré/saillie (3000 K, 11 W).

Read more on the website

B | LED | CRI >90 | DC 48 V | 60°

LEDS OSRAM 2835





Ø155

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C155CL-11W3K-B	11 W	810 LM	NO	IP 20


Luna


[EN] Glass pendant in the Holity system offering a soft, glowing atmosphere; 3-second swap, 48 V, trimless/recessed/surface (3000 K, 10 W, 1.5 m cable).
[DE] Glas-Pendelleuchte im Holity-System für eine sanfte, leuchtende Atmosphäre; 3-Sekunden-Tausch, 48 V, randlos/Einbau/Aufbau (3000 K, 10 W, 1,5 m Kabel).
[IT] Sospensione in vetro nel sistema Holity con atmosfera morbida e luminosa; sostituzione in 3 secondi, 48 V, trimless/incasso/superficie (3000 K, 10 W, cavo 1,5 m).
[FR] Suspension en verre du système Holity pour une ambiance douce et lumineuse; remplacement en 3 secondes, 48 V, sans rebord/encastré/saillie (3000 K, 10 W, câble 1,5 m).

Read more
on the website

B | LED | CRI >90 | DC 48 V | 120°

LEDS OSRAM 2835

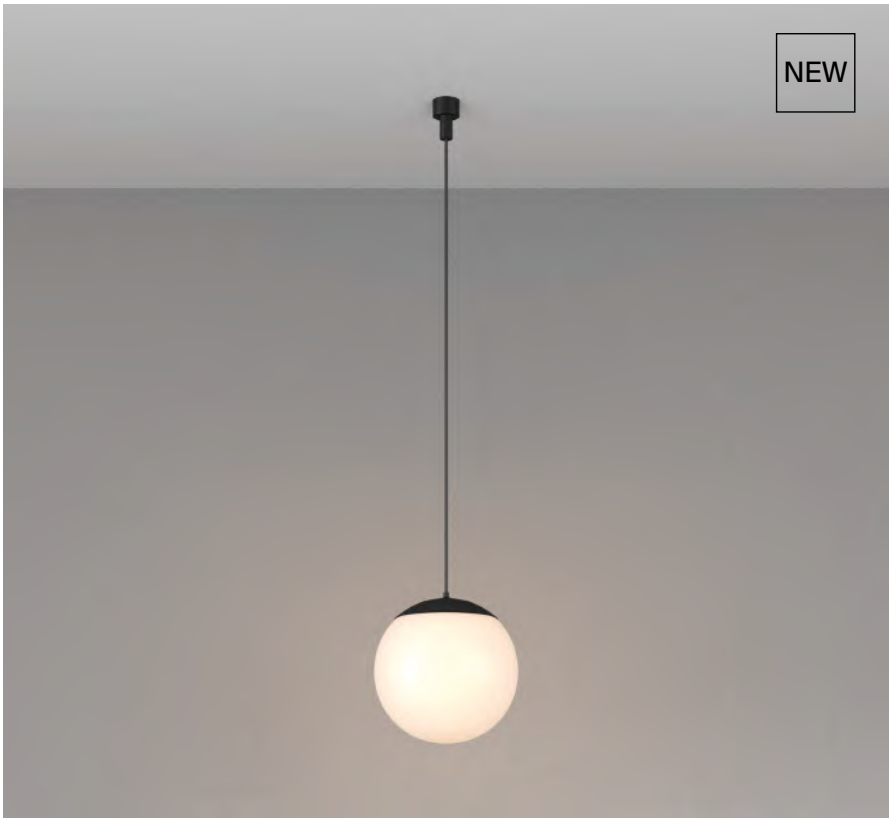



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C156PL-10W3K-B	12 W	935 LM	NO	IP 20

Accessories for Holity

Read more on the website



SYSTEM ELEMENT	COLOR	ARTICLE
FORMWORK WITHOUT DECORATIVE TRIM	BLACK	CA050-TRS-FW-B

Seamless integration with a refined decorative edge. Adds elegance and precision to the installation while preserving the minimalist look of the system.



SYSTEM ELEMENT	COLOR	ARTICLE
FORMWORK WITH DECORATIVE TRIM	BLACK	CA050-TFW

Pure minimalism — hidden installation without visible borders. Perfect for interiors where lighting should remain invisible, yet functional.



SYSTEM ELEMENT	COLOR	ARTICLE
MAGNETIC HOLDER	BLACK	CA050-GMH-B

Flexible accessory for instant fixture placement. Secure magnetic mounting with automatic power connection — fast, safe, and adaptable.



SYSTEM ELEMENT	COLOR	ARTICLE
CEILING MOUNTING BOX	BLACK	CA050-CCS-B

A practical solution for clean ceiling integration. Ensures reliable mounting and a flawless aesthetic in any installation type.




SYSTEM ELEMENT	COLOR	ARTICLE
DECORATIVE END CAP	BLACK	CA050-DEC-B

Flexible accessory for instant fixture placement. Secure magnetic mounting with automatic power connection — fast, safe, and adaptable.



BASIS	40	**BUBBLE**	44	**KEILA**	49
FOCUS LED	41	**BIANCA**	45	**CALIPSO**	50
ALFA	42	**COSMO**	48	**BIANCA**	51

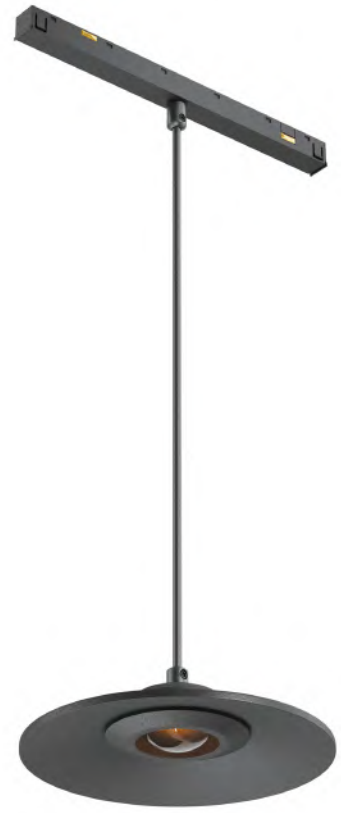

COSMO
TR248-5W2.7-6K-B-DE

Elements for surface mounting

Read more
on the website

SYSTEM ELEMENT	COLOR	ARTICLE
SURFACE CORNER CONNECTOR	BLACK	TRA239CL-41B



SYSTEM ELEMENT	COLOR	ARTICLE
SURFACE T-CONNECTOR	BLACK	TRA239CL-41B1




END CAPS	BLACK	TRA239EC-41B



SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	BLACK	TRX239-411B	H50 X W19 X L1000
	BLACK	TRX239-412B	H50 X W19 X L2000



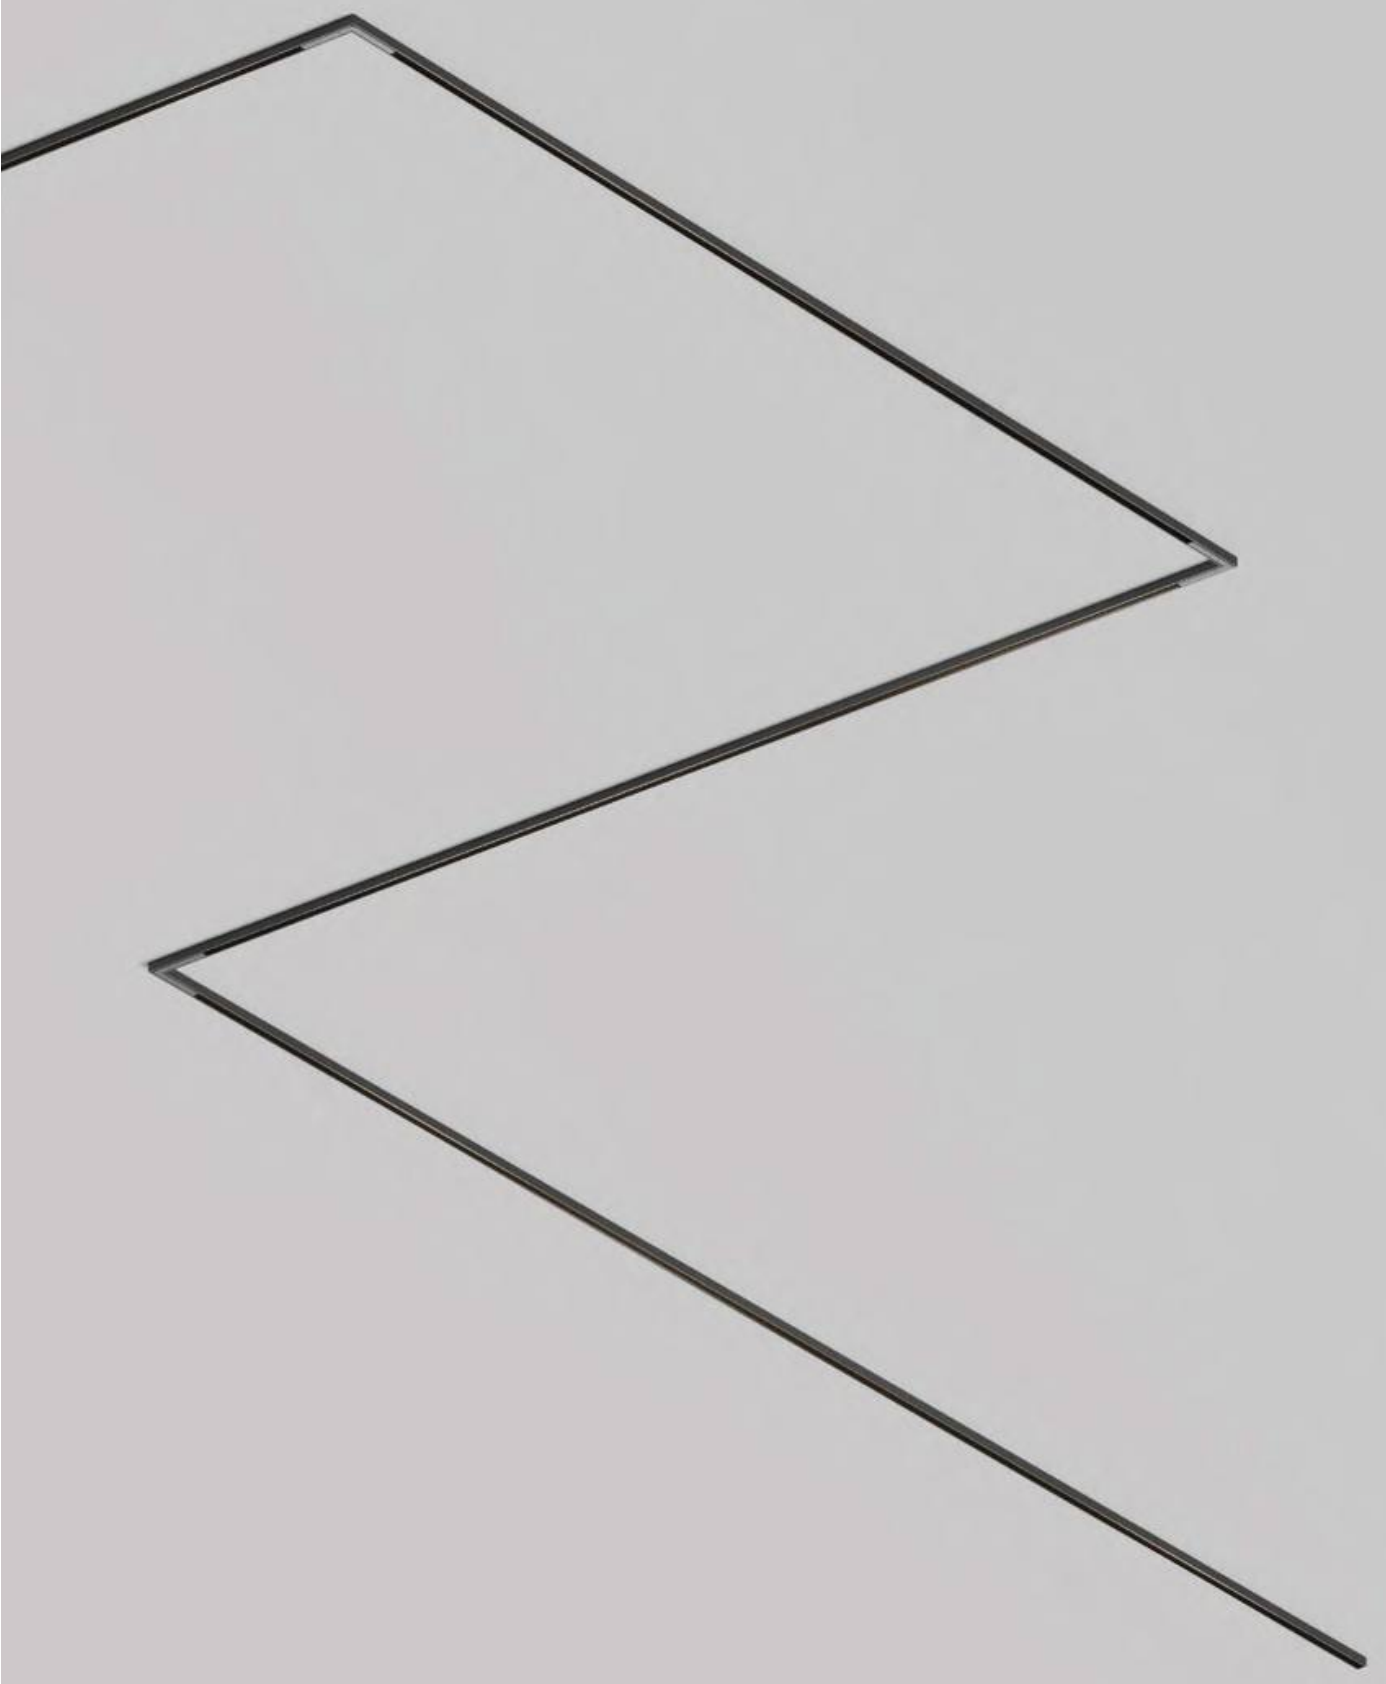

Elements for recessed mounting

Read more
on the website

SYSTEM ELEMENT	COLOR	ARTICLE
RECESSED CORNER CONNECTOR	BLACK	TRA239CLS-42.12B




SYSTEM ELEMENT	COLOR	ARTICLE
RECESSED CORNER CONNECTOR	BLACK	TRA239ICL-42.12B




SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	BLACK	TRX239-421.12B	H50 X W19 X L1000
	BLACK	TRX239-422.12B	H50 X W19 X L2000

SYSTEM ELEMENT	COLOR	ARTICLE
RECESSED T-CONNECTOR	BLACK	TRA239CLS-42.12B1



SYSTEM ELEMENT	COLOR	ARTICLE
DECORATIVE COVER	BLACK	TRA239DC-1B



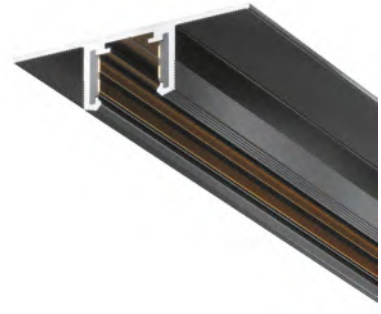



Power supply

Read more
on the website

SYSTEM ELEMENT	COLOR	ARTICLE
EXTERNAL POWER SUPPLY	BLACK	TRA239B-42B



SYSTEM ELEMENT	COLOR	ARTICLE
DIRECT POWER CONNECTOR	BLACK	TRA239PC-42B



SYSTEM ELEMENT	COLOR	ARTICLE
INTERNAL DRIVER	BLACK	TRX239DR-150B



SYSTEM ELEMENT	COLOR	ARTICLE
FLEXIBLE POWER CONNECTOR	BLACK	TRA239CS-42B



SYSTEM ELEMENT	COLOR	ARTICLE
CONNECTOR (EACH TRACK)	BLACK	TRA239C-21B



SYSTEM ELEMENT	COLOR	ARTICLE
INTERNAL DRIVER	BLACK	TRX239DR-100B



SYSTEM ELEMENT	COLOR	ARTICLE
POWER T-CONNECTOR	BLACK	TRA239CT-42B





Basis


[EN] 10 mm track luminaire for uniform, comfortable lighting — simple, clean, and always relevant; smart DALI control with adjustable 3CCT, durable aluminium body.
[DE] 10-mm-Schienenleuchte für gleichmäßiges, komfortables Licht — schlicht, klar und stets passend; smarte DALI-Steuerung mit einstellbarem 3CCT, robustes Aluminiumgehäuse.
[IT] Apparecchio su binario 10 mm per un'illuminazione uniforme e confortevole — semplice, pulito e sempre attuale; controllo DALI smart con 3CCT regolabile, corpo in alluminio resistente.
[FR] Luminaire sur rail 10 mm pour un éclairage uniforme et confortable — simple, épuré et toujours pertinent; commande DALI intelligente avec 3CCT réglable, corps en aluminium durable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 120°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR240-18W2.7-6K-B-DE	18 W	960-1070 LM	DALI	IP 20

Focus LED


[EN] 10 mm track spotlight designed to highlight what matters — focused, precise, and stylish accent lighting; smart DALI control, adjustable 3CCT, durable aluminium body.
[DE] 10-mm-Schienenstrahler für das Wesentliche — fokussiertes, präzises und stilvolles Akzentlicht; smarte DALI-Steuerung, einstellbares 3CCT, robustes Aluminiumgehäuse.
[IT] Proiettore su binario 10 mm per valorizzare l'essenziale — luce d'accento focalizzata, precisa e di stile; controllo DALI smart, 3CCT regolabile, corpo in alluminio resistente.
[FR] Projecteur sur rail 10 mm pour mettre en valeur l'essentiel — éclairage d'accent focalisé, précis et élégant; commande DALI intelligente, 3CCT réglable, corps en aluminium durable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 36°

LEDS BRIDGELUX





ANTI-DAZZLE FILTERS HONEYCOMB-D55

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR243-18W2.7-6K-B-DE	18 W	1480-1910 LM	DALI	IP 20

Alfa


[EN] 10 mm track luminaire with compact geometry in two shapes; smart DALI control and adjustable 3CCT colour.
[DE] 10-mm-Schienenleuchte mit kompakter Geometrie in zwei Formen; smarte DALI-Steuerung und einstellbare 3CCT-Farbtemperatur.
[IT] Apparecchio su binario 10 mm con geometria compatta in due forme; controllo DALI smart e 3CCT regolabile.
[FR] Luminaire sur rail 10 mm à géométrie compacte en deux formes; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 36°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR246-5W2.7-6K-B-DE	5 W	420 LM	DALI	IP 20

Alfa


[EN] 10 mm track luminaire with compact geometry in two shapes; smart DALI control and adjustable 3CCT colour.
[DE] 10-mm-Schienenleuchte mit kompakter Geometrie in zwei Formen; smarte DALI-Steuerung und einstellbare 3CCT-Farbtemperatur.
[IT] Apparecchio su binario 10 mm con geometria compatta in due forme; controllo DALI smart e 3CCT regolabile.
[FR] Luminaire sur rail 10 mm à géométrie compacte en deux formes; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 36°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR247-5W2.7-6K-B-DE	5 W	390 LM	DALI	IP 20

Bubble


[EN] 10 mm track luminaire with a playful glass design that delivers soft, decorative light and a unique atmosphere; smart DALI control and adjustable 3CCT.
[DE] 10-mm-Schienenleuchte mit verspieltem Glasdesign für weiches, dekoratives Licht und besondere Atmosphäre; smarte DALI-Steuerung und einstellbares 3CCT.
[IT] Apparecchio su binario 10 mm dal design in vetro giocoso, con luce morbida e decorativa per un'atmosfera unica; controllo DALI smart e 3CCT regolabile.
[FR] Luminaire sur rail 10 mm au design en verre ludique, offrant une lumière douce et décorative pour une ambiance unique; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 360°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR249-5W2.7-6K-B-DE	5 W	310 LM	DALI	IP 20

Bianca


[EN] 10 mm track luminaire in refined glass — timeless elegance with modern efficiency; smart DALI control and adjustable 3CCT.
[DE] 10-mm-Schienenleuchte aus raffiniertem Glas — zeitlose Eleganz mit moderner Effizienz; smarte DALI-Steuerung und einstellbares 3CCT.
[IT] Apparecchio su binario 10 mm in vetro raffinato — eleganza senza tempo ed efficienza moderna; controllo DALI smart e 3CCT regolabile .
[FR] Luminaire sur rail 10 mm en verre raffiné — élégance intemporelle et efficacité moderne; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 150°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR252-5W2.7-6K-B-DE	5 W	390 LM	DALI	IP 20




TR249-5W2.7-6K-B-DE
TR252-5W2.7-6K-B-DE

Cosmo


[EN] 10 mm track luminaire with a minimalist form and designer's touch — ideal for dynamic, creative interiors; smart DALI control and adjustable 3CCT.
[DE] 10-mm-Schienenleuchte mit minimalistischer Form und Designer-Touch — ideal für dynamische, kreative Interieurs; smarte DALI-Steuerung und einstellbares 3CCT.
[IT] Apparecchio su binario 10 mm dalla forma minimale con tocco di design — perfetto per interni dinamici e creativi; controllo DALI smart e 3CCT regolabile.
[FR] Luminaire sur rail 10 mm à forme minimaliste avec touche design — parfait pour des intérieurs dynamiques et créatifs; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 75°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR248-5W2.7-6K-B-DE	5 W	545 LM	DALI	IP 20

Keila


[EN] 10 mm track luminaire with a minimalist form and designer's touch — ideal for dynamic, creative interiors; smart DALI control and adjustable 3CCT.
[DE] 10-mm-Schienenleuchte mit minimalistischer Form und Designer-Touch — ideal für dynamische, kreative Interieurs; smarte DALI-Steuerung und einstellbares 3CCT.
[IT] Apparecchio su binario 10 mm dalla forma minimale con tocco di design — perfetto per interni dinamici e creativi; controllo DALI smart e 3CCT regolabile.
[FR] Luminaire sur rail 10 mm à forme minimaliste avec touche design — parfait pour des intérieurs dynamiques et créatifs; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 150°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR253-5W2.7-6K-B-DE	5 W	380 LM	DALI	IP 20

Calipso


EN 10 mm track luminaire with a minimalist form and designer's touch — ideal for dynamic, creative interiors; smart DALI control and adjustable 3CCT.
DE 10-mm-Schienenleuchte mit minimalistischer Form und Designer-Touch — ideal für dynamische, kreative Interieurs; smarte DALI-Steuerung und einstellbares 3CCT.
IT Apparecchio su binario 10 mm dalla forma minimale con tocco di design — perfetto per interni dinamici e creativi; controllo DALI smart e 3CCT regolabile.
FR Luminaire sur rail 10 mm à forme minimaliste avec touche design — parfait pour des intérieurs dynamiques et créatifs; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 36°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR254-7W2.7-6K-B-DE	7 W	680 LM	DALI	IP 20

Bianca


EN 10 mm track luminaire with a minimalist form and designer's touch — ideal for dynamic, creative interiors; smart DALI control and adjustable 3CCT.
DE 10-mm-Schienenleuchte mit minimalistischer Form und Designer-Touch — ideal für dynamische, kreative Interieurs; smarte DALI-Steuerung und einstellbares 3CCT.
IT Apparecchio su binario 10 mm dalla forma minimale con tocco di design — perfetto per interni dinamici e creativi; controllo DALI smart e 3CCT regolabile.
FR Luminaire sur rail 10 mm à forme minimaliste avec touche design — parfait pour des intérieurs dynamiques et créatifs; commande DALI intelligente et 3CCT réglable.

Read more
on the website

B | LED | DALI | CRI >90 | DC 48 V | 150°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR255-5W2.7-6K-B-DE	5 W	400 LM	DALI	IP 20



ALFA	68	**GALA**	94	**PLATO**	108
ALFA S	69	**LENS**	96	**POINTS**	112
ARTISAN	70	**LARC**	98	**POINTS ROT**	114
BASIS	72	**LUNA**	102	**POINTS S**	115
ELTI	80	**OUTLINE**	104	**RELAX**	116
FOCUS LED	84	**PARETE**	106	**RADO**	118



ALFA
TR122-4-7W-DS-W

Elements for surface and suspended mounting

Read more on the website

SYSTEM ELEMENT	COLOR	ARTICLE
END CAP	■ BLACK	TRA034EC-41B
	□ WHITE	TRA034EC-41W




SYSTEM ELEMENT	COLOR	ARTICLE
ANGLE-CONNECTOR	■ BLACK	TRA034HCL-41B
	□ WHITE	TRA034HCL-41W



SYSTEM ELEMENT	COLOR	ARTICLE
STRAIGHT CONNECTOR	■ BLACK	TRA034C-21B
	□ WHITE	TRA034C-21W



SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	■ BLACK	TRX034-411B	H52 X W26 X L1000
	■ BLACK	TRX034-412B	H52 X W26 X L2000
	□ WHITE	TRX034-411W	H52 X W26 X L1000
	□ WHITE	TRX034-412W	H52 X W26 X L2000





Elements for surface and suspended mounting

Read more on the website

SYSTEM ELEMENT	COLOR	ARTICLE
INTERNAL ANGLE-CONNECTOR	■ BLACK	TRA034ICL-41B
	□ WHITE	TRA034ICL-41W



SYSTEM ELEMENT	COLOR	ARTICLE
T-CONNECTOR	■ BLACK	TRA034CT-41B-DE
	□ WHITE	TRA034CT-41W-DE




SYSTEM ELEMENT	COLOR	ARTICLE
SURFACE MOUNTING CLIP	■ BLACK	TRA034HS-21B
	□ WHITE	TRA034HS-21W



SYSTEM ELEMENT	COLOR	ARTICLE
SUSPENSION KIT	■ BLACK	TRA034SW-2B
	□ WHITE	TRA034SW-2W

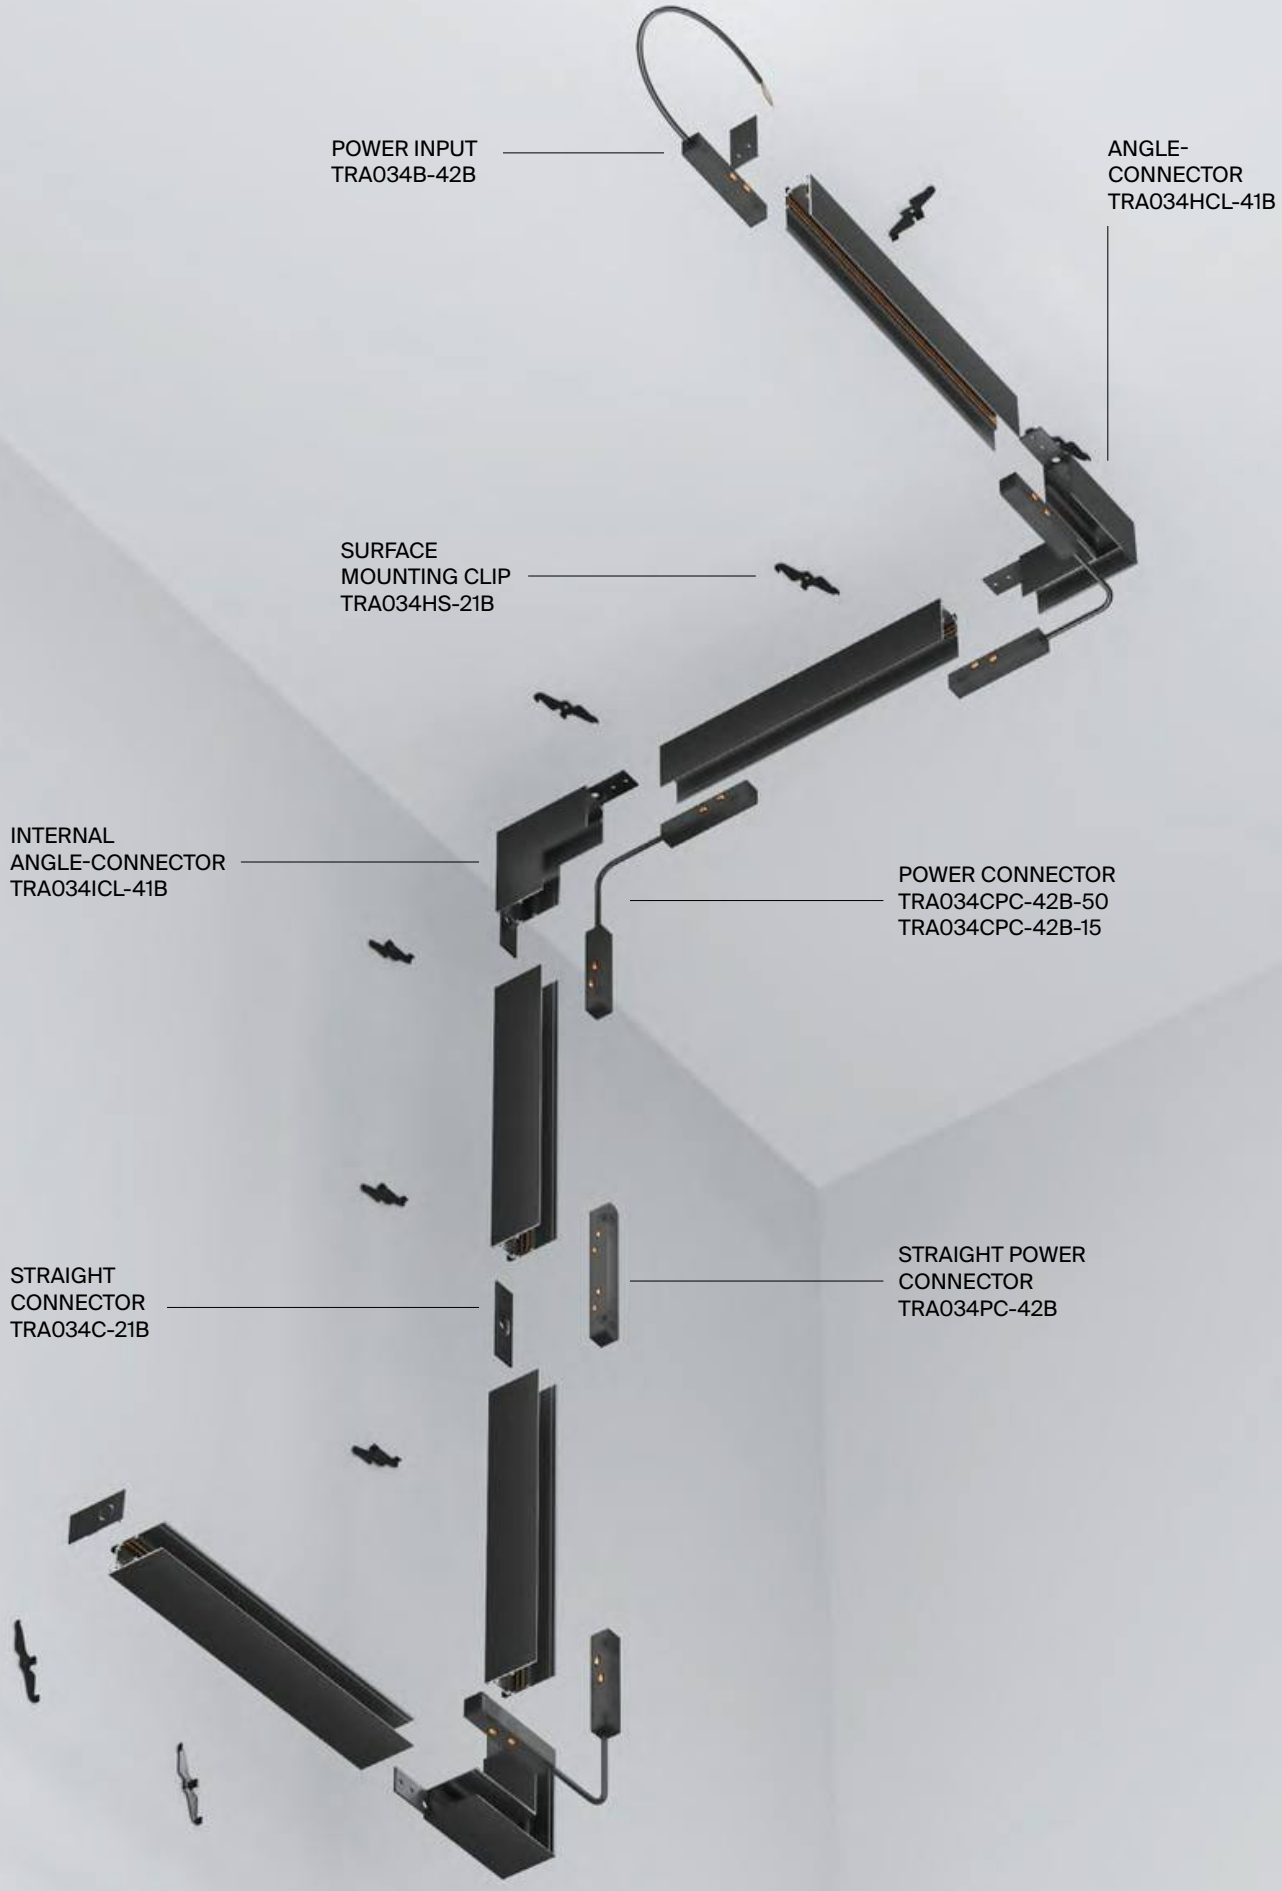


POWER INPUT
TRA034B-42B
ANGLE-
CONNECTOR
TRA034HCL-41B
SURFACE
MOUNTING CLIP
TRA034HS-21B
INTERNAL
ANGLE-CONNECTOR
TRA034ICL-41B
POWER CONNECTOR
TRA034CPC-42B-50
TRA034CPC-42B-15
STRAIGHT
CONNECTOR
TRA034C-21B
STRAIGHT POWER
CONNECTOR
TRA034PC-42B

Elements for recessed mounting

Read more on the website

SYSTEM ELEMENT	COLOR	ARTICLE
END CAP	BLACK	TRA034EC-42B
	WHITE	TRA034EC-42W



SYSTEM ELEMENT	COLOR	ARTICLE
STRAIGHT CONNECTOR	GRAY	TRA034C-42S




*GYPSUM BOARD 9.5 MM


**GYPSUM BOARD 12.5 MM

SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	BLACK	*TRX034-421B	H46 X W62 X L1000
	BLACK	**TRX034-421.12B	H46 X W70 X L1000
	BLACK	**TRX034-422.12B	H46 X W70 X L2000
	WHITE	**TRX034-422.12W	H46 X W70 X L2000
	WHITE	**TRX034-421.12W	H46 X W70 X L1000

*TRX034-421B



**TRX034-421.12B





Elements for recessed mounting

Read more on the website

*GYPSUM BOARD 9.5 MM

**GYPSUM BOARD 12.5 MM

SYSTEM ELEMENT	COLOR	ARTICLE
T-CONNECTOR	■ BLACK	TRA034CT-42.12B
	□ WHITE	TRA034CT-42.12W



SYSTEM ELEMENT	COLOR	ARTICLE
L-CONNECTOR	■ BLACK	*TRACL034-42B-R
	■ BLACK	**TRA034CL-42.12B
	□ WHITE	**TRA034CL-42.12W



INTERNAL L-CONNECTOR	■ BLACK	*TRA034CL-42B
	■ BLACK	**TRA034ICL-42.12B
	□ WHITE	**TRA034ICL-42.12W



RADIUS CONNECTOR	■ BLACK	**TRA044-ANGLE.12B
	□ WHITE	**TRA044-ANGLE.12W




POWER INPUT
TRA034B-42B
INTERNAL
L-CONNECTOR
TRA034CL-42B
POWER CONNECTOR
TRA034CPC-42B-50
TRA034CPC-42B-15
STRAIGHT
CONNECTOR
TRA034C-42S
STRAIGHT POWER CONNECTOR
TRA034PC-42B
L-CONNECTOR
TRACL034-42B-R

Power input and connectors

Read more on the website

*GYPSUM BOARD 9.5 MM

**GYPSUM BOARD 12.5 MM

SYSTEM ELEMENT	COLOR	ARTICLE
POWER INPUT	■ BLACK	**TRA034B-42B-1
	□ WHITE	**TRA034B-42W-1



SYSTEM ELEMENT	COLOR	ARTICLE
RADIUS CONNECTOR	■ BLACK	TRA034CS-B-DE
	□ WHITE	TRA034CS-W-DE



SYSTEM ELEMENT	COLOR	ARTICLE
STRAIGHT POWER CONNECTOR	■ BLACK	TRA034PC-42B
	□ WHITE	TRA034PC-42W



SYSTEM ELEMENT	COLOR	ARTICLE
T-CONNECTOR	■ BLACK	TRA034CWT-42B-DE
	□ WHITE	TRA034CWT-42W-DE




SYSTEM ELEMENT	COLOR	ARTICLE
POWER ANGLE FLEXIBLE CONNECTOR 50CM	■ BLACK	TRA034CPC-42B-50



SYSTEM ELEMENT	COLOR	ARTICLE
POWER ANGLE FLEXIBLE CONNECTOR 15CM	■ BLACK	TRA034CPC-42B-15-1
	□ WHITE	TRA034CPC-42W-15-1



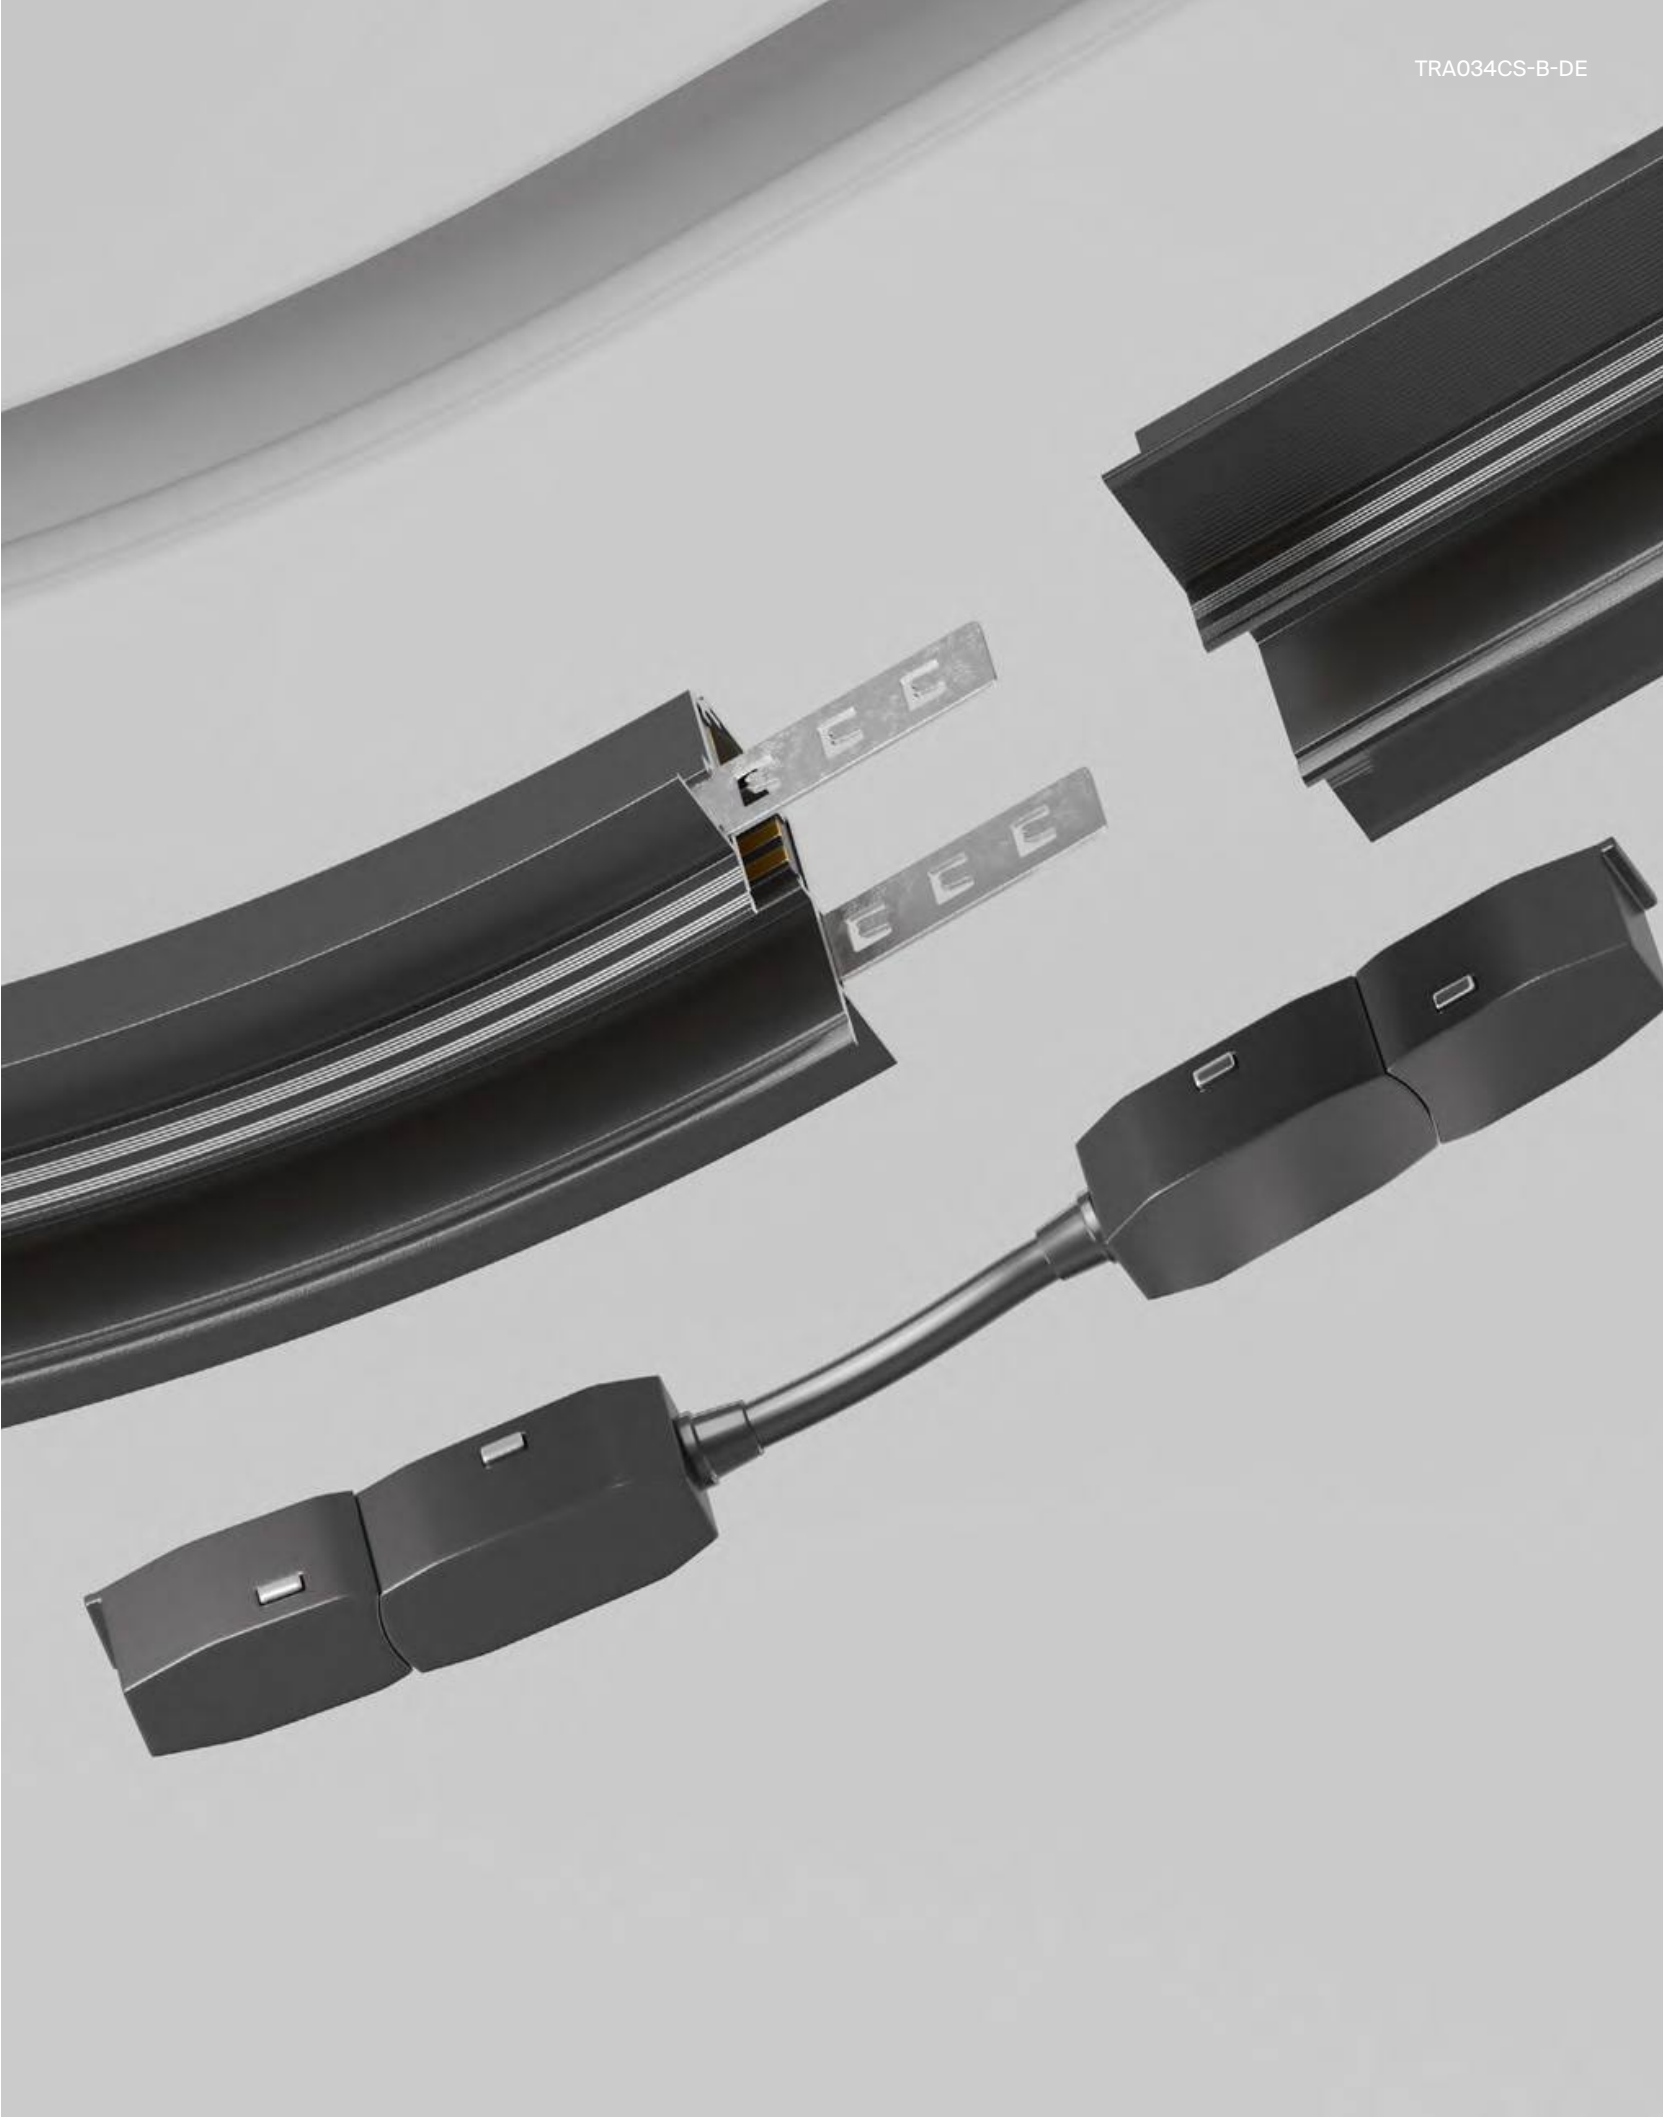

Power supples

Read more
on the website

EN Power supplies convert AC mains voltage of 220V to DC 24V.
DE Netzteile wandeln die Netzwechselspannung von 220 V (AC) in 24 V Gleichspannung (DC) um.
IT Gli alimentatori sono convertitori CA tensione di rete CA 220 V a tensione CC 24 V.
FR Les blocs d'alimentation sont des convertisseurs de tension secteur 220VAC en 24VDC.

SYSTEM ELEMENT	COLOR	ARTICLE	SIZE	MAX W
POWER SUPPLY	SILVER	TRA004DR-100S	H97 X W129	100 W
	SILVER	TRA004DR-150S	H97 X W159	150 W
	SILVER	TRA004DR-200S	H115 X W215	200 W
	SILVER	TRA004DR-320S	H115 X W215	320 W




POWER SUPPLY	BLACK	TRX034DR4-100B-1	H23 X W300	100W
	WHITE	TRX034DR4-100W-1	H23 X W300	100W
	BLACK	TRX034DR4-200B-1	H23 X W325	200W
	WHITE	TRX034DR4-200W-1	H23 X W325	200W



POWER SUPPLY DALI	BLACK	TRA034DR-100W-DD-B-DE	H45 X W22 X L305	100 W
	WHITE	TRA034DR-100W-DD-W-DE	H45 X W22 X L305	100 W
	BLACK	TRA034DR-200W-DD-B-DE	H45 X W22 X L330	200 W
	WHITE	TRA034DR-200W-DD-W-DE	H45 X W22 X L330	200 W



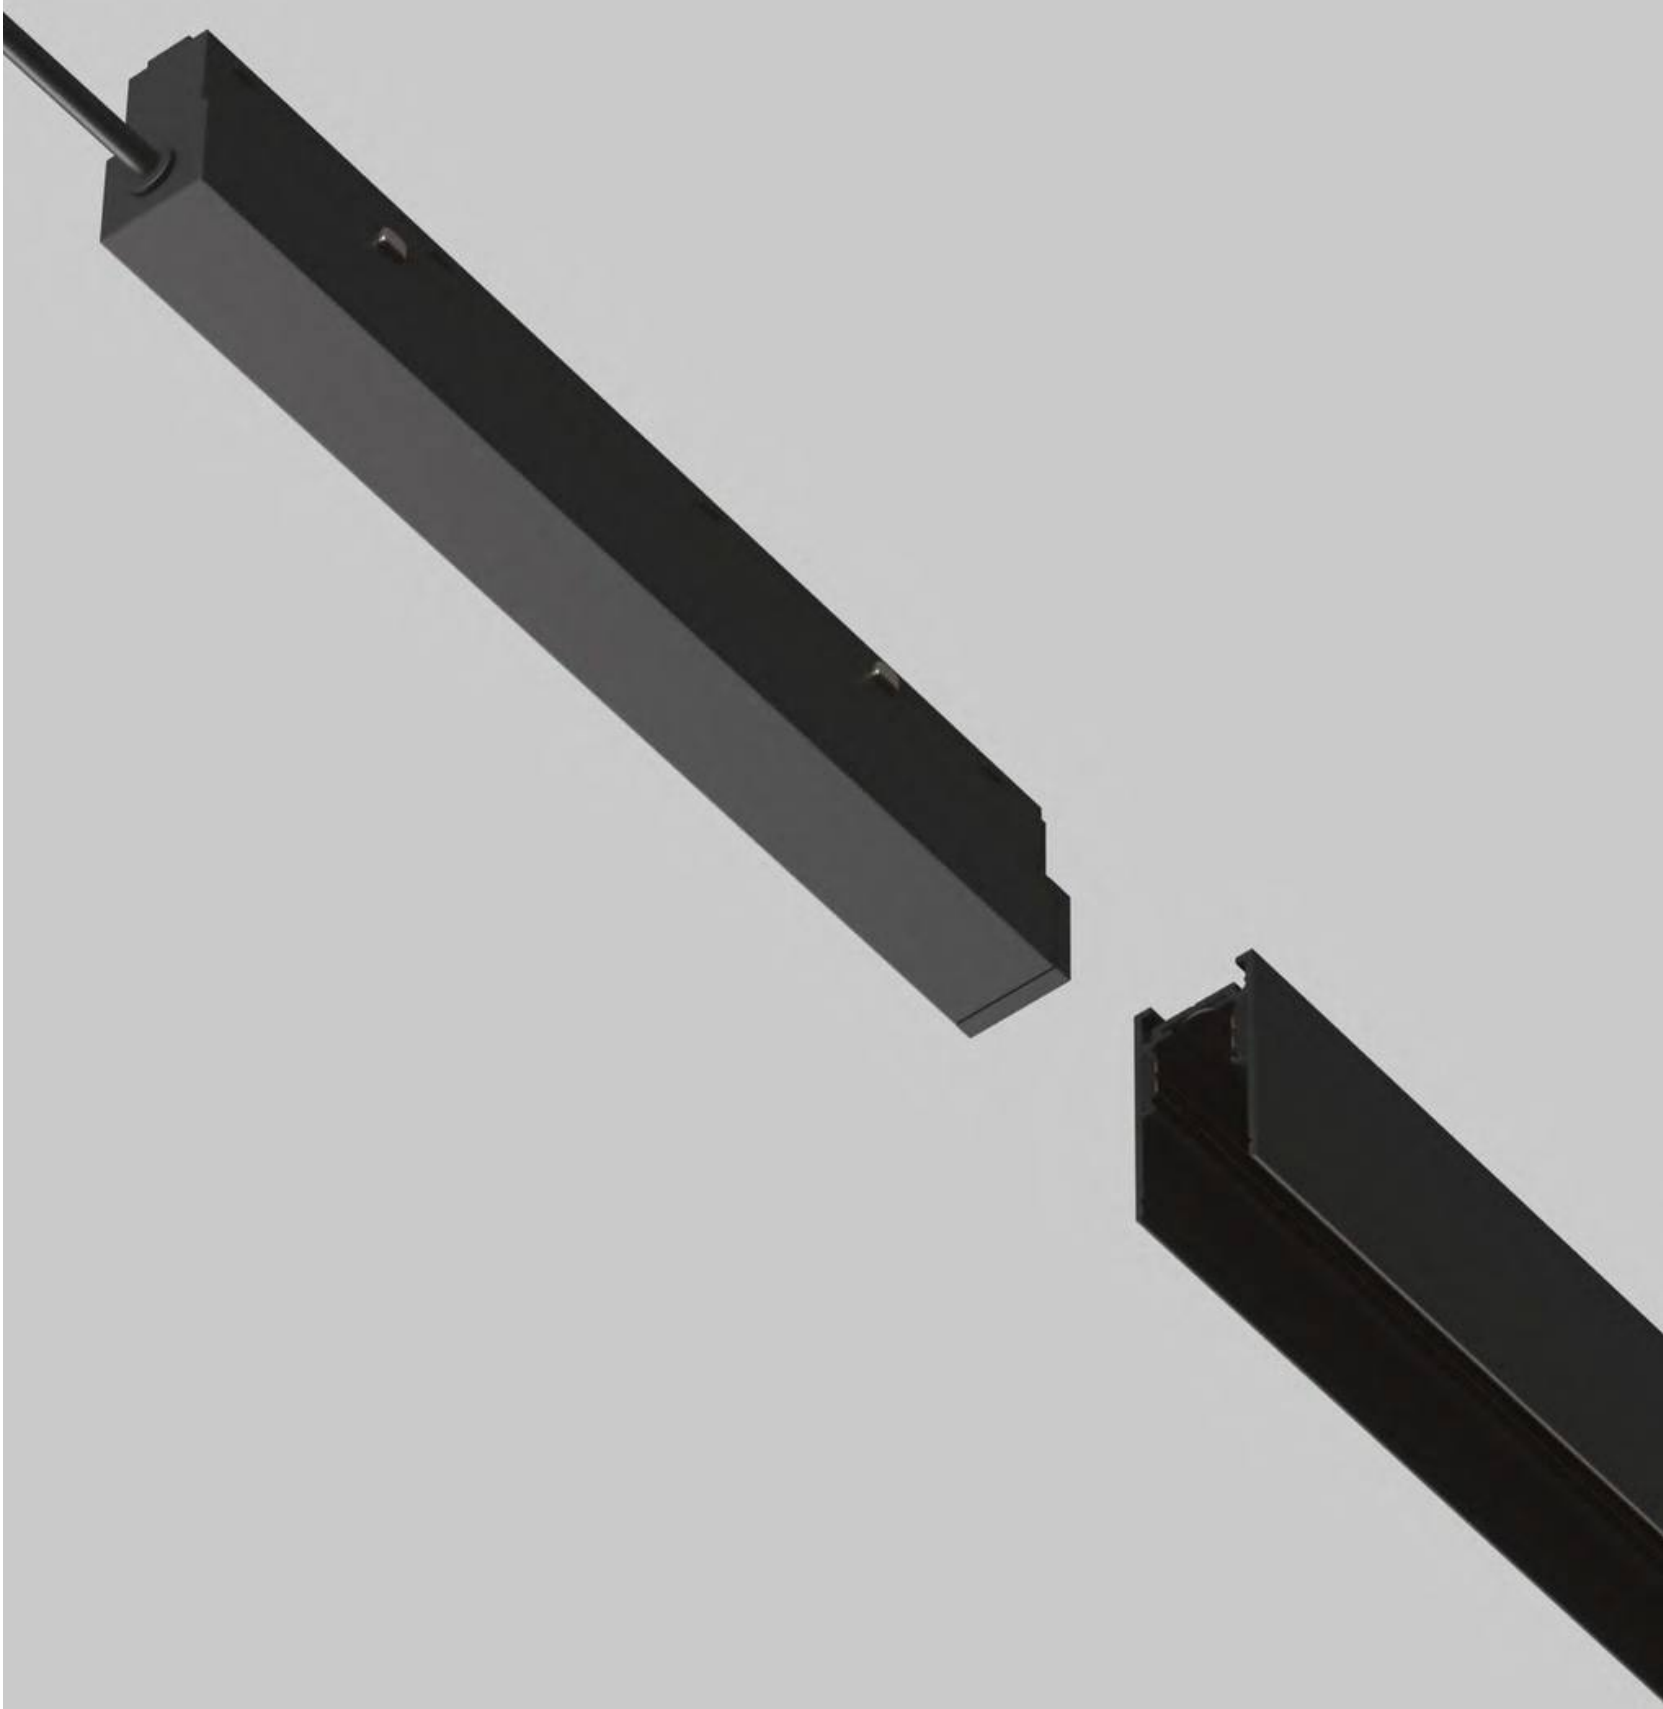


TR122-2-7W3K-W


TR122-2-7W3K-W

Alfa


EN Metal body. The LED light source is recessed into the body.
DE Metallrahmen. Die im Rahmen versenkte LED-Lichtquelle.
IT Corpo in metallo. La sorgente luminosa a LED è incassata nel corpo.
FR Corps métallique. Source de lumière LED encastrée dans le corps.

Read more
on the website

B W BS B LED CRI >90 DC 48 V
SMART BT 50°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR122-2-7W3K-B	7 W	370 LM	NO	IP 20
3K WARM WHITE	WHITE	TR122-2-7W3K-W	7 W	340 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR122-2-7W3K-BS	7 W	370 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR122-4-7W-DS-B	7 W	410 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR122-4-7W-DS-W	7 W	380 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR122-4-7W-DS-BS	7 W	370 LM	BLUETOOTH MESH	IP 20

Alfa S


[EN] Aluminium fittings. Cylinder-shaped lamps for accent lighting. A recessed LED light source eliminates glare.
[DE] Beschläge aus Aluminium. Zylinderförmige Leuchten für die Akzentbeleuchtung. Versenkte LED-Lichtquelle - schließt die Blendwirkung aus.
[IT] L'armatura e' in alluminio. Le lampade sono fatte a forma di cilindro per illuminazione d'accento. La sorgente luminosa da incasso a LED-elimina l'effetto accecante.
[FR] Armature en aluminium. Lampes en forme de cylindre pour un éclairage d'accentuation. Source de lumière LED calorifuge encastrée - élimine l'éblouissement.

Read more
on the website

B W BS B LED CRI >90 DC 48 V
SMART BT 50°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR132-2-7W3K-B	7 W	330 LM	NO	IP 20
3K WARM WHITE	WHITE	TR132-2-7W3K-W	7 W	330 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR132-2-7W3K-BS	7 W	380 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR132-4-7W-DS-B	7 W	360 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR122-4-7W-DS-W	7 W	350 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR132-4-7W-DS-BS	7 W	390 LM	BLUETOOTH MESH	IP 20


Artisan


Read more
on the website

[EN] Graphic texture. Metal body. An optional anti-glare grille HoneyComb-D45 ensuring a low glare factor is available for this model.
[DE] Grafische Textur. Metallrahmen. Das Blendschutzgitter HoneyComb-D45 kann für diese Modell nachgekauft werden, um einen geringen Blendfaktor zu gewährleisten.
[IT] La fattura e' grafica. Il corpo di metallo. A questo modello può acquistare una griglia antiriflesso HoneyComb-D45, che garantisce un basso coefficiente di un abbagliamento dalla luce.
[FR] Facture graphique. Corps métallique. Vous pouvez acheter une grille anti-éblouissement HoneyComb-D45 pour le modèle, qui assurera un faible facteur d'éblouissement.

B | W / B | G | LED | CRI >90 | DC 48 V | 36°

LEDS EPISTAR

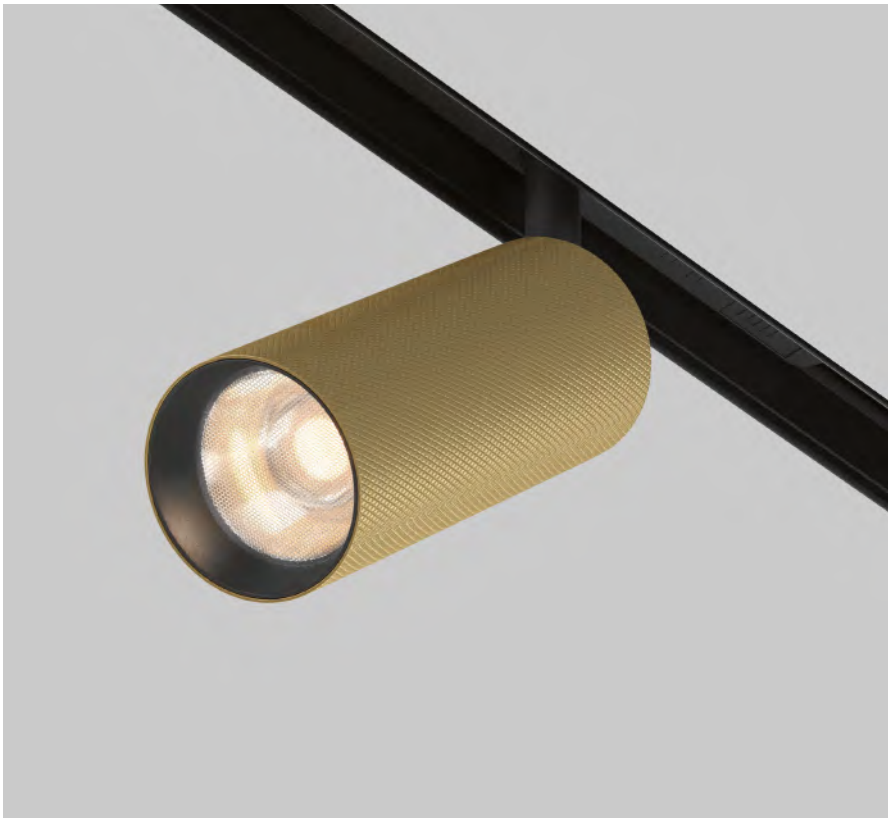





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	TR097-2-12W2.7K-M-BB	12 W	920 LM	NO	IP 20
3K WARM WHITE	BLACK	TR097-2-12W3K-M-BB	12 W	870 LM	NO	IP 20
3K WARM WHITE	BLACK / WHITE	TR097-2-12W3K-M-BW	12 W	930 LM	NO	IP 20
3K WARM WHITE	GOLD	TR097-2-12W3K-M-BMG	12 W	950 LM	NO	IP 20
4K WHITE	BLACK	TR097-2-12W4K-M-BB	12 W	980 LM	NO	IP 20
4K WHITE	BLACK / WHITE	TR097-2-12W4K-M-BW	12 W	980 LM	NO	IP 20
4K WHITE	GOLD	TR097-2-12W4K-M-BMG	12 W	1050 LM	NO	IP 20


Lenses, filters and rings


[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

Read more on the website

1


2


3

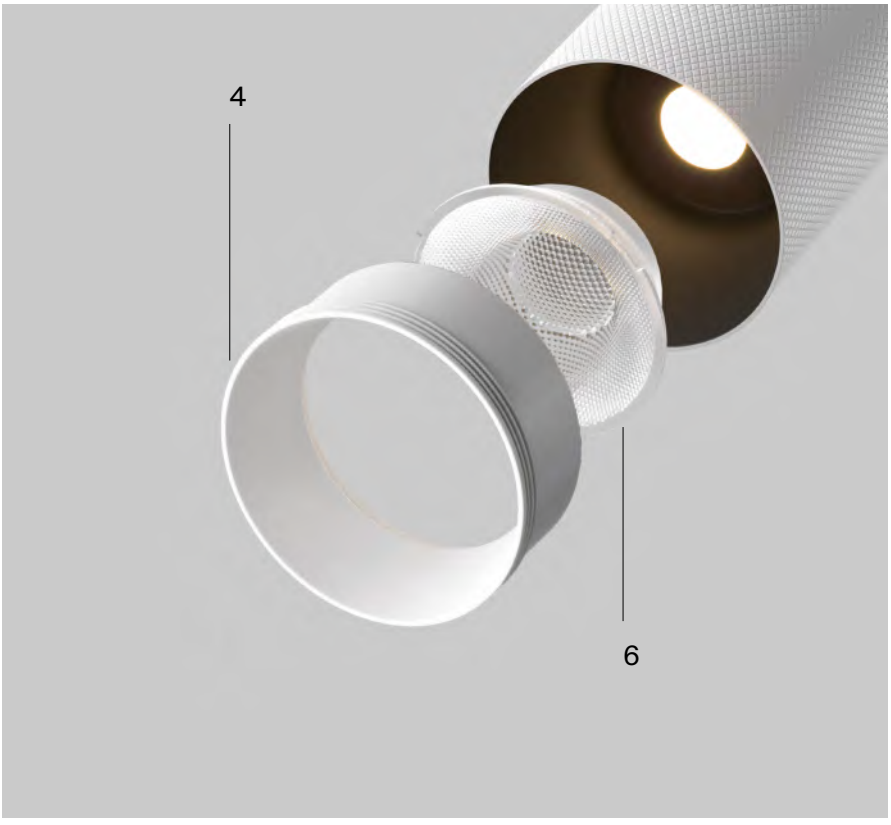


SYSTEM ELEMENT	ARTICLE	SYSTEM ELEMENT	ARTICLE	DEGREE	COLOR
1 MATTE DIFFUSER	RINGSACR-12-W	4 RING	RINGM-12-W		☐ WHITE
2 MATTE DIFFUSER	RINGLACR-12-W	5 ANTI-DAZZLE FILTERS	HONEYCOMB-D38		
3 MATTE DIFFUSER	RINGMACR-12-W	6 LENSES	LENSD38-15	15°	
			LENSD38-24	24°	
			LENSD38-36	36°	
			LENSD38-50	50°	

Basis


Read more
on the website

[EN] Metal body. The LED light source is hidden under a matte diffuser. Smart luminaires with temperature control, dimmable, controlled by voice and remotely with the application.
[DE] Metallrahmen. Die LED-Lichtquelle ist unter einem matten. Diffusor verborgen. Die intelligenten Leuchten mit Temperatursteuerung.
[IT] Corpo in metallo. La sorgente luminosa a LED è nascosta sotto un diffusore opaco. Lampade intelligenti con controllo della temperatura, dimmerabili, comandate a voce e da remoto tramite l'applicazione.
[FR] Corps métallique. Source de lumière LED dissimulée sous un diffuseur mat. Les luminaires-smart avec réglage de température, sont équipés de variateurs, contrôlables à la voix et à distance via une application.


B | W | LED | CRI >90 | DALI | DALI 2 | DC 48 V
SMART | BT | 120°

LEDS OSRAM






1



2



3

1

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	TR030-2-12W2.7K-B	12 W	800 LM	NO	IP 20
3K WARM WHITE	BLACK	TR030-2-12W3K-B	12 W	720 LM	NO	IP 20
3K WARM WHITE	WHITE	TR030-2-12W3K-W	12 W	600 LM	NO	IP 20
4K WHITE	BLACK	TR030-2-12W4K-B	12 W	780 LM	NO	IP 20
4K WHITE	WHITE	TR030-2-12W4K-W	12 W	640 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR030-4-12W3K-WW-DS-B	12 W	780 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-12W3K-WW-DS-W	12 W	770 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR030-4-12WTW-DD-B	12 W	750 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-12WTW-DD-W	12 W	800 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR030-4-12WTW-DD2-B	12 W	977 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-12WTW-DD2-W	12 W	1081 LM	DALI 2	IP 20

2

2.7K WARM	BLACK	TR030-2-24W2.7K-B	24 W	1630 LM	NO	IP 20
3K WARM WHITE	BLACK	TR030-2-24W3K-B	24 W	1440 LM	NO	IP 20
3K WARM WHITE	WHITE	TR030-2-24W3K-W	24 W	1350 LM	NO	IP 20
4K WHITE	BLACK	TR030-2-24W4K-B	24 W	1560 LM	NO	IP 20
4K WHITE	WHITE	TR030-2-24W4K-W	24 W	1340 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR030-4-24W3K-WW-DS-B	24 W	1560 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-24W3K-WW-DS-W	24 W	1550 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR030-4-24WTW-DD-B	24 W	1500 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-24WTW-DD-W	24 W	1500 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR030-4-24WTW-DD2-B	24 W	1867 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-24WTW-DD2-W	24 W	2153 LM	DALI 2	IP 20

3

2.7K-6K ADJUSTABLE	BLACK	TR030-4-30WTW-DD-B	30 W	1650 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-30WTW-DD-W	30 W	1650 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR030-4-30WTW-DD2-B	30 W	1919 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR030-4-30WTW-DD2-W	30 W	2201 LM	DALI 2	IP 20


TR042-4-24W3K-WW-DS-1


TR030-4-12WTW-DD-B
TR030-4-30WTW-DD-B

Basis


Read more
on the website

[EN] Metal body. The LED light source is hidden under a matte diffuser. Smart luminaires with temperature control, dimmable, controlled by voice and remotely with the application.
[DE] Metallrahmen. Die LED-Lichtquelle ist unter einem matten. Diffusor verborgen. Die intelligenten Leuchten mit Temperatursteuerung.
[IT] Corpo in metallo. La sorgente luminosa a LED è nascosta sotto un diffusore opaco. Lampade intelligenti con controllo della temperatura, dimmerabili, comandate a voce e da remoto tramite l'applicazione.
[FR] Corps métallique. Source de lumière LED dissimulée sous un diffuseur mat. Les luminaires-smart avec réglage de température, sont équipés de variateurs, contrôlables à la voix et à distance via une application.

B | W | LED | CRI >90 | DC 48 V | SMART
BT | 120°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR042-2-24W3K-1	12 W	1230 LM	NO	IP 20
3K WARM WHITE	WHITE	TR042-2-24W3K-W	12 W	1310 LM	NO	IP 20
4K WHITE	BLACK	TR042-2-24W4K-1	12 W	1250 LM	NO	IP 20
4K WHITE	WHITE	TR042-2-24W4K-W	12 W	1400 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR042-4-24W3K-WW-DS-1	12 W	1280 LM	NO	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR042-4-24W3K-WW-DS-W	12 W	1380 LM	NO	IP 20

Basis


[EN] Metal body. The LED light source is hidden under a matte diffuser. Smart luminaires with temperature control, dimmable, controlled by voice and remotely with the application.
[DE] Metallrahmen. Die LED-Lichtquelle ist unter einem matten. Diffusor verborgen. Die intelligenten Leuchten mit Temperatursteuerung.
[IT] Corpo in metallo. La sorgente luminosa a LED è nascosta sotto un diffusore opaco. Lampade intelligenti con controllo della temperatura, dimmerabili, comandate a voce e da remoto tramite l'applicazione.
[FR] Corps métallique. Source de lumière LED dissimulée sous un diffuseur mat. Les luminaires-smart avec réglage de température, sont équipés de variateurs, contrôlables à la voix et à distance via une application.

Read more on the website

B | W | LED | CRI >90 | DC 48 V | SMART | BT | 120°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR102-24W3K-B-1	24 W	1230 LM	NO	IP 20
3K WARM WHITE	WHITE	TR102-24W3K-W	24 W	1680 LM	NO	IP 20
4K WHITE	BLACK	TR102-24W4K-B-1	24 W	1250 LM	NO	IP 20
4K WHITE	WHITE	TR102-24W4K-W	24 W	1770 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR102-24W-DS-B-1	24 W	1280 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR102-24W-DS-W	24 W	1150 LM	BLUETOOTH MESH	IP 20

Basis Rot


[EN] Aluminium fittings. Luminaires with a rotary mechanism allow to direct light in the interior.
[DE] Beschläge aus Aluminium. Leuchten mit einem. Drehmechanismus ermöglichen es, das Licht in den Innenraum zu richten.
[IT] L'armatura e' in alluminio. Le lampade con il meccanismo rotante consentono di dirigere la luce all'interno.
[FR] Armature en aluminium. Les luminaires à mécanisme rotatif permettent de diriger la lumière à l'intérieur.

Read more
on the website

B W LED CRI >90 DC 48 V SMART
BT 120°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	■ BLACK	TR036-4-12WTW-DD-B	12 W	550 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	□ WHITE	TR036-4-12WTW-DD-W	12 W	600 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	■ BLACK	TR036-4-12WTW-DD2-B	12 W	629 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	□ WHITE	TR036-4-12WTW-DD2-W	12 W	821 LM	DALI 2	IP 20



Elti


[EN] A high pressure aluminum body provides high heat dissipation. A rotating mechanism on an elegant bar to adjust the light flux.
[DE] Hochdruck-Aluminiumrahmen für hohe Wärmeableitung. Schwenkvorrichtung an einer stilvollen Leiste zur Einstellung des Lichtstroms.
[IT] Il corpo fatto in alluminio ad alta pressione fornisce l'alto livello di dissipatore di calore. Il meccanismo girevole su una barra elegante per regolare il flusso luminoso.
[FR] Le corps est en aluminium haute pression, offre une dissipation thermique élevée. Un mécanisme rotatif sur une barre élégante pour régler le flux lumineux.

Read more on the website

B | W B | G B | LED | CRI >90 | DC 48 V | SMART | BT | 36°

LEDS EPISTAR







CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR005-2-12W3K-B	12 W	844 LM	NO	IP 20
3K WARM WHITE	BLACK / WHITE	TR005-2-12W3K-BW	12 W	862 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR005-2-12W3K-BBS	12 W	844 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR005-4-12W-DS-B	12 W	947 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / WHITE	TR005-4-12W-DS-BW	12 W	987 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR005-4-12W-DS-BBS	12 W	953 LM	BLUETOOTH MESH	IP 20

Lenses, filters and rings

[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

Read more on the website

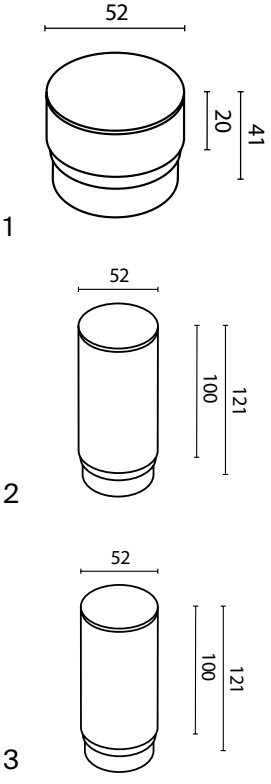

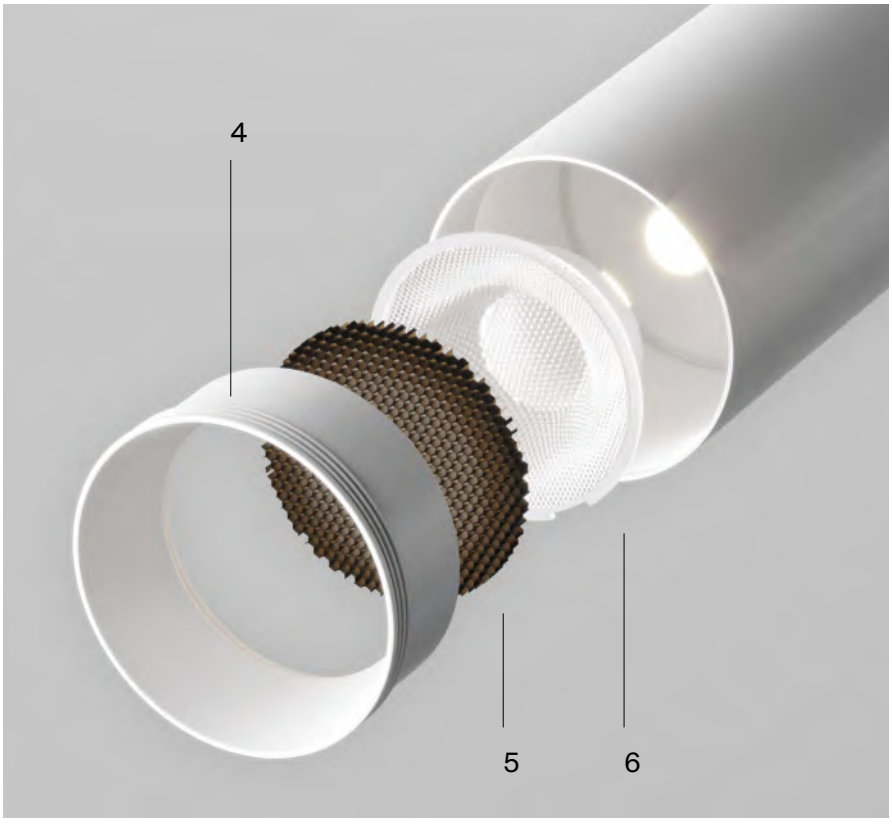

SYSTEM ELEMENT		ARTICLE	SYSTEM ELEMENT		ARTICLE	DEGREE	COLOR
1	MATTE DIFFUSER	RINGSACR-12-W	4	RING	RINGM-12-W		☐ WHITE
2	MATTE DIFFUSER	RINGLACR-12-W	5	ANTI-DAZZLE FILTERS	HONEYCOMB-D38		
3	MATTE DIFFUSER	RINGMACR-12-W	6	LENSES	LENSD38-15	15°	
					LENSD38-24	24°	
					LENSD38-36	36°	
					LENSD38-50	50°	

Elti Duo


[EN] A high pressure aluminum body provides high heat dissipation. A rotating mechanism on an elegant bar to adjust the light flux.
[DE] Hochdruck-Aluminiumrahmen für hohe Wärmeableitung. Schwenkvorrichtung an einer stilvollen Leiste zur Einstellung des Lichtstroms.
[IT] Il corpo fatto in alluminio ad alta pressione fornisce l'alto livello di dissipatore di calore. Il meccanismo girevole su una barra elegante per regolare il flusso luminoso.
[FR] Le corps est en aluminium haute pression, offre une dissipation thermique élevée. Un mécanisme rotatif sur une barre élégante pour régler le flux lumineux.

Read more on the website

B | W B | G B | LED | CRI >90 | DC 48 V | SMART
BT | 36°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR005-2-2X12W3K-B	24 W	1463 LM	NO	IP 20
3K WARM WHITE	BLACK / WHITE	TR005-2-2X12W3K-BW	24 W	1563 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR005-2-2X12W3K-BBS	24 W	1517 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR005-4-2X12W-DS-B	24 W	1735 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / WHITE	TR005-4-2X12W-DS-BW	24 W	1802 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR005-4-2X12W-DS-BBS	24 W	1624 LM	BLUETOOTH MESH	IP 20


TR005-2-2X12W3K-B


Focus LED

EN A distinctive feature of the Focus LED series is minimalism combined with modern technologies.
DE Minimalismus in Kombination mit moderner Technik ist das Markenzeichen der Serie FOCUS LED.
IT Il minimalismo combinato con la tecnologia moderna è una caratteristica distintiva della serie Focus LED.
FR Le minimalisme en combinaison avec les technologies modernes est une caractéristique distinctive de la série Focus LED.


Read more on the website

B W BS B LED CRI >90 DC 48 V SMART DALI
DALI 2 BT

LEDS EPISTAR



1



2




1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR032-2-5W3K-S-B	5 W	350 LM	NO	IP 20
3K WARM WHITE	WHITE	TR032-2-5W3K-S-W	5 W	420 LM	NO	IP 20
4K WHITE	BLACK	TR032-2-5W4K-S-B	5 W	380 LM	NO	IP 20
4K WHITE	WHITE	TR032-2-5W4K-S-W	5 W	470 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR032-4-5W3K-S-DS-B	5 W	380 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-5W3K-S-DS-W	5 W	420 LM	BLUETOOTH MESH	IP 20


2						
3K WARM WHITE	BLACK / BRASS	TR032-2-5W3K-M-BBS	5 W	377 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR032-4-5W3K-M-DS-BBS	5 W	376 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-5WTW-S-DD-W	5 W	300 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR032-4-5WTW-S-DD2-B	5 W	300 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-5WTW-S-DD2-W	5 W	300 LM	DALI 2	IP 20


Lenses, filters and rings


[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

Read more
on the website

1


2


3

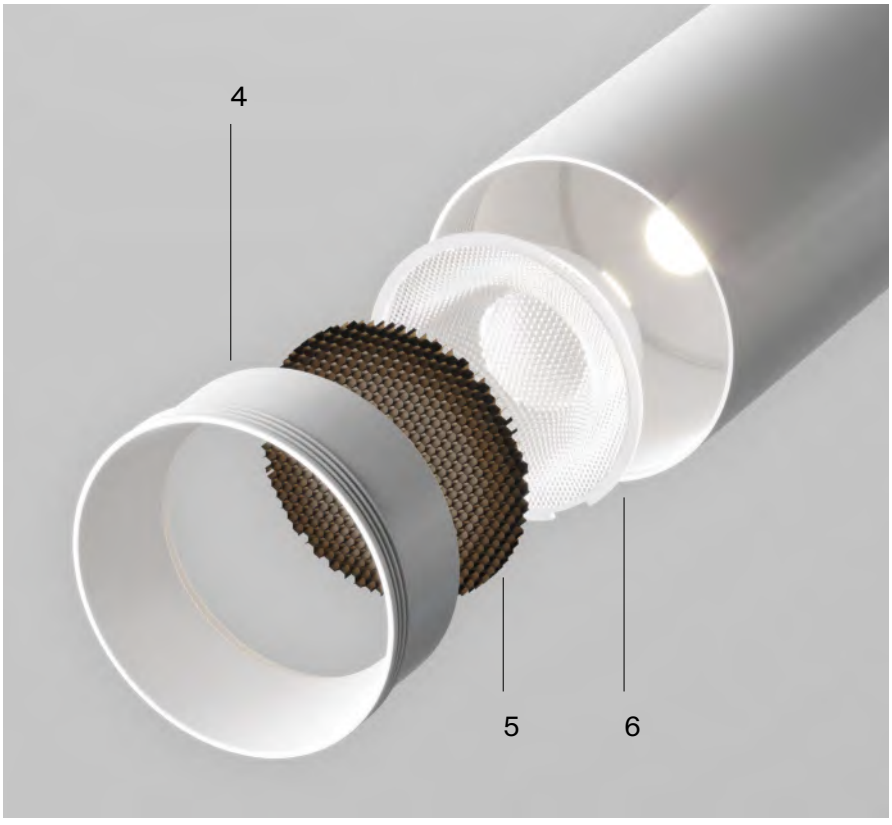


SYSTEM ELEMENT		ARTICLE	SYSTEM ELEMENT		ARTICLE	DEGREE	COLOR
1	MATTE DIFFUSER	RINGSACR-5-W	4	RING	RINGS-5-W		☐ WHITE
2	MATTE DIFFUSER	RINGLACR-5-W	5	ANTI-DAZZLE FILTERS	HONEYCOMB-D31		
3	MATTE DIFFUSER	RINGMACR-5-W	6	LENSES	LENSD31-15	15°	
					LENSD31-24	24°	
					LENSD31-36	36°	
					LENSD31-50	50°	


Focus LED

EN A distinctive feature of the Focus LED series is minimalism combined with modern technologies.
DE Minimalismus in Kombination mit moderner Technik ist das Markenzeichen der Serie FOCUS LED.
IT Il minimalismo combinato con la tecnologia moderna è una caratteristica distintiva della serie Focus LED.
FR Le minimalisme en combinaison avec les technologies modernes est une caractéristique distinctive de la série Focus LED.


Read more on the website

B | W | BS B | LED | CRI >90 | DC 48 V | SMART | DALI
DALI 2 | BT


LEDS EPISTAR



1



2

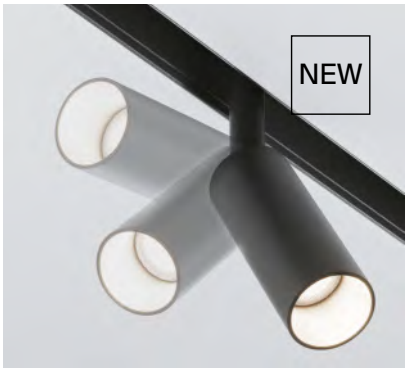



1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR032-2-12W3K-S-B	12 W	840 LM	NO	IP 20
3K WARM WHITE	WHITE	TR032-2-12W3K-S-W	12 W	970 LM	NO	IP 20
4K WHITE	BLACK	TR032-2-12W4K-S-B	12 W	840 LM	NO	IP 20
4K WHITE	WHITE	TR032-2-12W4K-S-W	12 W	1000 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR032-4-12W3K-S-DS-B	12 W	900 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-12W3K-S-DS-W	12 W	1080 LM	BLUETOOTH MESH	IP 20
2						
3K WARM WHITE	BLACK / BRASS	TR032-2-12W3K-M-BBS	12 W	904 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR032-4-12W3K-M-DS-BBS	12 W	944 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR032-4-12WTW-S-DD-B	12 W	950 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-12WTW-S-DD-W	12 W	950 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR032-4-12WTW-S-DD2-B	12 W	950 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-12WTW-S-DD2-W	12 W	950 LM	DALI 2	IP 20


Lenses, filters and rings


[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

Read more on the website

1


2


3

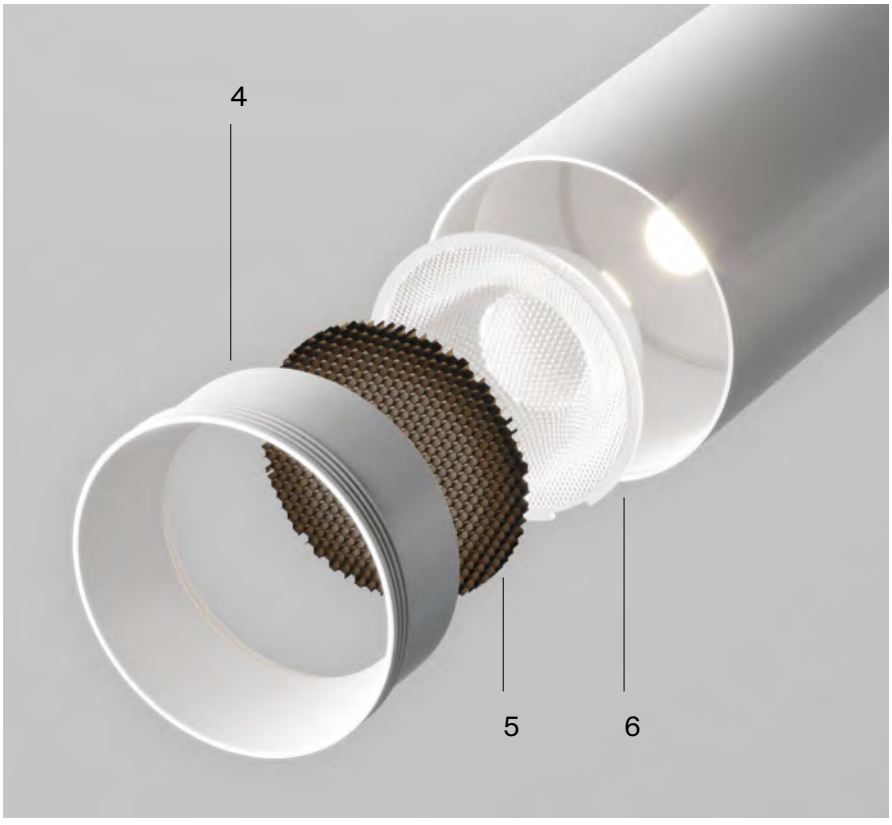


SYSTEM ELEMENT		ARTICLE	SYSTEM ELEMENT		ARTICLE	DEGREE	COLOR
1	MATTE DIFFUSER	RINGSACR-12-W	4	RING	RINGM-12-W		☐ WHITE
2	MATTE DIFFUSER	RINGLACR-12-W	5	ANTI-DAZZLE FILTERS	HONEYCOMB-D38		
3	MATTE DIFFUSER	RINGMACR-12-W	6	LENSES	LENSD38-15	15°	
					LENSD38-24	24°	
					LENSD38-36	36°	
					LENSD38-50	50°	






Focus LED

EN A distinctive feature of the Focus LED series is minimalism combined with modern technologies.
DE Minimalismus in Kombination mit moderner Technik ist das Markenzeichen der Serie FOCUS LED.
IT Il minimalismo combinato con la tecnologia moderna è una caratteristica distintiva della serie Focus LED.
FR Le minimalisme en combinaison avec les technologies modernes est une caractéristique distinctive de la série Focus LED.


Read more on the website

B | W | BS B | LED | CRI >90 | DC 48 V | SMART | DALI
DALI 2 | BT | 24° | 36°


LEDS EPISTAR



1 24°



2 36°

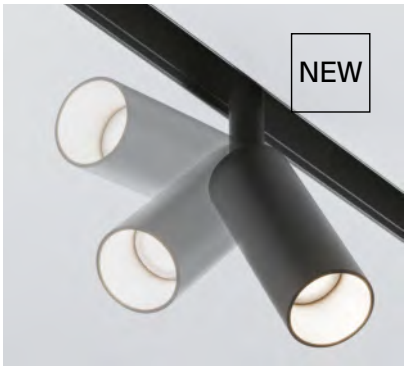


1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR032-2-20W3K-S-B	20 W	1400 LM	NO	IP 20
3K WARM WHITE	WHITE	TR032-2-20W3K-S-W	20 W	1600 LM	NO	IP 20
4K WHITE	BLACK	TR032-2-20W4K-S-B	20 W	1500 LM	NO	IP 20
4K WHITE	WHITE	TR032-2-20W4K-S-W	20 W	1910 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR032-4-20W3K-S-DS-B	20 W	1500 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-20W3K-S-DS-W	20 W	1630 LM	BLUETOOTH MESH	IP 20
2						
2.7K-6K ADJUSTABLE	BLACK	TR032-4-20WTW-S-DD-B	20 W	1200 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-20WTW-S-DD-W	20 W	1200 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR032-4-20WTW-S-DD2-B	20 W	1200 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR032-4-20WTW-S-DD2-W	20 W	1200 LM	DALI 2	IP 20

Lenses, filters and rings

Read more
on the website

[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

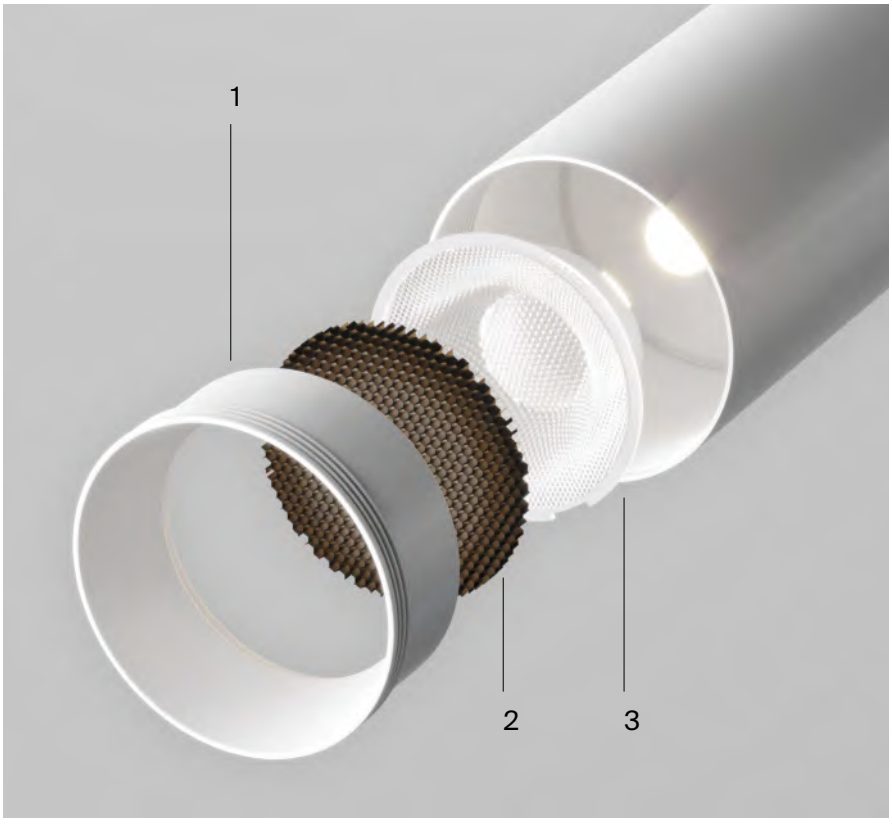


	SYSTEM ELEMENT	ARTICLE	DEGREE	COLOR
1	RING	RINGL-20-W		☐ WHITE
2	ANTI-DAZZLE FILTERS	HONEYCOMB-D50		
3	LENSES	LENSD50-15	15°	
		LENSD50-24	24°	
		LENSD50-36	36°	
		LENSD50-50	50°	


Focus LED

EN A distinctive feature of the Focus LED series is minimalism combined with modern technologies.
DE Minimalismus in Kombination mit moderner Technik ist das Markenzeichen der Serie FOCUS LED.
IT Il minimalismo combinato con la tecnologia moderna è una caratteristica distintiva della serie Focus LED.
FR Le minimalisme en combinaison avec les technologies modernes est une caractéristique distinctive de la série Focus LED.

Read more
on the website



LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR041-2-12W3K-B	12 W	840 LM	NO	IP 20
3K WARM WHITE	WHITE	TR041-2-12W3K-W	12 W	1040 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR041-2-12W3K-BBS	12 W	883 LM	NO	IP 20
4K WHITE	BLACK	TR041-2-12W4K-B	12 W	900 LM	NO	IP 20
4K WHITE	WHITE	TR041-2-12W4K-W	12 W	1090 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR041-4-12W3K-M-DS-B	12 W	900 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR041-4-12W3K-M-DS-W	12 W	890 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR041-4-12W3K-M-DS-BBS	12 W	1014 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR041-4-12WTW-DD-B	12 W	900 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR041-4-12WTW-DD-W	12 W	900 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR041-4-12WTW-DD2-B	12 W	900 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR041-4-12WTW-DD2-W	12 W	900 LM	DALI 2	IP 20

Focus T

EN Aluminium body. A compact diameter of the dome lamp.
DE Der Rahmen ist aus Aluminium hergestellt. Kompakter Lampenschirmdurchmesser.
IT Il corpo è fatto in alluminio. L'angolo di dispersione è 36. Il diametro compatto del paralume.
FR Le corps est fait en aluminium. Diamètre de l'abat-jour compact.


Read more
on the website

B W BS LED
CRI >90 DC 48 V 36°

LEDS BRIDGELUX



ANTI-DAZZLE FILTERS HONEYCOMB-D24



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR141-2-6W3K-M-B	6 W	270 LM	NO	IP 20
3K WARM WHITE	WHITE	TR141-2-6W3K-M-W	6 W	280 LM	NO	IP 20
3K WARM WHITE	BRASS	TR141-2-6W3K-M-BS	6 W	280 LM	NO	IP 20


Gala

EN Special shutters give a round or square shape to a light spot of various sizes. A focusing ring adjusts the light spot clarity.
DE Mit Hilfe spezieller Verschlüsse kann der Lichtpunkt rund oder quadratisch in verschiedenen Größen gestaltet werden. Mit dem Fokussierring lässt sich die Schärfe des Lichtpunkts einstellen.
IT Con l'aiuto delle tende speciali è possibile dare una forma rotonda o quadrata di una macchia luminosa delle diverse dimensioni. Con l'anello di messa a fuoco è possibile regolare la chiarezza della macchia luminosa.
FR À l'aide de rideaux spéciaux, vous pouvez créer une forme ronde ou carrée d'un spot lumineux de différentes tailles. À l'aide de la bague de mise au point, vous pouvez régler la clarté du spot lumineux.

Read more
on the website

B | LED | CRI >90 | DC 48 V | SMART | BT

LEDS LUMINUS







CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR108-2-10W3K-B	10 W	360 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR108-4-10W3K-DS-B	10 W	290 LM	BLUETOOTH MESH	IP 20



TR108-2-10W3K-B

Lens

[EN] Housing material: Metal. The luminaire includes a clear lens, providing a studio-like effect.
[DE] Metallgehäuse. Die Leuchte hat eine transparente Linse, die einen studioähnlichen Effekt erzeugt.
[IT] Crpo in metallo. La lampadacomprende una lente trasparente, che crea un effetto studio.
[FR] Boîtier en métal. Le luminaire est doté d'une lentille transparente, offrant un effet semblable à celui d'un studio.

Read more
on the website





B | LED | CRI >90 | DC 48 V | DALI | DALI 2 | SMART
BT | 70°

LEDS BRIDGELUX



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR217-2-15W3K-B	15 W	770 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR217-4-15WTW-DD-B	15 W	770 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR217-4-15WTW-DD2-B	15 W	770 LM	DALI 2	IP 20


TR217-4-15WTW-DD-B


Larc


[EN] Matte diffuser on the body for uniform illumination. Rotation around its axis by 355°. Wide beam angle. LED light source.
[DE] Matter Diffusor am Rahmen sorgt für eine gleichmäßige Beleuchtung. 355°-Drehung um die eigene Achse. Breiter Lichtstreuwinkel. LED-Lichtquelle.
[IT] Diffusore opaco sul corpo per un'illuminazione uniforme. Rotazione attorno al proprio asse di 355°. Ampio angolo di diffusione. Sorgente luminosa LED.
[FR] Diffuseur mat sur le corps pour un éclairage uniforme. Rotation autour de son axe sur 355°. Grand angle de diffusion. Source de lumière LED.

Read more
on the website

B W LED CRI >90 DC 48 V SMART
BT 360°

LEDS OSRAM

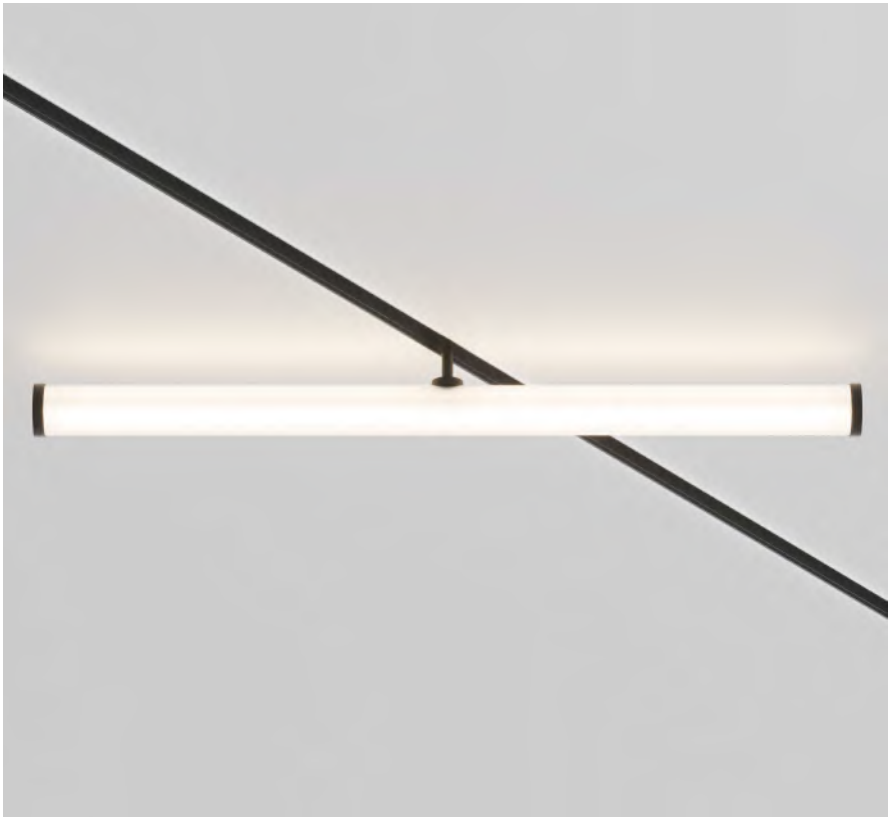



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR086-2-25W3K-B	25 W	1880 LM	NO	IP 20
3K WARM WHITE	WHITE	TR086-2-25W3K-W	25 W	1880 LM	NO	IP 20
4K WHITE	BLACK	TR086-2-25W4K-B	25 W	1880 LM	NO	IP 20
4K WHITE	WHITE	TR086-2-25W4K-W	25 W	1880 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR086-4-25W-DS-B	25 W	1950 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR086-4-25W-DS-W	25 W	1950 LM	BLUETOOTH MESH	IP 20


TR086-2-25W3K-B

TR039-2-5W3K-1




TR038-2-5W3K-1

Luna


[EN] Metal fittings. Dome lamp: blown glass with a compact matte diffuser inside.
[DE] Beschläge - Metall. Lampenschirm - mundgeblasenes. Glas mit einem kompakten matten. Diffusor im Inneren.
[IT] L' armature e' metallo. Il paralume è fatto in vetro soffiato con il diffusore di color opaco compatto all'interno.
[FR] Armature en métal. L'abat-jour est en verre soufflé avec un diffuseur mat compact à l'intérieur.

Read more
on the website

B W LED CRI >90 DC 48 V SMART DALI
DALI 2 BT 360°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR039-2-5W3K-1	5 W	280 LM	NO	IP 20
3K WARM WHITE	WHITE	TR039-2-5W3K-W-1	5 W	220 LM	NO	IP 20
4K WHITE	BLACK	TR039-2-5W4K-1	5 W	300 LM	NO	IP 20
4K WHITE	WHITE	TR039-2-5W4K-W-1	5 W	240 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR039-4-5W3K-WW-DS-1	5 W	300 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR039-4-5W3K-WW-DS-W-1	5 W	230 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR039-4-5WTW-DD-B	6 W	300 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR039-4-5WTW-DD2-B	6 W	350 LM	DALI 2	IP 20

Luna


EN Metal fittings. Dome lamp: blown glass with a compact matte diffuser inside.
DE Beschläge - Metall. Lampenschirm - mundgeblasenes. Glas mit einem kompakten matten. Diffusor im Inneren.
IT L' armature e' metallo. Il paralume è fatto in vetro soffiato con il diffusore di color opaco compatto all'interno.
FR Armature en métal. L'abat-jour est en verre soufflé avec un diffuseur mat compact à l'intérieur.

Read more on the website

B W LED CRI >90 DC 48 V SMART DALI
DALI 2 BT 360°

LEDS EPISTAR






CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR038-2-5W3K-1	5 W	280 LM	NO	IP 20
3K WARM WHITE	WHITE	TR038-2-5W3K-W-1	5 W	220 LM	NO	IP 20
4K WHITE	BLACK	TR038-2-5W4K-1	5 W	300 LM	NO	IP 20
4K WHITE	WHITE	TR038-2-5W4K-W-1	5 W	240 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR038-4-5W3K-WW-DS-1	5 W	300 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR038-4-5W3K-WW-DS-W-1	5 W	230 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR038-4-5WTW-DD-B	6 W	300 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR038-4-5WTW-DD2-B	6 W	300 LM	DALI 2	IP 20

Outline


[EN] Black aluminum housing with a “light corridor” linear light effect. A special lens creates an optical effect of circular peripheral lighting.
[DE] Schwarzes Aluminiumgehäuse mit linearem “Lichtstrahl“-Lichteffekt. Eine spezielle Linse erzeugt den optischen Effekt einer kreisförmigen peripheren Beleuchtung.
[IT] Corpo in alluminio nero. Effetto della linea di luce a “corridoio luminoso“. Lente speciale - effetto ottico di illuminazione periferica circolare.
[FR] Boîtier en aluminium noir. Effet lumineux linéaire “couloir de lumière“. Lentille spéciale créant un effet optique d’éclairage périphérique circulaire.

Read more
on the website





LEDS OSRAM

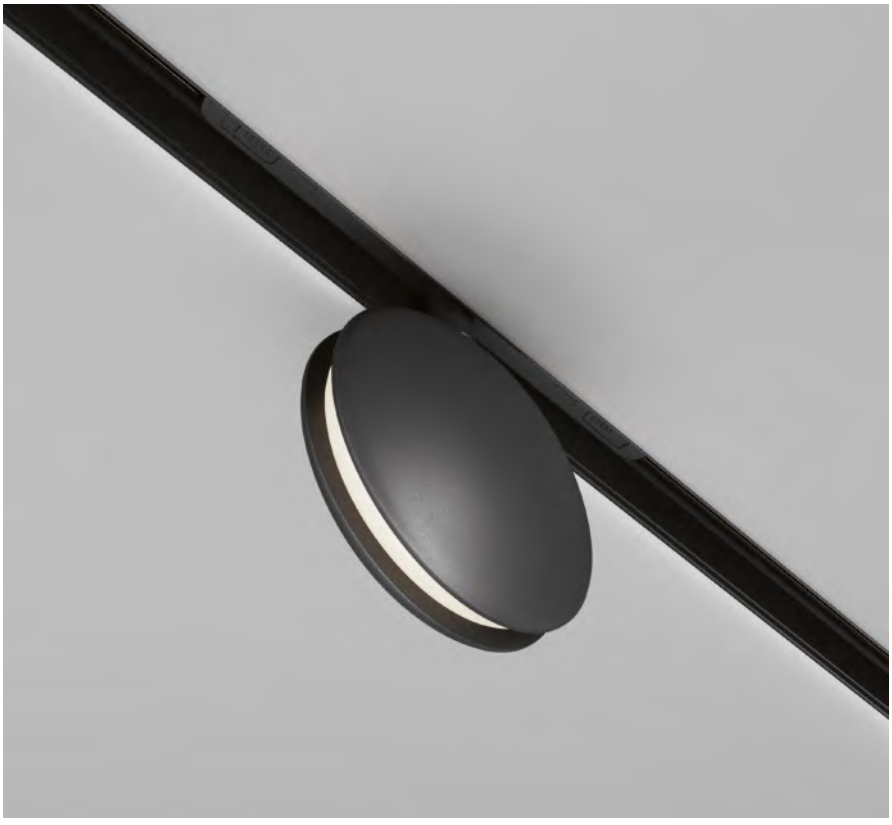

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR090-2-6W3K-B	6 W	28 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR090-4-6W-DS-B	6 W	31 LM	BLUETOOTH MESH	IP 20




Parete

EN Wall Washer optics in an aluminum housing provide uniform wall illumination.
DE Aluminiumgehäuse mit Wandfluter Optik – sorgt für eine gleichmäßige „Flutung“ der Wände mit Licht.
IT Lampade con corpo in alluminio. L’ottica Wall Washer assicura un “riempimento” uniforme della luce sulle pareti.
FR Lampes dans un boîtier en aluminium, Les optiques Wall Washing assurent une diffusion uniforme sur les murs.


Read more
on the website

B W LED CRI >90 DC 48 V SMART
BT 120°

LEDS EPISTAR



1



2




1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	■ BLACK	TR106-2-12W3K-B	12 W	474 LM	NO	IP 20
3K WARM WHITE	□ WHITE	TR106-2-12W3K-W	12 W	552 LM	NO	IP 20
2.7K-6K ADJUSTABLE	■ BLACK	TR106-4-12W-DS-B	12 W	218 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	□ WHITE	TR106-4-12W-DS-W	12 W	309 LM	BLUETOOTH MESH	IP 20
2						
3K WARM WHITE	■ BLACK	TR106-2-18W3K-B	18 W	719 LM	NO	IP 20
3K WARM WHITE	□ WHITE	TR106-2-18W3K-W	18 W	879 LM	NO	IP 20
2.7K-6K ADJUSTABLE	■ BLACK	TR106-4-18W-DS-B	18 W	374 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	□ WHITE	TR106-4-18W-DS-W	18 W	360 LM	BLUETOOTH MESH	IP 20




Plato

[EN] Aluminium fittings. The lifting mechanism provides cable length adjustment with a slight movement of the hand.
[DE] Beschläge aus Aluminium. Das Hebezeug ermöglicht es, die Länge des Seils durch einfache. Handbewegung einzustellen.
[IT] L'armatura e' in alluminio. Il meccanismo di sollevamento consente di regolare la lunghezza del cavo con un leggero movimento di una mano.
[FR] Armature en aluminium. Le mécanisme de levage permet d'ajuster la longueur du câble d'un léger mouvement de la main.


Read more
on the website







CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR131-2-15W3K-B	15 W	712 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR131-4-15W-DS-B	15 W	707 LM	BLUETOOTH MESH	IP 20





3K WARM WHITE	BLACK	TR123-2-15W3K-B	15 W	708 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR123-4-15W-DS-B	15 W	769 LM	BLUETOOTH MESH	IP 20


TR131-2-15W3K-B





Points


[EN] Metal body. Hidden LED light source. Focusing optics for key-light.
[DE] Metallrahmen. Versteckte LED-Lichtquelle. Konzentrierende Optik für gerichtete Beleuchtung.
[IT] Corpo in metallo. Sorgente luminosa a LED nascosta. Ottica concentrante per illuminazione direzionale.
[FR] Corps en métal. de lumière LED dissimulée. Optique non imageante pour un éclairage orientable.

Read more
on the website


B W LED CRI >90 DALI DALI 2 DC 48 V
SMART BT 36°

LEDS SANAN






1



2



3

1

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	TR031-2-12W2.7K-B	12 W	760 LM	NO	IP 20
3K WARM WHITE	BLACK	TR031-2-12W3K-B	12 W	840 LM	NO	IP 20
3K WARM WHITE	WHITE	TR031-2-12W3K-W	12 W	900 LM	NO	IP 20
4K WHITE	BLACK	TR031-2-12W4K-B	12 W	900 LM	NO	IP 20
4K WHITE	WHITE	TR031-2-12W4K-W	12 W	940 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR031-4-12W3K-S-DS-B	12 W	900 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-12W3K-S-DS-W	12 W	810 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR031-4-12WTW-DD-B	12 W	900 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-12WTW-DD-W	12 W	950 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR031-4-12WTW-DD2-B	12 W	840 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-12WTW-DD2-W	12 W	960 LM	DALI 2	IP 20

2

2.7K WARM	BLACK	TR031-2-18W2.7K-B	18 W	1110 LM	NO	IP 20
3K WARM WHITE	BLACK	TR031-2-18W3K-B	18 W	1260 LM	NO	IP 20
3K WARM WHITE	WHITE	TR031-2-18W3K-W	18 W	1210 LM	NO	IP 20
4K WHITE	BLACK	TR031-2-18W4K-B	18 W	1350 LM	NO	IP 20
4K WHITE	WHITE	TR031-2-18W4K-W	18 W	1320 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR031-4-18W3K-S-DS-B	18 W	1350 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-18W3K-S-DS-W	18 W	1160 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR031-4-18WTW-DD-B	18 W	1350 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-18WTW-DD-W	18 W	1350 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR031-4-18WTW-DD2-B	18 W	1237 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-18WTW-DD2-W	18 W	1399 LM	DALI 2	IP 20

3

2.7K-6K ADJUSTABLE	BLACK	TR031-4-24WTW-DD-B	24 W	1650 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-24WTW-DD-W	24 W	1650 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR031-4-24WTW-DD2-B	24 W	1655 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR031-4-24WTW-DD2-W	24 W	1793 LM	DALI 2	IP 20

Points Rot


[EN] Aluminium and plastic fittings. Lamps with a rotary mechanism allow you to direct light in the interior.
[DE] Material der Beschläge - Aluminium und Kunststoff. Leuchten mit einem Drehmechanismus ermöglichen es, das Licht in den Innenraum zu richten.
[IT] Il materiale della armatura è di alluminio e della material plastica. Le lampade con il meccanismo rotante consentono di dirigere la luce all'interno.
[FR] Matériau de l'armature - aluminium et plastique. Les luminaires à mécanisme rotatif permettent de diriger la lumière vers l'intérieur.

Read more
on the website

B W LED CRI >90 DALI DC 48 V SMART
BT

LEDS SANAN





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K-6K ADJUSTABLE	BLACK	TR033-4-12WTW-DD-B	12 W	850 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR033-4-12WTW-DD-W	12 W	900 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR033-4-12WTW-DD2-B	12 W	844 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR033-4-12WTW-DD2-W	12 W	944 LM	DALI 2	IP 20


Points S

[EN] Aluminium fittings. The unique optical system of the lamp creates an amazing “light from nowhere” effect and is invisible even when turned on, illuminating only the necessary object.
[DE] Material der Beschläge - Aluminium. Die einzigartige Optik der Leuchte erzeugt einen überraschenden «Licht aus dem Nichts»-Effekt und ist selbst im eingeschalteten Zustand unsichtbar und beleuchtet nur das gewünschte Objekt.
[IT] Il materiale del rinforzo è alluminio. L’esclusivo sistema ottico della lampada crea un effetto straordinario «luce da nessun luogo» ed è invisibile anche quando è acceso, illuminando solo di un oggetto necessario.
[FR] Matériau de l’armature - aluminium. Le système optique unique de la lampe crée un effet étonnant de « lumière venue de nulle part» et est invisible même lorsqu’elle est allumée, illuminant uniquement l’objet nécessaire.

Read more
on the website

B W LED DC 48 V 24°





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR100-2-2W3K-S-B	2 W	81 LM	NO	IP 20
3K WARM WHITE	WHITE	TR100-2-2W3K-S-W	2 W	79 LM	NO	IP 20
4K WHITE	BLACK	TR100-2-2W4K-S-B	2 W	82 LM	NO	IP 20
4K WHITE	WHITE	TR100-2-2W4K-S-W	2 W	95 LM	NO	IP 20

Relax


EN Aluminium body.A decorative disk-shaped track luminaire.
DE Material der Beschläge - Aluminium. Dekorative Schienenleuchte in Form einer Scheibe.
IT Il materiale dell'armatura è alluminio. La lampada a binario decorativa a forma di un disco.
FR Matériau de l'armature en aluminium. Luminaire sur rail décoratif en forme de disque.

Read more
on the website

B | W | BS B | LED | CRI >90 | DC 48 V | BT | 120°

LEDS SANAN






CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR107-2-5W3K-B	5 W	164 LM	NO	IP 20
3K WARM WHITE	WHITE	TR107-2-5W3K-W	5 W	160 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR107-2-5W3K-BS	5 W	139 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR107-4-5W-DS-B	5 W	204 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR107-4-5W-DS-W	5 W	215 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR107-4-5W-DS-BS	5 W	180 LM	BLUETOOTH MESH	IP 20


TR100-2-2W4K-S-B
TR107-4-5W-DS-B


Rado

[EN] Matte diffuser on the body for uniform illumination. Rotation around its axis by 355°. Wide beam angle.
[DE] Matter Diffusor am Rahmen sorgt für eine gleichmäßige Beleuchtung. 355°-Drehung um die eigene Achse. Breiter Lichtstreuwinkel.
[IT] Diffusore opaco sul corpo per un'illuminazione uniforme. Rotazione intorno al proprio asse di 355°. Ampio angolo di diffusione.
[FR] Diffuseur mat sur le corps pour un éclairage uniforme. Rotation autour de son axe sur 355°. Grand angle de diffusion.

Read more
on the website



LEDS SANAN





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR040-2-18W3K	18 W	1080 LM	NO	IP 20
3K WARM WHITE	WHITE	TR040-2-18W3K-W	18 W	1120 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR040-2-18W3K-BBS	18 W	1205 LM	NO	IP 20
4K WHITE	BLACK	TR040-2-18W4K	18 W	1170 LM	NO	IP 20
4K WHITE	WHITE	TR040-2-18W4K-W	18 W	1260 LM	NO	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR040-4-18W3K-DS	18 W	1170 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR040-4-18W3K-DS-W	18 W	890 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK / BRASS	TR040-4-18W3K-DS-BBS	18 W	994 LM	BLUETOOTH MESH	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR040-4-18WTW-DD-B	18 W	750 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR040-4-18WTW-DD-W	18 W	750 LM	DALI	IP 20
2.7K-6K ADJUSTABLE	BLACK	TR040-4-18WTW-DD2-B	18 W	750 LM	DALI 2	IP 20
2.7K-6K ADJUSTABLE	WHITE	TR040-4-18WTW-DD2-W	18 W	750 LM	DALI 2	IP 20





FOCUS LED 136
SKIM 138
BASIS 140
POINTS 142
BUBBLE 144
LUNA 146
KEILA 147
BIANCA 148
PLATO 150
ZERO 154




LUNA
TR149-1-5W3K-B-DE


Track

Read more
on the website

1




2







SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
1 TRACK	BLACK	TRX154-111B	H15 X W8.5 X L1000
	BLACK	TRX154-112B	H15 X W8.5 X L2000
	BRASS	TRX154-111BS	H15 X W8.5 X L1000
	BRASS	TRX154-112BS	H15 X W8.5 X L2000
2 ROUND TRACK	BLACK	TRX154-R-D650-B	H15 X W325 X L650
	BLACK	TRX154-R-D800-B	H15 X W400 X L800
	BRASS	TRX154-R-D650-BS	H15 X W325 X L650
	BRASS	TRX154-R-D800-BS	H15 X W400 X L800








1



2



3



SYSTEM ELEMENT	COLOR	ARTICLE
1 *SIDE POWER INPUT	BLACK	TRA154C-SB1-B
	BRASS	TRA154C-SB1-BS

*The length is adjustable from 200 to 1200 mm.



SYSTEM ELEMENT	COLOR	ARTICLE
2 A HANGING SET WITH A BASE FOR A POWER SUPPLY UNIT FOR A ROUND TRACK	BLACK	TRA154SW-BB-R-B
	BRASS	TRA154SW-BB-R-BS



SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
3 SEMICIRCULAR TRACK	BLACK	TRX154-SR-D650-B	H15 X W650 X L650
	BLACK	TRX154-SR-D800-B	H15 X W800 X L800
	BRASS	TRX154-SR-D650-BS	H15 X W650 X L650
	BRASS	TRX154-SR-D800-BS	H15 X W800 X L800



Wall modification

[EN] Wall mounting components.
[DE] Zubehör für die Wandmontage.
[IT] Componenti per il montaggio a parete.
[FR] Composants pour montage mural.

Read more
on the website

SYSTEM ELEMENT	COLOR	ARTICLE
*WALL BASE FOR THE POWER SUPPLY UNIT WITH POWER INLET	BLACK	TRA155CW-BB-B
	BRASS	TRA155CW-BB-BS



*30W and 60W power suppliers are suitable.

SYSTEM ELEMENT	COLOR	ARTICLE
WALL SINGLE MOUNT	BLACK	TRA155CW-S1-B
	BRASS	TRA155CW-S1-BS



WALL DOUBLE MOUNT	BLACK	TRA155CW-D1-B
	BRASS	TRA155CW-D1-BS



WALL SINGLE MOUNT ELONGATED	BLACK	TRA155CW-SL1-B
	BRASS	TRA155CW-SL1-BS





Recommended number of fastenings - at least three per 2 metres.
Maximum mechanical load for a one metre track - 5kg,
for a two metre track - 8kg.

Short modification

Read more
on the website

[EN] Surface mounting components with shortened bases. Assembled height: minimum 124 mm, maximum 184 mm.
[DE] Zubehör für die Montage mit verkürzten Sockeln. Aufbauhöhe: mindestens 124 mm, maximal 184 mm.
[IT] Componenti per il montaggio su superficie con basi accorciate. Altezza complessiva: minima - 124 mm, massima - 184 mm.
[FR] Composants pour montage en surface avec des bases raccourcies.
Hauteur totale : minimum 124mm, maximum 184mm.

SYSTEM ELEMENT	COLOR	ARTICLE
*SHORT CEILING BASE FOR THE POWER SUPPLY UNIT WITH POWER INLET	BLACK	TRA156C-BB1-B
	BRASS	TRA156C-BB1-BS



*30W and 60W power suppliers are suitable.

SYSTEM ELEMENT	COLOR	ARTICLE
SHORT CEILING MOUNT WITH POWER INLET 78 MM	BLACK	TRA156C-B1-B
	BRASS	TRA156C-B1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
SHORT SINGLE CEILING MOUNT 78 MM	BLACK	TRA156C-S1-B
	BRASS	TRA156C-B1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
SHORT SINGLE CEILING MOUNT 138 MM	BLACK	TRA156C-SL1-B
	BRASS	TRA156C-SL1-BS




SYSTEM ELEMENT	COLOR	ARTICLE
SHORT DOUBLE CEILING MOUNT 78 MM	BLACK	TRA156C-D1-B
	BRASS	TRA156C-D1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
SHORT CEILING MOUNT WITH DIRECT POWER CONNECTOR 78 MM	BLACK	TRA156C-IPC1-B
	BRASS	TRA156C-IPC1-BS



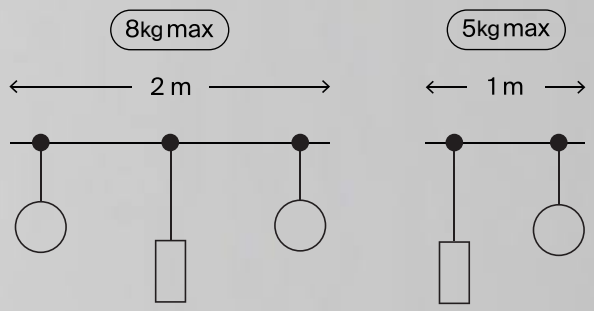

SHORT SINGLE
CEILING
MOUNT 78 MM
TRA156C-SL1-B
TRA156C-SL1-BS

SHORT CEILING MOUNT
WITH DIRECT POWER
CONNECTOR 78 MM
TRA156C-IPC1-B
TRA156C-IPC1-BS

SHORT CEILING MOUNT
WITH POWER INLET 78 MM
TRA156C-B1-B
TRA156C-B1-BS

Medium modification

[EN] Surface mounting components with medium bases. Assembled height: minimum 346 mm, maximum 406 mm.
[DE] Zubehör für die Aufputzmontage mit mittleren Sockeln. Aufbauhöhe: mindestens 346 mm, maximal 406 mm.
[IT] Componenti per il montaggio su superficie con basi intermedie. Altezza complessiva: minima - 346 mm, massima - 406 mm.
[FR] Composants pour montage en surface avec des bases moyennes.
Hauteur totale : hauteur minimale 346mm, hauteur maximale 406mm.

Read more
on the website

SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM CEILING MOUNT WITH POWER INLET 360 MM	BLACK	TRA158C-BL1-B
	BRASS	TRA158C-BL1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM SINGLE CEILING MOUNT 300 MM	BLACK	TRA158C-S1-B
	BRASS	TRA158C-S1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM DOUBLE CEILING MOUNT 300 MM	BLACK	TRA158C-D1-B
	BRASS	TRA158C-D1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM SINGLE CEILING MOUNT 360 MM	BLACK	TRA158C-SL1-B
	BRASS	TRA158C-SL1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM CEILING MOUNT WITH DIRECT POWER CONNECTOR 300 MM	BLACK	TRA158C-IPC1-B
	BRASS	TRA158C-IPC1-BS




SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM CEILING MOUNT WITH DIRECT POWER CONNECTOR 360 MM	BLACK	TRA158C-IPCL1-B
	BRASS	TRA158C-IPCL1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM CEILING MOUNT WITH POWER INLET 300 MM	BLACK	TRA158C-B1-B
	BRASS	TRA158C-B1-BS



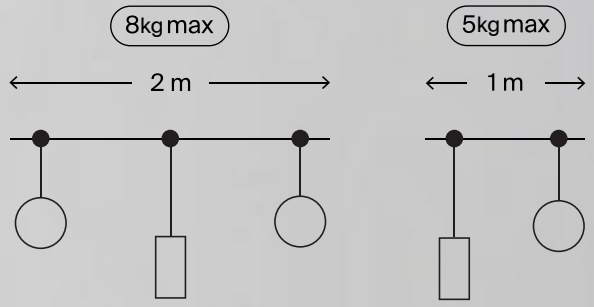

MEDIUM CEILING
MOUNT
WITH POWER INLET
300 MM
TRA158C-B1-B
TRA158C-B1-BS

MEDIUM DOUBLE
CEILING MOUNT
300 MM
TRA158C-D1-B
TRA158C-D1-BS

MEDIUM SINGLE
CEILING MOUNT
300 MM
TRA158C-S1-B
TRA158C-S1-BS

MEDIUM SINGLE
CEILING MOUNT
360 MM
TRA158C-SL1-B
TRA158C-SL1-BS

Long modification

[EN] Surface mounting components with long bases. Assembled height: minimum 745 mm, maximum 804 mm.
[DE] Zubehör für die Aufbaumontage mit hohen Sockeln. Aufbauhöhe: mindestens 745 mm, maximal 804 mm.
[IT] Componenti per il montaggio su superficie con basi lunghe. Altezza complessiva: minima - 745 mm, massima - 804 mm.
[FR] Composants pour montage en surface avec des bases longues.
Hauteur totale : minimum 745mm, maximum 804mm.

Read more on the website

SYSTEM ELEMENT	COLOR	ARTICLE
LONG CEILING MOUNT WITH POWER INLET 700 MM	BLACK	TRA159C-B1-B
	BRASS	TRA159C-B1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
LONG SINGLE CEILING MOUNT 700 MM	BLACK	TRA159C-S1-B
	BRASS	TRA159C-S1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
LONG DOUBLE CEILING MOUNT 700 MM	BLACK	TRA159C-D1-B
	BRASS	TRA159C-D1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
LONG SINGLE CEILING MOUNT 760 MM	BLACK	TRA159C-SL1-B
	BRASS	TRA159C-SL1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
LONG CEILING MOUNT WITH DIRECT POWER CONNECTOR 700 MM	BLACK	TRA159C-IPC1-B
	BRASS	TRA159C-IPC1-BS




SYSTEM ELEMENT	COLOR	ARTICLE
LONG CEILING MOUNT WITH DIRECT POWER CONNECTOR 760 MM	BLACK	TRA159C-IPCL1-B
	BRASS	TRA159C-IPCL1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
LONG CEILING BASE FOR THE POWER SUPPLY UNIT WITH POWER INLET 385 MM	BLACK	TRA159C-BB1-B
	BRASS	TRA159C-BB1-BS



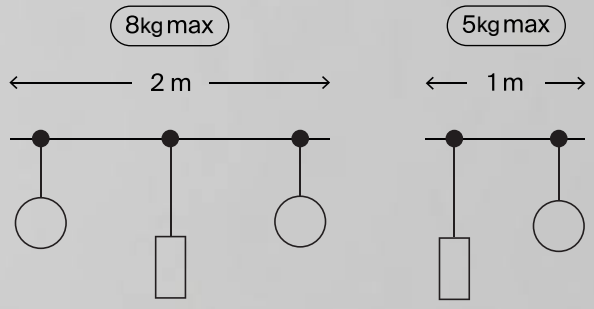

LONG SINGLE
CEILING
MOUNT 700 MM
TRA159C-S1-B
TRA159C-S1-BS

LONG DOUBLE
CEILING
MOUNT 700 MM
TRA159C-D1-B
TRA159C-D1-BS

Pendant modification

Read more
on the website

[EN] Suspended mounting components on cable pendants. Assembled height: min 85 mm – max 1,200 mm.
[DE] Zubehör für Pendelmontage mit Drahtseilaufhängung. Gesamthöhe: mindestens 85 mm, maximal 1200 mm.
[IT] Componenti per il montaggio a sospensione tramite fune. Altezza complessiva min 85 – max 1200mm.
[FR] Composants pour installation suspendue à l'aide de suspensions à câbles.
Hauteur totale : minimum 85mm, maximum 1200 mm.

SYSTEM ELEMENT	COLOR	ARTICLE
HANG CABLE SUSPENSION WITH POWER SUPPLY INLET	BLACK	TRA157SW-B1-B
	BRASS	TRA157SW-B1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
HANG SINGLE CABLE SUSPENSION	BLACK	TRA157SW-S1-B
	BRASS	TRA157SW-S1-BS




SYSTEM ELEMENT	COLOR	ARTICLE
HANG DOUBLE CABLE SUSPENSION	BLACK	TRA157SW-D1-B
	BRASS	TRA157SW-D1-BS



SYSTEM ELEMENT	COLOR	ARTICLE
HANG CABLE SUSPENSION WITH DIRECT POWER CONNECTOR	BLACK	TRA157SW-IPC1-B
	BRASS	TRA157SW-IPC1-BS

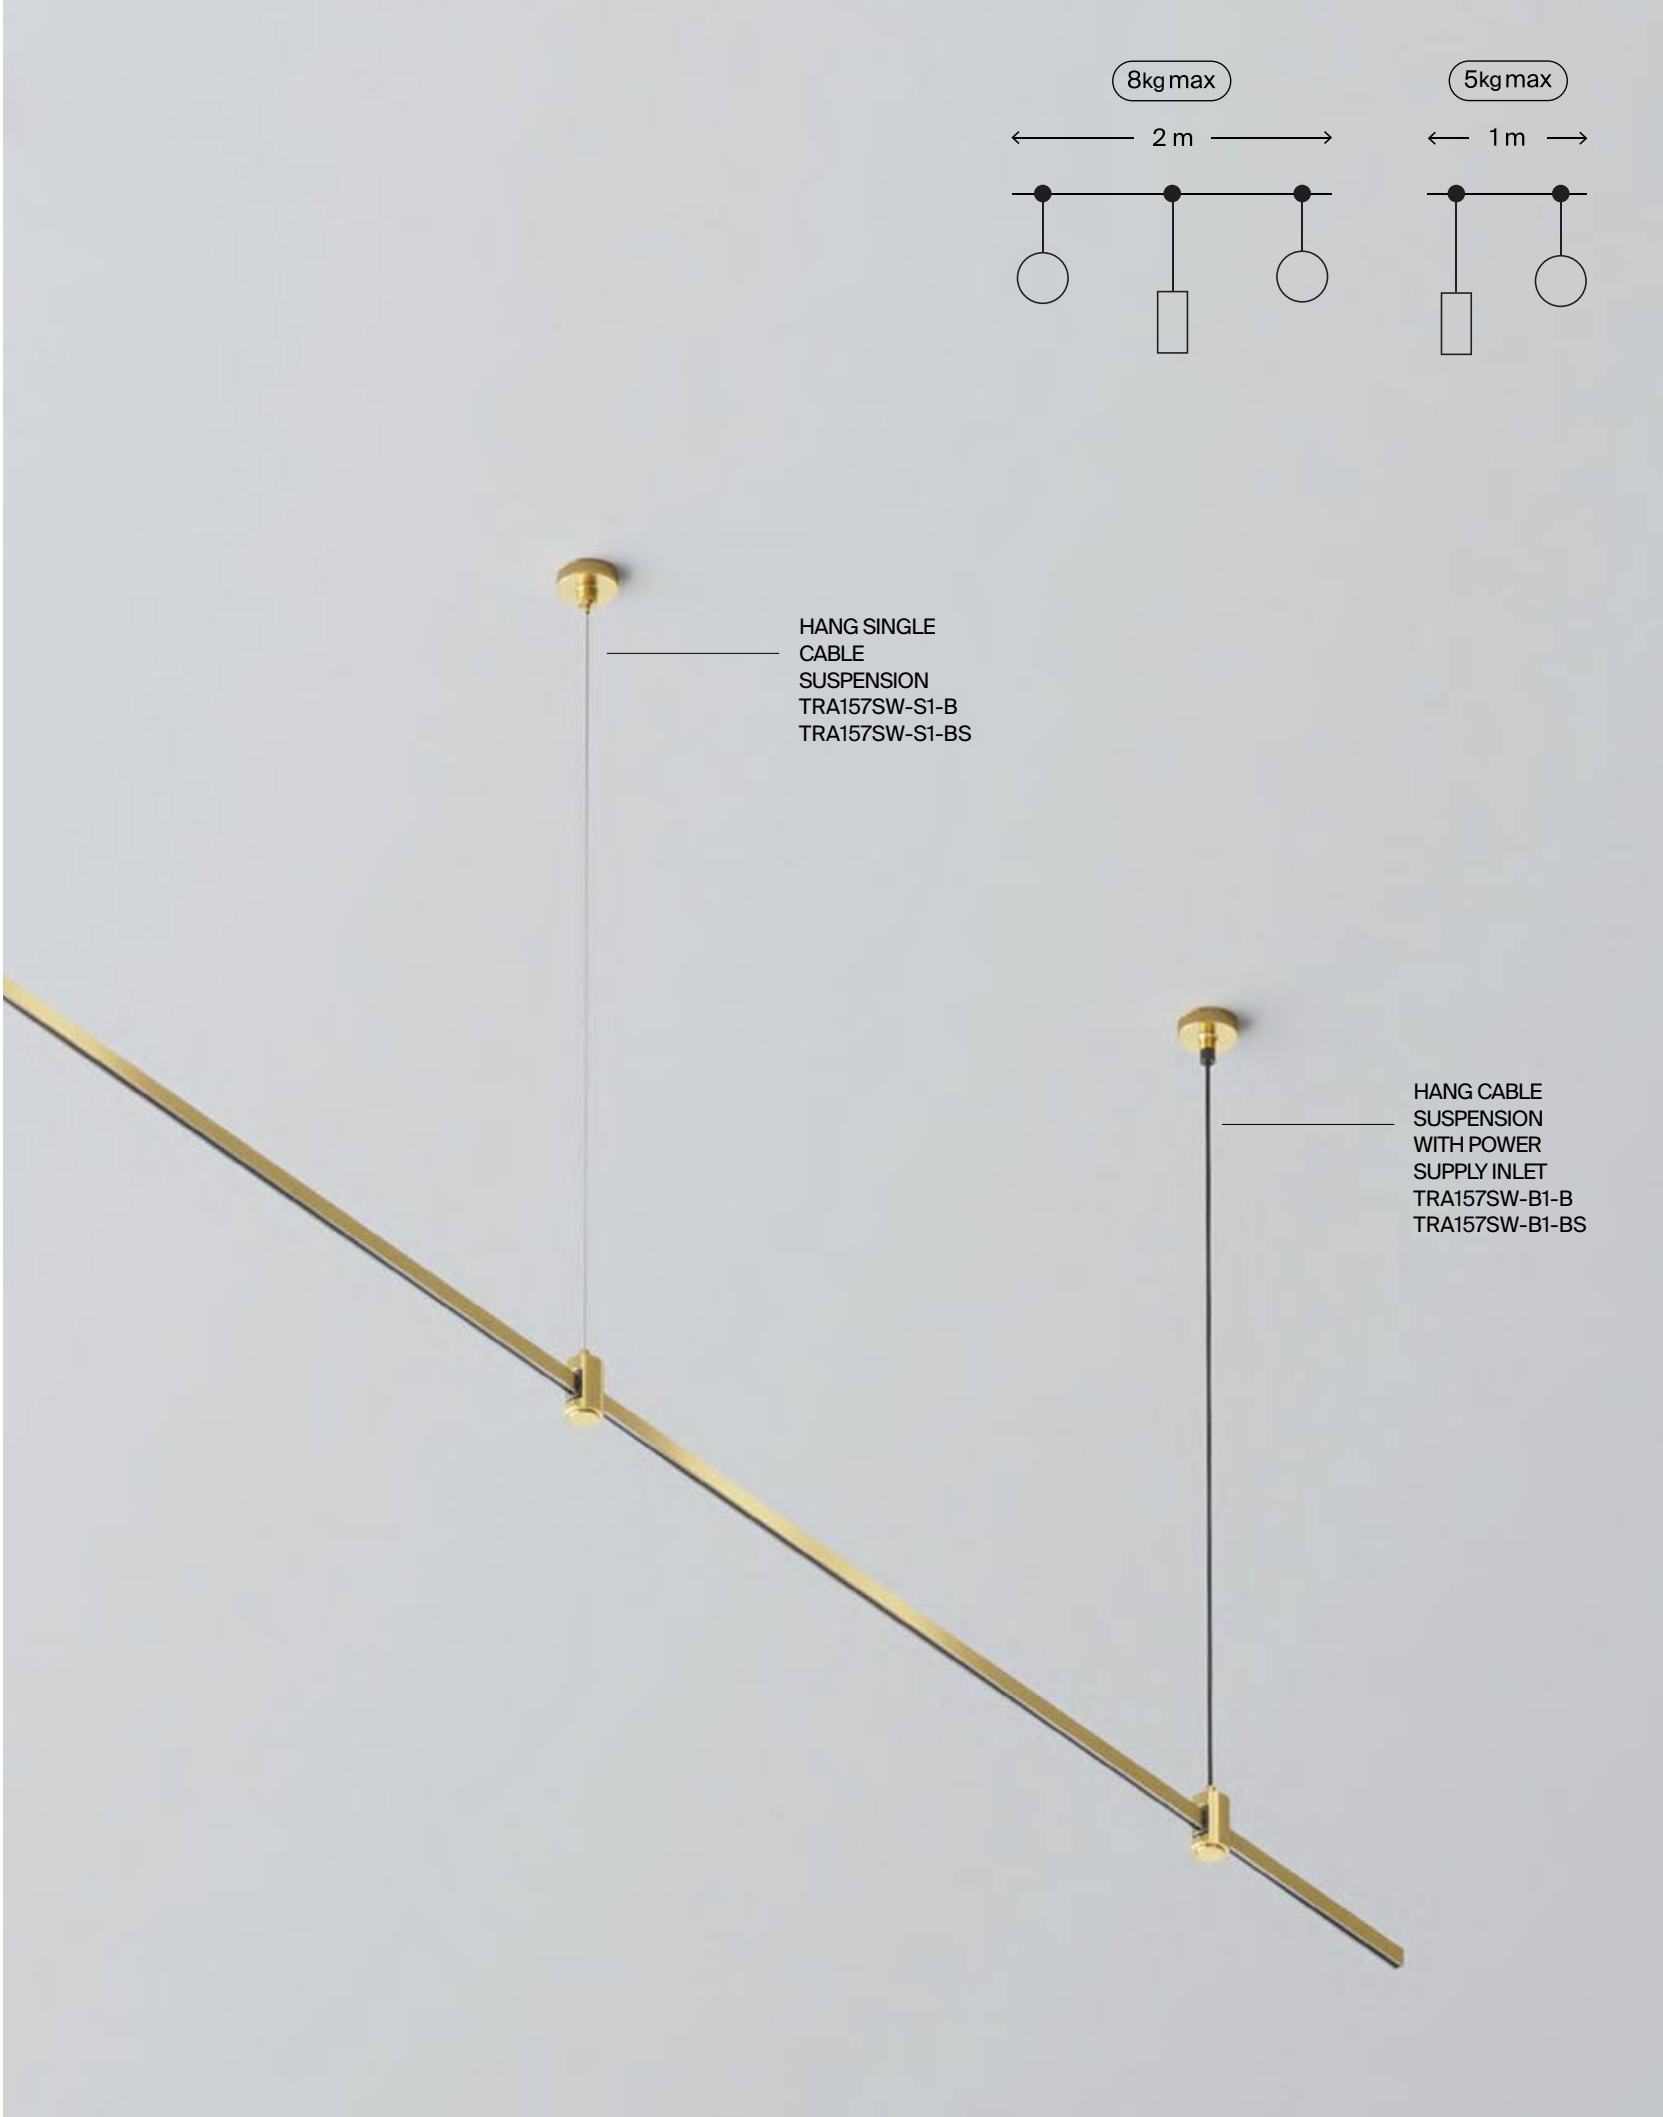



8kg max
2 m
5kg max
1 m
HANG SINGLE
CABLE
SUSPENSION
TRA157SW-S1-B
TRA157SW-S1-BS
HANG CABLE
SUSPENSION
WITH POWER
SUPPLY INLET
TRA157SW-B1-B
TRA157SW-B1-BS

Power supply

[EN] Power supplies convert AC mains voltage of 220V to DC 24V.
[DE] Netzteile wandeln die Netzwechselspannung von 220 V (AC) in 24 V Gleichspannung (DC) um.
[IT] Gli alimentatori sono convertitori CA tensione di rete CA 220 V a tensione CC 24 V.
[FR] Les blocs d'alimentation sont des convertisseurs de tension secteur 220VAC en 24VDC.

Read more
on the website





SYSTEM ELEMENT	COLOR	ARTICLE	SIZE	MAX W LAMPS
POWER SUPPLY	☐ WHITE	30-220-240-24-G2	H26,5 X W40 X L145	30 W
	☐ WHITE	60-220-240-24-G2	H31 X W40 X L200	60 W



Focus LED


[EN] Aluminum housing in two versions: with swivel and fixed mechanisms. Group dimming supported with compatible DALI / 0-10V power supplies.
[DE] Aluminiumgehäuse in zwei Varianten: mit festem oder schwenkbarem Mechanismus. Gruppendimmfunktion ist möglich mit kompatiblen DALI / 0-10V Netzteilen.
[IT] Corpo in alluminio. Due opzioni per il corpo: con meccanismo rotante o senza. La funzione di dimmerazione di gruppo è supportata quando si utilizzano gli alimentatori appropriati utilizzando i protocolli Dali / 0~10V.
[FR] Boîtier en aluminium. Deux variantes de boîtier : avec ou sans mécanisme de rotation. La fonction de gradation de groupe est possible avec des alimentations compatibles DALI / 0-10V.

Read more on the website

B BS LED CRI >90 DC 24V 60°

LEDS BRIDGELUX


1





1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR144-1-5W2.7K-W-BS-DE	5 W	200 LM	NO	IP 20
3K WARM WHITE	BLACK	TR144-1-5W3K-W-B-DE	5 W	200 LM	NO	IP 20

2





2						
2.7K WARM	BRASS	TR143-1-5W2.7K-W-BS-DE	5 W	200 LM	NO	IP 20
3K WARM WHITE	BLACK	TR143-1-5W3K-W-B-DE	5 W	200 LM	NO	IP 20


TR143-1-5W2.7K-W-BS-DE

Skim


[EN] Aluminum housing with light intensity control available through dimming (compatible with DALI / 0-10V power supplies).
[DE] Aluminiumgehäuse mit Lichtstärkeregelung durch Dimmen (kompatibel mit DALI / 0-10V Netzteilen).
[IT] Corpo in alluminio. Grazie alla funzione di dimmerazione è possibile regolare la potenza luminosa (opzione disponibile in caso di utilizzo con alimentatori DALI / 0~10V).
[FR] Boîtier en aluminium. Grâce à la fonction de gradation, il est possible de régler l'intensité lumineuse (option disponible si utilisation des alimentations compatibles DALI / 0-10V).

Read more
on the website

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR145-1-3W2.7K-W-BS-DE	3 W	90 LM	NO	IP 20
3K WARM WHITE	BLACK	TR145-1-3W3K-W-B-DE	3 W	90 LM	NO	IP 20


TR145-1-3W2.7K-W-BS-DE

Basis


[EN] Aluminum housing. Diffuser made of matte polycarbonate. Dimming function allows light intensity control (available with DALI / 0-10V power supplies).
[DE] Aluminiumgehäuse. Diffusor aus mattem Polycarbonat. Dimmfunktion ermöglicht die Steuerung der Lichtintensität (erhältlich mit DALI / 0-10V Netzteilen).
[IT] Corpo in alluminio. Diffusore in policarbonato opaco. Grazie alla funzione di dimmerazione è possibile regolare la potenza luminosa (opzione disponibile in caso di utilizzo con alimentatori DALI / 0~10V).
[FR] Boîtier en aluminium. Diffuseur en polycarbonate mat. La fonction de gradation permet de contrôler l'intensité lumineuse (disponible avec les alimentations DALI / 0-10V).

Read more on the website

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR151-1-12W2.7K-BS-DE	12 W	400 LM	NO	IP 20
3K WARM WHITE	BLACK	TR151-1-12W3K-B-DE	12 W	400 LM	NO	IP 20


TR151-1-12W2.7K-BS-DE


Points


[EN] Aluminum housing with light intensity control available through dimming (compatible with DALI / 0-10V power supplies).
[DE] Aluminiumgehäuse mit Lichtstärkeregelung durch Dimmen (kompatibel mit DALI / 0-10V Netzteilen).
[IT] Corpo in alluminio. Grazie alla funzione di dimmerazione è possibile regolare la potenza luminosa (opzione disponibile in caso di utilizzo con alimentatori DALI / 0~10V).
[FR] Boîtier en aluminium. Grâce à la fonction de gradation, il est possible de régler l'intensité lumineuse (option disponible si utilisation des alimentations compatibles DALI / 0-10V).

Read more
on the website

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM

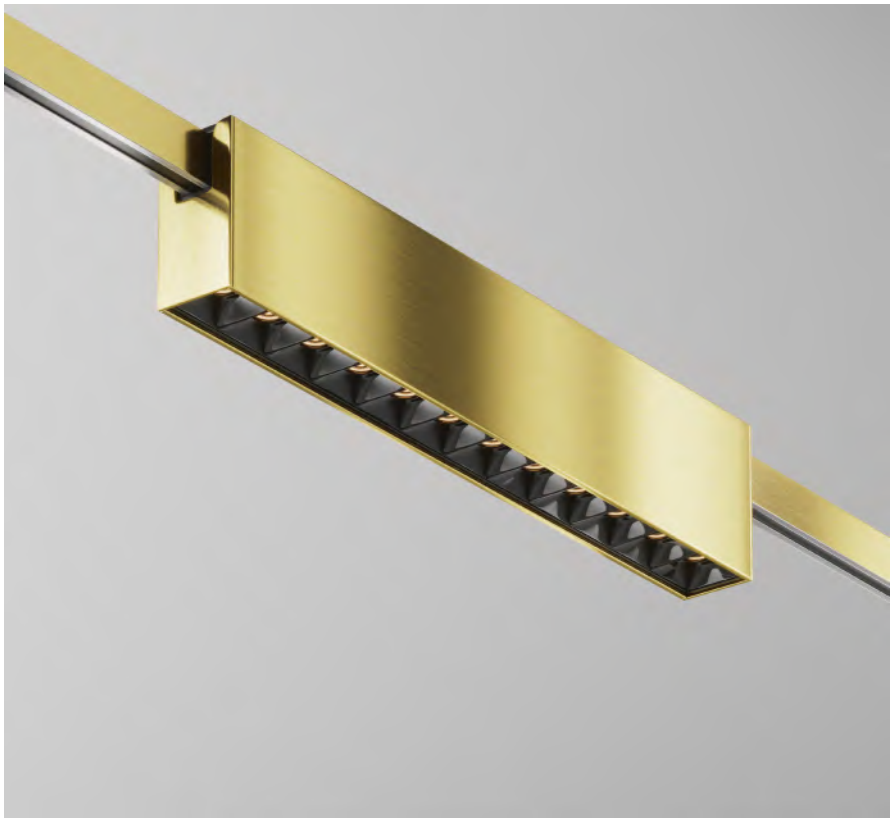



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR150-1-12W2.7K-M-BS-DE	12 W	400 LM	NO	IP 20
3K WARM WHITE	BLACK	TR150-1-12W3K-M-B-DE	12 W	400 LM	NO	IP 20


TR150-1-12W2.7K-M-BS-DE

Bubble


[EN] Aluminum housing with a spherical designer glass shade in clear color. Light intensity control with dimming is available.
[DE] Aluminiumgehäuse mit einem kugelförmigen Design-Glasschirm in transparenter Ausführung. Lichtstärkeregelung mit Dimmung ist möglich.
[IT] Corpo in alluminio. Lampada di design realizzata in vetro fuso ad alta resistenza. Grazie alla funzione di dimmerazione è possibile regolare la luminosità.
[FR] Boîtier en aluminium. Lampe sphérique en verre design de couleur claire. La fonction de gradation permet de régler l'intensité lumineuse.

Read more
on the website

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS TRANSPARENT	TR148-1-3W2.7K-BS-DE	3 W	80 LM	NO	IP 20
3K WARM WHITE	BLACK	TR148-1-3W3K-B-DE	3 W	80 LM	NO	IP 20


TR148-1-3W2.7K-BS-DE

Luna


Read more
on the website

EN Aluminum housing with a spherical matte glass shade. Light intensity control with dimming is available (with compatible DALI / 0-10V power supplies).
DE Aluminiumgehäuse. Kugelförmiger Schirm aus mattiertem Glas. Lichtstärkeregelung mit Dimmen ist möglich (mit kompatiblen DALI / 0-10V Netzteilen).
IT Corpo in alluminio. Paralume sferico in vetro satinato. Grazie alla funzione di dimmerazione è possibile regolare la luminosità (opzione disponibile se utilizzato con alimentatori DALI / 0~10V).
FR Boîtier en aluminium. Abat-jour sphérique en verre dépoli. Grâce à la fonction de gradation, il est possible de régler l'intensité lumineuse (option disponible si utilisation des alimentations compatibles DALI / 0-10V).

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR149-1-5W2.7K-BS-DE	5 W	250 LM	NO	IP 20
3K WARM WHITE	BLACK	TR149-1-5W3K-B-DE	5 W	250 LM	NO	IP 20

Keila


[EN] Conical aluminum fittings and shade with an opal diffuser. Light intensity control with dimming is available.
[DE] Armatur und Schirm in konischer Form aus Aluminium. Opalweißer Diffusor. Lichtstärkeregelung mit Dimmfunktion ist möglich.
[IT] Struttura e paralume conico in alluminio. Diffusore in opale. Grazie alla funzione di dimmerazione è possibile regolare la luminosità.
[FR] Structure en aluminium et abat-jour conique. Diffuseur opalin. La fonction de gradation permet d'ajuster l'intensité lumineuse.

Read more
on the website

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR146-1-5W2.7K-BS-DE	5 W	250 LM	NO	IP 20
3K WARM WHITE	BLACK	TR146-1-5W3K-B-DE	5 W	250 LM	NO	IP 20

Bianca


Read more
on the website

[EN] Aluminum housing with a high-strength molded glass shade. Dimming function enables light adjustment (available with DALI / 0-10V power supplies).
[DE] Aluminiumgehäuse mit hochfestem, geformtem Glasschirm. Die Dimmfunktion ermöglicht die Anpassung des Lichts (erhältlich mit DALI / 0-10V Netzteilen).
[IT] Corpo in alluminio. Lampada realizzata in vetro fuso ad alta resistenza. Grazie alla funzione di dimmerazione è possibile regolare la potenza luminosa (opzione disponibile in caso di utilizzo con alimentatori DALI / 0~10V).
[FR] Corps en aluminium. Lampe en verre moulé à haute résistance. Grâce à la fonction de gradation, il est possible d'ajuster l'intensité lumineuse (disponible avec les alimentations DALI / 0-10V).

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS TRANSPARENT	TR147-1-3W2.7K-BS-DE	3 W	60 LM	NO	IP 20
3K WARM WHITE	BLACK	TR147-1-3W3K-B-DE	3 W	60 LM	NO	IP 20


TR147-1-3W2.7K-BS-DE

Plato


[EN] Aluminum housing with light intensity control available through dimming (compatible with DALI / 0-10V power supplies).
[DE] Aluminiumgehäuse mit Lichtstärkeregelung durch Dimmen (kompatibel mit DALI / 0-10V Netzteilen).
[IT] Corpo in alluminio. Grazie alla funzione di dimmerazione è possibile regolare la potenza luminosa (opzione disponibile in caso di utilizzo con alimentatori DALI / 0~10V).
[FR] Boîtier en aluminium. Grâce à la fonction de gradation, il est possible de régler l'intensité lumineuse (option disponible si utilisation des alimentations compatibles DALI / 0-10V).

Read more
on the website

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR153-1-10W2.7K-BS-DE	10 W	400 LM	NO	IP 20
3K WARM WHITE	BLACK	TR153-1-10W3K-B-DE	10 W	400 LM	NO	IP 20


TR153-1-10W2.7K-BS-DE

Plato


[EN] Aluminum housing with light intensity control available through dimming (compatible with DALI / 0-10V power supplies).
[DE] Aluminiumgehäuse mit Lichtstärkeregelung durch Dimmen (kompatibel mit DALI / 0-10V Netzteilen).
[IT] Corpo in alluminio. Grazie alla funzione di dimmerazione è possibile regolare la potenza luminosa (opzione disponibile in caso di utilizzo con alimentatori DALI / 0~10V).
[FR] Boîtier en aluminium. Grâce à la fonction de gradation, il est possible de régler l'intensité lumineuse (option disponible si utilisation des alimentations compatibles DALI / 0-10V).

Read more
on the website

B BS LED CRI >90 DC 24V 60°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR152-1-7W2.7K-BS-DE	7 W	250 LM	NO	IP 20
3K WARM WHITE	BLACK	TR152-1-7W3K-B-DE	7 W	250 LM	NO	IP 20


TR152-1-7W2.7K-BS-DE

Zero


[EN] Zero embodies a unique combination of design craftsmanship and the engineering excellence of the Flarity system.
[DE] Zero vereint einzigartiges Designhandwerk mit der technischen Perfektion des Flarity-Systems.
[IT] Zero incarna una combinazione unica di maestria nel design e perfezione ingegneristica del sistema Flarity.
[FR] Zero incarne une combinaison unique de savoir-faire en design et de perfection ingénierique du système Flarity.

Read more
on the website

B BS LED CRI >90 DC 24V 180°

LEDS OSRAM





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BRASS	TR230-1-10W2.7K-BS-DE	10 W	550 LM	NO	IP 20
3K WARM WHITE	BLACK	TR230-1-10W3K-B-DE	10 W	550 LM	NO	IP 20


TR230-1-10W3K-B-DE



BASIS 166
BASIS GRIG 167
FOCUS LED 168
POINTS 169



POINTS
TR149-1-5W3K-B-DE

Elements for surface mounting

Read more on the website


SYSTEM ELEMENT	COLOR	ARTICLE
END CAP	■ BLACK	TRA084EC-111B*
	□ WHITE	TRA084EC-111W*
	■ BLACK	TRA084EC-112B**
	□ WHITE	TRA084EC-112W**



SYSTEM ELEMENT	COLOR	ARTICLE
POWER INPUT	■ BLACK	TRA084B-11B
	□ WHITE	TRA084B-11W



SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	■ BLACK	TRX084EC-111B	H5.5 X W25 X L1000
*END CAPS INCLUDED	□ WHITE	TRX084EC-111W	H5.5 X W25 X L1000
	■ BLACK	TRX084EC-112B	H5.5 X W25 X L2000
	□ WHITE	TRX084EC-112W	H5.5 X W25 X L2000



111* - for one-meter track
112** - for a two-meter track
The mounting kit in a set with plugs (differs by the quantity of self-tappers)

TRX084-111B



Elements for surface mounting

Read more on the website

SYSTEM ELEMENT	COLOR	ARTICLE
STRAIGHT CONNECTOR	■ BLACK	TRA084C-11B
	□ WHITE	TRA084C-11W



SYSTEM ELEMENT	COLOR	ARTICLE
L-CONNECTOR	■ BLACK	TRA084CL-11B
	□ WHITE	TRA084CL-11W



SYSTEM ELEMENT	COLOR	ARTICLE
T-CONNECTOR	■ BLACK	TRA084CT-11B
	□ WHITE	TRA084CT-11W



SYSTEM ELEMENT	COLOR	ARTICLE
INTERNAL CORNER CONNECTOR	■ BLACK	TRA084CI-11B
	□ WHITE	TRA084CI-11W




SYSTEM ELEMENT	COLOR	ARTICLE
ROUND CONNECTOR	■ BLACK	TRA084CR-11B
	□ WHITE	TRA084CR-11W



SYSTEM ELEMENT	COLOR	ARTICLE
X-CONNECTOR	■ BLACK	TRA084CX-11B
	□ WHITE	TRA084CX-11W

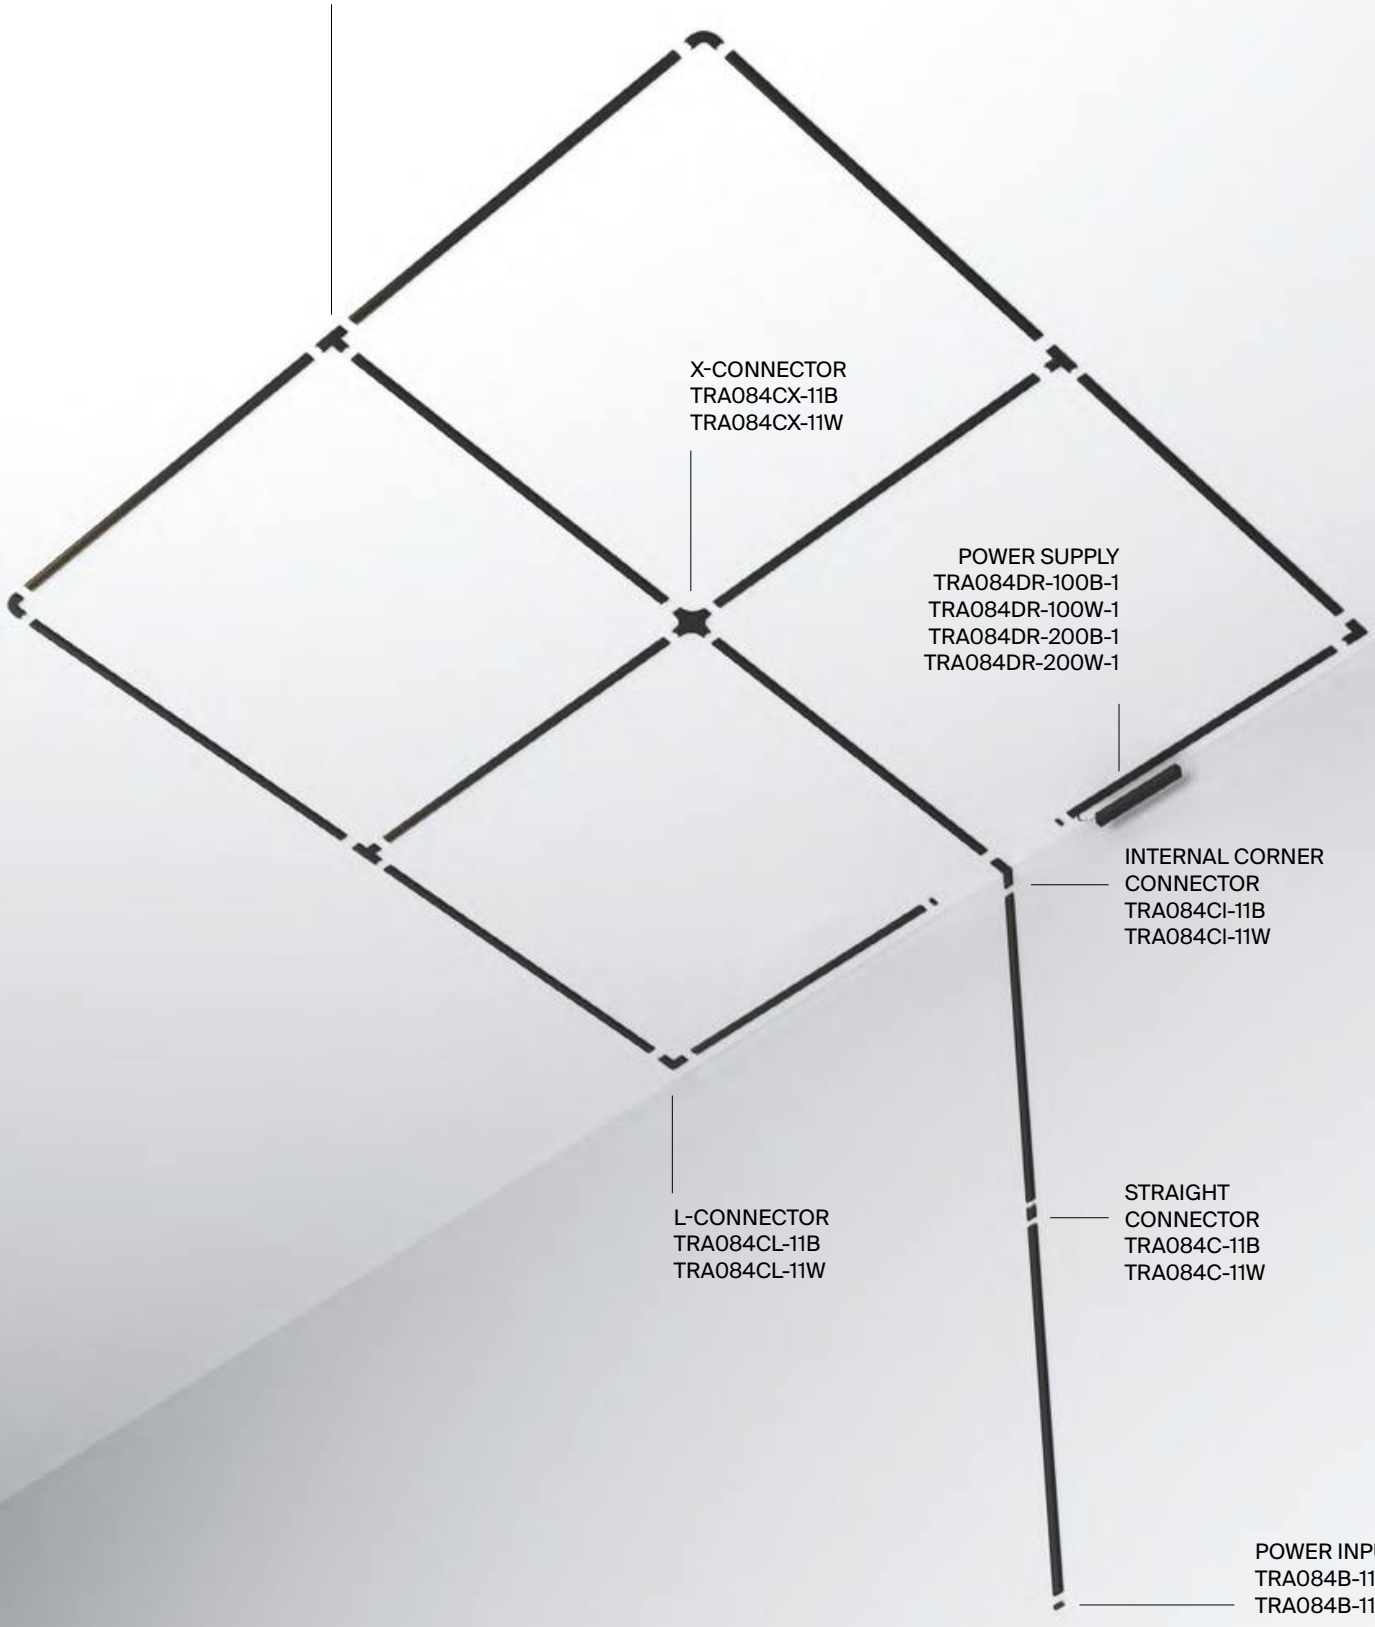



T-CONNECTOR
TRA084CT-11B
TRA084CT-11W
X-CONNECTOR
TRA084CX-11B
TRA084CX-11W
POWER SUPPLY
TRA084DR-100B-1
TRA084DR-100W-1
TRA084DR-200B-1
TRA084DR-200W-1
INTERNAL CORNER
CONNECTOR
TRA084CI-11B
TRA084CI-11W
L-CONNECTOR
TRA084CL-11B
TRA084CL-11W
STRAIGHT
CONNECTOR
TRA084C-11B
TRA084C-11W
POWER INPUT
TRA084B-11B
TRA084B-11W

Power Supply

Read more
on the website

[EN] Power supplies convert AC mains voltage of 220V to DC 24V.
[DE] Netzteile wandeln die Netzwechselspannung von 220 V (AC) in 24 V Gleichspannung (DC) um.
[IT] Gli alimentatori sono convertitori CA tensione di rete CA 220 V a tensione CC 24 V.
[FR] Les blocs d'alimentation sont des convertisseurs de tension secteur 220VAC en 24VDC.

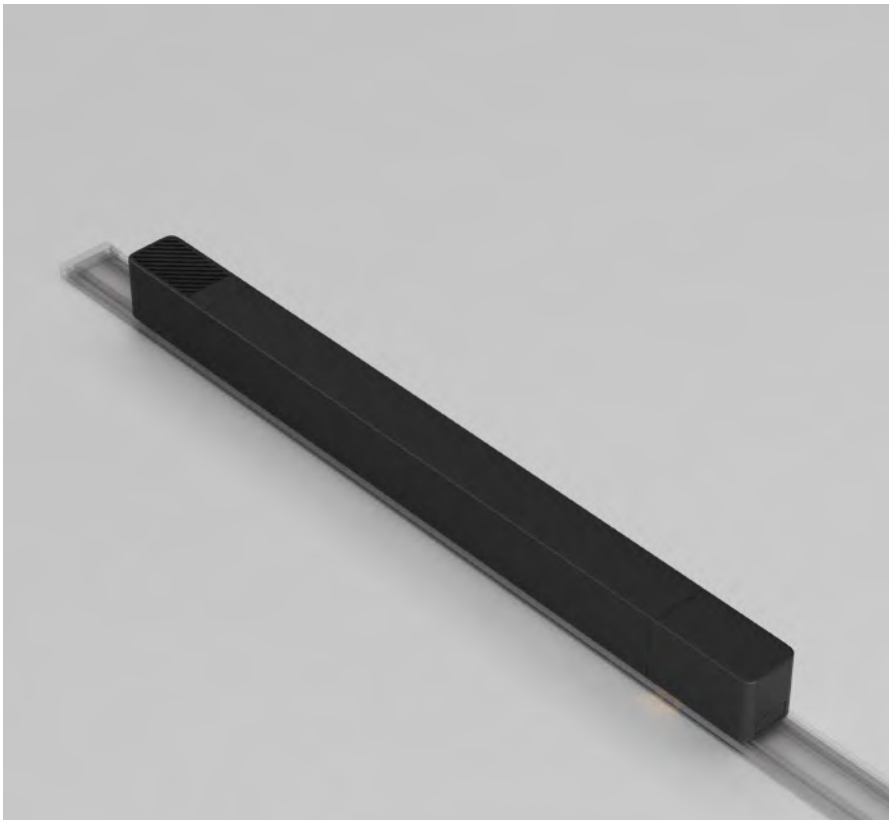

SYSTEM ELEMENT	COLOR	ARTICLE	SIZE	MAX W LAMPS
POWER SUPPLY	BLACK	TRA084DR-100B-1	H28 x W25 x L340	100 W
	WHITE	TRA084DR-100W-1	H28 x W25 x L340	100 W
	BLACK	TRA084DR-200B-1	H28 x W25 x L395	200 W
	WHITE	TRA084DR-200W-1	H28 x W25 x L395	200 W
POWER SUPPLY	SILVER	TRA004DR-100S	H97 X W129	100 W
	SILVER	TRA004DR-150S	H97 X W159	150 W
	SILVER	TRA004DR-200S	H97 X W215	200 W
	SILVER	TRA004DR-320S	H115 X W215	320 W

Accessories

Read more
on the website



TRACK ADAPTOR	■ BLACK	TRA084FC-11SB	H52 X W25 X L115
	□ WHITE	TRA084FC-11SW	H52 X W25 X L115
TRACK ADAPTOR	■ BLACK	TRA084FC-11LB	H52 X W25 X L222
	□ WHITE	TRA084FC-11LW	H52 X W25 X L222




TR080-1-6W3K-B
TR080-1-12W3K-B
TR080-1-12W3K-B


Basis

EN Metal body. Wide scattering angle. LED light source. Soft dispersion.
DE Metallrahmen. Breiter Lichtstreuwinkel. LED-Lichtquelle. Weiche Streuung.
IT Corpo in metallo. Ampio angolo di diffusione. Sorgente luminosa LED. Diffusione morbida.
FR Corps métallique. Grand angle de diffusion. Source de lumière LED. Dissémination douce.


Read more on the website

B W LED CRI >90 DC 24V 60°


LEDS SANAN



1



2



3



1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR080-1-6W3K-B	6 W	350 LM	NO	IP 20
3K WARM WHITE	WHITE	TR080-1-6W3K-W	6 W	450 LM	NO	IP 20
4K WHITE	BLACK	TR080-1-6W4K-B	6 W	350 LM	NO	IP 20
4K WHITE	WHITE	TR080-1-6W4K-W	6 W	500 LM	NO	IP 20
2						
3K WARM WHITE	BLACK	TR080-1-12W3K-B	12 W	700 LM	NO	IP 20
3K WARM WHITE	WHITE	TR080-1-12W3K-W	12 W	950 LM	NO	IP 20
4K WHITE	BLACK	TR080-1-12W4K-B	12 W	850 LM	NO	IP 20
4K WHITE	WHITE	TR080-1-12W4K-W	12 W	1000 LM	NO	IP 20
3						
3K WARM WHITE	BLACK	TR080-1-18W3K-B	16 W	900 LM	NO	IP 20
3K WARM WHITE	WHITE	TR080-1-18W3K-W	16 W	1150 LM	NO	IP 20
4K WHITE	BLACK	TR080-1-18W4K-B	16 W	900 LM	NO	IP 20
4K WHITE	WHITE	TR080-1-18W4K-W	16 W	1200 LM	NO	IP 20

Basis Grid

EN Metal body. Wide scattering angle. LED light source. Soft dispersion.
DE Metallrahmen. Breiter Lichtstreuwinkel. LED-Lichtquelle. Weiche Streuung.
IT Corpo in metallo. Ampio angolo di diffusione. Sorgente luminosa LED. Diffusione morbida.
FR Corps métallique. Grand angle de diffusion. Source de lumière LED. Dissémination douce.


Read more on the website

B W LED CRI >90 DC 24V 60°


LEDS SANAN



1



2



1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR084-1-6W3K-B	6 W	90 LM	NO	IP 20
3K WARM WHITE	WHITE	TR084-1-6W3K-W	6 W	90 LM	NO	IP 20
4K WHITE	BLACK	TR084-1-6W4K-B	6 W	90 LM	NO	IP 20
4K WHITE	WHITE	TR084-1-6W4K-W	6 W	90 LM	NO	IP 20
2						
3K WARM WHITE	BLACK	TR084-1-12W3K-B	12 W	700 LM	NO	IP 20
3K WARM WHITE	WHITE	TR084-1-12W3K-W	12 W	950 LM	NO	IP 20
4K WHITE	BLACK	TR084-1-12W4K-B	12 W	850 LM	NO	IP 20
4K WHITE	WHITE	TR084-1-12W4K-W	12 W	1000 LM	NO	IP 20

Focus LED


EN Metal body with swivel mechanism. 36° LED light source for perfect accent lighting.
DE Metallrahmen mit einer Schwenkvorrichtung. LED-Lichtquelle mit 36°-Lichtstreuwinkel für eine perfekte Akzentbeleuchtung.
IT Corpo in metallo con meccanismo girevole. Sorgente luminosa LED 36° per una perfetta illuminazione d'accento.
FR Corps métallique avec mécanisme pivotant. Source de lumière LED avec angle de dissémination de 36° pour un éclairage d'accentuation parfait.

Read more on the website


B W LED CRI >90 DC 24V 60°

LEDS BRIDGELUX

1



2





1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR103-1-5W3K-M-B	5 W	400 LM	NO	IP 20
3K WARM WHITE	WHITE	TR103-1-5W3K-M-W	5 W	400 LM	NO	IP 20
4K WHITE	BLACK	TR103-1-5W4K-M-B	5 W	450 LM	NO	IP 20
4K WHITE	WHITE	TR103-1-5W4K-M-W	5 W	450 LM	NO	IP 20
2						
3K WARM WHITE	BLACK	TR103-1-12W3K-M-B	12 W	1000 LM	NO	IP 20
3K WARM WHITE	WHITE	TR103-1-12W3K-M-W	12 W	1000 LM	NO	IP 20
4K WHITE	BLACK	TR103-1-12W4K-M-B	12 W	1100 LM	NO	IP 20
4K WHITE	WHITE	TR103-1-12W4K-M-W	12 W	1100 LM	NO	IP 20


Points

EN Metal body. Hidden LED light source. Focusing optics for key-light.
DE Metallrahmen. Versteckte LED-Lichtquelle. Konzentrierende Optik für gerichtete Beleuchtung.
IT Corpo in metallo. Sorgente luminosa a LED nascosta. Ottica concentrante per illuminazione direzionale.
FR Corps métallique. Source de lumière LED dissimulée. Optique concentrée pour un éclairage orienté.


Read more on the website

B W LED CRI >90 DC 24V 60°


LEDS SANAN



1



2



3



1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR082-1-6W3K-M-B	6 W	600 LM	NO	IP 20
3K WARM WHITE	WHITE	TR082-1-6W3K-M-W	6 W	600 LM	NO	IP 20
4K WHITE	BLACK	TR082-1-6W4K-M-B	6 W	700 LM	NO	IP 20
4K WHITE	WHITE	TR082-1-6W4K-M-W	6 W	700 LM	NO	IP 20
2						
3K WARM WHITE	BLACK	TR082-1-12W3K-M-B	12 W	1200 LM	NO	IP 20
3K WARM WHITE	WHITE	TR082-1-12W3K-M-W	12 W	1300 LM	NO	IP 20
4K WHITE	BLACK	TR082-1-12W4K-M-B	12 W	1400 LM	NO	IP 20
4K WHITE	WHITE	TR082-1-12W4K-M-W	12 W	1400 LM	NO	IP 20
3						
3K WARM WHITE	BLACK	TR082-1-18W3K-M-B	16 W	1800 LM	NO	IP 20
3K WARM WHITE	WHITE	TR082-1-18W3K-M-W	16 W	1800 LM	NO	IP 20
4K WHITE	BLACK	TR082-1-18W4K-M-B	16 W	1850 LM	NO	IP 20
4K WHITE	WHITE	TR082-1-18W4K-M-W	16 W	1850 LM	NO	IP 20



ARTISAN	180	**FOCUS ZOOM**	192	**ZON**	210
CALIPSO	181	**LIPARI**	194	**VIRAR**	211
BASIS ROT	182	**ONDA**	196	**FOCUS MINI**	212
FOCUS	184	**POINTS ROT**	200	**ELTI**	214
FOCUS DUAL	186	**POLAR**	202	**FOCUS DESIGN**	216
FOCUS LED	188	**VOURO**	204	**ORLO**	218
FOCUS S	190	**YIN**	208	**RIM**	220



FOCUS LED
TR021-1-12W4K-W-D-B

Elements for surface and pendant mounting

Read more on the website


SYSTEM ELEMENT	COLOR	ARTICLE
END CAP	■ BLACK	TRA001EC-11B
	□ WHITE	TRA001EC-11W



SYSTEM ELEMENT	COLOR	ARTICLE
POWER INPUT	■ BLACK	TRA001B-11B
	□ WHITE	TRA001B-11W



SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	■ BLACK	TRX001-111B	H20 X W34 X L1000
	■ BLACK	TRX001-112B	H20 X W34 X L2000
	□ WHITE	TRX001-111W	H20 X W34 X L1000
	□ WHITE	TRX001-112W	H20 X W34 X L2000






Elements for surface and pendant mounting

Read more on the website

SYSTEM ELEMENT	COLOR	ARTICLE
STRAIGHT CONNECTOR	■ BLACK	TRA001C-11B
	□ WHITE	TRA001C-11W



SYSTEM ELEMENT	COLOR	ARTICLE
L-CONNECTOR	■ BLACK	TRA001CL-11B
	□ WHITE	TRA001CL-11W



SYSTEM ELEMENT	COLOR	ARTICLE
FLEXIBLE CONNECTOR	■ BLACK	TRA001CF-11B
	□ WHITE	TRA001CF-11W



SYSTEM ELEMENT	COLOR	ARTICLE
T-CONNECTOR	■ BLACK	TRA001CT-11B
	□ WHITE	TRA001CT-11W




SYSTEM ELEMENT	COLOR	ARTICLE
X-CONNECTOR	■ BLACK	TRA001CX-11B
	□ WHITE	TRA001CX-11W



SYSTEM ELEMENT	COLOR	ARTICLE
SUSPENSION KIT	■ BLACK	TRA001CW-11B
	□ WHITE	TRA001CW-11W

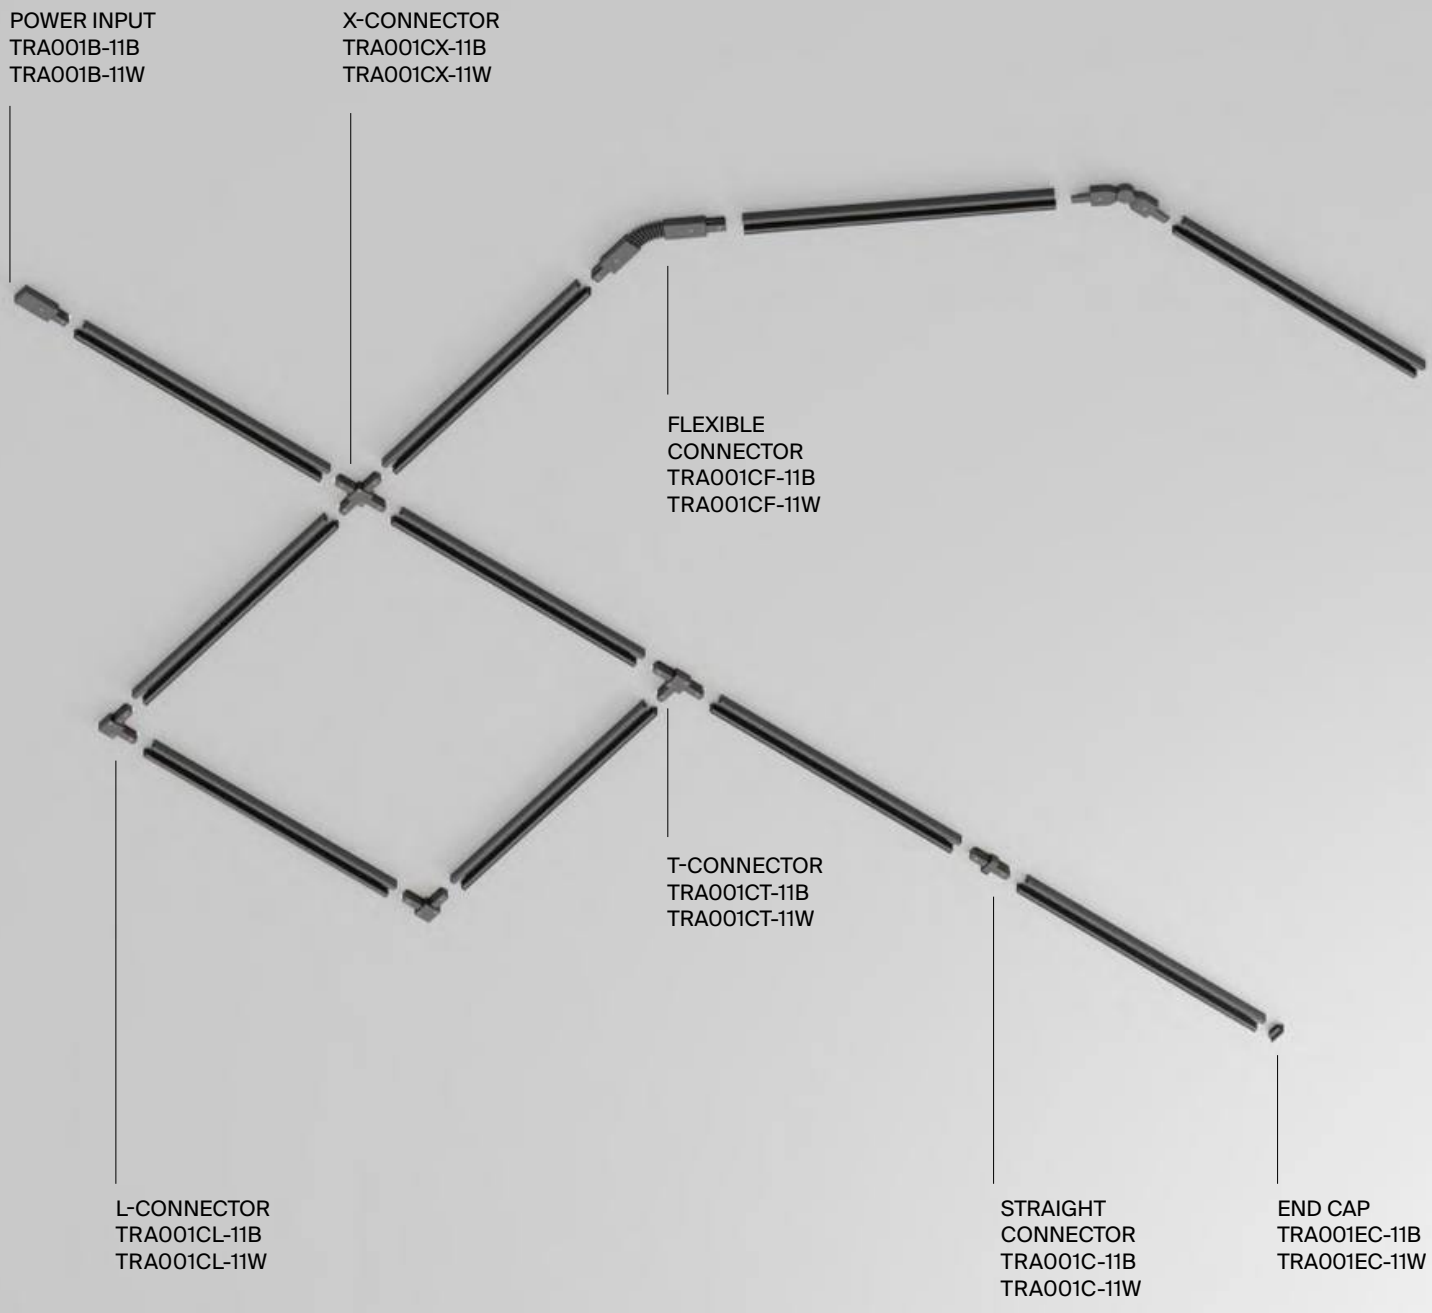


POWER INPUT
TRA001B-11B
TRA001B-11W
X-CONNECTOR
TRA001CX-11B
TRA001CX-11W
FLEXIBLE
CONNECTOR
TRA001CF-11B
TRA001CF-11W
T-CONNECTOR
TRA001CT-11B
TRA001CT-11W
L-CONNECTOR
TRA001CL-11B
TRA001CL-11W
STRAIGHT
CONNECTOR
TRA001C-11B
TRA001C-11W
END CAP
TRA001EC-11B
TRA001EC-11W

Elements for recessed mounting

Read more on the website


SYSTEM ELEMENT	COLOR	ARTICLE
END CAP	■ BLACK	TRA002EC-11B
	□ WHITE	TRA002EC-11W



SYSTEM ELEMENT	COLOR	ARTICLE
CORNER CONNECTOR	■ BLACK	TRA002CL-11B
	□ WHITE	TRA002CL-11W



SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	■ BLACK	TRX004-111B	H20 X W60 X L1000
	■ BLACK	TRX004-112B	H20 X W60 X L2000
	□ WHITE	TRX004-111W	H20 X W60 X L1000
	□ WHITE	TRX004-112W	H20 X W60 X L2000






Elements for recessed mounting

Read more on the website

SYSTEM ELEMENT	COLOR	ARTICLE
SPRING HOLDER	SILVER	TRA002HR-11B



SYSTEM ELEMENT	COLOR	ARTICLE
X-CONNECTOR	BLACK	TRA002CX-11B
	WHITE	TRA002CX-11W



SYSTEM ELEMENT	COLOR	ARTICLE
STRAIGHT CONNECTOR	BLACK	TRA002C-11B
	WHITE	TRA002C-11W



SYSTEM ELEMENT	COLOR	ARTICLE
POWER INPUT	BLACK	TRA002B-11B
	WHITE	TRA002B-11W



SYSTEM ELEMENT	COLOR	ARTICLE
T-CONNECTOR	BLACK	TRA002CT-11B
	WHITE	TRA002CT-11W




SYSTEM ELEMENT	COLOR	ARTICLE
TRACK ADAPTOR	BLACK	TRA011-1-A-B
	WHITE	TRA011-1-A-W



SYSTEM ELEMENT	COLOR	ARTICLE
MEDIUM POWER CONNECTOR	BLACK	TRA001CB-11B
	WHITE	TRA001CB-11W

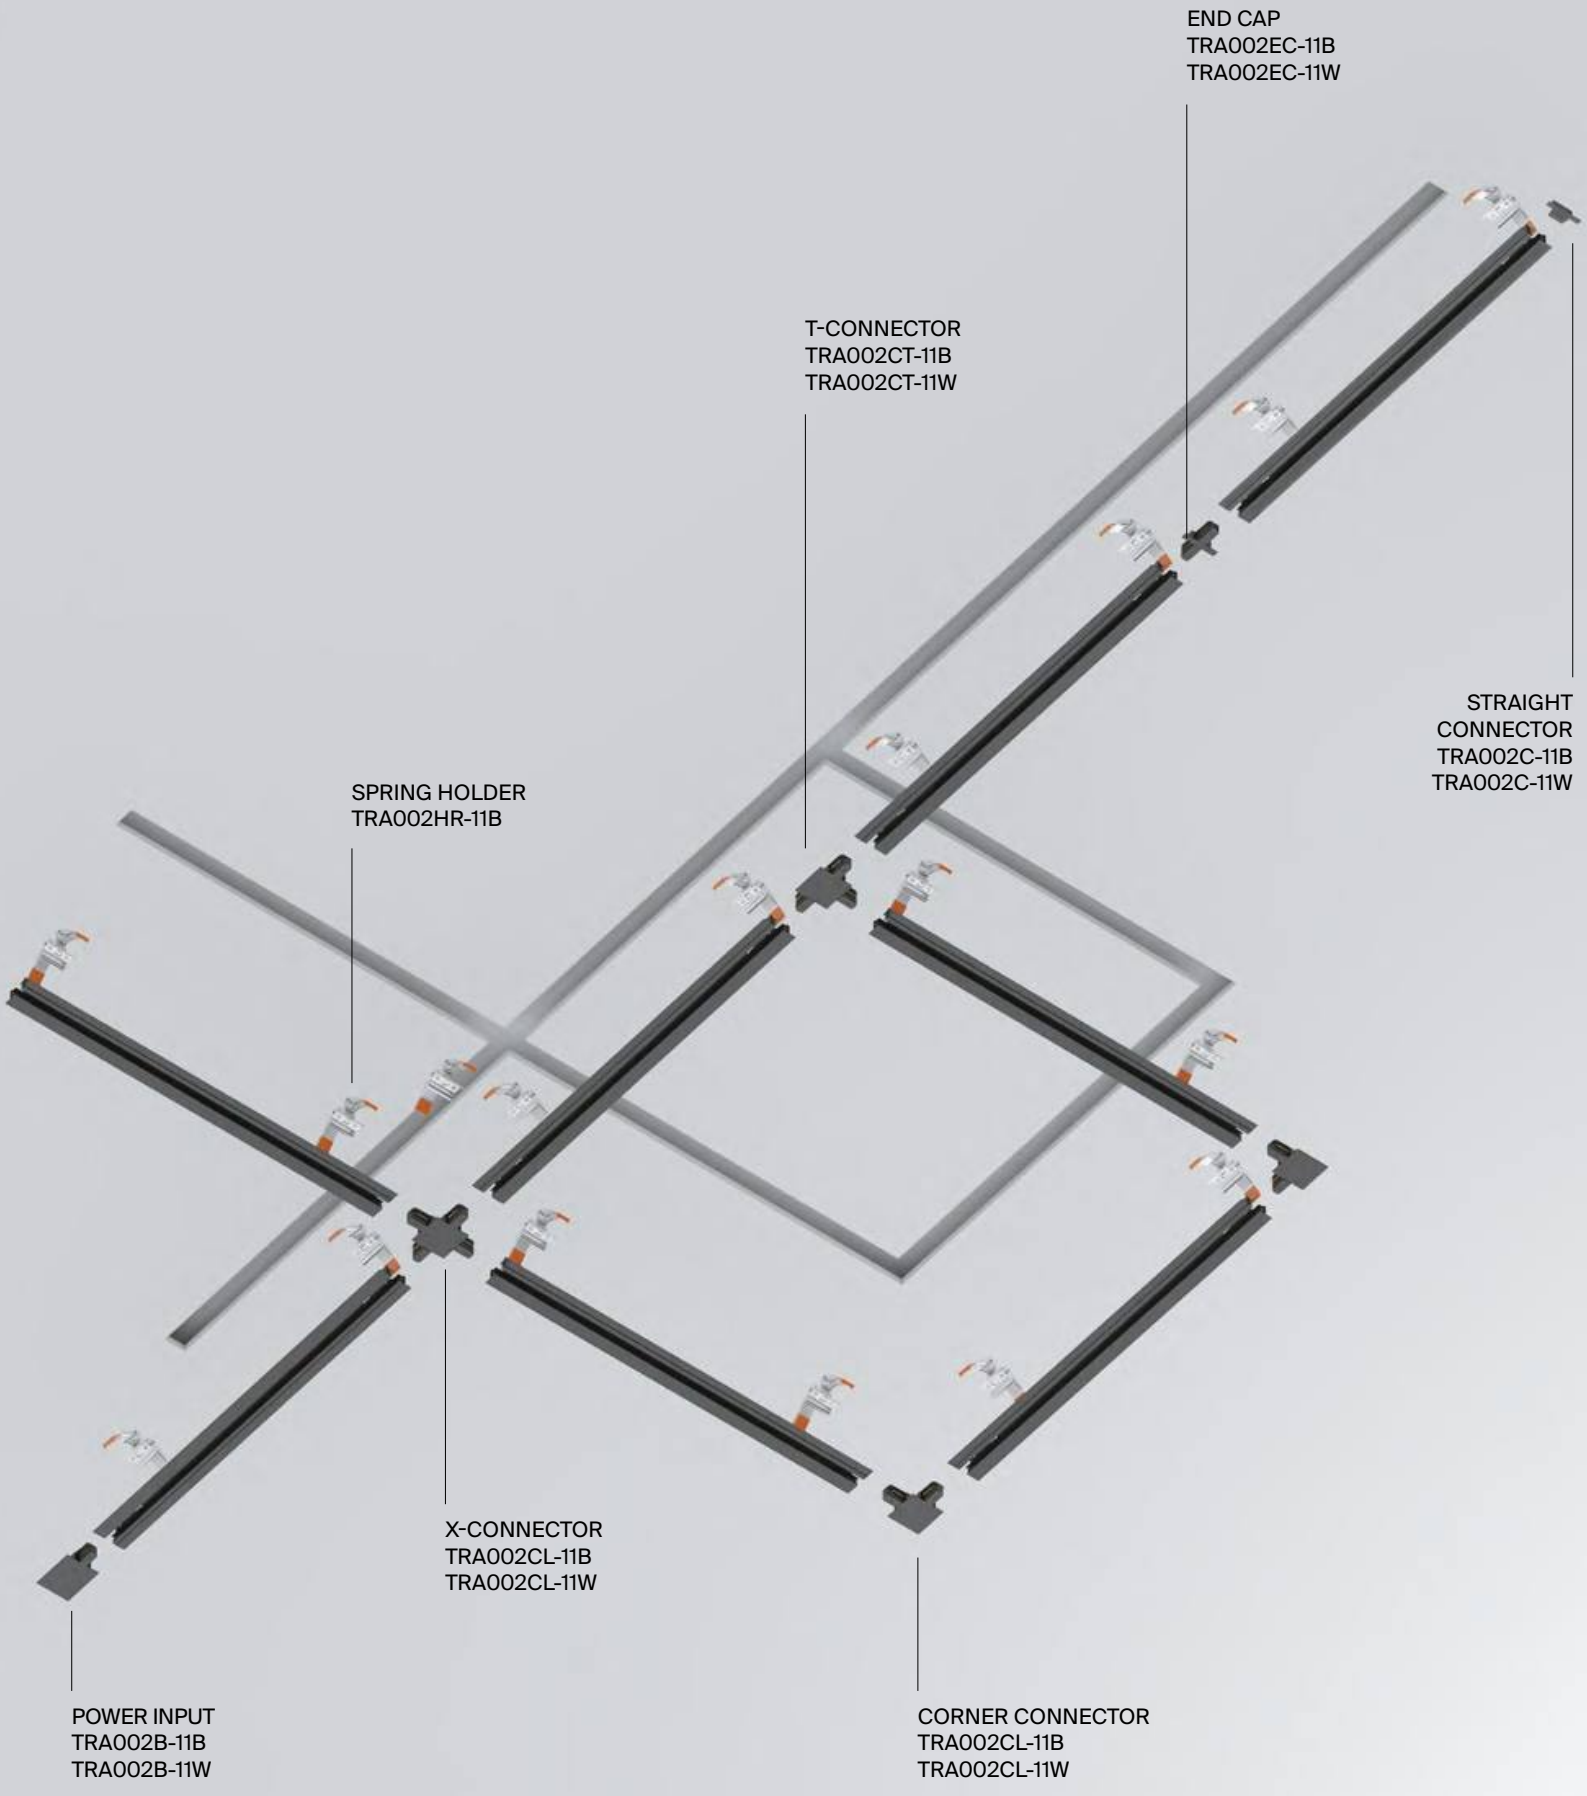



END CAP
TRA002EC-11B
TRA002EC-11W
T-CONNECTOR
TRA002CT-11B
TRA002CT-11W
STRAIGHT
CONNECTOR
TRA002C-11B
TRA002C-11W
SPRING HOLDER
TRA002HR-11B
X-CONNECTOR
TRA002CL-11B
TRA002CL-11W
POWER INPUT
TRA002B-11B
TRA002B-11W
CORNER CONNECTOR
TRA002CL-11B
TRA002CL-11W


Artisan

Read more
on the website

[EN] Graphic texture, metal body. GU10 lamp (not included). An optional anti-glare grille HoneyComb-D45 ensuring a low glare factor is available for this model.
[DE] Grafische Textur, Metallgehäuse. GU10- Leuchtmittel mit Sockel (nicht im Lieferumfang enthalten). Für dieses Modell ist optional ein zusätzlicher Blendschutzgitter HoneyComb-D45 erhältlich, der einen geringen Blendfaktor gewährleistet.
[IT] Texture grafica, corpo in metallo. Lampada GU10 (non inclusa). Per questo modello è disponibile una griglia antiriflesso HoneyComb-D45 opzionale che assicura un basso fattore di abbagliamento.
[FR] Texture graphique, corps en métal.Lampe avec culot GU10 (non incluse). Une grille anti-éblouissement HoneyComb-D45 garantissant un faible niveau d'éblouissement est disponible pour ce modèle.

B | W | MG B | 220V

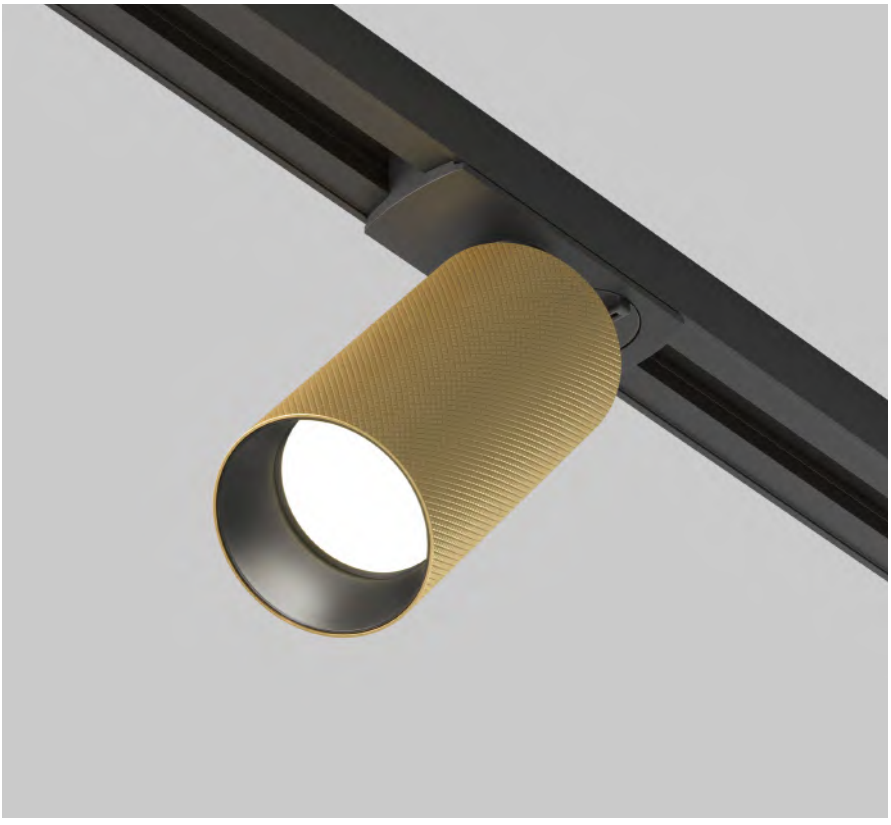



ANTI-DAZZLE FILTERS HONEYCOMB-D45


LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR089-1-GU10-BB	10 W	IP 20
1 x GU10	WHITE	TR089-1-GU10-WW	10 W	IP 20
1 x GU10	MATTE GOLD / BLACK	TR089-1-GU10-BMG	10 W	IP 20


Calipso

[EN] Metal housing available in three shades. Anti-glare effect. Swivel mechanism for adjusting light flow. Light source — GU10 lamp (not included).
[DE] Metallgehäuse in drei Farbtönen. Blendfreier Effekt. Drehmechanismus zur Regulierung des Lichtstroms. Lichtquelle – GU10- Leuchtmittel (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo in tre tonalità. Effetto antiriflesso.
Meccanismo rotante per la regolazione del flusso luminoso. Fonte luminosa: lampada GU10 (non inclusa).
[FR] Boîtier métallique disponible en trois teintes. Effet anti-éblouissement. Mécanisme rotatif pour ajuster le flux lumineux. Source lumineuse : lampe avec culot GU10 (non incluse).

Read more
on the website

B W MG B 220V

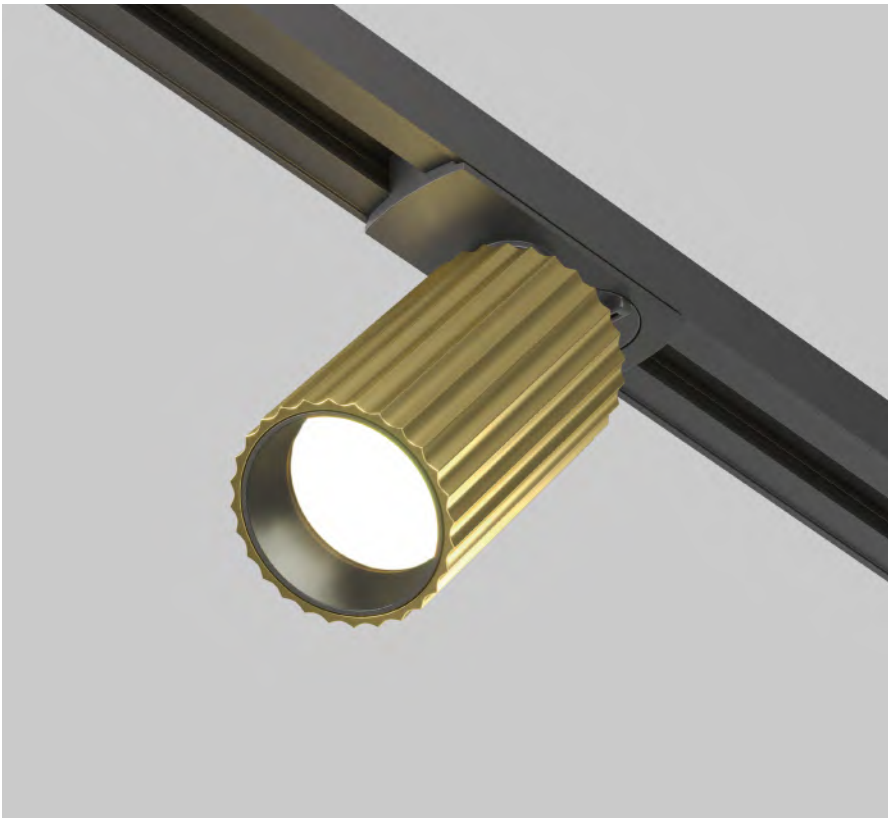



ANTI-DAZZLE FILTERS HONEYCOMB-D45

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR218-1-GU10-BK	10 W	IP 20
1 x GU10	WHITE	TR218-1-GU10-W	10 W	IP 20
1 x GU10	BRASS / BLACK	TR218-1-GU10-BS	10 W	IP 20

Basis Rot

[EN] Aluminium fittings. The luminaires with a rotary mechanism allow to direct light in the interior.
[DE] Beschläge aus Aluminium. Leuchten mit einem Drehmechanismus ermöglichen es, das Licht in den Innenraum zu richten.
[IT] L'armatura e' in alluminio. Le lampade con il meccanismo rotante consentono di dirigere la luce all'interno.
[FR] Armature en aluminium. Les luminaires à mécanisme rotatif permettent de diriger la lumière à l'intérieur.


Read more
on the website

B W LED CRI >90 DC 24V 60°


LEDS BRIDGELUX



1



2



1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	■ BLACK	TR104-1-12W3K-B-DE	12 W	780 LM	NO	IP 20
3K WARM WHITE	□ WHITE	TR104-1-12W3K-W-DE	12 W	780 LM	NO	IP 20
4K WHITE	■ BLACK	TR104-1-12W4K-B-DE	12 W	980 LM	NO	IP 20
4K WHITE	□ WHITE	TR104-1-12W4K-W-DE	12 W	980 LM	NO	IP 20
2						
3K WARM WHITE	■ BLACK	TR104-1-24W3K-B-DE	24 W	1540 LM	NO	IP 20
3K WARM WHITE	□ WHITE	TR104-1-24W3K-W-DE	24 W	1540 LM	NO	IP 20
4K WHITE	■ BLACK	TR104-1-24W4K-B-DE	24 W	1900 LM	NO	IP 20
4K WHITE	□ WHITE	TR104-1-24W4K-W-DE	24 W	1900 LM	NO	IP 20


TR104-1-24W3K-B-DE


Focus

Read more
on the website

[EN] Metal body. The LED light source is recessed into the body. The lens provides a bright key-light. Low UGR level (no blinding). High color rendering index. Swivel mechanism.
[DE] Metallrahmen. Die im Rahmen versenkte LED-Lichtquelle. Die Linse liefert helles gerichtetes Licht. Niedrige UGR-Werte (keine Blendung). Hoher Farbwiedergabeindex. Schwenkvorrichtung.
[IT] Corpo in metallo. La sorgente luminosa a LED è incassata nel corpo. La lente fornisce una luce direzionale brillante. Basso UGR (non abbaglia). Alto indice di resa cromatica. Meccanismo girevole.
[FR] Corps métallique. Source de lumière LED encastrée. La lentille assure une orientation nette de la lumière. Faible taux d'éblouissement UGR (n'éblouit pas). Fort indice de rendu de couleur. Mécanisme pivotant.

B W MG GF 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR004-1-GU10-B	10 W	IP 20
1 x GU10	WHITE	TR004-1-GU10-W	10 W	IP 20
1 x GU10	GRAPHITE	TR004-1-GU10-GF	10 W	IP 20
1 x GU10	MATTE GOLD	TR004-1-GU10-MG	10 W	IP 20


TR004-1-GU10-B

Focus Dual

[EN] Metal body. Swivel mechanism to adjust the light direction. The recessed light source, a lamp with LED, provides visual comfort and prevents glare effect.
[DE] Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms. Die versenkte Lichtquelle — Leuchtmittel mit LED, sorgt für Sehkomfort und verhindert Blendung.
[IT] Corpo in metallo. Meccanismo girevole per regolare la direzione della luce. La sorgente luminosa incassata - una lampadina LED, offre comfort visivo e previene l'abbagliamento.
[FR] Corps en métal. Mécanisme pivotant pour le réglage de l'orientation de la lumière. La source de lumière encastrée – ampoule à culot LED, procure un confort visuel et évite l'effet d'éblouissement.


Read more
on the website

B W BS B LED 36°

LEDS BRIDGELUX



ANTI-DAZZLE FILTERS HONEYCOMB-D45



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR142-1-6W3K-B	6 W	400 LM	NO	IP 20
3K WARM WHITE	WHITE	TR142-1-6W3K-W	6 W	460 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	TR142-1-6W3K-BS	6 W	440 LM	NO	IP 20


TR142-1-6W3K-B


Focus LED

Read more
on the website

[EN] Metal body. The LED light source is recessed into the body. The lens provides a bright key-light. Low UGR level (no blinding). High color rendering index. Swivel mechanism.
[DE] Metallrahmen. Die im Rahmen versenkte LED-Lichtquelle. Die Linse liefert helles gerichtetes Licht. Niedrige UGR-Werte (keine Blendung). Hoher Farbwiedergabeindex. Schwenkvorrichtung.
[IT] Corpo in metallo. La sorgente luminosa a LED è incassata nel corpo. La lente fornisce una luce direzionale brillante. Basso UGR (non abbaglia). Alto indice di resa cromatica. Meccanismo girevole.
[FR] Corps métallique. Source de lumière LED encastrée. La lentille assure une orientation nette de la lumière. Faible taux d'éblouissement UGR (n'éblouit pas). Fort indice de rendu de couleur. Mécanisme pivotant.

B | W | BS B | LED | CRI >90 | TRIAC | DC 48 V | 36°

LEDS EPISTAR







CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR021-1-12B3K-W-B	12 W	900 LM	NO	IP 20
3K WARM WHITE	WHITE	TR021-1-12W3K-W-W	12 W	900 LM	NO	IP 20
3K WARM WHITE	BRASS / BLACK	TR021-1-12W3K-W-BBS	12 W	900 LM	NO	IP 20
3K WARM WHITE	BLACK	TR021-1-12B3K-W-D-B	12 W	900 LM	TRIAC	IP 20
3K WARM WHITE	WHITE	TR021-1-12W3K-W-D-W	12 W	900 LM	TRIAC	IP 20
4K WHITE	BLACK	TR021-1-12B4K-W-B	12 W	900 LM	NO	IP 20
4K WHITE	WHITE	TR021-1-12W4K-W-W	12 W	900 LM	NO	IP 20
4K WHITE	BLACK	TR021-1-12B4K-W-D-B	12 W	900 LM	TRIAC	IP 20
4K WHITE	WHITE	TR021-1-12W4K-W-D-W	12 W	900 LM	TRIAC	IP 20


Lenses, filters and rings


[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

Read more on the website

1


2


3

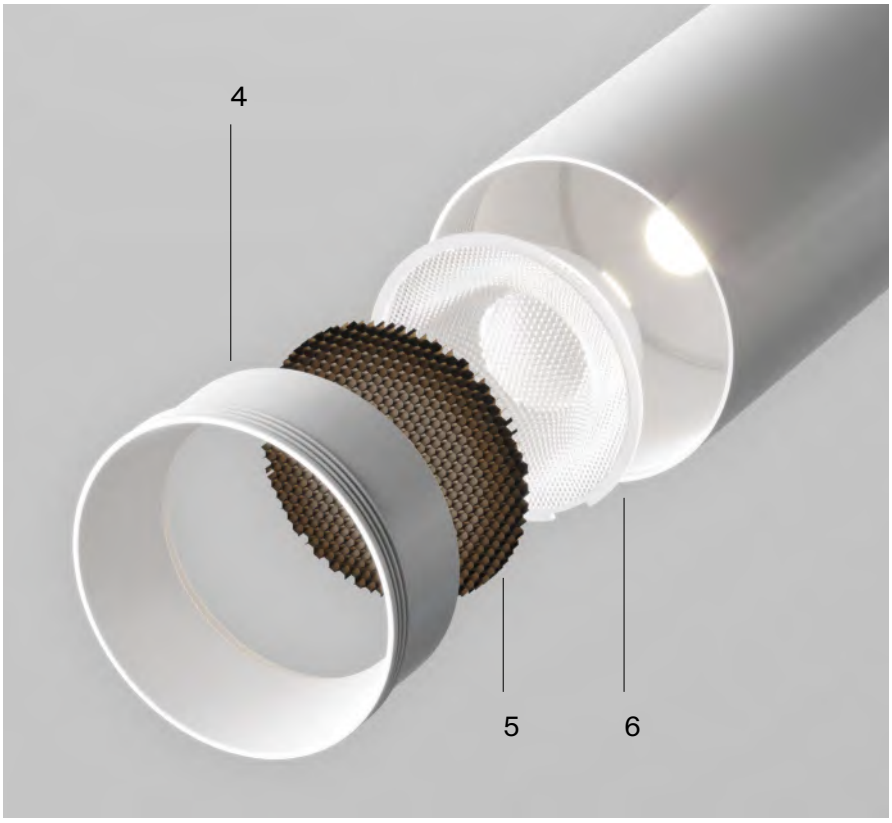



SYSTEM ELEMENT		ARTICLE	SYSTEM ELEMENT		ARTICLE	DEGREE	COLOR
1	MATTE DIFFUSER	RINGSACR-12-W	4	RING	RINGM-12-W		☐ WHITE
2	MATTE DIFFUSER	RINGLACR-12-W	5	ANTI-DAZZLE FILTERS	HONEYCOMB-D38		
3	MATTE DIFFUSER	RINGMACR-12-W	6	LENSES	LENSD38-15	15°	
					LENSD38-24	24°	
					LENSD38-36	36°	
					LENSD38-50	50°	

Focus S

Read more
on the website

[EN] Metal body. Swivel mechanism for 355° horizontal and 90° vertical light adjustment. Removable lamp with GU10 base (not included).
[DE] Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms um 355° horizontal und 90° vertikal. Auswechselbares Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten). IT Corpo in metallo. Meccanismo girevole per la regolazione della luce a 355° in orizzontale e 90° in verticale. Lampadina di ricambio con attacco GU10 (non inclusa).
[FR] Corps métallique. Mécanisme pivotant pour un réglage du flux lumineux à 355° sur le plan horizontal et à 90° sur le plan vertical. Ampoule amovible à culot GU10 (non comprise dans le lot).

B | W | MG B | S W | MG W | GF B | 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR020-1-GU10-B	10 W	IP 20
1 x GU10	WHITE	TR020-1-GU10-W	10 W	IP 20
1 x GU10	GOLD / WHITE	TR020-1-U-GU10-WG	10 W	IP 20
1 x GU10	GRAPHITE / WHITE	TR020-1-U-GU10-WGF	10 W	IP 20
1 x GU10	MATTE GOLD / WHITE	TR020-1-U-GU10-WMG	10 W	IP 20
1 x GU10	SILVER / BLACK	TR020-1-U-GU10-BS	10 W	IP 20
1 x GU10	GOLD / BLACK	TR020-1-U-GU10-BG	10 W	IP 20
1 x GU10	GRAPHITE / BLACK	TR020-1-U-GU10-BGF	10 W	IP 20
1 x GU10	MATTE GOLD / BLACK	TR020-1-U-GU10-BMG	10 W	IP 20


TR020-1-GU10-W

Focus Zoom


Read more
on the website

EN Metal body. The LED light source is recessed into the body. The lens provides a bright key-light. Low UGR level (no blinding). High color rendering index. Swivel mechanism.
DE Metallrahmen. Die im Rahmen versenkte LED-Lichtquelle. Die Linse liefert helles gerichtetes Licht. Niedrige UGR-Werte (keine Blendung). Hoher Farbwiedergabeindex. Schwenkvorrichtung.
IT Corpo in metallo. La sorgente luminosa a LED è incassata nel corpo. La lente fornisce una luce direzionale brillante. Basso UGR (non abbaglia). Alto indice di resa cromatica. Meccanismo girevole.
FR Corps métallique. Source de lumière LED encastrée. La lentille assure une orientation nette de la lumière. Faible taux d'éblouissement UGR (n'éblouit pas). Fort indice de rendu de couleur. Mécanisme pivotant.

B | W | LED | CRI >90 | 220V | TRIAC | 36°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR021-1-12B3K-Z-B	12 W	900 LM	NO	IP20
3K WARM WHITE	BLACK	TR021-1-12B3K-Z-D-B	12 W	900 LM	TRIAC	IP20
3K WARM WHITE	WHITE	TR021-1-12B3K-Z-W	12 W	900 LM	NO	IP20
3K WARM WHITE	WHITE	TR021-1-12B3K-Z-D-W	12 W	900 LM	TRIAC	IP20
4K WHITE	BLACK	TR021-1-124K-Z-B	12 W	900 LM	NO	IP20
4K WHITE	BLACK	TR021-1-12B4K-Z-D-B	12 W	900 LM	TRIAC	IP20
4K WHITE	WHITE	TR021-1-12B4K-Z-W	12 W	900 LM	NO	IP20
4K WHITE	WHITE	TR021-1-12B4K-Z-D-W	12 W	900 LM	TRIAC	IP20




Lipari

[EN] Metal body with a corrugated texture, asymmetrical cut. Swivel mechanism. The recessed light source, a lamp with GU10 base (not included).
[DE] Metallrahmen mit geriffelter Textur, asymmetrischer Schnitt. Schwenkvorrichtung. Die versenkte Lichtquelle — Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo con trama ondulata, taglio asimmetrico. Meccanismo girevole. La sorgente luminosa incassata - una lampadina GU10 (non inclusa).
[FR] Corps métallique avec motif texturé, coupe asymétrique. Mécanisme pivotant. La source de lumière encastrée – ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

MG B | MG W | 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	MATTE GOLD / BLACK	TR087-1-GU10-B	10 W	IP 20
1 x GU10	MATTE GOLD / WHITE	TR087-1-GU10-W	10 W	IP 20


TR087-1-GU10-B

Onda


[EN] Aluminum housing. Low glare and high color rendering index for comfortable accent lighting.
[DE] Aluminiumgehäuse. Geringe Blendung und hoher Farbwiedergabeindex für stimmungsvolle Akzentbeleuchtung.
[IT] Corpo in alluminio. Basso livello di abbagliamento e alto indice di resa cromatica. Confortevole illuminazione d'accento.
[FR] Boîtier en aluminium. Faible éblouissement et indice de rendu des couleurs élevé. Éclairage d'appoint confortable.

Read more on the website

B W LED CRI >90 DC 24V 60°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	TR007-1-12W2.7K-B-1	12 W	781 LM	NO	IP 20
2.7K WARM	WHITE	TR007-1-12W2.7K-W-1	12 W	838 LM	NO	IP 20
3K WARM WHITE	BLACK	TR007-1-12W3K-B-1	12 W	780 LM	NO	IP 20
3K WARM WHITE	WHITE	TR007-1-12W3K-W-1	12 W	830 LM	NO	IP 20
3K WARM WHITE	BLACK	TR007-1-12W3K-B	12 W	780 LM	NO	IP 20
3K WARM WHITE	WHITE	TR007-1-12W3K-W	12 W	800 LM	NO	IP 20
4K WHITE	BLACK	TR007-1-12W4K-B	12 W	800 LM	NO	IP 20
4K WHITE	WHITE	TR007-1-12W4K-W	12 W	960 LM	NO	IP 20

Onda


[EN] Aluminum housing. Low glare and high color rendering index for comfortable accent lighting.
[DE] Aluminiumgehäuse. Geringe Blendung und hoher Farbwiedergabeindex für stimmungsvolle Akzentbeleuchtung.
[IT] Corpo in alluminio. Basso livello di abbagliamento e alto indice di resa cromatica. Confortevole illuminazione d'accento.
[FR] Boîtier en aluminium. Faible éblouissement et indice de rendu des couleurs élevé. Éclairage d'appoint confortable.

Read more
on the website

B W LED CRI >90 DC 24V 60°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR007-1-18W3K-B-1	18 W	1370 LM	NO	IP 20
3K WARM WHITE	WHITE	TR007-1-18W3K-W-1	18 W	1490 LM	NO	IP 20
3K WARM WHITE	BLACK	TR007-1-18W3K-B	18 W	1000 LM	NO	IP 20
3K WARM WHITE	WHITE	TR007-1-18W3K-W	18 W	1400 LM	NO	IP 20
4K WHITE	BLACK	TR007-1-18W3K-B4K	18 W	1100 LM	NO	IP 20
4K WHITE	WHITE	TR007-1-18W3K-W4K	18 W	1500 LM	NO	IP 20




TR007-1-18W3K-B

Points Rot


[EN] Metal body. The hidden LED light source is comfortable for the eyes. Focusing optics for key-light.
[DE] Metallrahmen. Die verborgene LED-Lichtquelle ist angenehm für die Augen. Konzentrierende Optik für gerichtete Beleuchtung.
[IT] Corpo in metallo. La sorgente luminosa a LED nascosta è confortevole per gli occhi. Ottica concentrante per illuminazione direzionale.
[FR] Corps métallique. Source de lumière LED dissimulée confortable pour la vue. Optique non imageante pour l'éclairage d'accentuation.

Read more on the website


B W LED CRI >90 DC 24V 60°

LEDS BRIDGELUX





1



2

1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR010-1-10W3K-M-B-DE	10 W	750 LM	NO	IP 20
3K WARM WHITE	WHITE	TR010-1-10W3K-M-W-DE	10 W	750 LM	NO	IP 20
4K WHITE	BLACK	TR010-1-10W4K-M-B-DE	10 W	750 LM	NO	IP 20
4K WHITE	WHITE	TR010-1-10W4K-M-W-DE	10 W	750 LM	NO	IP 20
2						
3K WARM WHITE	BLACK	TR010-1-22W3K-M-B-DE	22 W	1130 LM	NO	IP 20
3K WARM WHITE	WHITE	TR010-1-22W3K-M-W-DE	22 W	1130 LM	NO	IP 20
4K WHITE	BLACK	TR010-1-22W4K-M-B-DE	22 W	1440 LM	NO	IP 20
4K WHITE	WHITE	TR010-1-22W4K-M-W-DE	22 W	1440 LM	NO	IP 20


TR010-1-20W4K-M-B
TR010-1-10W4K-M-B


Polar

[EN] Modern design. Metal body. Up-to-date colors: black, white and matte gold. The light source - GX53 lamp (not included) - provides effective lighting of the space.
[DE] Modernes Design. Metallrahmen. Aktuelle Farben - Schwarz, Weiß und Mattes Gold. Lichtquelle - ein Leuchtmittel mit einer GX53-Fassung (nicht im Lieferumfang enthalten) sorgt für eine wirkungsvolle Raumbeleuchtung.
[IT] Il design moderno. Corpo e' di metallo. I colori attuali sono nero, bianco ed oro opaco. La sorgente luminosa e' la lampada di GX53 (non inclusa in set completo) fornisce un'illuminazione efficiente dello spazio.
[FR] Design moderne. Corps en métal. Couleurs actuelles - noir, blanc et or mat. Source de lumière - la lampe GX53 (non incluse) fournit un éclairage efficace de l'espace.

Read more
on the website

B | MG B | W | 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 X GX53	BLACK	TR088-1-GX53-B	15 W	IP 20
1 X GX53	MATTE GOLD / BLACK	TR088-1-GX53-MG	15 W	IP 20
1 X GX53	WHITE	TR088-1-GX53-W	15 W	IP 20


TR088-1-GX53-B
STONE
NOGUCHI
CHIPPERFIELD


Vuoro

[EN] Metal body. The light source is an LED module. Swivel mechanism. Highcolor rendering index and low glare effect.
[DE] Metallrahmen. Die Lichtquelle ist ein LED-Modul. Schwenkvorrichtung. Hoher Farbwiedergabeindex und niedrige Blendwirkung.
[IT] Corpo in metallo. La sorgente luminosa è un modulo LED. Meccanismo girevole. Alto indice di resa cromatica e basso abbagliamento.
[FR] Corps métallique. Source de lumière: module LED. Mécanisme pivotant. Fort indice de rendu de couleur et faible taux d'éblouissement.


Read more
on the website

B W LED CRI >90 DC 24V 24°




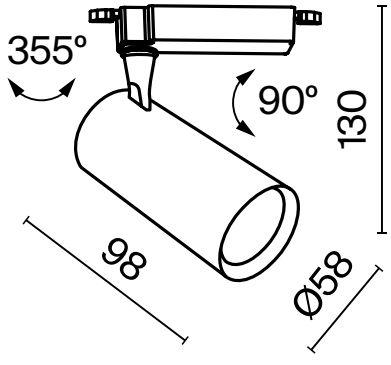

1

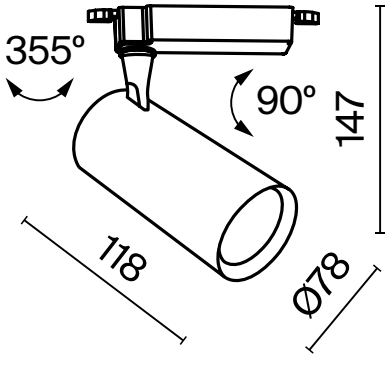

2

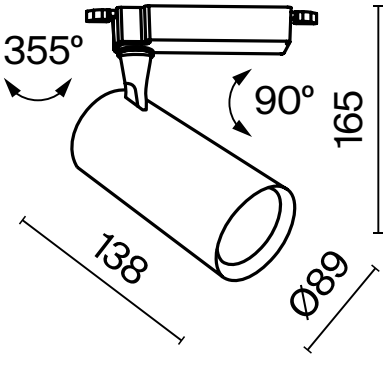

3

1

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR003-1-6W3K-S-B	6 W	450 LM	NO	IP 20
3K WARM WHITE	WHITE	TR003-1-6W3K-S-W	6 W	450 LM	NO	IP 20
3K WARM WHITE	BLACK	TR003-1-6W3K-B	6 W	450 LM	NO	IP 20
3K WARM WHITE	WHITE	TR003-1-6W3K-W	6 W	450 LM	NO	IP 20
4K WHITE	BLACK	TR003-1-6W4K-S-B	6 W	500 LM	NO	IP 20

2

3K WARM WHITE	BLACK	TR003-1-10W3K-S-B	10 W	850 LM	NO	IP 20
3K WARM WHITE	WHITE	TR003-1-10W3K-S-W	10 W	850 LM	NO	IP 20
4K WHITE	BLACK	TR003-1-10W4K-S-B	10 W	900 LM	NO	IP 20

3

3K WARM WHITE	WHITE	TR003-1-12W4K-W	12 W	900 LM	NO	IP 20
3K WARM WHITE	BLACK	TR003-1-15W3K-S-B	15 W	1600 LM	NO	IP 20
3K WARM WHITE	WHITE	TR003-1-15W3K-S-W	15 W	1600 LM	NO	IP 20
4K WHITE	BLACK	TR003-1-15W4K-S-B	15 W	1600 LM	NO	IP 20
4K WHITE	WHITE	TR003-1-15W4K-S-W	15 W	1600 LM	NO	IP 20


Vuoro

[EN] Metal body. The light source is an LED module. Swivel mechanism. Highcolor rendering index and low glare effect.
[DE] Metallrahmen. Die Lichtquelle ist ein LED-Modul. Schwenkvorrichtung. Hoher Farbwiedergabeindex und niedrige Blendwirkung.
[IT] Corpo in metallo. La sorgente luminosa è un modulo LED. Meccanismo girevole. Alto indice di resa cromatica e basso abbagliamento.
[FR] Corps métallique. Source de lumière: module LED. Mécanisme pivotant. Fort indice de rendu de couleur et faible taux d'éblouissement.


Read more
on the website

B W LED CRI >90 DC 24V 24°





1



2

1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR003-1-26W3K-S-B	26 W	2700 LM	NO	IP 20
4K WHITE	BLACK	TR003-1-26W4K-S-B	26 W	2800 LM	NO	IP 20
4K WHITE	WHITE	TR003-1-26W4K-S-W	26 W	3000 LM	NO	IP 20
2						
4K WHITE	WHITE	TR003-1-40W3K-W	36 W	3200 LM	NO	IP 20


TR003-1-40W4K-B


Yin

[EN] Metal body. Swivel mechanism. The LED light source. Part of models with Triac dimming. Narrow scattering angle for accent lighting is 24°.
[DE] Metallrahmen. Schwenkvorrichtung. LED-Lichtquelle. Einige Modelle sind Triac-dimmbar. Schmaler Streuwinkel von 24° für Akzentbeleuchtung.
[IT] Corpo in metallo. Meccanismo girevole. Sorgente luminosa LED. Parte dei modelli dimmerabile con Triac dimmer. Fascio stretto 24° per illuminazione d'accento.
[FR] Corps métallique. Mécanisme pivotant. Source de lumière LED. Partie des modèles avec variateur Triac. Angle étroit de diffusion (24°) pour un éclairage d'accentuation.

Read more on the website

B W LED CRI >90 DC 24V TRIAC 24°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR084-1-15W3K-B	15 W	750 LM	NO	IP 20
3K WARM WHITE	BLACK	TR084-1-15W3K-D-B	15 W	690 LM	TRIAC	IP 20
3K WARM WHITE	WHITE	TR084-1-15W3K-W	15 W	810 LM	NO	IP 20
3K WARM WHITE	WHITE	TR084-1-15W3K-D-W	15 W	760 LM	TRIAC	IP 20
4K WHITE	BLACK	TR084-1-15W4K-B	15 W	1030 LM	NO	IP 20
4K WHITE	WHITE	TR084-1-15W4K-D-W	15 W	840 LM	TRIAC	IP 20
2.7-4K ADJUSTABLE	BLACK	TR084-1-15W3K-D-B-DE	15 W	1207 LM	NO	IP 20
2.7-4K ADJUSTABLE	WHITE	TR084-1-15W3K-D-W-DE	15 W	1359 LM	NO	IP 20


TR084-1-15W4K-D-B

Zon


Read more
on the website

[EN] Metal body. The LED light source is hidden under an opal diffuser. Unique design with movable mount to adjust the light flux. Wide 120° beam angle.
[DE] Metallrahmen. Die LED-Lichtquelle ist unter einem opalen Diffusor verborgen. Einzigartiges Design mit beweglicher Halterung zur Einstellung des Lichtstroms. Breiter Lichtstreuwinkel 120°.
[IT] Corpo in metallo. La sorgente luminosa a LED è nascosta sotto un diffusore opalino. Design unico con supporto mobile per regolare il flusso luminoso. Ampio angolo di diffusione pari a 120°.
[FR] Corps métallique. Source de lumière LED dissimulée sous un diffuseur opaque. Design unique avec fixation mobile pour le réglage du flux lumineux. Grand angle de diffusion de 120°.

B | LED | 120° | 220V

LEDS SANAN





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR043-1-12W3K-B	12 W	840 LM	NO	IP 20
4K WHITE	BLACK	TR043-1-12W4K-B	12 W	840 LM	NO	IP 20


Virar

[EN] Metal body. Swivel mechanism to adjust the light direction. The recessed light source, a lamp with GU10 base (not included).
[DE] Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms. Die versenkte. Lichtquelle — Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Meccanismo girevole per regolare la direzione della luce. La sorgente luminosa incassata - una lampadina GU10 (non inclusa).
[FR] Corps en métal. Mécanisme pivotant pour le réglage de l'orientation de la lumière. La source de lumière encastrée – ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

B W 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR022-1-GU10-B	10 W	IP 20
1 x GU10	WHITE	TR022-1-GU10-W	10 W	IP 20


Focus mini

[EN] Metal body. Removable lamp with GU10 base (not included).
[DE] Metallrahmen. Auswechselbares Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Lampadina di ricambio con attacco GU10 (non inclusa).
[FR] Corps métallique. Ampoule amovible à culot GU10 (non comprise dans le lot).

Read more
on the website

B 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR002-1-GU10-B	10 W	IP 20


Focus mini

[EN] Metal body. Removable lamp with GU10 base (not included).
[DE] Metallrahmen. Auswechselbares Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Lampadina di ricambio con attacco GU10 (non inclusa).
[FR] Corps métallique. Ampoule amovible à culot GU10 (non comprise dans le lot).

Read more
on the website

W 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	WHITE	TR008-1-GU10-W	10 W	IP 20


Elti

[EN] Metal body. Swivel mechanism to adjust the light direction. The recessed light source, a lamp with GU10 base (not included).
[DE] Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms. Die versenkte. Lichtquelle — Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Meccanismo girevole per regolare la direzione della luce. La sorgente luminosa incassata - una lampadina GU10 (non inclusa).
[FR] Corps en métal. Mécanisme pivotant pour le réglage de l'orientation de la lumière. La source de lumière encastrée – ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

B W MG B 220V





ANTI-DAZZLE FILTERS HONEYCOMB-D45

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR005-1-GU10-B	10 W	IP 20
1 x GU10	WHITE	TR005-1-GU10-W	10 W	IP 20
1 x GU10	MATTE GOLD / BLACK	TR005-1-GU10-BG	10 W	IP 20



TR005-1-GU10-BG

Focus Design


[EN] Metal body with textured pattern. Swivel mechanism to adjust the light direction. Removable lamp with GU10 base (not included).
[DE] Metallrahmen mit strukturiertem Muster. Schwenkvorrichtung zur Einstellung des Lichtstroms. Auswechselbares Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo con motivo strutturato. Meccanismo girevole per regolare la direzione della luce. Lampadina di ricambio con attacco GU10 (non inclusa).
[FR] Cops en métal avec motif texturé. Mécanisme pivotant pour le réglage de l'orientation de la lumière. Ampoule amovible à culot GU10 (non comprise dans le lot).

Read more
on the website

B W G 220V

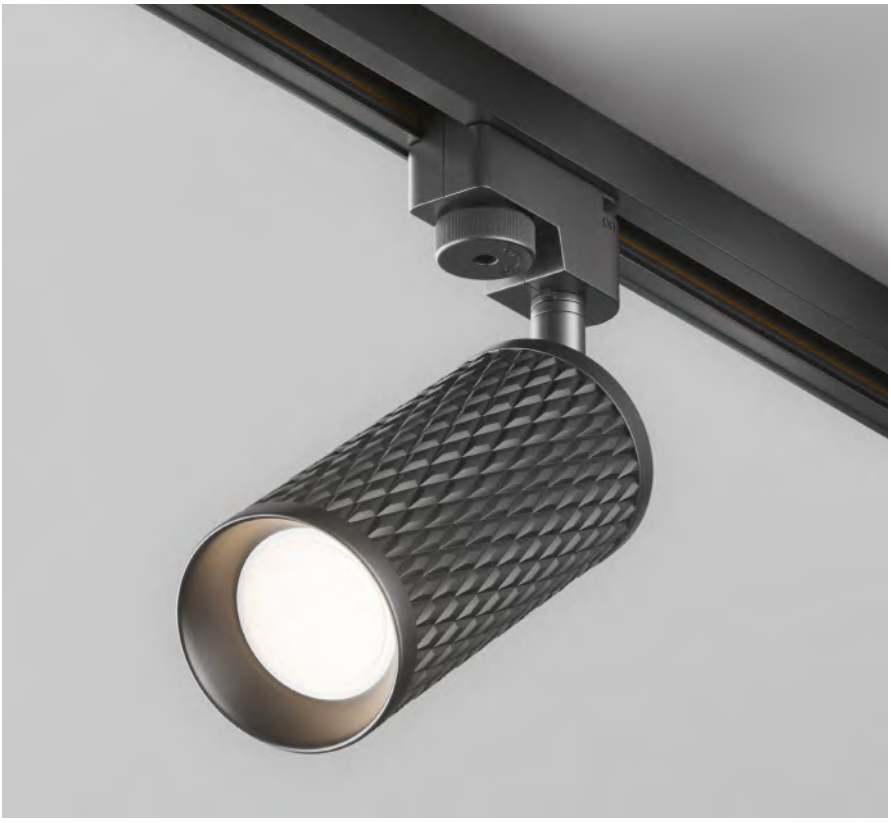

ANTI-DAZZLE FILTERS HONEYCOMB-D45



LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR011-1-GU10-B	10 W	IP 20
1 x GU10	WHITE	TR011-1-GU10-W	10 W	IP 20
1 x GU10	GOLD	TR011-1-GU10-G	10 W	IP 20

TR011-1-GU10-W

TR011-1-GU10-B



Orlo


[EN] Metal body. The recessed LED light source is hidden under an opal diffuser. Wide beam angle is 120°. High color rendering index. Swivel mechanism.
[DE] Metallrahmen. Die versenkte LED-Lichtquelle ist unter einem opalen Diffusor verborgen. Breiter Lichtstreuwinkel 120°. Hoher Farbwiedergabeindex. Schwenkvorrichtung.
[IT] Corpo in metallo. La sorgente luminosa LED ad incasso è nascosta sotto un diffusore opalino. Ampio angolo di diffusione 120°. Alto indice di resa cromatica. Meccanismo girevole.
[FR] Corps métallique. Source de lumière LED encastrée dissimulée sous un diffuseur opale. Grand angle de diffusion de 120°. Fort indice de rendu de couleur. Mécanisme pivotant.

Read more
on the website


B | LED | CRI >90 | DC 24V | 120°

LEDS SANAN





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
4K WHITE	BLACK	TR085-1-5W4K-B	5 W	200 LM	NO	IP 20

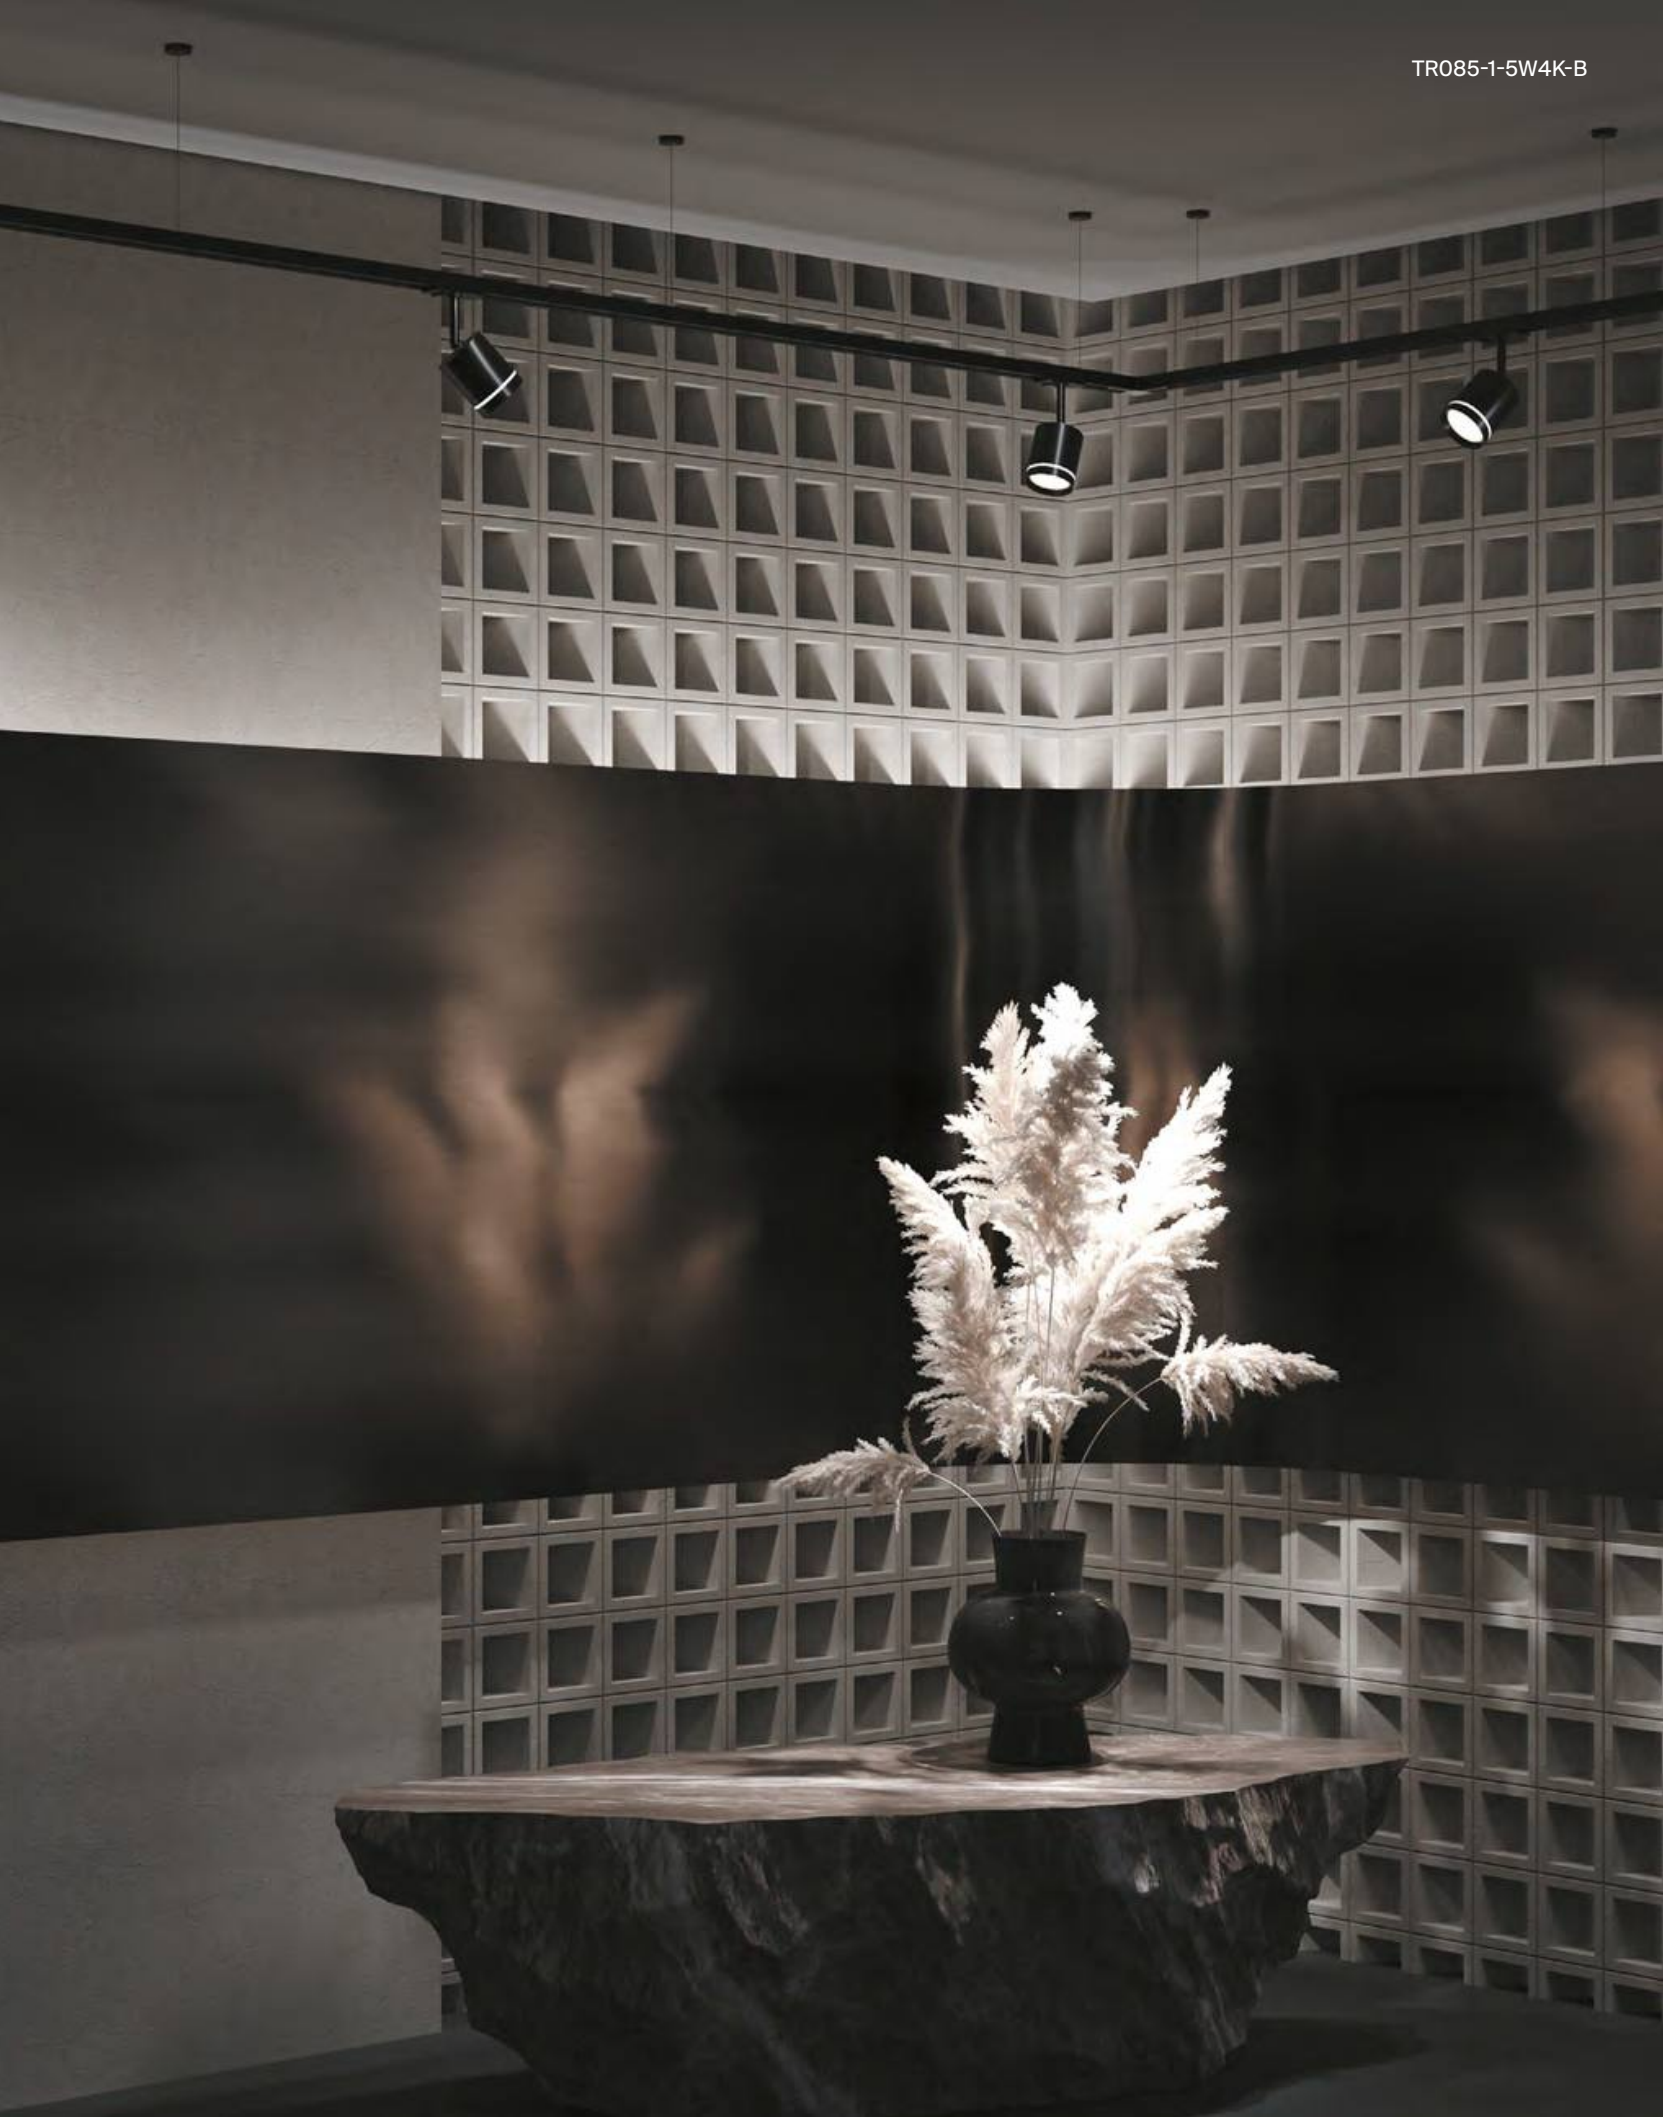
TR085-1-5W4K-B

Rim


[EN] Metal body. The LED light source is hidden under an opal diffuser. Unique design with movable mount to adjust the light flux. Wide 180° scattering angle.
[DE] Metallrahmen. Die LED-Lichtquelle ist unter einem opalen Diffusor verborgen. Einzigartiges Design mit beweglicher Halterung zur Einstellung des Lichtstroms. Breiter Lichtstreuwinkel 180°.
[IT] Corpo in metallo. La sorgente luminosa a LED è nascosta sotto un diffusore opalino. Design unico con supporto mobile per regolare il flusso luminoso. Ampio angolo di diffusione pari a 180°.
[FR] Corps métallique. Source de lumière LED dissimulée sous un diffuseur opaque. Design unique avec fixation mobile pour le réglage du flux lumineux. Grand angle de diffusion de 180°.

Read more
on the website

B LED 110° 220V

LEDS SANAN





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR044-1-12W3K-B	12 W	650 LM	NO	IP 20


TR044-1-12W4K-B




FOCUS 228
VUORO 230
VUORO PRO 232
CALIPSO 233




VUORO
TR029-3-20W3K-S-B

Elements for surface and pendant mounting


Read more on the website

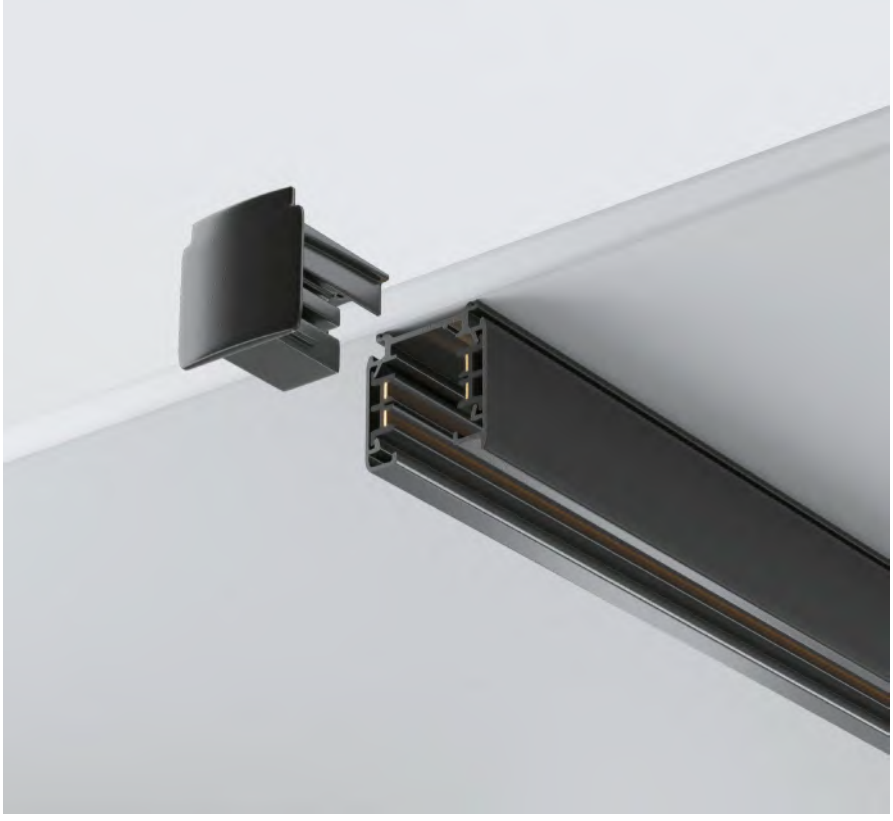

SYSTEM ELEMENT	COLOR	ARTICLE	SIZE
TRACK	■ BLACK	TRX005-311B	H36 X W33 X L1000
	■ BLACK	TRX005-312B	H36 X W33 X L2000
	□ WHITE	TRX005-311W	H36 X W33 X L1000
	□ WHITE	TRX005-312W	H36 X W33 X L2000
END CAP	■ BLACK	TRA005EC-31B	H33 x W33 x L31
	□ WHITE	TRA005EC-31W	H33 x W33 x L31



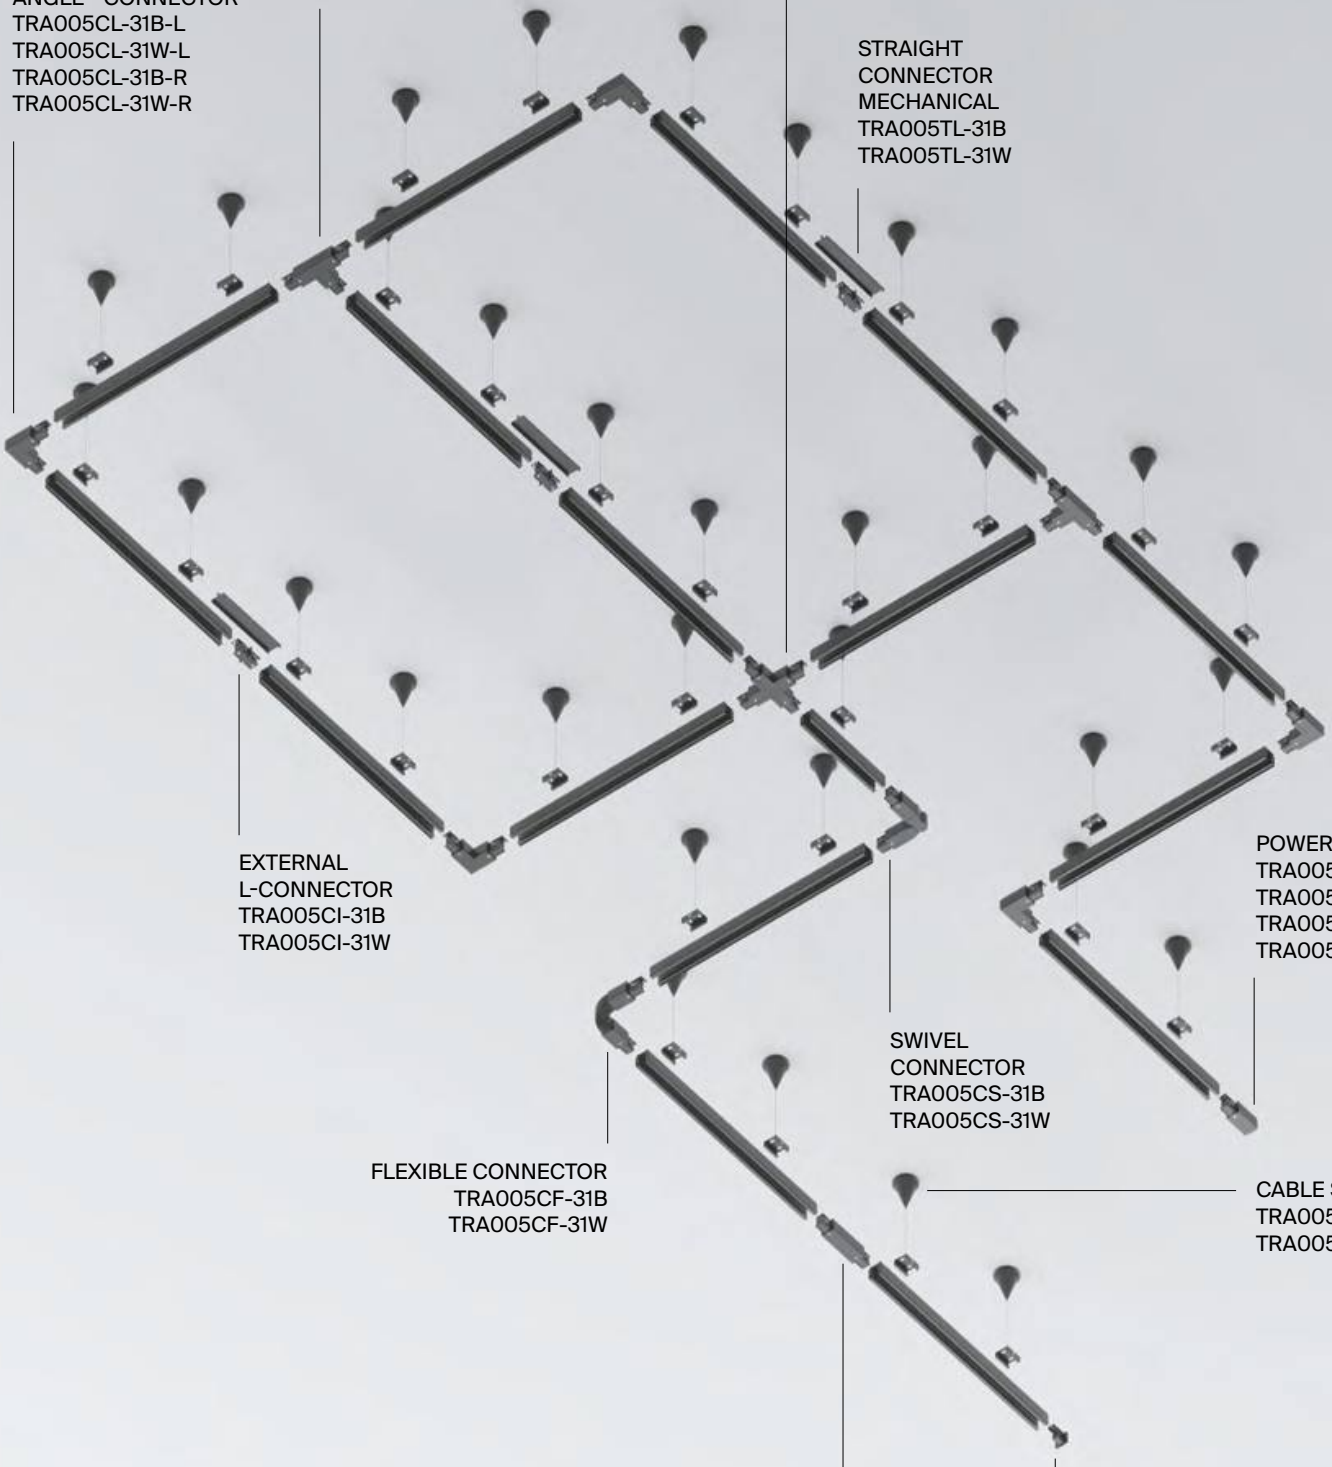


T-CONNECTOR
TRA005CT-31B-R
TRA005CT-31W-R
TRA005CT-31B-L
TRA005CT-31W-L
X-CONNECTOR
TRA005CX-31B
TRA005CX-31W
ANGLE - CONNECTOR
TRA005CL-31B-L
TRA005CL-31W-L
TRA005CL-31B-R
TRA005CL-31W-R
STRAIGHT
CONNECTOR
MECHANICAL
TRA005TL-31B
TRA005TL-31W
EXTERNAL
L-CONNECTOR
TRA005CI-31B
TRA005CI-31W
POWER INPUT
TRA005B-31B-R
TRA005B-31W-R
TRA005B-31B-L
TRA005B-31W-L
SWIVEL
CONNECTOR
TRA005CS-31B
TRA005CS-31W
FLEXIBLE CONNECTOR
TRA005CF-31B
TRA005CF-31W
CABLE SUSPENSION
TRA005WS-31B
TRA005WS-31W
STRAIGHT CONNECTOR
TRA005C-31B
TRA005C-31W
END CAP
TRA005EC-31B
TRA005EC-31W

Elements for surface and pendant mounting

Read more on the website

Power input for a three-phase track (the necessary connector is determined relative to the system grounding pin).

SYSTEM ELEMENT	COLOR	ARTICLE
INTERNAL POWER INPUT (RIGHT)	■ BLACK	TRA005B-31B-R
	□ WHITE	TRA005B-31W-R
EXTERNAL POWER INPUT (LEFT)	■ BLACK	TRA005B-31B-L
	□ WHITE	TRA005B-31W-L



Straight connector for connecting the three-phase track into the line.

STRAIGHT CONNECTOR	■ BLACK	TRA005C-31B
	□ WHITE	TRA005C-31W



Internal straight connector for a three-phase track. This connector allows installing the track along the perimeter of the room into the tructure of any complexity.

INNER STRAIGHT CONNECTOR	■ BLACK	TRA005CI-31B
	□ WHITE	TRA005CI-31W



The suspended set with a plastic bowl and a 2-meter wire is used for fixing the three-phase track lighting system at the necessary height.

SUSPENSION KIT	■ BLACK	TRA005WS-31B
	□ WHITE	TRA005WS-31W



*External connectors are designated as left; internal connectors are right.

	SYSTEM ELEMENT	COLOR	ARTICLE	
Angle connector for a three-phase track. Power supply along the external or internal side (the necessary connector is determined relative to the system grounding pin). This connector allows installing the track along the perimenter of the room at 90°.	EXTERNAL L-CONNECTOR (LEFT)	■ BLACK	TRA005CL-31B-L	
		☐ WHITE	TRA005CL-31W-L	
	EXTERNAL L-CONNECTOR (RIGHT)	■ BLACK	TRA005CL-31B-R	
		☐ WHITE	TRA005CL-31W-R	
X-connector for a three-phase track. This connector allows installing the track along the perimeter of the room into the structure of any complexity.	X CONNECTOR	■ BLACK	TRA005CX-31B	
		☐ WHITE	TRA005CX-31W	
Flexible connector for a three-phase track. This connector allows installing the structure along the perimeter of the room into the structure of any complexity.	FLEXIBLE CONNECTOR	■ BLACK	TRA005CF-31B	
		☐ WHITE	TRA005CF-31W	
Revolving swivel connector for a three-phase track. This connector allows installing the track along the perimeter of the room into the structure of any complexity.	SWIVEL CONNECTOR	■ BLACK	TRA005CS-31B	
		☐ WHITE	TRA005CS-31W	
Clamp for Trinity tracks for bracing the structure in places of connection.	STRAIGHT CONNECTOR MECHANICAL	■ BLACK	TRA005TL-31B	
		☐ WHITE	TRA005TL-31W	
T-connector for a three-phase track. Direction of connections outside/right or outside/left (the necessary connector is determined relative to the system grounding pin). This connector allows installing the track along the perimeter of the room into the structure of any complexity.	INTERNAL T CONNECTOR (RIGHT)	■ BLACK	TRA005CT-31B-R	
		☐ WHITE	TRA005CT-31W-R	
	EXTERNAL T CONNECTOR (LEFT)	■ BLACK	TRA005CT-31B-L	
		☐ WHITE	TRA005CT-31W-L	


Focus

EN Metal body. Replaceable light source with GU10 base.
DE Metallrahmen. Austauschbare Lichtquelle mit einer Fassung GU10.
IT Corpo in metallo. Sorgente luminosa sostituibile con attacco GU10.
FR Corps métallique. Source de lumière remplaçable à culot GU10.

Read more
on the website

B W MG 220V





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	TR028-3-GU10-B	10 W	IP 20
1 x GU10	WHITE	TR028-3-GU10-W	10 W	IP 20
1 x GU10	MATTE GOLD	TR028-3-GU10-MG	10 W	IP 20


TR028-3-GU10-W

Vuoro


[EN] Metal body. Swivel mechanism. LED light source. Low glare level, non-pulsing light. Highcolor rendering index.
[DE] Metallrahmen. Schwenkvorrichtung. LED-Lichtquelle. Niedrige Blendwirkung, nicht pulsierendes Licht. Hoher Farbwiedergabeindex.
[IT] Corpo in metallo. Meccanismo girevole. Sorgente luminosa LED. Abbagliamento ridotto, luce non pulsante. Alto indice di resa cromatica.
[FR] Corps métallique. Mécanisme pivotant. Source de lumière LED. Faible taux d'éblouissement, lumière non pulsée. Fort indice de rendu de couleur.

Read more
on the website


B W LED CRI >90 DC 24V 24°

LEDS SANAN




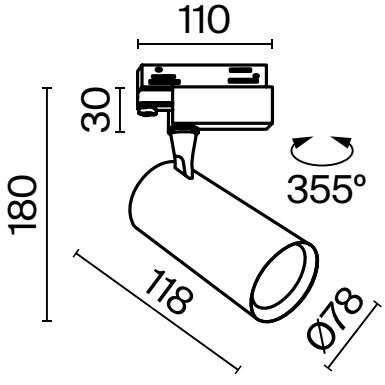

1

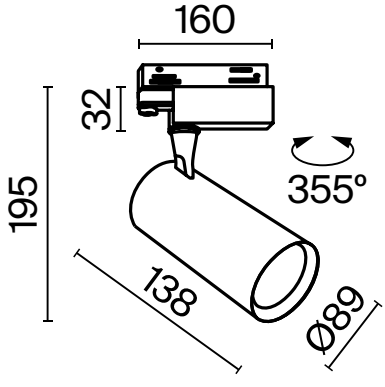

2

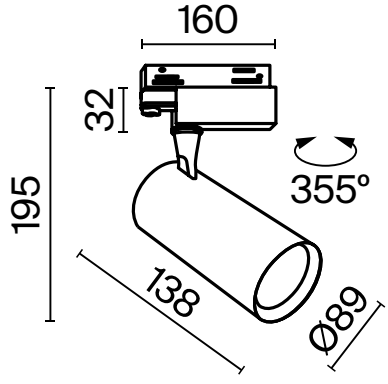

3

1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR029-3-10W3K-B	10 W	900 LM	NO	IP 20
3K WARM WHITE	BLACK	TR029-3-10W3K-S-B	10 W	750 LM	NO	IP 20
3K WARM WHITE	WHITE	TR029-3-10W3K-S-W	10 W	750 LM	NO	IP 20
4K WHITE	BLACK	TR029-3-10W4K-B	10 W	950 LM	NO	IP 20
4K WHITE	BLACK	TR029-3-10W4K-S-B	10 W	800 LM	NO	IP 20
4K WHITE	WHITE	TR029-3-10W4K-S-W	10 W	800 LM	NO	IP 20

2

3K WARM WHITE	BLACK	TR029-3-20W3K-S-B	20 W	1500 LM	NO	IP 20
3K WARM WHITE	WHITE	TR029-3-20W3K-S-W	20 W	1500 LM	NO	IP 20
4K WHITE	BLACK	TR029-3-20W4K-S-B	20 W	1600 LM	NO	IP 20
4K WHITE	WHITE	TR029-3-20W4K-S-W	20 W	1600 LM	NO	IP 20

3

3K WARM WHITE	BLACK	TR029-3-26W3K-S-B	26 W	2690 LM	NO	IP 20
3K WARM WHITE	WHITE	TR029-3-26W3K-S-W	26 W	2690 LM	NO	IP 20
4K WHITE	BLACK	TR029-3-26W4K-S-B	26 W	2690 LM	NO	IP 20
4K WHITE	WHITE	TR029-3-26W4K-S-W	26 W	2790 LM	NO	IP 20
4K WHITE	BLACK	TR029-3-30W4K-B	30 W	2600 LM	NO	IP 20
4K WHITE	WHITE	TR029-3-30W4K-W	30 W	2800 LM	NO	IP 20

Vuoro Pro


[EN] Integrated 3-phase driver, optic lens, adjustable CCT, and flicker-free performance ensure precise, customizable lighting for retail, exhibition, and office spaces.
[DE] Integrierter 3-Phasen-Treiber, optische Linse, einstellbare Farbtemperatur und flimmerfreier Betrieb sorgen für präzises, anpassbares Licht in Verkaufs-, Ausstellungs- und Büroräumen.
[IT] Driver trifase integrato, lente ottica, CCT regolabile e funzionamento senza sfarfallio assicurano un'illuminazione precisa e personalizzabile per negozi, spazi espositivi e uffici.
[FR] Pilote triphasé intégré, lentille optique, CCT réglable et éclairage sans scintillement garantissent une lumière précise et personnalisable pour les espaces commerciaux, d'exposition et de bureau.

Read more
on the website

B W LED CRI >90 DC 24V 38°

LEDS BRIDGELUX





1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7-4-5K ADJUSTABLE	BLACK	TR251-30W2.7-5K-B	30 W	2250 LM	NO	IP 20
2.7-4-5K ADJUSTABLE	WHITE	TR251-30W2.7-5K-W	30 W	2250 LM	NO	IP 20
2.7-4-5K ADJUSTABLE	BLACK	TR251-40W2.7-5K-B	40 W	3000 LM	NO	IP 20
2.7-4-5K ADJUSTABLE	WHITE	TR251-40W2.7-5K-W	40 W	3000 LM	NO	IP 20

Calipso


[EN] Features a swivel mechanism for precise light adjustment, warm white illumination, and an anti-glare effect for comfortable, professional lighting.
[DE] Mit Schwenkmechanismus für präzise Lichtausrichtung, warmweißem Licht und Blendfreiheit für komfortable, professionelle Beleuchtung.
[IT] Dotato di meccanismo orientabile per regolare con precisione la luce, illuminazione bianco caldo e sistema anti-abbagliamento per una luce professionale e confortevole.
[FR] Mécanisme orientable pour un réglage précis de la lumière, éclairage blanc chaud et effet anti-éblouissement pour un confort lumineux professionnel.

Read more
on the website

B W BS LED CRI >90 DC 24V 38°

LEDS BRIDGELUX





1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	TR250-30W3K-B	30 W	2740 LM	NO	IP 20
3K WARM WHITE	WHITE	TR250-30W3K-W	30 W	2750 LM	NO	IP 20
3K WARM WHITE	BRASS	TR250-30W3K-BS	30 W	2715 LM	NO	IP 20



DIP	236	**METEL MODERN**	264	**SHARE**	288
LENS	242	**MINOR**	266	**LIPARI**	291
ALFA LED	244	**OKNO**	268	**SLIM**	292
ATOM	250	**ONDA**	276	**STARK**	294
DOT	254	**ORLO**	277	**STOCKTON**	296
HIDDEN	258	**PHANTON**	278	**WISE**	298
HOOP	260	**REIF**	280	**YIN**	302
MAGNUM	263	**ROUND**	282	**ZOOM**	304



DIP
DL118-15W-3K-B

Dip


[EN] Designed for maximum comfort: an anti-glare filter and interchangeable lenses with different beam angles allow you to highlight the most important details.
[DE] Für maximalen Komfort entwickelt: ein Blendfilter und austauschbare Linsen mit unterschiedlichen Abstrahlwinkeln betonen die wichtigsten Details.
[IT] Progettato per il massimo comfort: filtro anti-abbagliamento e lenti intercambiabili con diversi angoli di emissione consentono di mettere in risalto i dettagli più importanti.
[FR] Conçu pour un confort maximal : un filtre anti-éblouissement et des lentilles interchangeables à faisceaux variés permettent de souligner les détails essentiels.


Read more
on the website

B | W | LED | CRI >90 | DALI | TRIAC | DC 24V | 60°

LEDS TOYONIA



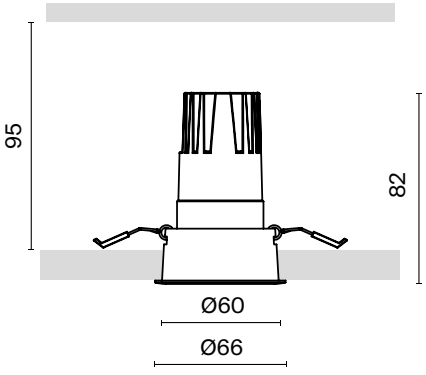



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	DL115-10W-2.7K-B	10 W	1100 LM	NO	IP 20
2.7K WARM	WHITE	DL115-10W-2.7K-W	10 W	1130 LM	NO	IP 20
3K WARM WHITE	BLACK	DL115-10W-3K-B	10 W	1120 LM	NO	IP 20
3K WARM WHITE	WHITE	DL115-10W-3K-W	10 W	1170 LM	NO	IP 20

Dip


EN Designed for maximum comfort: an anti-glare filter and interchangeable lenses with different beam angles allow you to highlight the most important details.
DE Für maximalen Komfort entwickelt: ein Blendfilter und austauschbare Linsen mit unterschiedlichen Abstrahlwinkeln betonen die wichtigsten Details.
IT Progettato per il massimo comfort: filtro anti-abbagliamento e lenti intercambiabili con diversi angoli di emissione consentono di mettere in risalto i dettagli più importanti.
FR Conçu pour un confort maximal : un filtre anti-éblouissement et des lentilles interchangeables à faisceaux variés permettent de souligner les détails essentiels.


Read more
on the website

B W LED CRI >90 DALI TRIAC DC 24V 60°

LEDS TOYONIA



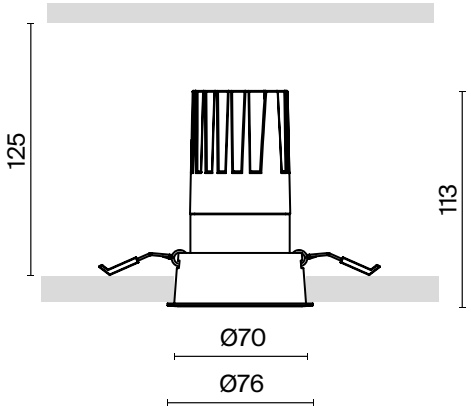





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	DL118-15W-2.7K-B	15 W	1490 LM	NO	IP 20
2.7K WARM	WHITE	DL118-15W-2.7K-W	15 W	1640 LM	NO	IP 20
3K WARM WHITE	BLACK	DL118-15W-3K-B	15 W	1550 LM	NO	IP 20
3K WARM WHITE	WHITE	DL118-15W-3K-W	15 W	1620 LM	NO	IP 20

Dip

[EN] Designed for maximum comfort: an anti-glare filter and interchangeable lenses with different beam angles allow you to highlight the most important details.
[DE] Für maximalen Komfort entwickelt: ein Blendfilter und austauschbare Linsen mit unterschiedlichen Abstrahlwinkeln betonen die wichtigsten Details.
[IT] Progettato per il massimo comfort: filtro anti-abbagliamento e lenti intercambiabili con diversi angoli di emissione consentono di mettere in risalto i dettagli più importanti.
[FR] Conçu pour un confort maximal : un filtre anti-éblouissement et des lentilles interchangeables à faisceaux variés permettent de souligner les détails essentiels.

Read more
on the website

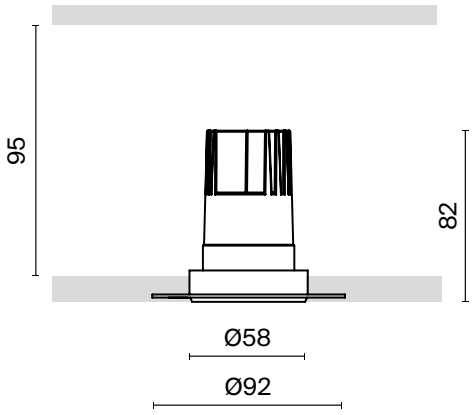



B | W | LED | CRI >90 | DALI | TRIAC | DC 24V | 60°

LEDS TOYONIA





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	DL119-10W-2.7K-TRS-B	10 W	1060 LM	NO	IP 20
2.7K WARM	WHITE	DL119-10W-2.7K-TRS-W	10 W	1130 LM	NO	IP 20
3K WARM WHITE	BLACK	DL119-10W-3K-TRS-B	10 W	1160 LM	NO	IP 20
3K WARM WHITE	WHITE	DL119-10W-3K-TRS-W	10 W	1150 LM	NO	IP 20

Dip

[EN] Designed for maximum comfort: an anti-glare filter and interchangeable lenses with different beam angles allow you to highlight the most important details.
[DE] Für maximalen Komfort entwickelt: ein Blendfilter und austauschbare Linsen mit unterschiedlichen Abstrahlwinkeln betonen die wichtigsten Details.
[IT] Progettato per il massimo comfort: filtro anti-abbagliamento e lenti intercambiabili con diversi angoli di emissione consentono di mettere in risalto i dettagli più importanti.
[FR] Conçu pour un confort maximal : un filtre anti-éblouissement et des lentilles interchangeables à faisceaux variés permettent de souligner les détails essentiels.

Read more
on the website

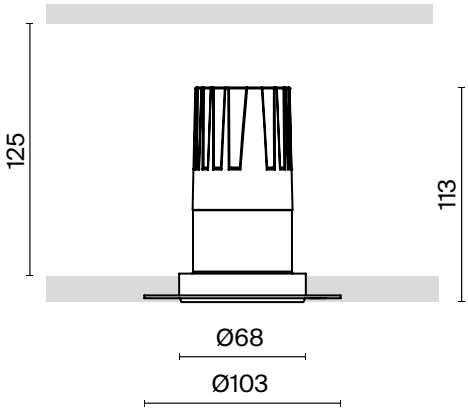



B | W | LED | CRI >90 | DALI | TRIAC | DC 24V | 60°


LEDS TOYONIA



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	DL122-15W-2.7K-TRS-B	15 W	1480 LM	NO	IP 20
2.7K WARM	WHITE	DL122-15W-2.7K-TRS-W	15 W	1600 LM	NO	IP 20
3K WARM WHITE	BLACK	DL122-15W-3K-TRS-B	15 W	1550 LM	NO	IP 20
3K WARM WHITE	WHITE	DL122-15W-3K-TRS-W	15 W	1650 LM	NO	IP 20

Accessories

Read more
on the website



ACCESSORIES	ARTICLE
HONEYCOMB	HONEYCOMB001-D32



ACCESSORIES	ARTICLE
GLASS IP44	GLASS001-D35




ACCESSORIES	DEGREE	ARTICLE
LENS	15°	LENS001D35-15W
	24°	LENS002D35-15W
	36°	LENS003D35-15W



Accessories

Read more
on the website



ACCESSORIES	ARTICLE
HONEYCOMB	HONEYCOMB001-D41.5



ACCESSORIES	ARTICLE
GLASS IP44	GLASS001-D45



ACCESSORIES	DEGREE	ARTICLE
LENS	15°	LENS001D45-15W
	24°	LENS002D45-15W
	36°	LENS003D45-15W




Lens

[EN] Sleek 12 W metal downlight, 3000 K illumination through a clear lens for a clean, professional effect.
[DE] Eleganter 12 W Metalleinbaustrahler, 3000 K Licht durch klare Linse für einen sauberen, professionellen Effekt.
[IT] Faretto da incasso in metallo da 12 W, luce 3000 K attraverso una lente trasparente per un effetto pulito e professionale.
[FR] Spot encastré en métal 12 W, lumière 3000 K à travers une lentille transparente pour un effet net et professionnel.


Read more
on the website

B W LED CRI >90 DC 24V 70°

LEDS BRIGELUX

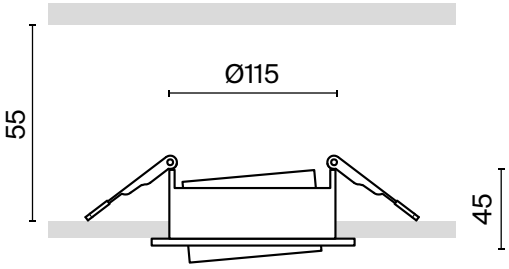

Ø120



20°

Ø120




CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL105-12W3K-B	12 W	830 LM	NO	IP 44
3K WARM WHITE	WHITE	DL105-12W3K-W	12 W	880 LM	NO	IP 44
4K WHITE	BLACK	DL105-12W4K-B	12 W	760 LM	NO	IP 44
4K WHITE	WHITE	DL105-12W4K-W	12 W	830 LM	NO	IP 44



DL105-12W3K-W

Alfa LED

EN Metal body. In a series of models with and without dimming. LED light source.
DE Metallrahmen. In der Serie gibt es dimmbare und nicht dimmbare Modelle. LED-Lichtquelle.
IT Corpo in metallo. La serie include sia modelli con dimmer che senza. Sorgente luminosa LED.
FR Corps métallique. Dans la série du modèle avec variateur et sans. Source de lumière LED.

Read more
on the website

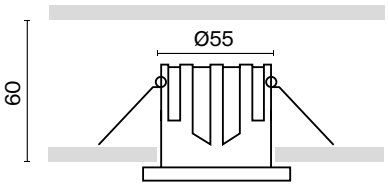



B W LED TRIAC CRI >90 36°

LEDS BRIDGELUX / *EPISTAR



COMPATIBLE WITH DRIVER


TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE
PSL-TR40-300MA-DE	


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	■ BLACK	*DL043-01-10W2.7K-RD-WB-DE	10 W	500 LM	NO	IP 20
2.7K WARM	□ WHITE	*DL043-01-10W2.7K-RD-W-DE	10 W	500 LM	NO	IP 20
4K WHITE	□ WHITE	DL043-01-10W4K-D-RD-WB	10 W	500 LM	TRIAC	IP 20

Alfa LED

EN Metal body. In a series of models with and without dimming. LED light source.
DE Metallrahmen. In der Serie gibt es dimmbare und nicht dimmbare Modelle. LED-Lichtquelle.
IT Corpo in metallo. La serie include sia modelli con dimmer che senza. Sorgente luminosa LED.
FR Corps métallique. Dans la série du modèle avec variateur et sans. Source de lumière LED.

Read more
on the website

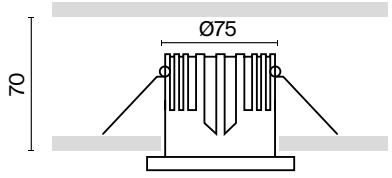



B W LED TRIAC CRI >90 36°

LEDS EPISTAR



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-350-500MA-DE	PSL-DL40-S-350-500MA-DE
PSL-TR40-300MA-DE	PSL-DL40-S-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	DL043-01-15W2.7K-RD-WB-DE	15 W	750 LM	NO	IP 20
2.7K WARM	WHITE	DL043-01-15W2.7K-RD-W-DE	15 W	750 LM	NO	IP 20


Alfa LED


EN Metal body. In a series of models with and without dimming. LED light source.
DE Metallrahmen. In der Serie gibt es dimmbare und nicht dimmbare Modelle. LED-Lichtquelle.
IT Corpo in metallo. La serie include sia modelli con dimmer che senza. Sorgente luminosa LED.
FR Corps métallique. Dans la série du modèle avec variateur et sans. Source de lumière LED.

Read more
on the website

B | LED | TRIAC | CRI >90 | 36°

LEDS EPISTAR

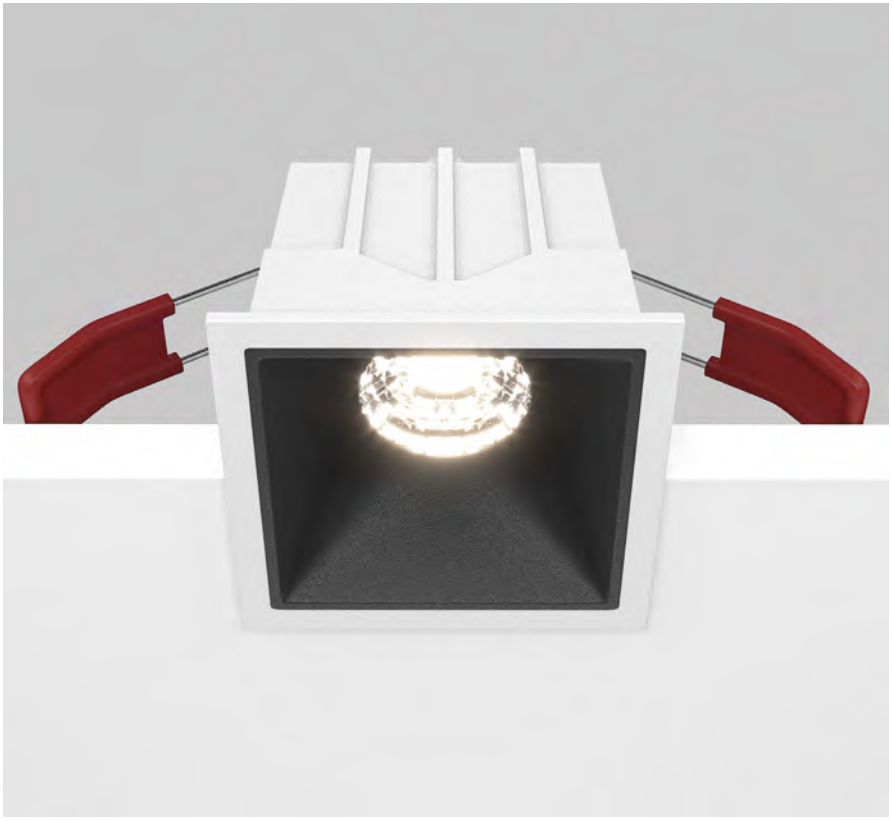

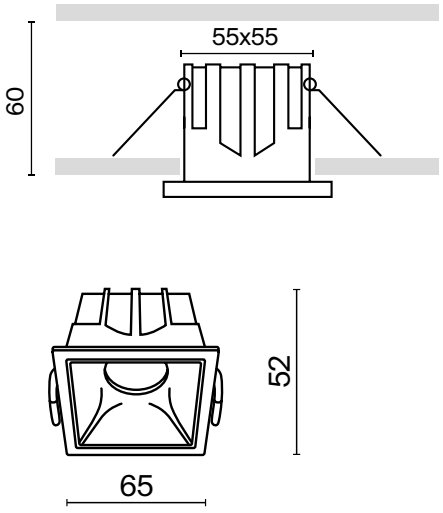

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE
PSL-TR40-300MA-DE	PSL-DL40-S-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
4K WHITE	BLACK	DL043-01-10W4K-D-SQ-WB	10 W	500 LM	TRIAC	IP 20

DL043-01-10W4K-D-RD-WB

DL043-01-15W4K-D-RD-W




Alfa LED


EN Metal body. In a series of models with and without dimming. LED light source.
DE Metallrahmen. In der Serie gibt es dimmbare und nicht dimmbare Modelle. LED-Lichtquelle.
IT Corpo in metallo. La serie include sia modelli con dimmer che senza. Sorgente luminosa LED.
FR Corps métallique. Dans la série du modèle avec variateur et sans. Source de lumière LED.


Read more
on the website

B W LED TRIAC CRI >90 36°

LEDS BRIDGELUX

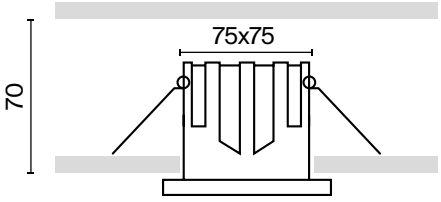



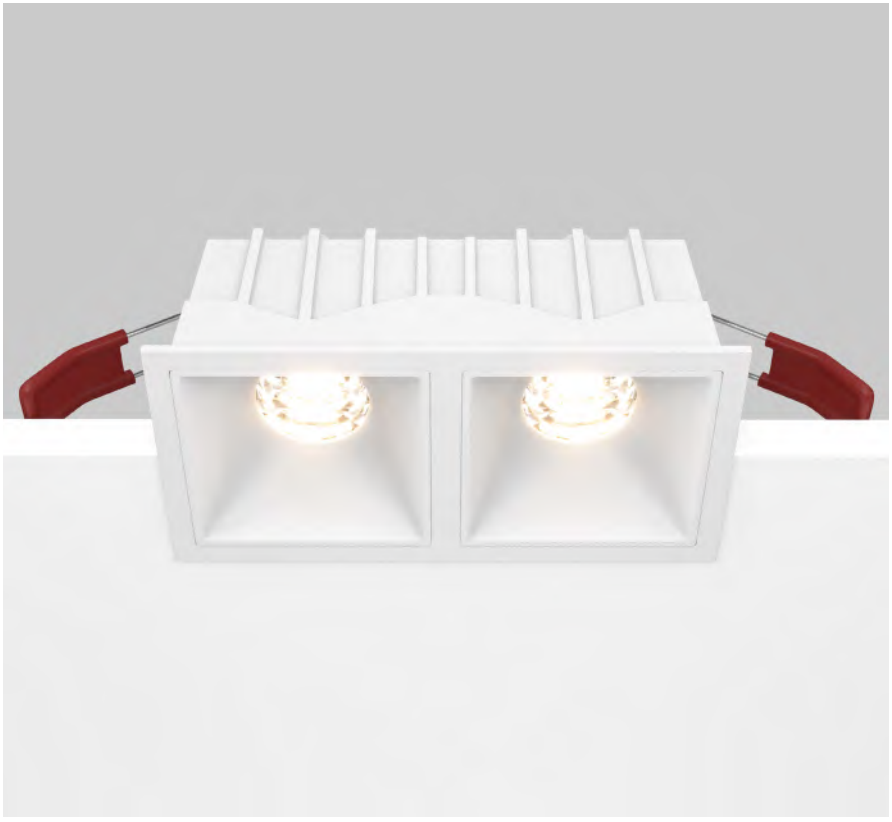

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE
PSL-TR40-300MA-DE	PSL-DL40-S-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
4K WHITE	BLACK	DL043-02-10W4K-SQ-WB	20 W	1000 LM	NO	IP 20
3K WARM WHITE	BLACK	DL043-02-10W3K-D-SQ-WB	20 W	900 LM	TRIAC	IP 20
4K WHITE	WHITE	DL043-02-10W4K-D-SQ-W	20 W	1100 LM	TRIAC	IP 20


Alfa LED


[EN] Metal body. In a series of models with and without dimming. LED light source.
[DE] Metallrahmen. In der Serie gibt es dimmbare und nicht dimmbare Modelle. LED-Lichtquelle.
[IT] Corpo in metallo. La serie include sia modelli con dimmer che senza. Sorgente luminosa LED.
[FR] Corps métallique. Dans la série du modèle avec variateur et sans. Source de lumière LED.


Read more
on the website

B W LED TRIAC CRI >90 38°

LEDS BRIDGELUX

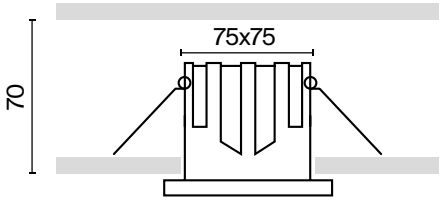



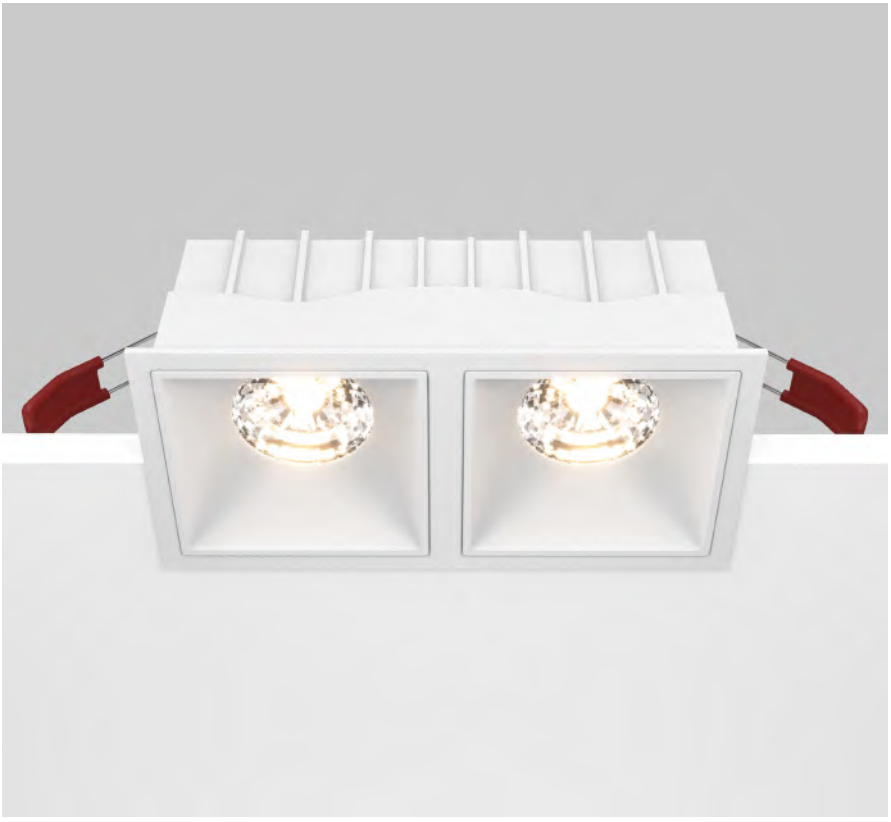

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE
PSL-TR40-300MA-DE	PSL-DL40-S-300MA-DE


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL043-02-15W3K-SQ-WB	30 W	2100 LM	NO	IP 20
3K WARM WHITE	WHITE	DL043-02-15W3K-SQ-W	30 W	2250 LM	NO	IP 20
4K WHITE	WHITE	DL043-02-15W4K-SQ-W	30 W	2500 LM	NO	IP 20
3K WARM WHITE	BLACK	DL043-02-15W3K-D-SQ-WB	30 W	2100 LM	TRIAC	IP 20


Atom


[EN] Aluminum case. Swivel mechanism for adjusting the light flux. Light source — GU10 lamp (not included).
[DE] Rahmen aus Aluminium. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in alluminio. Meccanismo girevole per la regolazione del flusso luminoso. Sorgente luminosa — Lampadina GU10 (non inclusa).
[FR] Corps en aluminium. Mécanisme pivotant pour le réglage du flux lumineux. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more on the website


B W

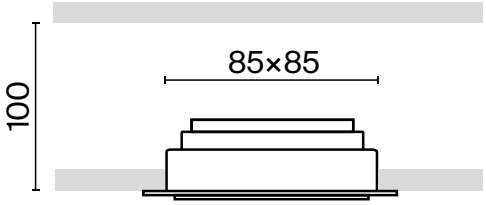





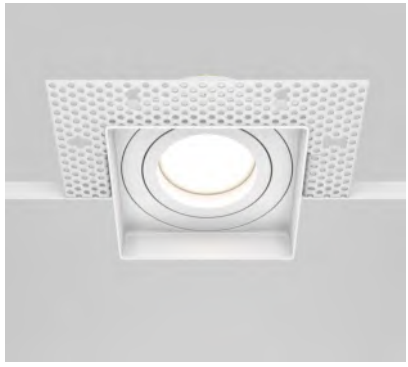

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	WHITE	DL003-01-W	10 W	IP 20

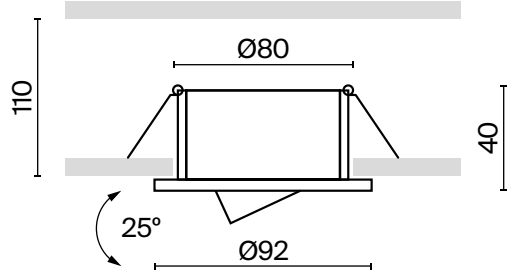



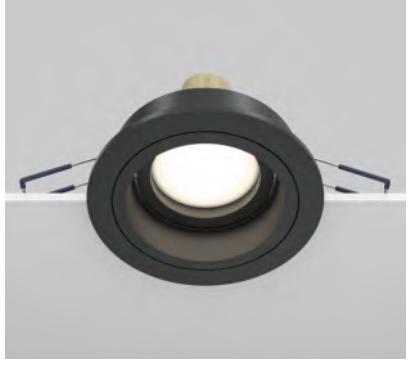

1 x GU10	BLACK	DL025-2-01B	10 W	IP 20
1 x GU10	WHITE	DL025-2-01W	10 W	IP 20





Atom


[EN] Aluminum case. Swivel mechanism for adjusting the light flux. Light source — GU10 lamp (not included).
[DE] Rahmen aus Aluminium. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in alluminio. Meccanismo girevole per la regolazione del flusso luminoso. Sorgente luminosa — Lampadina GU10 (non inclusa).
[FR] Corps en aluminium. Mécanisme pivotant pour le réglage du flux lumineux. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more
on the website


B W

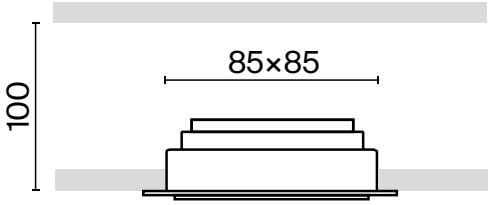




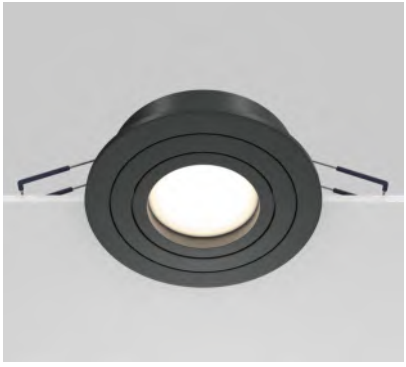

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL023-2-01B	10 W	IP 20
1 x GU10	WHITE	DL023-2-01W	10 W	IP 20

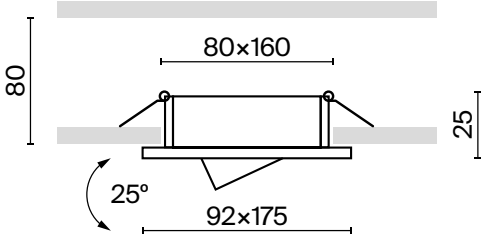






2 x GU10	BLACK	DL024-2-02B	10 W	IP 20
2 x GU10	WHITE	DL024-2-02W	10 W	IP 20


Atom


[EN] Aluminum case. Swivel mechanism for adjusting the light flux. Light source — GU10 lamp (not included).
[DE] Rahmen aus Aluminium. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in alluminio. Meccanismo girevole per la regolazione del flusso luminoso. Sorgente luminosa — Lampadina GU10 (non inclusa).
[FR] Corps en aluminium. Mécanisme pivotant pour le réglage du flux lumineux. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more
on the website

B W

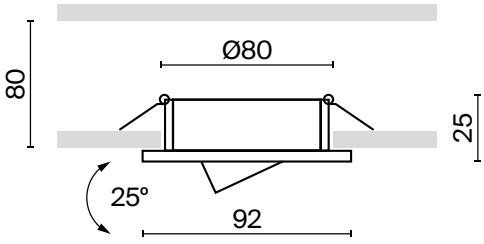



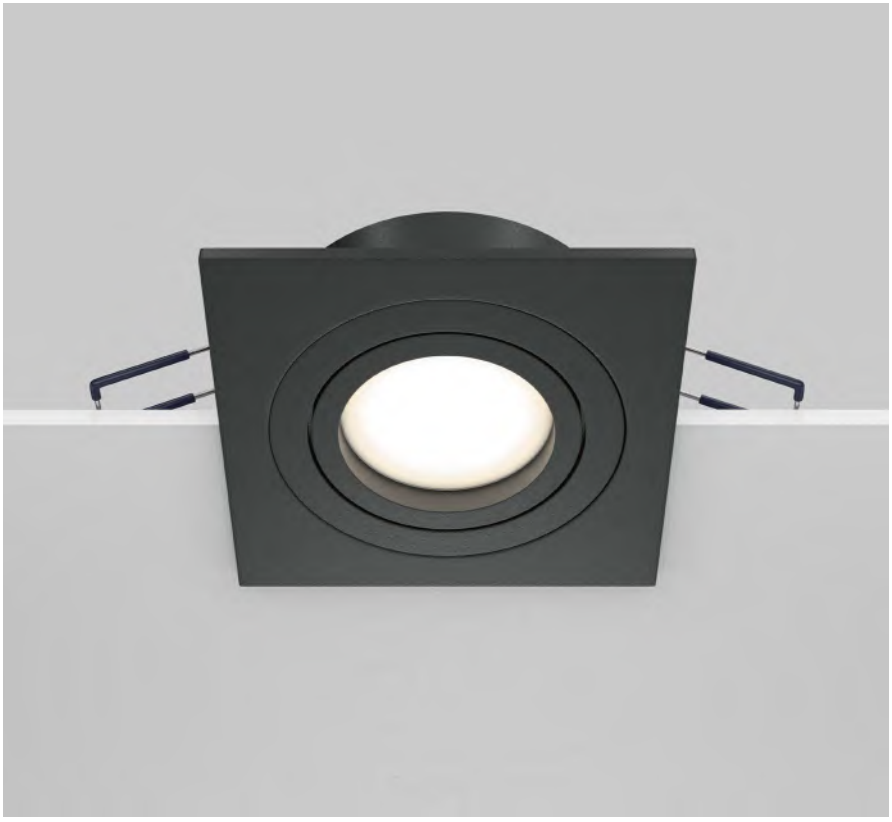


LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL024-2-01B	10 W	IP 20
1 x GU10	WHITE	DL024-2-01W	10 W	IP 20


Dot

[EN] Aluminum case. Swivel mechanism for adjusting the light flux. Light source — GU10 lamp (not included).
[DE] Rahmen aus Aluminium. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in alluminio. Meccanismo girevole per la regolazione del flusso luminoso. Sorgente luminosa — Lampadina GU10 (non inclusa).
[FR] Corps en aluminium. Mécanisme pivotant pour le réglage du flux lumineux. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more on the website


B W

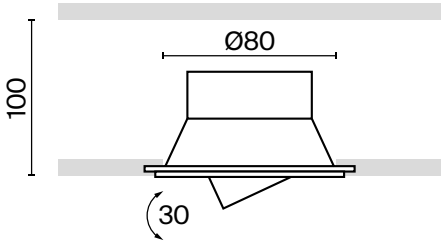






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL042-01-RD-B	10 W	IP 20
1 x GU10	WHITE	DL042-01-RD-W	10 W	IP 20

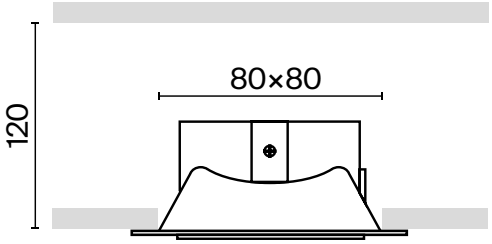






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL042-01-SQ-B	10 W	IP 20
1 x GU10	WHITE	DL042-01-SQ-W	10 W	IP 20


Dot

[EN] Aluminum case. Swivel mechanism for adjusting the light flux. Light source — GU10 lamp (not included).
[DE] Rahmen aus Aluminium. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in alluminio. Meccanismo girevole per la regolazione del flusso luminoso. Sorgente luminosa — Lampadina GU10 (non inclusa).
[FR] Corps en aluminium. Mécanisme pivotant pour le réglage du flux lumineux. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more on the website


B W

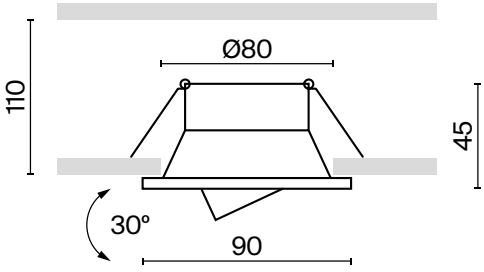






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL029-2-01B	10 W	IP 20
1 x GU10	WHITE	DL029-2-01W	10 W	IP 20

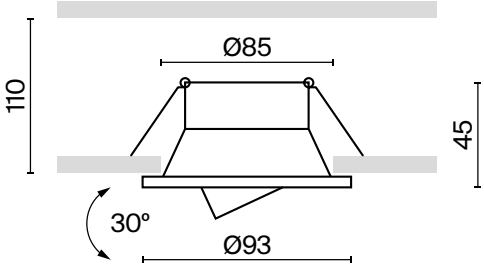






1 x GU10	BLACK	DL028-2-01B	10 W	IP 20
1 x GU10	WHITE	DL028-2-01W	10 W	IP 20


Dot

[EN] Aluminum case. Swivel mechanism for adjusting the light flux. Light source — GU10 lamp (not included).
[DE] Rahmen aus Aluminium. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in alluminio. Meccanismo girevole per la regolazione del flusso luminoso. Sorgente luminosa — Lampadina GU10 (non inclusa).
[FR] Corps en aluminium. Mécanisme pivotant pour le réglage du flux lumineux. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more
on the website

B W

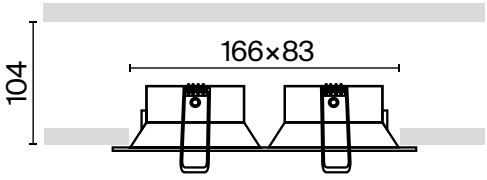





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
2 x GU10	BLACK	DL029-2-02B	10 W	IP 20
2 x GU10	WHITE	DL029-2-02W	10 W	IP 20


DL029-2-01B
DL029-2-01W


Hidden


Read more
on the website

EN This minimalistic recessed LED luminaire will perfectly fit both into the modern interior of apartments, country houses and commercial premises. The luminaire has a retractable rotary mechanism.
DE Die minimalistische LED-Einbauleuchte passt perfekt sowohl in moderne Innenräume von Wohnungen und Landhäusern als auch in die Innenräume von gewerblichen Räumen. Die Leuchte verfügt über einen drehbaren Schwenkvorrichtung.
IT La lampada da incasso a LED minimalista si adatta perfettamente agli interni moderni di appartamenti e case di campagna, nonché agli interni di locali commerciali. La lampada ha un meccanismo girevole retrattile.
FR Le luminaire LED encastrable minimaliste s'inscrit parfaitement à l'intérieur moderne des appartements et des maisons de campagne, ainsi qu'à celui des locaux commerciaux. Le luminaire a un mécanisme rotatif téléscopique.

B | W | LED | CRI >90 | 24°

LEDS BRIDGELUX

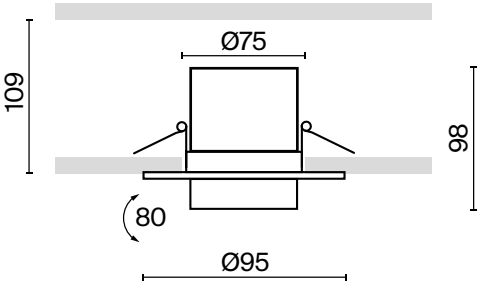





COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE
PSL-TR40-300MA-DE	PSL-DL40-S-300mA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL095-01-10W3K-B	10 W	760 LM	NO	IP 20
3K WARM WHITE	WHITE	DL095-01-10W3K-W	10 W	780 LM	NO	IP 20

Hidden


Read more
on the website


[EN] This minimalistic recessed LED luminaire will perfectly fit both into the modern interior of apartments, country houses and commercial premises. The luminaire has a retractable rotary mechanism.
[DE] Die minimalistische LED-Einbauleuchte passt perfekt sowohl in moderne Innenräume von Wohnungen und Landhäusern als auch in die Innenräume von gewerblichen Räumen. Die Leuchte verfügt über einen drehbaren Schwenkvorrichtung.
[IT] La lampada da incasso a LED minimalista si adatta perfettamente agli interni moderni di appartamenti e case di campagna, nonché agli interni di locali commerciali. La lampada ha un meccanismo girevole retrattile.
[FR] Le luminaire LED encastrable minimaliste s'inscrit parfaitement à l'intérieur moderne des appartements et des maisons de campagne, ainsi qu'à celui des locaux commerciaux. Le luminaire a un mécanisme rotatif téléscopique.

B | W | LED | CRI >90 | 24°

LEDS BRIDGELUX



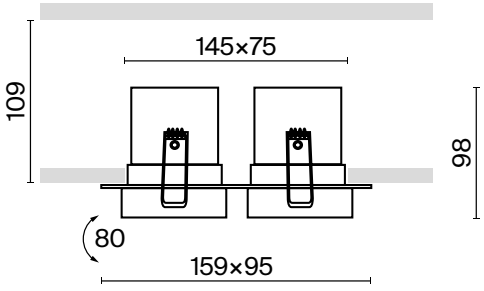



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE
PSL-TR40-300MA-DE	PSL-DL40-S-300mA-DE


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL095-02-10W3K-B	20 W	1400 LM	NO	IP 20
3K WARM WHITE	WHITE	DL095-02-10W3K-W	20 W	1450 LM	NO	IP 20


Hoop

[EN] The Hoop family encompasses an array of ceiling lamps and downlights, available in a diverse palette of color combinations.
[DE] Die Hoop-Familie besteht aus Decken- und Einbauleuchten in einer Vielzahl von Farbkombinationen.
[IT] La famiglia Hoop è rappresentata da lampade da soffitto e da incasso con una varietà di combinazioni dei colori.
[FR] La famille Hoop est représentée par des plafonniers et des luminaires encastrables avec une variété de combinaisons de couleurs.

Read more
on the website

B W MG B








LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GX53	BLACK	DL086-GX53-RD-B	12 W	IP 20
1 x GX53	WHITE	DL086-GX53-RD-W	12 W	IP 20
1 x GX53	BLACK / MATTE GOLD	DL086-GX53-RD-BG	12 W	IP 20


Hoop

[EN] The Hoop family encompasses an array of ceiling lamps and downlights, available in a diverse palette of color combinations.
[DE] Die Hoop-Familie besteht aus Decken- und Einbauleuchten in einer Vielzahl von Farbkombinationen.
[IT] La famiglia Hoop è rappresentata da lampade da soffitto e da incasso con una varietà di combinazioni dei colori.
[FR] La famille Hoop est représentée par des plafonniers et des luminaires encastrables avec une variété de combinaisons de couleurs.

Read more
on the website

B W MG B

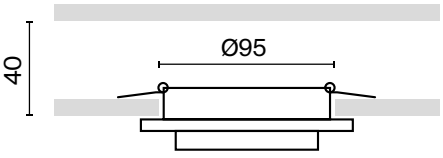






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GX53	BLACK	DL086-GX53-SQ-B	12 W	IP 20
1 x GX53	WHITE	DL086-GX53-SQ-W	12 W	IP 20
1 x GX53	BLACK / MATTE GOLD	DL086-GX53-SQ-BG	12 W	IP 20


Hoop

[EN] The Hoop family encompasses an array of ceiling lamps and downlights, available in a diverse palette of color combinations.
[DE] Die Hoop-Familie besteht aus Decken- und Einbauleuchten in einer Vielzahl von Farbkombinationen.
[IT] La famiglia Hoop è rappresentata da lampade da soffitto e da incasso con una varietà di combinazioni dei colori.
[FR] La famille Hoop est représentée par des plafonniers et des luminaires encastrables avec une variété de combinaisons de couleurs.

Read more
on the website



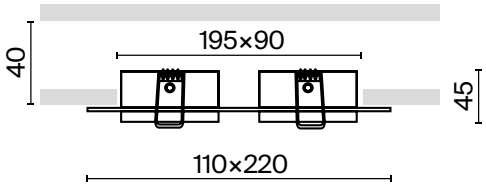



220

B W MG B



LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GX53	BLACK	DL086-02-GX53-SQ-B	12 W	IP 20
1 x GX53	WHITE	DL086-02-GX53-SQ-W	12 W	IP 20
1 x GX53	BLACK / MATTE GOLD	DL086-02-GX53-SQ-BG	12 W	IP 20


Magnum


[EN] Magnum is a recessed luminaire with magnete mechanism providing flexibility in arranging lighting space. Direction flexibility 45 ensures precise illumination to any object.
[DE] Magnum ist eine Einbauleuchte mit einem magnetischen Mechanismus, der Flexibilität bei der Organisation des Beleuchtungsraums bietet. Die Richtungsflexibilität 45 bietet eine präzise Beleuchtung für jedes Objekt.
[IT] Magnum è la lampada da incasso con il meccanismo magnetico che offre flessibilità nell'organizzazione dello spazio luminoso. La flessibilità direzionale di 45 garantisce la precisione dell'illuminazione per qualsiasi oggetto.
[FR] Magnum est un luminaire encastré doté d'un mécanisme magnétique qui offre une flexibilité dans l'organisation de l'espace lumineux. La flexibilité de direction 45 garantit un éclairage précis pour n'importe quel sujet.


Read more
on the website

B W LED CRI >90 24°

LEDS EPISTAR

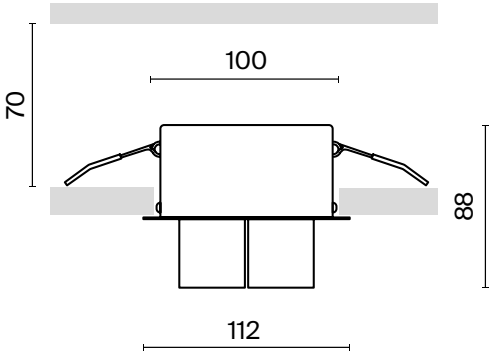



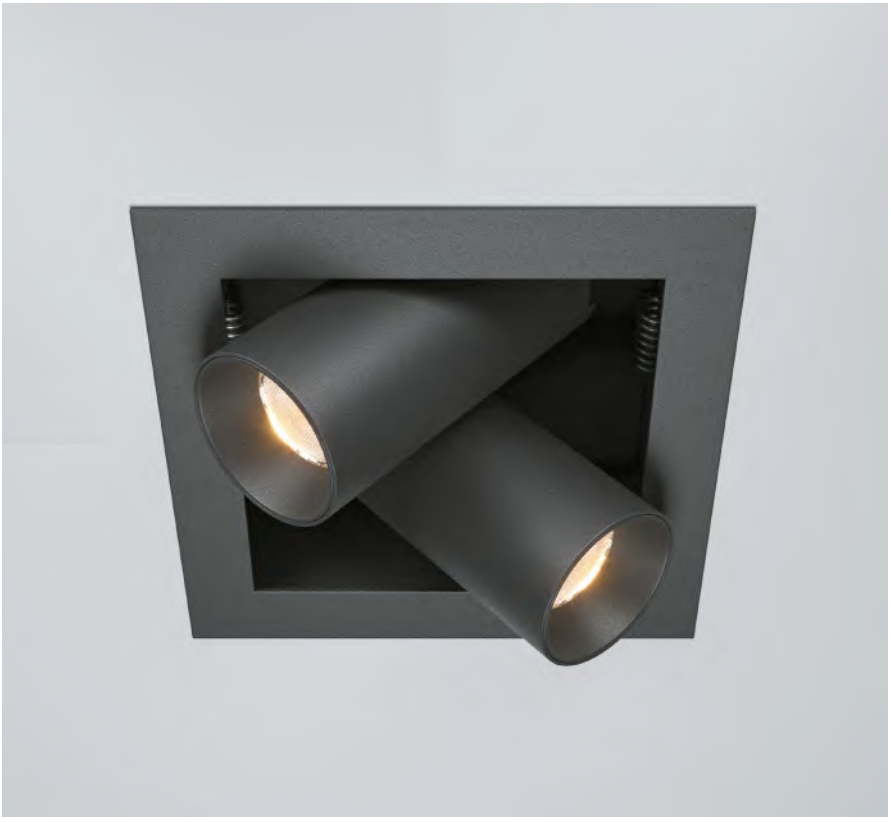


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL094-02-7W3K-B	14 W	1000 LM	NO	IP 20
3K WARM WHITE	WHITE	DL094-02-7W3K-W	14 W	1250 LM	NO	IP 20


Metal Modern

[EN] Metal body. Swivel mechanism to adjust the light direction. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: ein Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Meccanismo girevole per regolare la direzione della luce. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps métallique. Mécanisme pivotant pour le réglage de l'orientation de la lumière. Source de lumière : ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website


B W

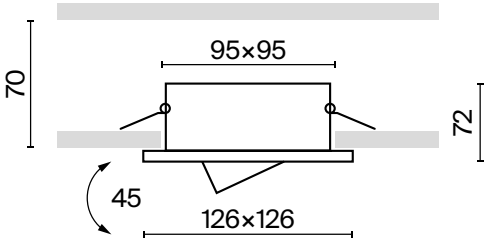






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL008-2-01-B	10 W	IP 20
1 x GU10	WHITE	DL008-2-01-W	10 W	IP 20

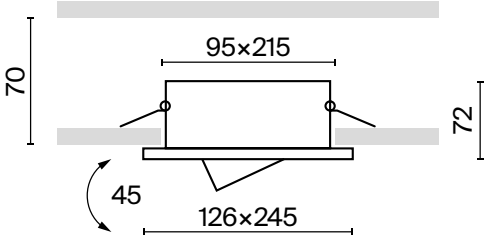






2 x GU10	BLACK	DL008-2-02-B	10 W	IP 20
2 x GU10	WHITE	DL008-2-02-W	10 W	IP 20


Metal Modern

[EN] Metal body. Swivel mechanism to adjust the light direction. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms. Lichtquelle: ein Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Meccanismo girevole per regolare la direzione della luce. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps métallique. Mécanisme pivotant pour le réglage de l'orientation de la lumière. Source de lumière : ampoule à culot GU10 (non comprise dans le lot).

Read more on the website


B W LED 24°

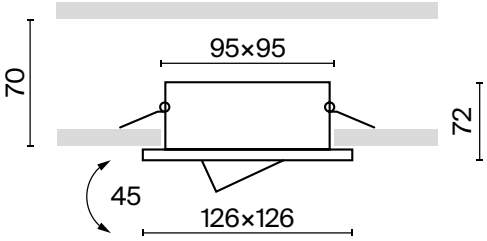






CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL093-01-10W3K-B	10 W	650 LM	NO	IP 20
3K WARM WHITE	WHITE	DL093-01-10W3K-W	10 W	750 LM	NO	IP 20

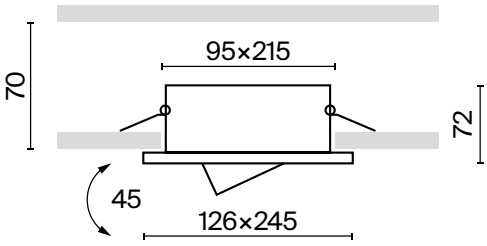





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL093-02-10W3K-B	20 W	1300 LM	NO	IP 20
3K WARM WHITE	WHITE	DL093-02-10W3K-W	20 W	1450 LM	NO	IP 20


Minor


[EN] Minor is a recessed luminaire with small dimensions, which will be perfect for home spaces or small offices. A deeply recessed light source protects the sight from glare.
[DE] Minor ist eine kleine Einbauleuchte, die sich ideal für Wohnräume oder kleine Büros eignet. Die tief versenkte Lichtquelle schützt Ihre Augen vor Blendung.
[IT] Minor è una lampada da incasso di piccole dimensioni ideale per spazi domestici o piccoli uffici. La sorgente luminosa profondamente incassata protegge gli occhi dagli abbagliamenti luminosi.
[FR] Minor est un petit luminaire encastré qui convient parfaitement aux intérieurs ou les petits bureaux. La source de lumière profondément encastrée protège les yeux des éblouissements.

Read more on the website

B W | LED | 24°


LEDS EPISTAR

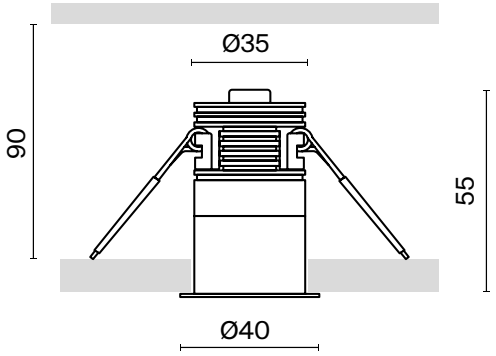






CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK / WHITE	DL089-5W3K-BW	5 W	230 LM	NO	IP 20

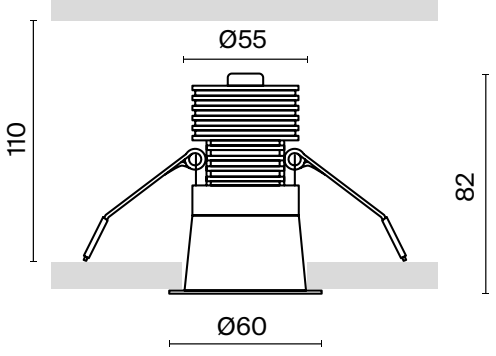





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK / WHITE	DL089-9W3K-BW	9 W	700 LM	NO	IP 20




Okno


[EN] White metal body. Round or square shape.
[DE] Weißes Metallrahmen. Runde oder quadratische Form.
[IT] Corpo e' in metallo bianco. Forma e' rotonda oppure quadrata.
[FR] Boîtier en métal blanc. Forme ronde ou carrée.

Read more
on the website

W | LED | CRI >90 | 100°

LEDS EPISTAR

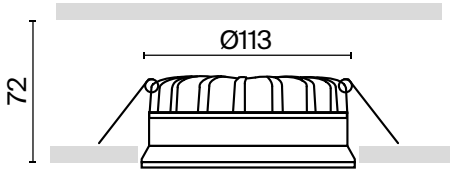





COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3-4-6K ADJUSTABLE WITH A SWITCH	☐ WHITE	DL055-12W3-4-6K-W	12 W	770, 890, 860 LM	NO	IP 44


DL055-12W3-4-6K-W
INTERIOR DESIGN


Okno


EN White metal body. Round or square shape.
DE Weißes Metallrahmen. Runde oder quadratische Form.
IT Corpo e' in metallo bianco. Forma e' rotonda oppure quadrata.
FR Boîtier en métal blanc. Forme ronde ou carrée.

Read more
on the website

W LED CRI >90 100°

LEDS EPISTAR

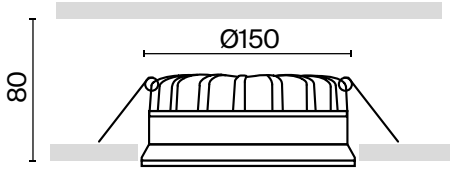



Ø155



COMPATIBLE WITH DRIVER

TRIAC

PSL-TR40-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
4K WHITE	☐ WHITE	DL055-18W4K-W	18 W	1400 LM	NO	IP 44
3-4-6K ADJUSTABLE WITH A SWITCH	☐ WHITE	DL055-18W3-4-6K-W	18 W	1190, 1370, 1250 LM	NO	IP 44


Okno


EN White metal body. Round or square shape.
DE Weißes Metallrahmen. Runde oder quadratische Form.
IT Corpo e' in metallo bianco. Forma e' rotonda oppure quadrata.
FR Boîtier en métal blanc. Forme ronde ou carrée.

Read more
on the website

W LED CRI >90 100°

LEDS EPISTAR

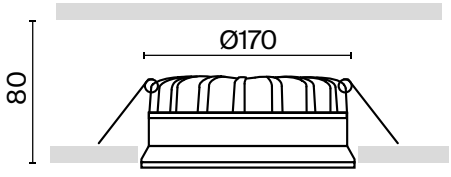



Ø175



CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	WHITE	DL055-24W3K-W	24 W	1800 LM	NO	IP 44
3-4-6K ADJUSTABLE WITH A SWITCH	WHITE	DL055-24W3-4-6K-W	24 W	1630, 1840, 1730 LM	NO	IP 44


Okno


EN White metal body. Round or square shape.
DE Weißes Metallrahmen. Runde oder quadratische Form.
IT Corpo e' in metallo bianco. Forma e' rotonda oppure quadrata.
FR Boîtier en métal blanc. Forme ronde ou carrée.


Read more
on the website

W LED CRI >90 100°

LEDS EPISTAR

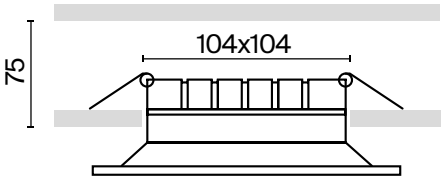



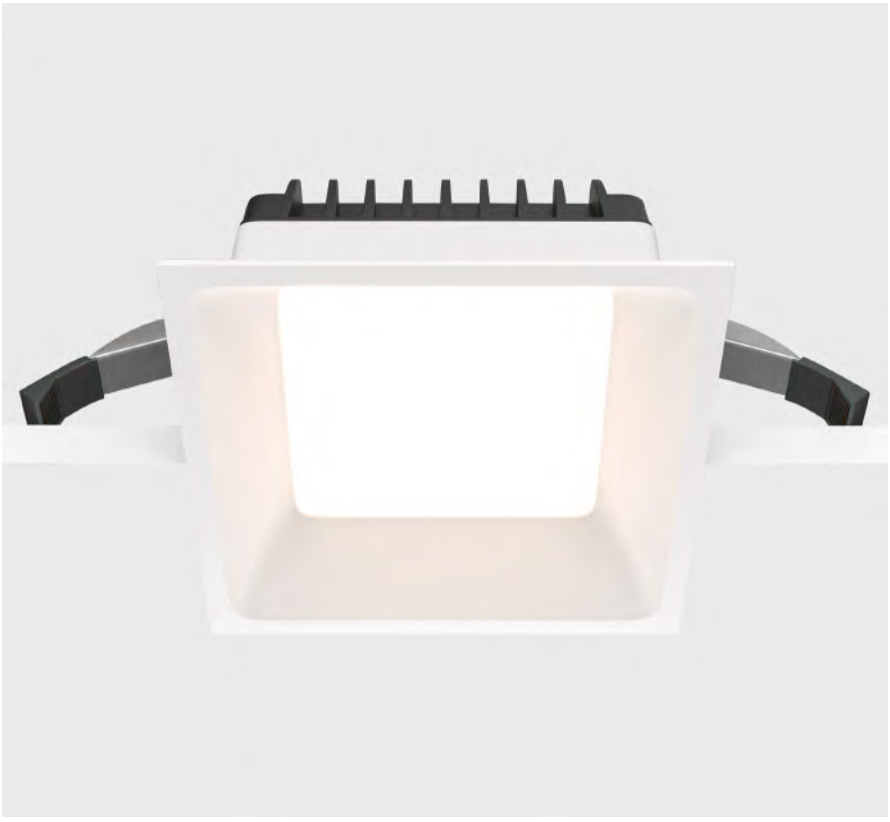

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3-4-6K ADJUSTABLE WITH A SWITCH	WHITE	DL056-12W3-4-6K-W	12 W	780, 820, 800 LM	NO	IP 44

Okno


[EN] White metal body. Round or square shape.
[DE] Weißes Metallrahmen. Runde oder quadratische Form.
[IT] Corpo e' in metallo bianco. Forma e' rotonda oppure quadrata.
[FR] Boîtier en métal blanc. Forme ronde ou carrée.


Read more
on the website

W | LED | CRI >90 | 100°

LEDS EPISTAR



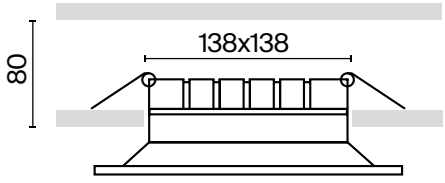



COMPATIBLE WITH DRIVER

TRIAC

PSL-TR40-350-500MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3-4-6K ADJUSTABLE WITH A SWITCH	☐ WHITE	DL056-18W3-4-6K-W	18 W	1180, 1420, 1380 LM	NO	IP 44


Okno

EN White metal body. Round or square shape.
DE Weißes Metallrahmen. Runde oder quadratische Form.
IT Corpo e' in metallo bianco. Forma e' rotonda oppure quadrata.
FR Boîtier en métal blanc. Forme ronde ou carrée.


Read more
on the website

W LED CRI >90 100°

LEDS EPISTAR

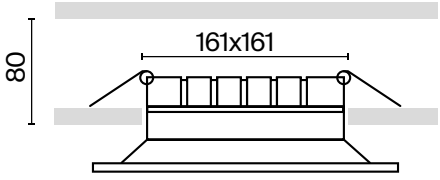





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3-4-6K ADJUSTABLE WITH A SWITCH	☐ WHITE	DL056-24W3-4-6K-W	24 W	1470, 1730, 1700 LM	NO	IP 44


DL054-24W3K-W

Onda


[EN] Housing material: Metal. Wide scattering angle. 12W models are compatible with DALI and Triac drivers for color temperature adjustment and dimming.
[DE] Metallgehäuse. Breiter Abstrahlwinkel. Die 12W-Modelle sind mit DALI- und Triac-Treibern zur Einstellung der Farbtemperatur und zum Dimmen kompatibel.
[IT] Corpo in metallo. Ampio angolo di dispersione.
I modelli da 12 W sono compatibili con driver DALI e Triac per la variazione della temperatura colore e la dimmerazione.
[FR] Boîtier en métal. Grand angle de diffusion. Les modèles 12W sont compatibles avec les pilotes DALI et Triac pour le réglage de la température de couleur et de la gradation.


Read more
on the website

B W MG B LED TRIAC CRI >90 120°

LEDS BRIDGELUX



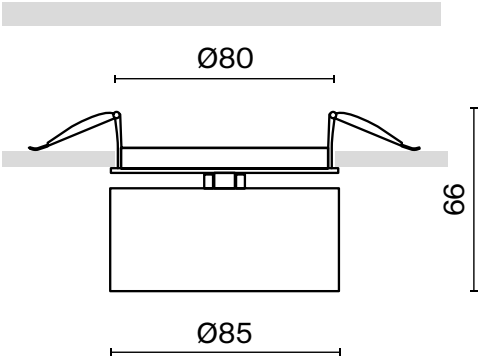



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.2-4K ADJUSTABLE	BLACK	DL024-12W-DTW-B	12 W	640 LM	TRIAC	IP 20
2.2-4K ADJUSTABLE	WHITE	DL024-12W-DTW-W	12 W	800 LM	TRIAC	IP 20
2.2-4K ADJUSTABLE	BLACK / MATTE GOLD	DL024-12W-DTW-BMG	12 W	620 LM	TRIAC	IP 20

Orlo

[EN] Orlo is a recessed luminaire with small dimensions providing a modern solution for indoor use. An interesting design with an acrylic rim on the lamp bulb.
[DE] Orlo ist eine kleine Einbauleuchte, die eine moderne Lösung für den Innenbereich darstellt. Interessantes Design dank des Acrylrandes der Röhrenlampe.
[IT] Orlo è una lampada da incasso di piccole dimensioni che rappresenta una soluzione moderna per l'uso interno. Il design interessante grazie al bordo acrilico della lampadina.
[FR] Orlo est un luminaire encastrable de petite taille représentant une solution moderne pour une utilisation intérieure. Design intéressant grâce à la jante acrylique de l'ampoule de la lampe.

Read more
on the website

B W

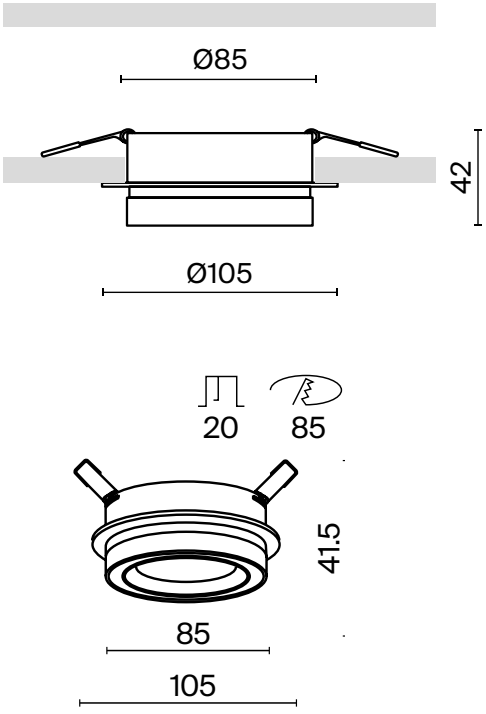



LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GX53	BLACK	DL087-GX53-RD-B	12 W	IP 20
1 x GX53	WHITE	DL087-GX53-RD-W	12 W	IP 20


Phanton


EN Metal body. Wide beam angle is 120°. LED light source.
DE Metallrahmen. Breiter Lichtstreuwinkel 120°. LED-Lichtquelle.
IT Corpo in metallo. Ampio angolo di diffusione 120°. Sorgente luminosa LED.
FR Corps en métal. Grand angle de diffusion : 120°. Source de lumière LED.

Read more
on the website

B W LED 120°


LEDS SANAN

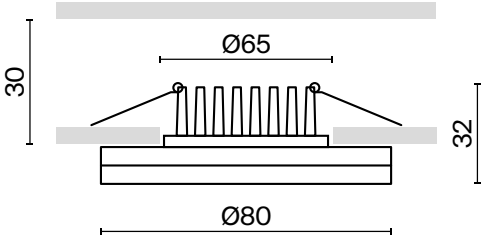






CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	WHITE	DL303-L7W	7 W	450 LM	NO	IP 20

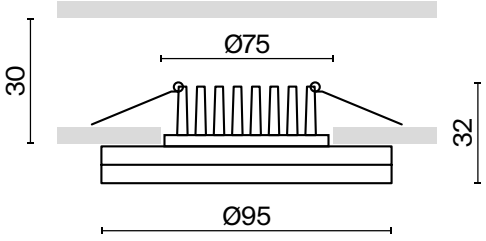





3K WARM WHITE	BLACK	DL303-L12B	12 W	750 LM	NO	IP 20
3K WARM WHITE	WHITE	DL2001-L12W	12 W	750 LM	NO	IP 20



DL303-L12B


Reif

[EN] Metal body. Two types of models: with and without a fully integrated body. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Es gibt zwei Arten von Modellen: Mit voll integriertem und mit nicht integriertem Rahmen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Due tipi di modelli: con corpo completamente integrato e non. Sorgente luminosa - lampadina con attacco GU10 (non inclusa).
[FR] Corps métallique. Deux types de modèles: avec un cops entièrement encastré ou non. Source de lumière: ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

B W G W G B

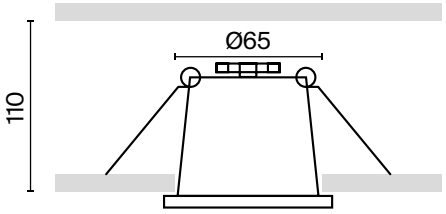






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL049-01B	10 W	IP 20
1 x GU10	WHITE	DL049-01W	10 W	IP 20
1 x GU10	GOLD / BLACK	DL049-01GB	10 W	IP 20
1 x GU10	GOLD / WHITE	DL049-01WG	10 W	IP 20


Reif


[EN] Metal body. Two types of models: with and without a fully integrated body. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Es gibt zwei Arten von Modellen: Mit voll integriertem und mit nicht integriertem Rahmen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Due tipi di modelli: con corpo completamente integrato e non. Sorgente luminosa - lampadina con attacco GU10 (non inclusa).
[FR] Corps métallique. Deux types de modèles: avec un cops entièrement encastré ou non. Source de lumière: ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

B W G W G B

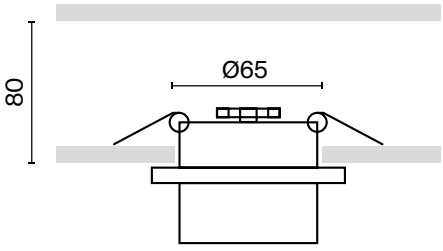



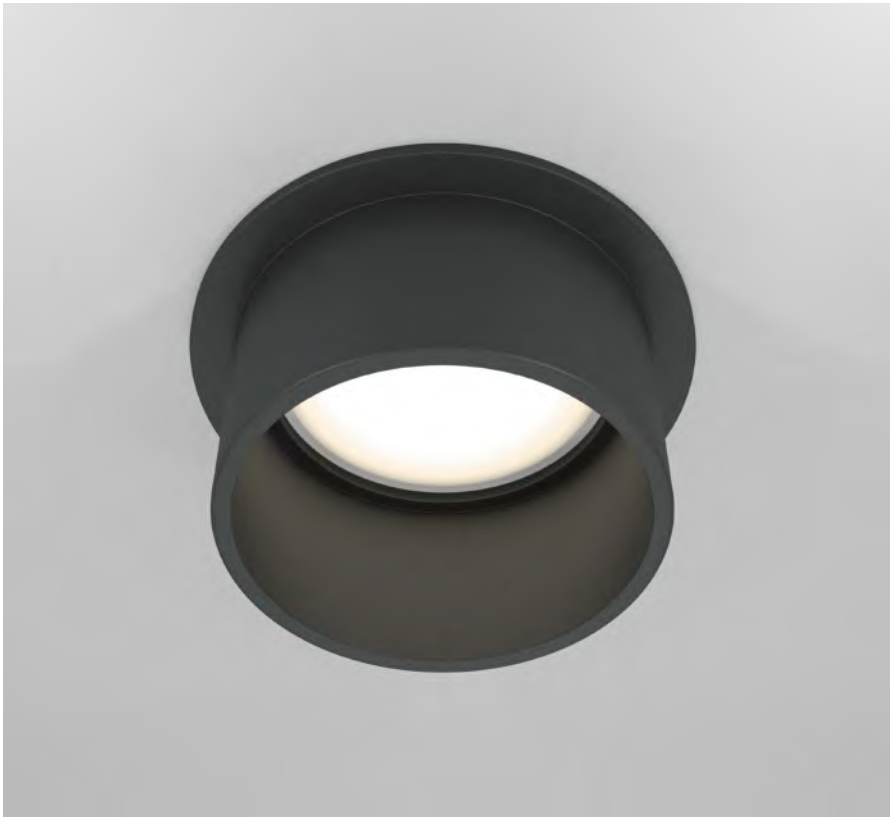

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL050-01B	10 W	IP 20
1 x GU10	WHITE	DL050-01W	10 W	IP 20
1 x GU10	GOLD / BLACK	DL050-01GB	10 W	IP 20
1 x GU10	GOLD / WHITE	DL050-01WG	10 W	IP 20


Round


[EN] Compact metal body, colors – black, white, brass. Two body options: recessed lamps with a narrow frame and recessed lamps without a visible frame.
[DE] Kompakter Metallrahmen. Zwei Rahmenoptionen: Einbauleuchten mit schmalem Rahmen und Einbauleuchten ohne sichtbaren Rahmen.
[IT] Il corpo in metallo compatto. Le due opzioni dell' alloggiamento sono le lampade da incasso con una cornice stretta e quelle da incasso senza la cornice visibile.
[FR] Corps métallique compact. Deux options de corps: luminaires encastrables avec cadre étroit et luminaires encastrables sans cadre visible.

Read more
on the website

B W BS LED CRI >90 60°

LEDS EPISTAR

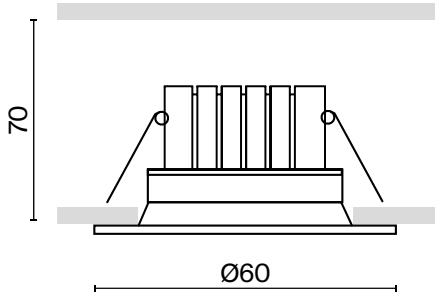





ANTI-DAZZLE FILTERS HONEYCOMB-D26

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL058-7W3K-B	7 W	450 LM	NO	IP 20
3K WARM WHITE	WHITE	DL058-7W3K-W	7 W	450 LM	NO	IP 20
3K WARM WHITE	BLACK/BRASS	DL058-7W3K-BS	7 W	460 LM	NO	IP 20


Round


[EN] Compact metal body, colors – black, white, brass. Two body options: recessed lamps with a narrow frame and recessed lamps without a visible frame.
[DE] Kompakter Metallrahmen. Zwei Rahmenoptionen: Einbauleuchten mit schmalem Rahmen und Einbauleuchten ohne sichtbaren Rahmen.
[IT] Il corpo in metallo compatto. Le due opzioni dell' alloggiamento sono le lampade da incasso con una cornice stretta e quelle da incasso senza la cornice visibile.
[FR] Corps métallique compact. Deux options de corps: luminaires encastrables avec cadre étroit et luminaires encastrables sans cadre visible.

Read more
on the website

B W BS LED CRI >90 60°

LEDS EPISTAR

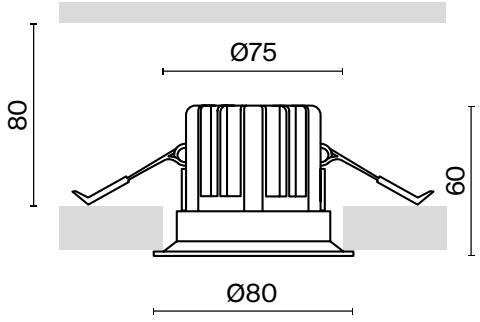





ANTI-DAZZLE FILTERS HONEYCOMB-D38

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL058-12W3K-B	12 W	910 LM	NO	IP 20
3K WARM WHITE	WHITE	DL058-12W3K-W	12 W	920 LM	NO	IP 20
3K WARM WHITE	BLACK/BRASS	DL058-12W3K-BS	12 W	930 LM	NO	IP 20




DL058-12W3K-BS


Round


EN Compact metal body, colors – black, white, brass. Two body options: recessed lamps with a narrow frame and recessed lamps without a visible frame.
DE Kompakter Metallrahmen. Zwei Rahmenoptionen: Einbauleuchten mit schmalem Rahmen und Einbauleuchten ohne sichtbaren Rahmen.
IT Il corpo in metallo compatto. Le due opzioni dell' alloggiamento sono le lampade da incasso con una cornice stretta e quelle da incasso senza la cornice visibile.
FR Corps métallique compact. Deux options de corps: luminaires encastrables avec cadre étroit et luminaires encastrables sans cadre visible.

Read more
on the website

B W BS LED CRI >90 60°

LEDS EPISTAR

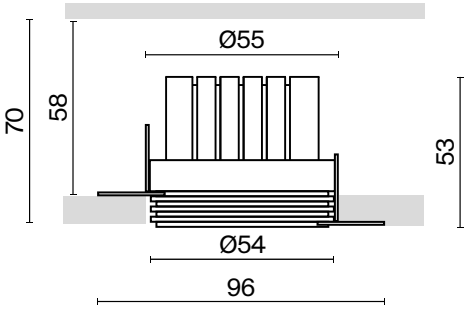





ANTI-DAZZLE FILTERS HONEYCOMB-D26

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL058-7W3K-TRS-B	7 W	450 LM	NO	IP 20
3K WARM WHITE	WHITE	DL058-7W3K-TRS-W	7 W	460 LM	NO	IP 20
3K WARM WHITE	BLACK/BRASS	DL058-7W3K-TRS-BS	7 W	480 LM	NO	IP 20


Round


EN Compact metal body, colors – black, white, brass. Two body options: recessed lamps with a narrow frame and recessed lamps without a visible frame.
DE Kompakter Metallrahmen. Zwei Rahmenoptionen: Einbauleuchten mit schmalem Rahmen und Einbauleuchten ohne sichtbaren Rahmen.
IT Il corpo in metallo compatto. Le due opzioni dell' alloggiamento sono le lampade da incasso con una cornice stretta e quelle da incasso senza la cornice visibile.
FR Corps métallique compact. Deux options de corps: luminaires encastrables avec cadre étroit et luminaires encastrables sans cadre visible.


Read more
on the website

B W BS LED CRI >90 60°

LEDS EPISTAR

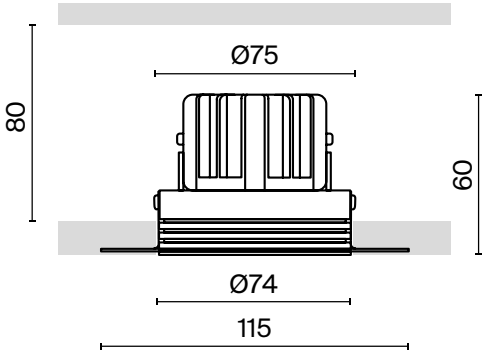



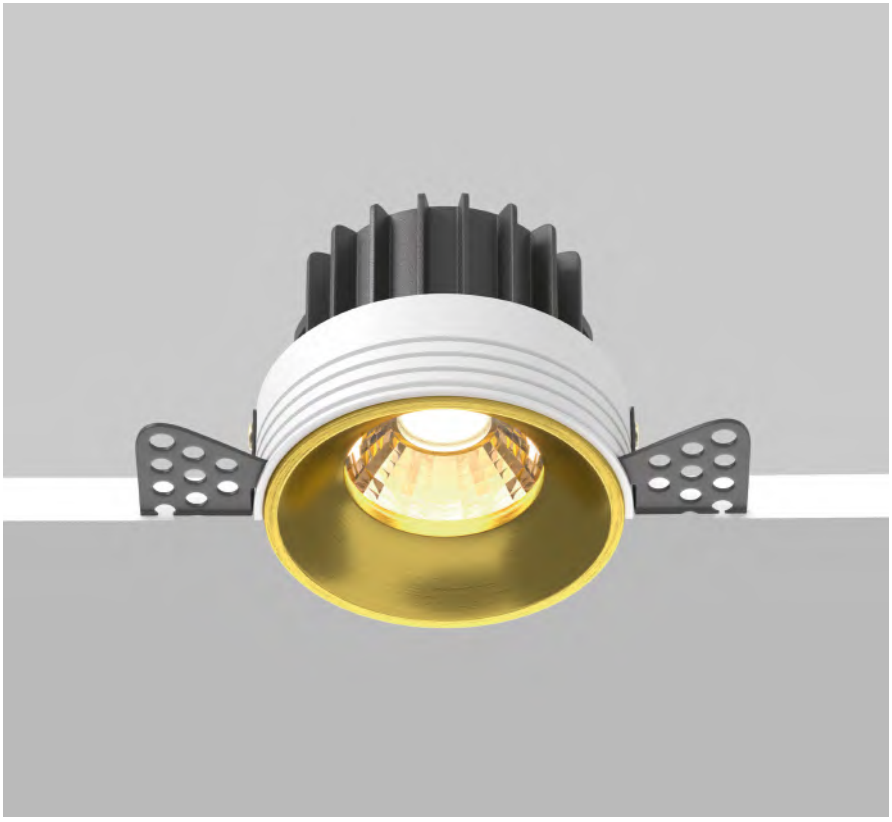

ANTI-DAZZLE FILTERS HONEYCOMB-D38

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL058-12W3K-TRS-B	12 W	880 LM	NO	IP 20
3K WARM WHITE	WHITE	DL058-12W3K-TRS-W	12 W	920 LM	NO	IP 20
3K WARM WHITE	BLACK/BRASS	DL058-12W3K-TRS-BS	12 W	920 LM	NO	IP 20


Share

[EN] Metal body. Part of the luminaires has a swivel mechanism for adjusting the light flux.
[DE] Metallrahmen. Ein Teil der Leuchten ist mit einer Schwenkvorrichtung zur Einstellung des Lichtstroms ausgestattet.
[IT] Corpo in metallo. Parte degli apparecchi con meccanismo girevole per la regolazione del flusso luminoso.
[FR] Corps métallique. Partie des LED avec un mécanisme pivotant pour le réglage du flux lumineux.

Read more
on the website

W | B W | MG W








LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	WHITE	DL051-U-2W	10 W	IP 20
1 x GU10	WHITE/BLACK	DL051-U-2WB	10 W	IP 20
1 x GU10	WHITE/MATTE GOLD	DL051-U-2WMG	10 W	IP 20


Share

[EN] Metal body. Part of the luminaires has a swivel mechanism for adjusting the light flux.
[DE] Metallrahmen. Ein Teil der Leuchten ist mit einer Schwenkvorrichtung zur Einstellung des Lichtstroms ausgestattet.
[IT] Corpo in metallo. Parte degli apparecchi con meccanismo girevole per la regolazione del flusso luminoso.
[FR] Corps métallique. Partie des LED avec un mécanisme pivotant pour le réglage du flux lumineux.

Read more
on the website

B
W
W
MG
MS

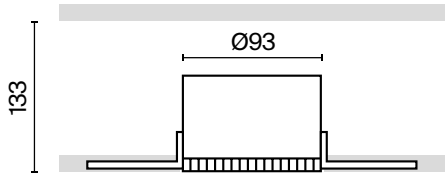






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	WHITE/BLACK	DL051-01-GU10-RD-WB	10 W	IP 20
1 x GU10	WHITE	DL051-01-GU10-RD-W	10 W	IP 20
1 x GU10	MATTE GOLD	DL051-01-GU10-RD-WMG	10 W	IP 20
1 x GU10	MATTE SILVER	DL051-01-GU10-RD-WS	10 W	IP 20


Share

[EN] Metal body. Part of the luminaires has a swivel mechanism for adjusting the light flux.
[DE] Metallrahmen. Ein Teil der Leuchten ist mit einer Schwenkvorrichtung zur Einstellung des Lichtstroms ausgestattet.
[IT] Corpo in metallo. Parte degli apparecchi con meccanismo girevole per la regolazione del flusso luminoso.
[FR] Corps métallique. Partie des LED avec un mécanisme pivotant pour le réglage du flux lumineux.

Read more
on the website

B | W | MG B | MG B | MG W

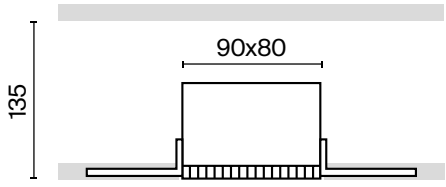





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL053-01B	10 W	IP 20
1 x GU10	WHITE	DL053-01W	10 W	IP 20
1 x GU10	WHITE/BLACK	DL053-01WB	10 W	IP 20
1 x GU10	BLACK/MATTE GOLD	DL053-01BMG	10 W	IP 20
1 x GU10	WHITE/MATTE GOLD	DL053-01WMG	10 W	IP 20


Lipari

[EN] Metal body with a trendy oblique cut of the dome lamp. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen mit trendigem schrägen Schnitt des Lampenschirms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo con taglio obliquo alla moda della plafoniera. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps métallique à coupe oblique tendance du globe. Source de de lumière: ampoule à culot GU10 (non comprise dans le lot).

Read more on the website

W






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	WHITE	DL044-01-GU10-W	10 W	IP 20


Slim

[EN] Metal body. Some models with a lamp recessed deep into the body. Light source with GU10 base (not included).
[DE] Metallrahmen. Einige Modelle haben ein im Rahmen versenktes Leuchtmittel. Eine Lichtquelle mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Alcuni modelli con una lampadina incassata in profondità nel corpo. Sorgente luminosa con attacco GU10 (non inclusa).
[FR] Corps en métal. Partie des modèles avec ampoule profondément encastrée dans le corps. Source de lumière à culot GU10 (non comprise dans le lot).

Read more
on the website

B W MG

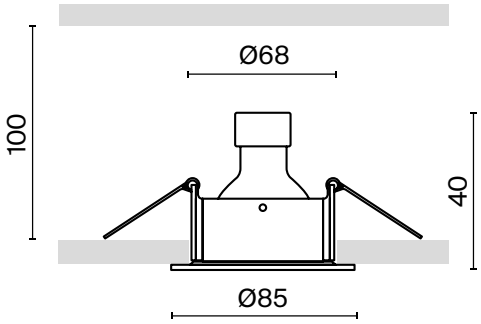






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL088-GU10-RD-B	10 W	IP 65
1 x GU10	WHITE	DL088-GU10-RD-W	10 W	IP 65
1 x GU10	MATTE GOLD	DL088-GU10-RD-MG	10 W	IP 65


Slim

[EN] Metal body. Some models with a lamp recessed deep into the body. Light source with GU10 base (not included).
[DE] Metallrahmen. Einige Modelle haben ein im Rahmen versenktes Leuchtmittel. Eine Lichtquelle mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Alcuni modelli con una lampadina incassata in profondità nel corpo. Sorgente luminosa con attacco GU10 (non inclusa).
[FR] Corps en métal. Partie des modèles avec ampoule profondément encastrée dans le corps. Source de lumière à culot GU10 (non comprise dans le lot).

Read more
on the website

B W MG S

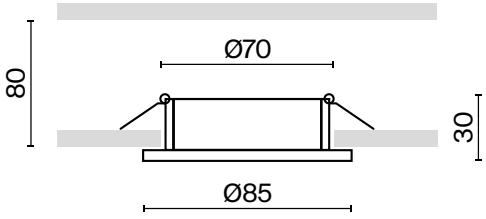






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL027-2-01B	10 W	IP 20
1 x GU10	WHITE	DL027-2-01W	10 W	IP 20
1 x GU10	MATTE GOLD	DL027-2-01-MG	10 W	IP 20
1 x GU10	SILVER	DL027-2-01-S	10 W	IP 20


Stark

[EN] Metal body. Round or square shape. High protection class IP65. Light source – GU10 lamp (not included).
[DE] Metallrahmen. Runde oder quadratische Form. Hohe Schutzart IP65. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Forma rotonda o quadrata. Classe di protezione elevata IP65. Sorgente luminosa - Lampadina GU10 (non inclusa).
[FR] Corps métallique. Forme ronde ou carré. Haut indice de protection IP65. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more
on the website


B W S

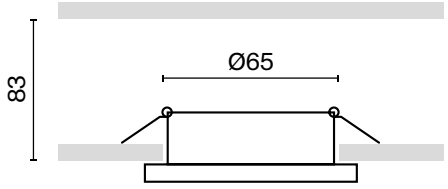







LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL083-01-GU10-RD-B	10 W	IP 65
1 x GU10	WHITE	DL083-01-GU10-RD-W	10 W	IP 65
1 x GU10	SILVER	DL083-01-GU10-RD-S	10 W	IP 65

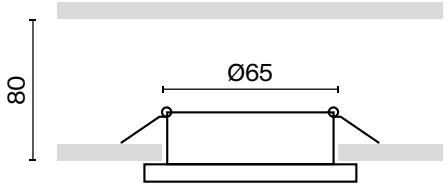



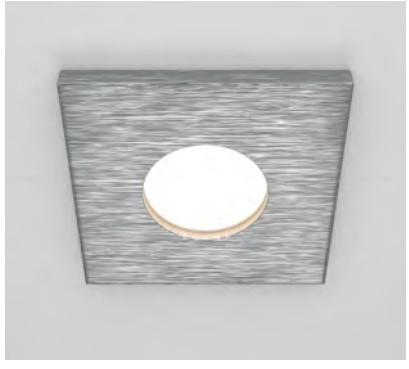

1 x GU10	BLACK	DL083-01-GU10-SQ-B	10 W	IP 65
1 x GU10	WHITE	DL083-01-GU10-SQ-W	10 W	IP 65
1 x GU10	SILVER	DL083-01-GU10-SQ-S	10 W	IP 65

DL083-01-GU10-RD-W




Stockton


[EN] Ultra-thin ABS plastic body in white color. A pulse driver eliminates ripple. Round form.
[DE] Ultradünner Rahmen aus ABS-Kunststoff in Weiß. Der Impulstreiber schließt die Pulsation aus. Runde Form.
[IT] Il corpo in plastica ABS ultra sottile in colore bianco. L'alimentazione elettrica di commutazione esclude l'ondulazione. La forma e' rotonda.
[FR] Corps ultra-fin en plastique ABS de couleur blanche. Le pilote d'impulsion élimine les pulsations. Forme ronde.

Read more
on the website

W | LED | CRI >90 | 110°


LEDS BMTC

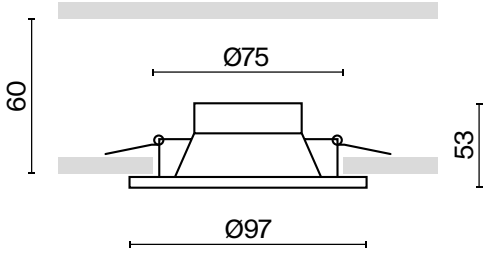






CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3-4-6K ADJUSTABLE WITH A SWITCH	WHITE	DL015-6-L7W	7 W	610, 730, 640 LM	NO	IP 44

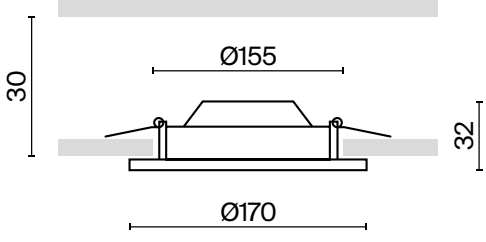





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3-4-6K ADJUSTABLE WITH A SWITCH	WHITE	DL016-6-L12W	12 W	850, 960, 840 LM	NO	IP 44


Stockton


[EN] Ultra-thin ABS plastic body in white color. A pulse driver eliminates ripple. Round form.
[DE] Ultradünner Rahmen aus ABS-Kunststoff in Weiß. Der Impulstreiber schließt die Pulsation aus. Runde Form.
[IT] Il corpo in plastica ABS ultra sottile in colore bianco. L'alimentazione elettrica di commutazione esclude l'ondulazione. La forma e' rotonda.
[FR] Corps ultra-fin en plastique ABS de couleur blanche. Le pilote d'impulsion élimine les pulsations. Forme ronde.


Read more
on the website

W | LED | CRI >90 | 110°

LEDS BMTC

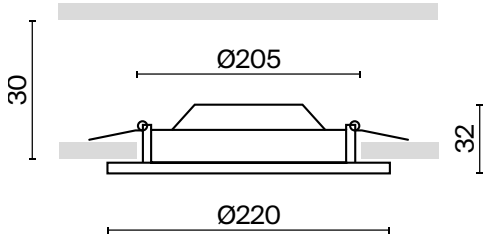



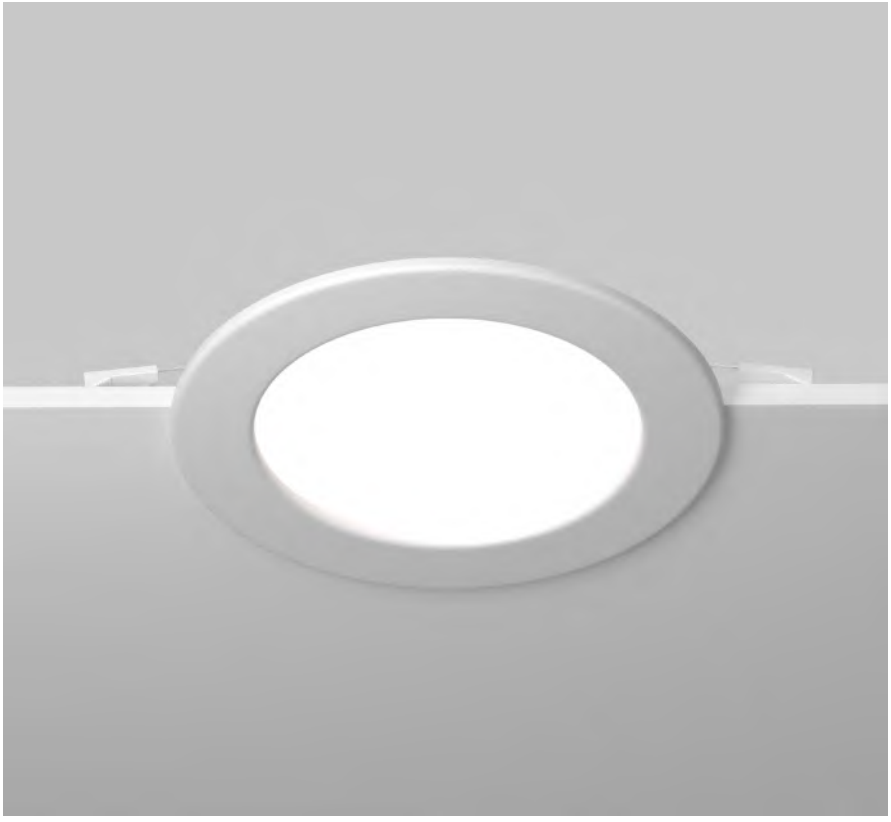

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3-4-6K ADJUSTABLE WITH A SWITCH	☐ WHITE	DL017-6-L18W3-4-6K	18 W	1670, 1830, 1690 LM	NO	IP 44

Wise


[EN] Material: aluminium and plastic. You can additionally purchase matte gold replaceable reflectors and lenses for beam adjustment in the range of 15°-50°.
[DE] Material: Aluminium und Kunststoff. Optional sind austauschbare Reflektoren in Farbe Mattes Gold und Linsen zur Strahleneinstellung zwischen 15°-50° erhältlich.
[IT] I materiali sono l'alluminio e il plastico. Inoltre, è possibile acquistare i riflettori intercambiabili di colore l'oro opaco e le lenti per la regolazione del fascio nell'intervallo da 15°a 50°.
[FR] Matériau: aluminium et plastique. De plus, vous pouvez acheter des réflecteurs remplaçables de couleur doré mat et des lentilles pour un réglage du faisceau entre 15° et 50°.


Read more
on the website

B W LED CRI >90 36°

LEDS EPISTAR



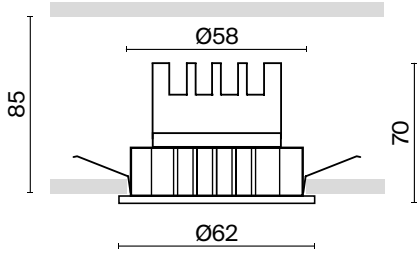



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL057-7W3K-B	7 W	390 LM	NO	IP 20
3K WARM WHITE	WHITE	DL057-7W3K-W	7 W	400 LM	NO	IP 20

Lenses, filters and rings

[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

Read more on the website



	SYSTEM ELEMENT	ARTICLE	DEGREE	COLOR
1	DECORATIVE RING	RING057-7-MG		MATTE GOLD
2	ANTI-DAZZLE FILTERS	HONEYCOMB-D26		
3	LENSES	LENSD29-15	15°	
		LENSD29-24	24°	
		LENSD29-36	36°	
		LENSD50-50	50°	

Wise


[EN] Material: aluminium and plastic. You can additionally purchase matte gold replaceable reflectors and lenses for beam adjustment in the range of 15°-50°.
[DE] Material: Aluminium und Kunststoff. Optional sind austauschbare Reflektoren in Farbe Mattes Gold und Linsen zur Strahleneinstellung zwischen 15°-50° erhältlich.
[IT] I materiali sono l'alluminio e il plastico. Inoltre, è possibile acquistare i riflettori intercambiabili di colore l'oro opaco e le lenti per la regolazione del fascio nell'intervallo da 15°a 50°.
[FR] Matériau: aluminium et plastique. De plus, vous pouvez acheter des réflecteurs remplaçables de couleur doré mat et des lentilles pour un réglage du faisceau entre 15° et 50°.


Read more
on the website

B W LED CRI >90 36°

LEDS EPISTAR



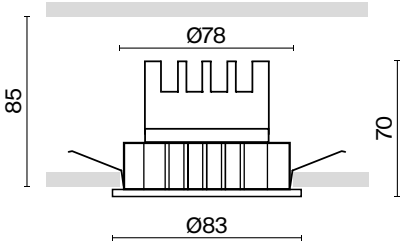



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL057-10W3K-B	10 W	570 LM	NO	IP 20
3K WARM WHITE	WHITE	DL057-10W3K-W	10 W	530 LM	NO	IP 20

Lenses, filters and rings

[EN] Replaceable lens to adjust the scattering beam angle (15°, 24°, 36° and 50°).
[DE] Auswechselbare Linse zur Einstellung des Streuwinkels (15°, 24°, 36° und 50°).
[IT] Lente intercambiabile per regolare l'angolo di diffusione (15°, 24°, 36° e 50°).
[FR] Lentille amovible pour le réglage de l'angle de diffusion (sur 15°, 24°, 36° et 50°).

Read more on the website




	SYSTEM ELEMENT	ARTICLE	DEGREE	COLOR
1	DECORATIVE RING	RING057-10-MG		MATTE GOLD
2	ANTI-DAZZLE FILTERS	HONEYCOMB-D31		
3	LENSES	LENSD31-15	15°	
		LENSD31-24	24°	
		LENSD31-36	36°	
		LENSD31-50	50°	


Yin

[EN] Metal body. Models with built-in LED source and replaceable light source (not included). Some models are equipped with a dimmer.
[DE] Metallrahmen. Modelle mit einer integrierten LED-Lichtquelle und austauschbaren Lichtquelle (nicht im Lieferumfang enthalten). Einige Modelle sind mit einem Dimmer ausgestattet.
[IT] Corpo in metallo. Modelli con sorgente LED integrata e sorgente luminosa sostituibile (non inclusa). Alcuni modelli sono dotati di un dimmer.
[FR] Corps en métallique. Modèles avec source LED intégrée et source de lumière amovible (non comprise dans le lot). Partie des modèles équipée d'un variateur.

Read more
on the website

B W

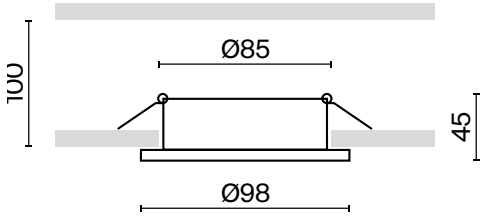





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL030-2-01B	10 W	IP 20
1 x GU10	WHITE	DL030-2-01W	10 W	IP 20


Yin

[EN] Metal body. Models with built-in LED source and replaceable light source (not included). Some models are equipped with a dimmer.
[DE] Metallrahmen. Modelle mit einer integrierten LED-Lichtquelle und austauschbaren Lichtquelle (nicht im Lieferumfang enthalten). Einige Modelle sind mit einem Dimmer ausgestattet.
[IT] Corpo in metallo. Modelli con sorgente LED integrata e sorgente luminosa sostituibile (non inclusa). Alcuni modelli sono dotati di un dimmer.
[FR] Corps en métallique. Modèles avec source LED intégrée et source de lumière amovible (non comprise dans le lot). Partie des modèles équipée d'un variateur.

Read more on the website

B W LED TRIAC CRI >90 60°

LEDS BRIDGELUX

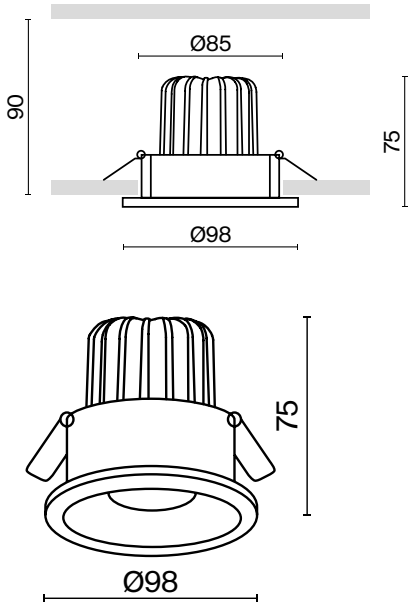



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL031-2-L12B	12 W	790 LM	NO	IP 20
4K WHITE	BLACK	DL031-L12W4K-B	12 W	830 LM	NO	IP 20
4K WHITE	WHITE	DL031-L12W4K-W	12 W	960 LM	NO	IP 20
3K WARM WHITE	BLACK	DL031-L12W3K-D-B	12 W	760 LM	TRIAC	IP 20
3K WARM WHITE	WHITE	DL031-L12W3K-D-W	12 W	870 LM	TRIAC	IP 20
4K WHITE	BLACK	DL031-L12W4K-D-B	12 W	820 LM	TRIAC	IP 20


Zoom

[EN] Body material - cast aluminum. High level of protection IP65. The light source is a GU10 lamp (not included) recessed into the body.
[DE] Rahmenmaterial: Aluminiumguss. Hohe Schutzart IP65. Die Lichtquelle – ein Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten) — ist im Rahmen versenkt.
[IT] Materiale del corpo: alluminio fuso . Alto livello di protezione IP65. La sorgente luminosa è una lampadina GU10 (non inclusa) incassata nel corpo.
[FR] Matériau du corps: aluminium coulé. Fort indice de protection IP65. Source de lumière : ampoule GU10 (non comprise dans le lot), encastrée dans le corps.

Read more
on the website

B W

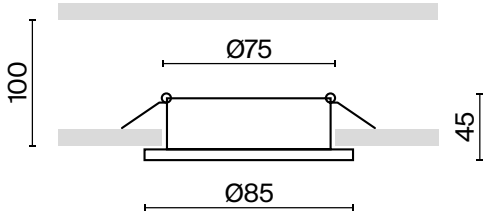






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL032-2-01B	10 W	IP 65
1 x GU10	WHITE	DL032-2-01W	10 W	IP 65


Zoom

[EN] Body material - cast aluminum. High level of protection IP65. The light source is a GU10 lamp (not included) recessed into the body.
[DE] Rahmenmaterial: Aluminiumguss. Hohe Schutzart IP65. Die Lichtquelle – ein Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten) — ist im Rahmen versenkt.
[IT] Materiale del corpo: alluminio fuso . Alto livello di protezione IP65. La sorgente luminosa è una lampadina GU10 (non inclusa) incassata nel corpo.
[FR] Matériau du corps: aluminium coulé. Fort indice de protection IP65. Source de lumière : ampoule GU10 (non comprise dans le lot), encastrée dans le corps.

Read more
on the website


B W

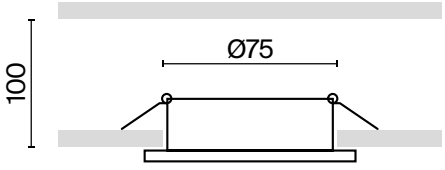






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	DL033-2-01B	10 W	IP 65
1 x GU10	WHITE	DL033-2-01W	10 W	IP 65

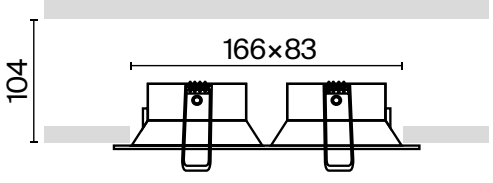





2 x GU10	BLACK	DL033-2-02B	10 W	IP 65
2 x GU10	WHITE	DL033-2-02W	10 W	IP 65




DL033-2-01B


Zoom


[EN] Body material - cast aluminum. High level of protection IP65. The light source is a GU10 lamp (not included) recessed into the body.
[DE] Rahmenmaterial: Aluminiumguss. Hohe Schutzart IP65. Die Lichtquelle – ein Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten) — ist im Rahmen versenkt.
[IT] Materiale del corpo: alluminio fuso . Alto livello di protezione IP65. La sorgente luminosa è una lampadina GU10 (non inclusa) incassata nel corpo.
[FR] Matériau du corps: aluminium coulé. Fort indice de protection IP65. Source de lumière : ampoule GU10 (non comprise dans le lot), encastrée dans le corps.

Read more
on the website

B W LED TRIAC 60°

LEDS BRIDGELUX

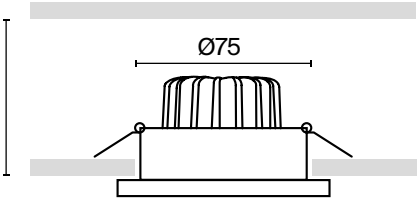





COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL034-01-06W3K-B	6 W	420 LM	NO	IP65
3K WARM WHITE	BLACK	DL034-01-06W3K-D-B	6 W	370 LM	TRIAC	IP65
3K WARM WHITE	WHITE	DL034-01-06W3K-W	6 W	470 LM	NO	IP65
3K WARM WHITE	WHITE	DL034-01-06W3K-D-W	6 W	420 LM	TRIAC	IP65
4K WHITE	BLACK	DL034-01-06W4K-B	6 W	410 LM	NO	IP65
4K WHITE	BLACK	DL034-01-06W4K-D-B	6 W	390 LM	TRIAC	IP65
4K WHITE	WHITE	DL034-01-06W4K-W	6 W	480 LM	NO	IP65
4K WHITE	WHITE	DL034-01-06W4K-D-W	6 W	440 LM	TRIAC	IP65


Zoom


[EN] Body material - cast aluminum. High level of protection IP65. The light source is a GU10 lamp (not included) recessed into the body.
[DE] Rahmenmaterial: Aluminiumguss. Hohe Schutzart IP65. Die Lichtquelle – ein Leuchtmittel mit GU10-Fassung (nicht im Lieferumfang enthalten) — ist im Rahmen versenkt.
[IT] Materiale del corpo: alluminio fuso . Alto livello di protezione IP65. La sorgente luminosa è una lampadina GU10 (non inclusa) incassata nel corpo.
[FR] Matériau du corps: aluminium coulé. Fort indice de protection IP65. Source de lumière : ampoule GU10 (non comprise dans le lot), encastrée dans le corps.

Read more
on the website

B W LED TRIAC 60°

LEDS BRIDGELUX

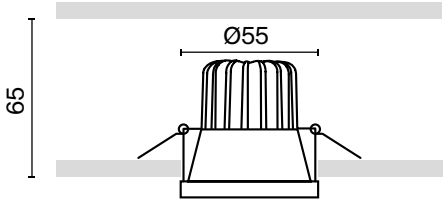





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	DL034-L12W4K-B	12 W	970 LM	NO	IP65
3K WARM WHITE	WHITE	DL034-L12W4K-W	12 W	1040 LM	NO	IP65
4K WHITE	BLACK	DL034-L12W3K-D-B	12 W	890 LM	TRIAC	IP65
4K WHITE	WHITE	DL034-L12W3K-D-W	12 W	910 LM	TRIAC	IP65
3K WARM WHITE	BLACK	DL034-L12W4K-D-B	12 W	930 LM	TRIAC	IP65
3K WARM WHITE	WHITE	DL034-L12W4K-D-W	12 W	990 LM	TRIAC	IP65



ARTISAN	312	**FOCUS LED**	316	**FOCUS S**	324
CALIPSO	314	**FOCUS T**	318	**FOCUS**	325



FOCUS T
C140TRS-L300-7W3K-B

Artisan


Read more
on the website

[EN] Graphic texture, metal body. GU10 lamp (not included). An optional anti-glare grille HoneyComb-D45 ensuring a low glare factor is available for this model.
[DE] Grafische Textur, Metallgehäuse. GU10- Leuchtmittel mit Sockel (nicht im Lieferumfang enthalten). Für dieses Modell ist optional ein zusätzlicher Blendschutzgitter HoneyComb-D45 erhältlich, der einen geringen Blendfaktor gewährleistet.
[IT] Texture grafica, corpo in metallo. Lampada GU10 (non inclusa). Per questo modello è disponibile una griglia antiriflesso HoneyComb-D45 opzionale che assicura un basso fattore di abbagliamento.
[FR] Texture graphique, corps en métal. Lampe avec culot GU10 (non incluse). Une grille anti-éblouissement HoneyComb-D45 garantissant un faible niveau d'éblouissement est disponible pour ce modèle.

B W MG B



ANTI-DAZZLE FILTERS HONEYCOMB-D45



LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C081CL-01-GU10-B	12 W	IP 20
1 x GU10	WHITE	C081CL-01-GU10-MG	12 W	IP 20
1 x GU10	MATTE GOLD / BLACK	C081CL-01-GU10-W	12 W	IP 20



C081CL-01-GU10-B


Calipso

[EN] Designer series. Metal housing with a textured, graphic pattern. Light source: replaceable GU10 lamp.
[DE] Designer-Serie. Metallgehäuse mit grafischem Reliefmuster. Lichtquelle: austauschbares GU10- Leuchtmittel mit Sockel.
[IT] Serie di design. Corpo in metallo con motivo grafico in rilievo. Fonte luminosa: lampada sostituibile con attacco GU10.
[FR] Série design. Boîtier en métal avec motif graphique en relief. Source lumineuse: lampe remplaçable avec culot GU10.

Read more
on the website

B W MG B



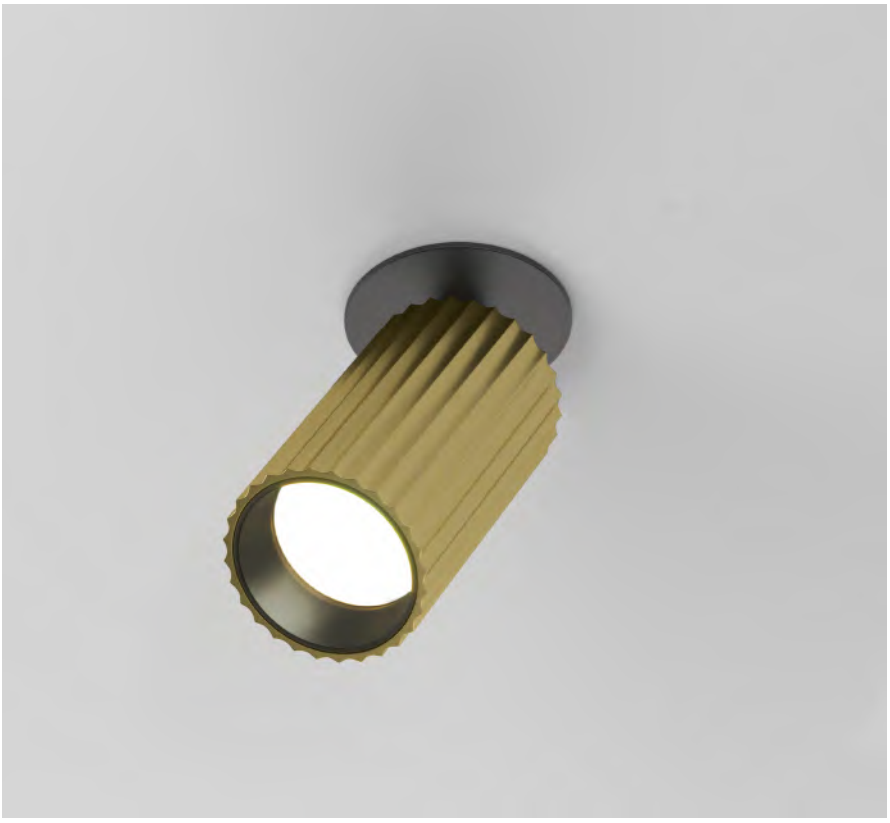

ANTI-DAZZLE FILTERS HONEYCOMB-D45

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C110CL-01-GU10-B	10 W	IP 20
1 x GU10	WHITE	C110CL-01-GU10-W	10 W	IP 20
1 x GU10	BLACK / BRASS	C110CL-01-GU10-BS	10 W	IP 20


C110CL-01-GU10-BS
DESIGN ESSENTIALS
INTERIOR
MODERN ARCHITECTURE


Focus LED


[EN] Metal body. Beam angle is 50°. Some models are dimmable. The LED light source is recessed into the body.
[DE] Metallrahmen. Lichtstreuwinkel 50°. Einige Modelle sind dimmbar. Die im Rahmen versenkte LED-Lichquelle.
[IT] Corpo in metallo. Angolo di diffusione 50°. Alcuni modelli sono dimmerabili. La sorgente luminosa a LED è incassata nel corpo.
[FR] Corps métallique. Angle de diffusion de 50°. Partie des modèles avec variateur. Source de lumière LED encastrée dans le corps.


Read more
on the website

B W LED CRI >90 50°

LEDS EPISTAR

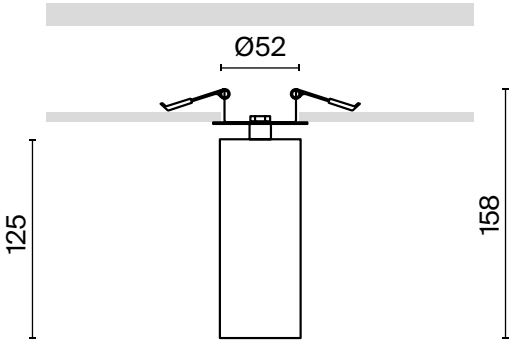



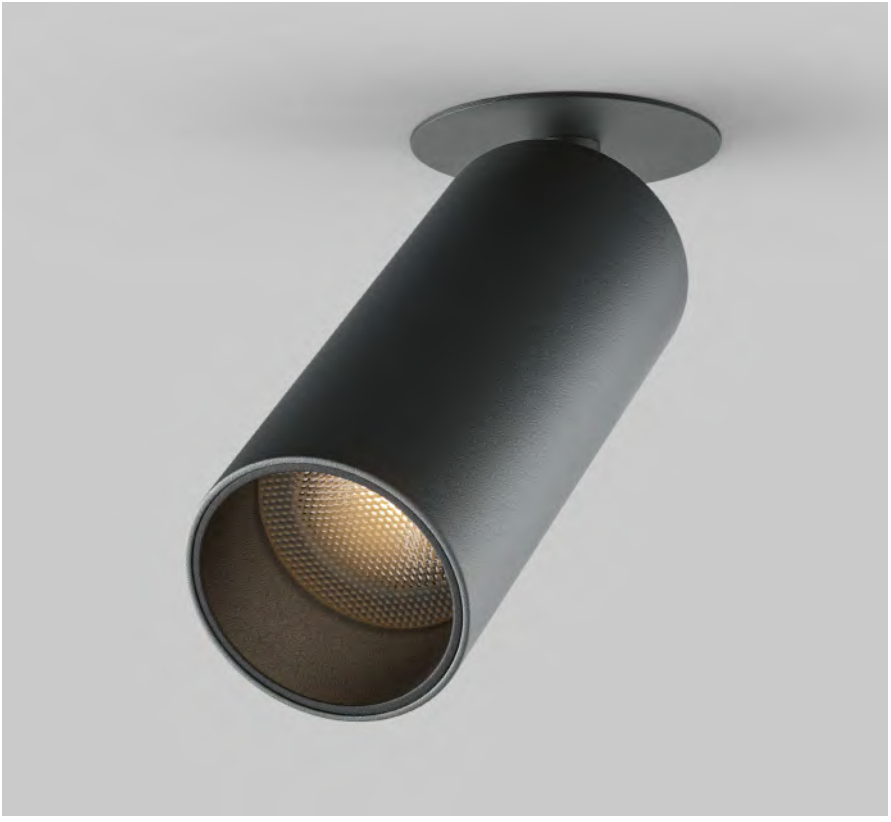

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C053CL-L12W3K-W-B	12 W	950 LM	NO	IP 20
3K WARM WHITE	WHITE	C053CL-L12W3K-W-W	12 W	950 LM	NO	IP 20
4K WHITE	BLACK	C053CL-L12W4K-W-B	12 W	1020 LM	NO	IP 20
4K WHITE	WHITE	C053CL-L12W4K-W-W	12 W	1020 LM	NO	IP 20


C053CL-L12W4K-W-B

Focus T

EN Compact metal body. A recessed light source for eye comfort.
DE Kompakter Metallrahmen. Die versenkte Lichtquelle für den Augenkomfort.
IT Il corpo in metallo compatto. La sorgente luminosa da incasso per il comfort degli occhi.
FR Corps métallique compact. Source de lumière encastrée pour le confort des yeux.


Read more
on the website

B LED CRI >90 36°

LEDS EPISTAR



ANTI-DAZZLE FILTERS HONEYCOMB-D45

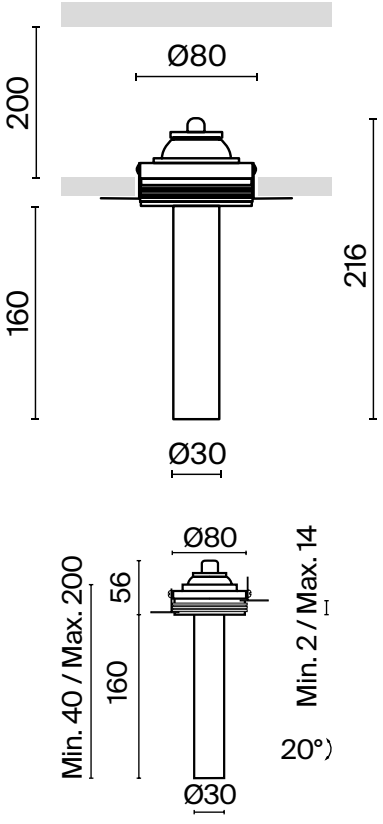

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C140TRS-L200-7W3K-B	7 W	460 LM	NO	IP 20


Focus T


[EN] Compact metal body. A recessed light source for eye comfort.
[DE] Kompakter Metallrahmen. Die versenkte Lichtquelle für den Augenkomfort.
[IT] Il corpo in metallo compatto. La sorgente luminosa da incasso per il comfort degli occhi.
[FR] Corps métallique compact. Source de lumière encastrée pour le confort des yeux.

Read more
on the website

B W BS B LED CRI >90 36°

LEDS EPISTAR

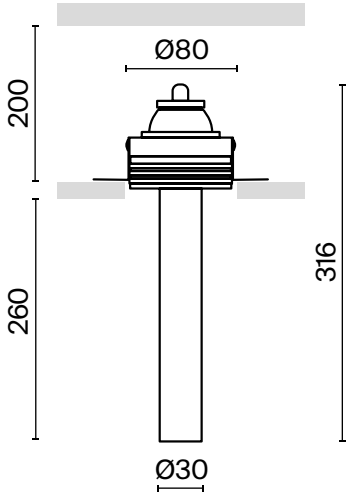





ANTI-DAZZLE FILTERS HONEYCOMB-D45

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C140TRS-L300-7W3K-B	7 W	460 LM	NO	IP 20
3K WARM WHITE	WHITE	C140TRS-L300-7W3K-W	7 W	460 LM	NO	IP 20
3K WARM WHITE	BLACK/BRASS	C140TRS-L300-7W3K-BBS	7 W	460 LM	NO	IP 20


Focus T


EN Compact metal body. A recessed light source for eye comfort.
DE Kompakter Metallrahmen. Die versenkte Lichtquelle für den Augenkomfort.
IT Il corpo in metallo compatto. La sorgente luminosa da incasso per il comfort degli occhi.
FR Corps métallique compact. Source de lumière encastrée pour le confort des yeux.

Read more
on the website

B W BS B LED CRI >90 36°

LEDS EPISTAR

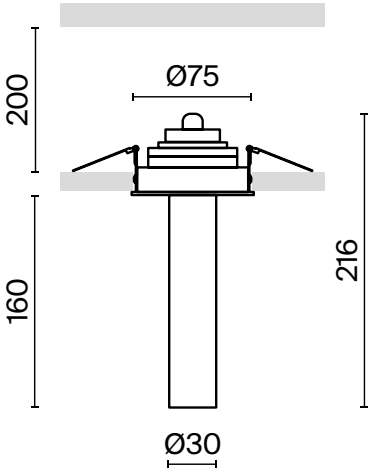





ANTI-DAZZLE FILTERS HONEYCOMB-D45

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C140RS-L200-7W3K-B	7 W	460 LM	NO	IP 20
3K WARM WHITE	WHITE	C140RS-L200-7W3K-W	7 W	460 LM	NO	IP 20
3K WARM WHITE	BLACK/BRASS	C140RS-L200-7W3K-BBS	7 W	460 LM	NO	IP 20


Focus T


EN Compact metal body. A recessed light source for eye comfort.
DE Kompakter Metallrahmen. Die versenkte Lichtquelle für den Augenkomfort.
IT Il corpo in metallo compatto. La sorgente luminosa da incasso per il comfort degli occhi.
FR Corps métallique compact. Source de lumière encastrée pour le confort des yeux.

Read more
on the website

W LED CRI >90 38°

LEDS EPISTAR

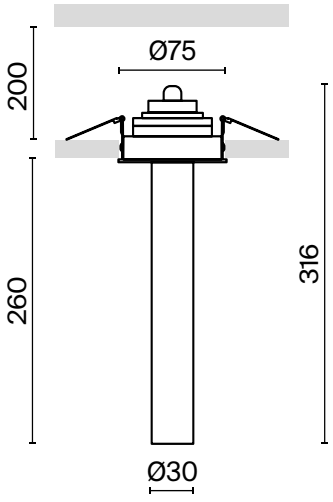





ANTI-DAZZLE FILTERS HONEYCOMB-D45

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	WHITE	C140RS-L300-7W3K-W	7 W	460 LM	NO	IP 20


Focus T


EN Compact metal body. A recessed light source for eye comfort.
DE Kompakter Metallrahmen. Die versenkte Lichtquelle für den Augenkomfort.
IT Il corpo in metallo compatto. La sorgente luminosa da incasso per il comfort degli occhi.
FR Corps métallique compact. Source de lumière encastrée pour le confort des yeux.

Read more
on the website

B W BS LED CRI >90 36°

LEDS EPISTAR

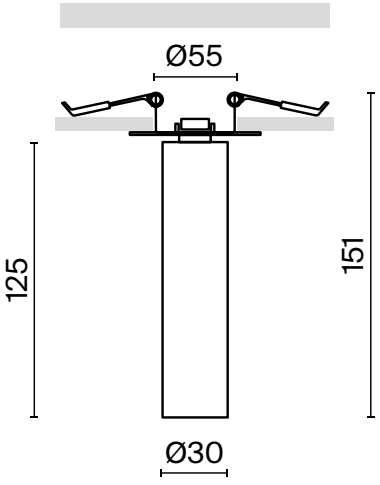





ANTI-DAZZLE FILTERS HONEYCOMB-D45

COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C141RS-L125-6W3K-B	6 W	270 LM	NO	IP 20
3K WARM WHITE	WHITE	C141RS-L125-6W3K-W	6 W	280 LM	NO	IP 20
3K WARM WHITE	BRASS	C141RS-L125-6W3K-BBS	6 W	340 LM	NO	IP 20


Focus T

EN Compact metal body. A recessed light source for eye comfort.
DE Kompakter Metallrahmen. Die versenkte Lichtquelle für den Augenkomfort.
IT Il corpo in metallo compatto. La sorgente luminosa da incasso per il comfort degli occhi.
FR Corps métallique compact. Source de lumière encastrée pour le confort des yeux.

Read more
on the website

B W LED CRI >90 36°

LEDS EPISTAR

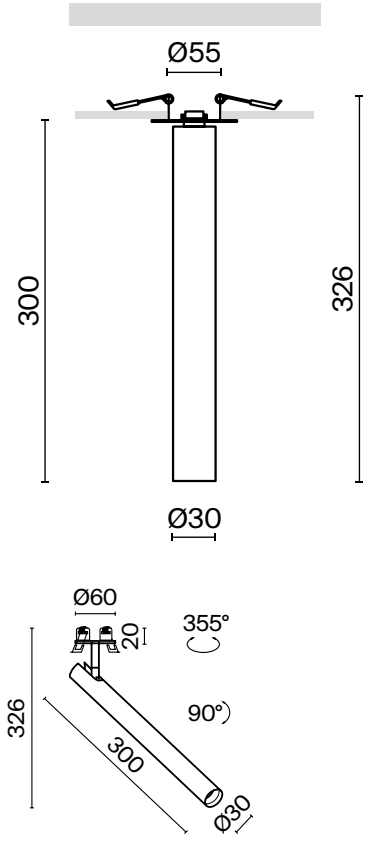



ANTI-DAZZLE FILTERS HONEYCOMB-D45

COMPATIBLE WITH DRIVER


TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE


CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C141RS-L300-6W3K-B	6 W	300 LM	NO	IP 20
3K WARM WHITE	WHITE	C141RS-L300-6W3K-W	6 W	350 LM	NO	IP 20

Focus S

[EN] Metal body. Swivel mechanism. Optional mounts: built-in and removable (for one or two dome lamps). Great choise of colors. The light source is a lamp with a GU10 base.
[DE] Metallrahmen. Schwenkvorrichtung. Befestigungen zur Auswahl: Einbau- und Aufsatzbefestigungen (für einen oder zwei Lampenschirme). Große Auswahl an Farbtönen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10.
[IT] Corpo in metallo. Meccanismo girevole. Fissaggi a scelta: integrato e sovrapposto (per una o due plafoniere). Ampia gamma di colori. La sorgente luminosa è una lampadina con attacco GU10.
[FR] Corps métallique. Mécanisme pivotant. Fixations au choix: encastrées et en saillie (pour un ou deux globes). Large choix de couleurs. Source de lumière: ampoule à culot GU10.

Read more
on the website

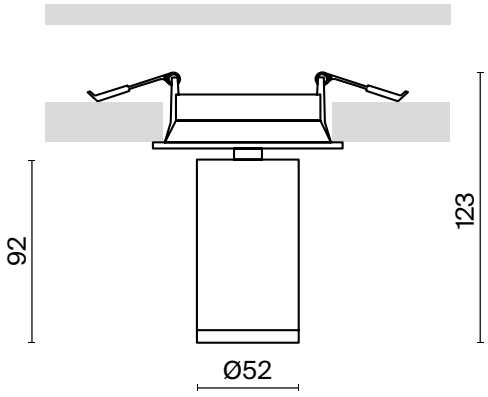






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C048CL-U-1B	10 W	IP 20
1 x GU10	WHITE	C048CL-U-1W	10 W	IP 20
1 x GU10	MATTE SILVER / BLACK	C048CL-U-1BS	10 W	IP 20
1 x GU10	MATTE GOLD / BLACK	C048CL-U-1BMG	10 W	IP 20
1 x GU10	MATTE GOLD / WHITE	C048CL-U-1WMG	10 W	IP 20


Focus


[EN] Metal body. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps en métal. Source de lumière: ampoule à culot GU10 (non comprise dans le lo).

Read more
on the website

B W MG

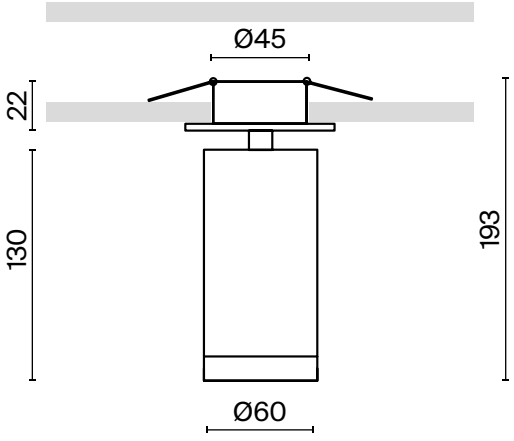



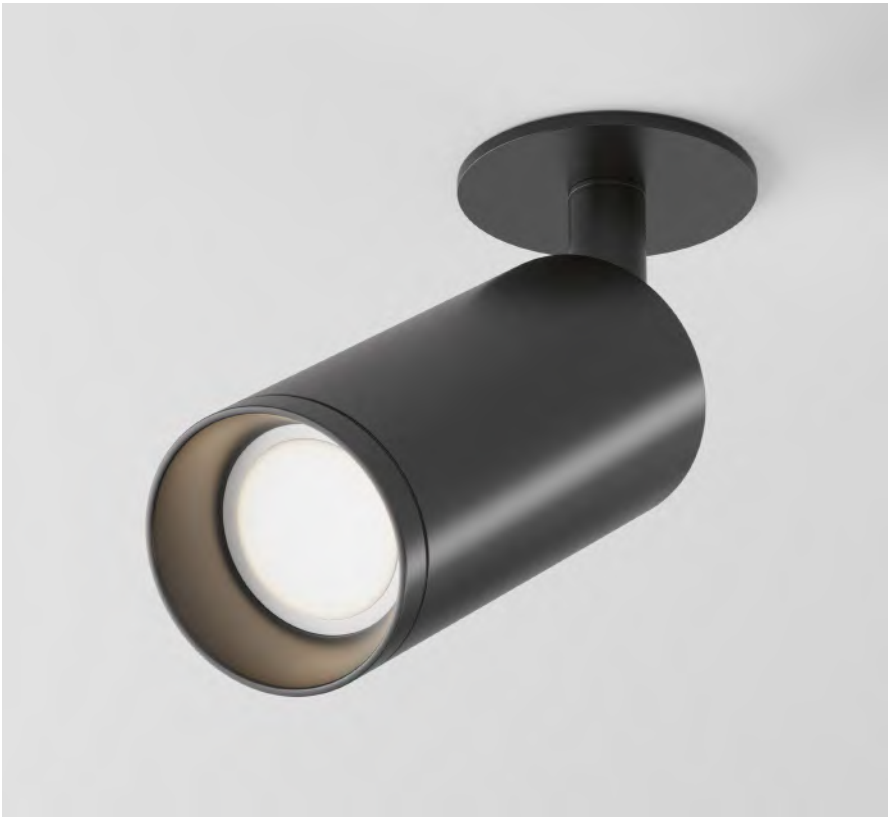

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C018CL-01B	10 W	IP 20
1 x GU10	WHITE	C018CL-01W	10 W	IP 20
1 x GU10	MATTE GOLD	C018CL-01MG	10 W	IP 20



ARTISAN	328	**FOCUS ZOOM**	354	**PLANET**	368
ATOM	330	**HOOP**	356	**YIN**	370
CALIPSO	332	**HYDRA**	357	**ZON**	372
ELTI	335	**LIPARI**	358	**ZOOM**	380
DAFNE	336	**ONDA**	360	**LENS**	382
FOCUS	338	**PAULINE**	362	**ALFA LED**	386
FOCUS LED	342	**VEGA**	363	**FOCUS DESIGN**	389
FOCUS S	346	**POLAR**	364	**ORLO**	390
FOCUS T	350	**SLIM**	366		




HYDRA
C090CL-15W3K-B


Artisan

[EN] Graphic texture, metal body. GU10 lamp (not included). An optional anti-glare grille HoneyComb-D45 ensuring a low glare factor is available for this model.
[DE] Grafische Textur, Metallgehäuse. GU10- Leuchtmittel mit Sockel (nicht im Lieferumfang enthalten). Für dieses Modell ist optional ein zusätzlicher Blendschutzgitter HoneyComb-D45 erhältlich, der einen geringen Blendfaktor gewährleistet.
[IT] Texture grafica, corpo in metallo. Lampada GU10 (non inclusa). Per questo modello è disponibile una griglia antiriflesso HoneyComb-D45 opzionale che assicura un basso fattore di abbagliamento.
[FR] Texture graphique, corps en métal.Lampe avec culot GU10 (non incluse). Une grille anti-éblouissement HoneyComb-D45 garantissant un faible niveau d'éblouissement est disponible pour ce modèle.

Read more on the website

B W MG

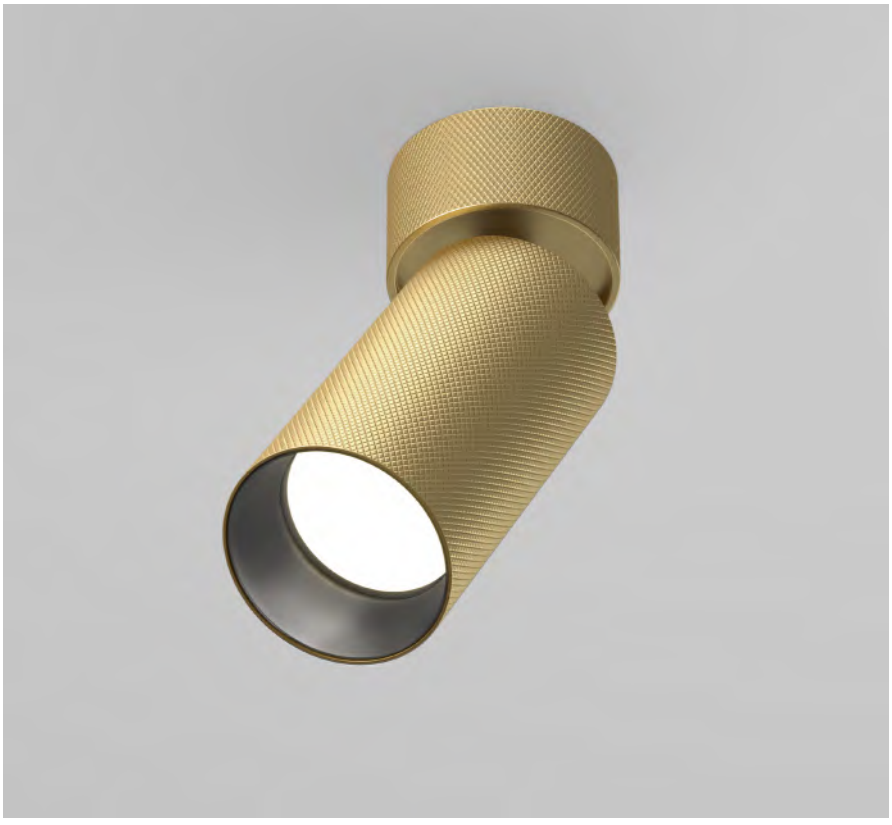



ANTI-DAZZLE FILTERS HONEYCOMB-D45

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C082CL-01-GU10-B	10 W	IP 20
1 x GU10	WHITE	C082CL-01-GU10-W	10 W	IP 20
1 x GU10	MATTE GOLD	C082CL-01-GU10-MG	10 W	IP 20


Artisan

[EN] Graphic texture, metal body. GU10 lamp (not included). An optional anti-glare grille HoneyComb-D45 ensuring a low glare factor is available for this model.
[DE] Grafische Textur, Metallgehäuse. GU10- Leuchtmittel mit Sockel (nicht im Lieferumfang enthalten). Für dieses Modell ist optional ein zusätzlicher Blendschutzgitter HoneyComb-D45 erhältlich, der einen geringen Blendfaktor gewährleistet.
[IT] Texture grafica, corpo in metallo. Lampada GU10 (non inclusa). Per questo modello è disponibile una griglia antiriflesso HoneyComb-D45 opzionale che assicura un basso fattore di abbagliamento.
[FR] Texture graphique, corps en métal.Lampe avec culot GU10 (non incluse). Une grille anti-éblouissement HoneyComb-D45 garantissant un faible niveau d'éblouissement est disponible pour ce modèle.

Read more on the website

B W MG





ANTI-DAZZLE FILTERS HONEYCOMB-D45

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C080CL-01-GU10-B	10 W	IP 20
1 x GU10	WHITE	C080CL-01-GU10-W	10 W	IP 20
1 x GU10	MATTE GOLD	C080CL-01-GU10-MG	10 W	IP 20


Atom

EN Metal body. The light source is a lamp with a GU10 base (not included).
DE Metallrahmen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
IT Corpo in metallo. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
FR Corps métallique. Source de lumière: ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

B W





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C016CL-01B	10 W	IP 20
1 x GU10	WHITE	C016CL-01W	10 W	IP 20


Atom

[EN] Metal body. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps métallique. Source de lumière: ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

B W





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
2 x GU10	BLACK	C017CL-02B	10 W	IP 20


Calipso

[EN] Designer series. Metal housing with a textured, graphic pattern. Light source: replaceable GU10 lamp.
[DE] Designer-Serie. Metallgehäuse mit grafischem Reliefmuster. Lichtquelle: austauschbares GU10- Leuchtmittel mit Sockel.
[IT] Serie di design. Corpo in metallo con motivo grafico in rilievo. Fonte luminosa: lampada sostituibile con attacco GU10.
[FR] Série design. Boîtier en métal avec motif graphique en relief. Source lumineuse: lampe remplaçable avec culot GU10.

Read more
on the website

B W BS





ANTI-DAZZLE FILTERS HONEYCOMB-D45

LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C106CL-01-GU10-B	10 W	IP 20
1 x GU10	WHITE	C106CL-01-GU10-W	10 W	IP 20
1 x GU10	BRASS	C106CL-01-GU10-BS	10 W	IP 20


C106CL-01-GU10-BS


Calipso

[EN] Designer series. Metal housing with a textured, graphic pattern. Light source: replaceable GU10 lamp.
[DE] Designer-Serie. Metallgehäuse mit grafischem Reliefmuster. Lichtquelle: austauschbares GU10- Leuchtmittel mit Sockel.
[IT] Serie di design. Corpo in metallo con motivo grafico in rilievo. Fonte luminosa: lampada sostituibile con attacco GU10.
[FR] Série design. Boîtier en métal avec motif graphique en relief. Source lumineuse: lampe remplaçable avec culot GU10.

Read more
on the website

B W BS





ANTI-DAZZLE FILTERS HONEYCOMB-D45


LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C108CL-01-GU10-B	10 W	IP 20
1 x GU10	WHITE	C108CL-01-GU10-W	10 W	IP 20
1 x GU10	BRASS	C108CL-01-GU10-BS	10 W	IP 20

Elti

[EN] Metal body. Adjustment of a light flux on 360 ° (in a horizontal plane) and 180° (in a vertical plane). The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Einstellbarer Lichtstrom um 360° (horizontal) und 180° (vertikal). Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Regolazione del flusso luminoso su 360° (in un piano orizzontale) e 180° (in un piano verticale). La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps en métal. Réglage du flux lumineux à 360° (sur le plan horizontal) et à 180° (sur le plan vertical). Source de lumière: ampoule à culot GU10 (non comprise dans le lot).


Read more on the website

B W G B





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
2 x GU10	BLACK	C021CL-02B	10 W	IP 20
2 x GU10	WHITE	C021CL-02W	10 W	IP 20





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK / GOLD	C020CL-01GB	10 W	IP 20

Dafne


EN Metal body. Swivel mechanism for adjusting the light flux. LED light source.
DE Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms. LED-Lichtquelle.
IT Corpo in metallo. Meccanismo girevole per la regolazione del flusso luminoso. Sorgente luminosa LED.
FR Corps métallique. Mécanisme pivotant pour le réglage du flux lumineux. Source de lumière LED.

Read more
on the website

B W LED CRI >90 50°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C027CL-L10B	10 W	800 LM	NO	IP 20
3K WARM WHITE	WHITE	C027CL-L10W	10 W	800 LM	NO	IP 20
4K WHITE	WHITE	C027CL-L10W4K	10 W	1060 LM	NO	IP 20




Focus

[EN] Metal body. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps en métal. Source de lumière: ampoule à culot GU10 (non comprise dans le lo).

Read more
on the website

B W MG





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C017CW-01B	10 W	IP 20
1 x GU10	WHITE	C017CW-01W	10 W	IP 20
1 x GU10	MATTE GOLD	C017CW-01MG	10 W	IP 20


C017CW-01B


Focus

[EN] Metal body. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen. Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps en métal. Source de lumière: ampoule à culot GU10 (non comprise dans le lo).

Read more
on the website

B W MG





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C010CL-01B	10 W	IP 20
1 x GU10	WHITE	C010CL-01W	10 W	IP 20
1 x GU10	MATTE GOLD	C010CL-01MG	10 W	IP 20


C010CL-01B

Focus LED


[EN] Metal body. Beam angle is 50° (lens can be changed to 15°, 24°, 36°). Some models are dimmable. The LED light source is recessed into the body.
[DE] Metallrahmen. Lichtstreuwinkel 50° (die Linse kann gegen eine andere mit dem Lichtstreuwinkel 15°, 24°, 36° ausgetauscht werden). Einige Modelle sind dimmbar. Die im Rahmen versenkte LED-Lichquelle.
[IT] Corpo in metallo. Angolo di diffusione 50° (lenti modificabili a 15°, 24°, 36°). Alcuni modelli sono dimmerabili. La sorgente luminosa a LED è incassata nel corpo.
[FR] Corps métallique. Angle de diffusion de 50° (possibilité de changer la lentille à 15°, 24°, 36°). Partie des modèles avec variateur. Source de lumière LED encastrée dans le corps.

Read more on the website

B W BS LED CRI >90 50°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C055CL-L12B3K-W-B	12 W	900 LM	NO	IP20
3K WARM WHITE	WHITE	C055CL-L12W3K-W-W	12 W	900 LM	NO	IP20
3K WARM WHITE	BLACK	C055CL-L12B3K-W-D-B	12 W	900 LM	TRIAC	IP20
3K WARM WHITE	WHITE	C055CL-L12W3K-W-D-W	12 W	900 LM	TRIAC	IP20
4K WHITE	BLACK	C055CL-L12B4K-W-B	12 W	900 LM	NO	IP20
4K WHITE	WHITE	C055CL-L12W4K-W-W	12 W	900 LM	NO	IP20
4K WHITE	BLACK	C055CL-L12B4K-W-D-B	12 W	900 LM	TRIAC	IP20
4K WHITE	WHITE	C055CL-L12W4K-W-D-W	12 W	900 LM	TRIAC	IP20
3K WARM WHITE	BRASS	C055CL-L12W3K-W-BS	12 W	900 LM	NO	IP 20


C055CL-L12B4K-W-B

Focus LED


[EN] Metal body. Beam angle is 50° (lens can be changed to 15°, 24°, 36°). Some models are dimmable. The LED light source is recessed into the body.
[DE] Metallrahmen. Lichtstreuwinkel 50° (die Linse kann gegen eine andere mit dem Lichtstreuwinkel 15°, 24°, 36° ausgetauscht werden). Einige Modelle sind dimmbar. Die im Rahmen versenkte LED-Lichquelle.
[IT] Corpo in metallo. Angolo di diffusione 50° (lenti modificabili a 15°, 24°, 36°). Alcuni modelli sono dimmerabili. La sorgente luminosa a LED è incassata nel corpo.
[FR] Corps métallique. Angle de diffusion de 50° (possibilité de changer la lentille à 15°, 24°, 36°). Partie des modèles avec variateur. Source de lumière LED encastrée dans le corps.

Read more on the website

B W BS LED CRI >90 50°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C056CL-L12B3K-W-B	12 W	900 LM	NO	IP 20
3K WARM WHITE	WHITE	C056CL-L12W3K-W-W	12 W	900 LM	NO	IP20
3K WARM WHITE	BRASS	C056CL-L12W3K-W-BS	12 W	900 LM	NO	IP 20
3K WARM WHITE	WHITE	C056CL-L12W3K-W-D-W	12 W	900 LM	TRIAC	IP20
4K WHITE	BLACK	C056CL-L12B4K-W-B	12 W	900 LM	NO	IP20
4K WHITE	WHITE	C056CL-L12W4K-W-W	12 W	900 LM	NO	IP20
4K WHITE	BLACK	C056CL-L12B4K-W-D-B	12 W	900 LM	TRIAC	IP20



C056CL-L12W4K-W-D-W

Focus S

[EN] Metal body. Swivel mechanism. Optional mounts: recessed and removable (for one or two dome lamps). Great choise of colors. The light source is a lamp with a GU10 base.
[DE] Metallrahmen. Schwenkvorrichtung. Befestigungen zur Auswahl: Einbau- und Aufsatzbefestigungen (für einen oder zwei Lampenschirme). Große Auswahl an Farbtönen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10.
[IT] Corpo in metallo. Meccanismo girevole. Fissaggi a scelta: integrato e sovrapposto (per una o due plafoniere). Ampia gamma di colori. La sorgente luminosa è una lampadina con attacco GU10.
[FR] Corps métallique. Mécanisme pivotant. Fixations au choix: encastrées et en saillie (pour un ou deux globes). Large choix de couleurs. Source de lumière: ampoule à culot GU10.


Read more on the website

B W BS MG





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C052CL-01B	10 W	IP 20
1 x GU10	WHITE	C052CL-01W	10 W	IP 20
1 x GU10	MATTE GOLD	C052CL-01MG	10 W	IP 20
1 x GU10	BRASS	C052CL-01BS	10 W	IP 20





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C051CL-01B	10 W	IP 20
1 x GU10	WHITE	C051CL-01W	10 W	IP 20
1 x GU10	MATTE GOLD	C051CL-01MG	10 W	IP 20
1 x GU10	BRASS	C051CL-01BS	10 W	IP 20


C051CL-01W


Focus S

[EN] Metal body. Swivel mechanism. Optional mounts: built-in and removable (for one or two dome lamps). Great choise of colors. The light source is a lamp with a GU10 base.
[DE] Metallrahmen. Schwenkvorrichtung. Befestigungen zur Auswahl: Einbau- und Aufsatzbefestigungen (für einen oder zwei Lampenschirme). Große Auswahl an Farbtönen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10.
[IT] Corpo in metallo. Meccanismo girevole. Fissaggi a scelta: integrato e sovrapposto (per una o due plafoniere). Ampia gamma di colori. La sorgente luminosa è una lampadina con attacco GU10.
[FR] Corps métallique. Mécanisme pivotant. Fixations au choix: encastrées et en saillie (pour un ou deux globes). Large choix de couleurs. Source de lumière: ampoule à culot GU10.

Read more
on the website

B W MG S





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C050CL-U-1B	10 W	IP 20
1 x GU10	WHITE	C050CL-U-1W	10 W	IP 20
1 x GU10	MATTE GOLD	C050CL-U-1MG	10 W	IP 20
1 x GU10	SILVER	C050CL-U-1S	10 W	IP 20


Focus S

[EN] Metal body. Swivel mechanism. Optional mounts: built-in and removable (for one or two dome lamps). Great choise of colors. The light source is a lamp with a GU10 base.
[DE] Metallrahmen. Schwenkvorrichtung. Befestigungen zur Auswahl: Einbau- und Aufsatzbefestigungen (für einen oder zwei Lampenschirme). Große Auswahl an Farbtönen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10.
[IT] Corpo in metallo. Meccanismo girevole. Fissaggi a scelta: integrato e sovrapposto (per una o due plafoniere). Ampia gamma di colori. La sorgente luminosa è una lampadina con attacco GU10.
[FR] Corps métallique. Mécanisme pivotant. Fixations au choix: encastrées et en saillie (pour un ou deux globes). Large choix de couleurs. Source de lumière: ampoule à culot GU10.

Read more
on the website

B | W | MG B | MG W | MS B | MS W





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
2 x GU10	BLACK	C051CL-U-2B	10 W	IP 20
2 x GU10	WHITE	C051CL-U-2W	10 W	IP 20
2 x GU10	BLACK / MATTE GOLD	C051CL-U-02BMG	10 W	IP 20
2 x GU10	WHITE / MATTE GOLD	C051CL-U-2WMG	10 W	IP 20
2 x GU10	BLACK / MATTE SILVER	C051CL-U-02BS	10 W	IP 20
2 x GU10	WHITE / MATTE SILVER	C051CL-U-2WS	10 W	IP 20

Focus T

[EN] A metallic housing. Their compact shade diameter and the discreet integration of the LED light source within the housing ensure a gentle and soothing illumination experience for the eyes.
[DE] Metallrahmen. Die Led-Lichtquelle ist für den Komfort der Augen in den Rahmen versenkt.
[IT] Corpo e' in metallo. Il diametro compatto del paralume. La sorgente luminosa a LED è incassata nel corpo per il comfort degli occhi.
[FR] Le boîtier est en métal. Diamètre compact du plafonnier. La source de lumière LED est noyée dans le boîtier pour le confort plus grand des yeux.


Read more
on the website

B W LED CRI >90 36°

LEDS EPISTAR



ANTI-DAZZLE FILTERS HONEYCOMB-D24



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C141CL-L300-6W3K-B	6 W	270 LM	NO	IP 20
3K WARM WHITE	WHITE	C141CL-L300-6W3K-W	6 W	290 LM	NO	IP 20

Focus T

[EN] A metallic housing. Their compact shade diameter and the discreet integration of the LED light source within the housing ensure a gentle and soothing illumination experience for the eyes.
[DE] Metallrahmen. Die Led-Lichtquelle ist für den Komfort der Augen in den Rahmen versenkt.
[IT] Corpo e' in metallo. Il diametro compatto del paralume. La sorgente luminosa a LED è incassata nel corpo per il comfort degli occhi.
[FR] Le boîtier est en métal. Diamètre compact du plafonnier. La source de lumière LED est noyée dans le boîtier pour le confort plus grand des yeux.


Read more on the website

B W BS LED CRI >90 36°

LEDS EPISTAR



ANTI-DAZZLE FILTERS HONEYCOMB-D24



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C141CL-L125-6W3K-B	6 W	280 LM	NO	IP 20
3K WARM WHITE	WHITE	C141CL-L125-6W3K-W	6 W	290 LM	NO	IP 20
3K WARM WHITE	BRASS	C141CL-L125-6W3K-BBS	6 W	340 LM	NO	IP 20

Focus T

[EN] A metallic housing. Their compact shade diameter and the discreet integration of the LED light source within the housing ensure a gentle and soothing illumination experience for the eyes.
[DE] Metallrahmen. Die Led-Lichtquelle ist für den Komfort der Augen in den Rahmen versenkt.
[IT] Corpo e' in metallo. Il diametro compatto del paralume. La sorgente luminosa a LED è incassata nel corpo per il comfort degli occhi.
[FR] Le boîtier est en métal. Diamètre compact du plafonnier. La source de lumière LED est noyée dans le boîtier pour le confort plus grand des yeux.


Read more
on the website

B | BS B | LED | CRI >90 | 36°

LEDS EPISTAR



ANTI-DAZZLE FILTERS HONEYCOMB-D24



COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-150-300MA-DE	PSL-DL40-S-150-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C142CL-6W3K-B	6 W	400 LM	NO	IP 20
3K WARM WHITE	BLACK / BRASS	C142CL-6W3K-BS	6 W	440 LM	NO	IP 20


WILLIAM SHAKESPEARE

Focus Zoom


[EN] LED ceiling luminaires of the Focus Zoom family are made of metal. Luminaires with a built-in LED light source have a high color rendering index.
[DE] Die LED-Deckenleuchten der Serie Focus Zoom sind aus Metall. Die Leuchten mit integrierter LED-Lichtquelle haben einen hohen Farbwiedergabeindex.
[IT] Le lampade da soffitto a LED di serie Focus Zoom sono realizzate di metallo. Le lampade con la sorgente luminosa a LED da incasso hanno l'indice di resa cromatica.
[FR] Les plafonniers LED de la série Focus Zoom sont en métal. Les lampes avec source de lumière LED intégrée ont un indice de rendu des couleurs.

Read more
on the website

B W LED CRI >90 15-50°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C055CL-L12W3K-Z-B	12 W	790 LM	NO	IP 20
3K WARM WHITE	WHITE	C055CL-L12W3K-Z-W	12 W	850 LM	NO	IP 20
4K WHITE	BLACK	C055CL-L12W4K-Z-B	12 W	890 LM	NO	IP 20
4K WHITE	WHITE	C055CL-L12W4K-Z-W	12 W	960 LM	NO	IP 20




Hoop

EN Metal body. Light source – GX53 lamp (not included).
DE Metallrahmen. Lichtquelle: Ein Leuchtmittel mit einer Fassung GX53 (nicht im Lieferumfang enthalten).
IT Corpo in metallo. Sorgente luminosa – Lampada GX53 (non inclusa).
FR Corps métallique. Source de lumière: ampoule GX53 (non comprise dans le lot).


Read more on the website







LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GX53	BLACK	C086CL-GX53-SRD-B	12 W	IP 20
1 x GX53	WHITE	C086CL-GX53-SRD-W	12 W	IP 20
1 x GX53	BLACK / GOLD	C086CL-GX53-SRD-BG	12 W	IP 20





1 x GX53	BLACK	C086CM-GX53-MRD-B	12 W	IP 20
1 x GX53	WHITE	C086CM-GX53-MRD-W	12 W	IP 20
1 x GX53	BLACK / GOLD	C086CM-GX53-MRD-BG	12 W	IP 20

Hydra

EN Compact ceiling luminaires Hydra have an aesthetic appearance.
DE Kompakte Hydra-Deckenleuchten haben ein ästhetisches Aussehen.
IT Le lampade da soffitto compatte Hydra hanno un aspetto estetico.
FR Les plafonniers compacts Hydra ont un aspect élégant.


Read more
on the website

B W MG LED CRI >90 120°


LEDS BRIDGELUX



1



2




1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C090CL-10W3K-B	10 W	600 LM	NO	IP 44
3K WARM WHITE	WHITE	C090CL-10W3K-W	10 W	740 LM	NO	IP 44
3K WARM WHITE	MATTE GOLD	C090CL-10W3K-MG	10 W	650 LM	NO	IP 44
2						
3K WARM WHITE	BLACK	C090CL-15W3K-B	15 W	1390 LM	NO	IP 44
3K WARM WHITE	WHITE	C090CL-15W3K-W	15 W	1320 LM	NO	IP 44
3K WARM WHITE	MATTE GOLD	C090CL-15W3K-MG	15 W	1270 LM	NO	IP 44

Lipari

[EN] Metal body with a trendy oblique cut of the dome lamp. The light source is a lamp with a GU10 base (not included).
[DE] Metallrahmen mit trendigem schrägen Schnitt des Lampenschirms. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo con taglio obliquo alla moda della plafoniera. La sorgente luminosa è una lampadina con attacco GU10 (non inclusa).
[FR] Corps métallique à coupe oblique tendance du globe. Source de de lumière: ampoule à culot GU10 (non comprise dans le lot).

Read more on the website





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK / MATTE GOLD	C044CL-01-15GU10-B	10 W	IP 20
1 x GU10	WHITE / MATTE GOLD	C044CL-01-15GU10-W	10 W	IP 20


C044CL-01-15GU10-B

Onda


[EN] Metal body. Wide beam angle is 120°. Swivel hinge for adjusting the light flux. LED light source.
[DE] Metallrahmen. Breiter Lichtstreuwinkel 120°. Schwenkscharnier zur Einstellung des Lichtstroms. LED-Lichtquelle.
[IT] Corpo in metallo. Ampio angolo di diffusione 120°. Cerniera girevole per la regolazione del flusso luminoso. Sorgente luminosa LED.
[FR] Corps métallique. Grand angle de diffusion de 120°. Charnière pivotante pour le réglage du flux lumineux. Source de lumière LED.

Read more
on the website

B W LED CRI >90 96° 120°

LEDS BRIDGELUX





COMPATIBLE WITH DRIVER

TRIAC	DALI
*PSL-TR40-300MA-DE	*PSL-DL40-S-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
2.7K WARM	BLACK	*C024CL-12W2.7K-B-1	12 W	700 LM	NO	IP 20
2.7K WARM	WHITE	*C024CL-12W2.7K-W-1	12 W	910 LM	NO	IP 20
3K WARM WHITE	BLACK	*C024CL-12W3K-B-1	12 W	780 LM	NO	IP 20
3K WARM WHITE	WHITE	*C024CL-12W3K-W-1	12 W	850 LM	NO	IP 20
3K WARM WHITE	BLACK	C024CL-L12B3K	12 W	650 LM	NO	IP 20
4K WHITE	BLACK	C024CL-L12B4K	12 W	700 LM	NO	IP 20

Onda


[EN] Metal body. Wide beam angle is 120°. Swivel hinge for adjusting the light flux. LED light source.
[DE] Metallrahmen. Breiter Lichtstreuwinkel 120°. Schwenkscharnier zur Einstellung des Lichtstroms. LED-Lichtquelle.
[IT] Corpo in metallo. Ampio angolo di diffusione 120°. Cerniera girevole per la regolazione del flusso luminoso. Sorgente luminosa LED.
[FR] Corps métallique. Grand angle de diffusion de 120°. Charnière pivotante pour le réglage du flux lumineux. Source de lumière LED.

Read more
on the website

B W LED CRI >90 120°

LEDS BRIDGELUX





COMPATIBLE WITH DRIVER

TRIAC	DALI
*PSL-TR40-300MA-DE	*PSL-DL40-S-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
4K WHITE	BLACK	C024CL-L18B4K	18 W	1000 LM	NO	IP 20
3K WARM WHITE	BLACK	*C024CL-18W3K-B-1	18 W	1370 LM	NO	IP 20
3K WARM WHITE	WHITE	*C024CL-18W3K-W-1	18 W	1490 LM	NO	IP 20


Pauline

[EN] Aluminium fittings. Light source: GX53 lamp (not included).
[DE] Material der Beschläge - Aluminium. Lichtquelle — ein Leuchtmittel GX53 (nicht im Lieferumfang enthalten).
[IT] Il materiale dell'armatura è l'alluminio. La sorgente luminosa è una lampada GX53 (non e' inclusa).
[FR] Le matériau de l'armature est en aluminium. Source de lumière - Lampe GX53 (non incluse).

Read more
on the website

B W





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GX53	BLACK	C087CL-GX53-B	12 W	IP 44
1 x GX53	WHITE	C087CL-GX53-W	12 W	IP 44

Vega

Read more
on the website


EN The compact ceiling luminaires, among the most sought-after models in the lighting market, seamlessly integrate into spaces. These fixtures incorporate energy-efficient LED light sources.
DE Kompakte Deckenleuchten, die zu den begehrtesten Modellen auf dem Beleuchtungsmarkt gehören, problemlos im Raum Integrierbar. Diese Leuchten sind mit energieeffizienten LED-Lichtquellen ausgestattet.
IT Lampade da soffitto compatte, tra i modelli più ricercati nel mercato dell'illuminazione, che si integrano perfettamente negli spazi. Questi apparecchi incorporano sorgenti luminose LED a risparmio energetico.
FR Les plafonniers compacts, parmi les modèles les plus recherchés sur le marché de l'éclairage, s'intègrent facilement dans les espaces. Ces luminaires intègrent des sources lumineuses LED à faible consommation d'énergie.

B W MG LED CRI >90 120°


LEDS SANAN




1



2



3



1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C089CL-8W3K-B	8 W	580 LM	NO	IP 20
3K WARM WHITE	WHITE	C089CL-8W3K-W	8 W	580 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C089CL-8W3K-BMG	8 W	580 LM	NO	IP 20
2						
3K WARM WHITE	BLACK	C089CL-12W3K-B	12 W	890 LM	NO	IP 20
3K WARM WHITE	WHITE	C089CL-12W3K-W	12 W	890 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C089CL-12W3K-BMG	12 W	890 LM	NO	IP 20
3						
3K WARM WHITE	BLACK	C089CL-15W3K-B	15 W	1020 LM	NO	IP 20
3K WARM WHITE	WHITE	C089CL-15W3K-W	15 W	1020 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C089CL-15W3K-BMG	15 W	1030 LM	NO	IP 20


Polar

Read more
on the website

[EN] Modern design. Metal body. Up-to-date colors: black, white and matte gold. The light source - GX53 lamp (not included) - provides effective lighting of the space.
[DE] Modernes Design. Metallrahmen. Aktuelle Farben - Schwarz, Weiß und Mattes Gold. Lichtquelle - ein Leuchtmittel mit einer GX53-Fassung (nicht im Lieferumfang enthalten) sorgt für eine wirkungsvolle Raumbeleuchtung.
[IT] Il design moderno. Corpo e' di metallo. I colori attuali sono nero, bianco ed oro opaco. La sorgente luminosa e' la lampada di GX53 (non inclusa in set completo) fornisce un'illuminazione efficiente dello spazio.
[FR] Design moderne. Corps en métal. Couleurs actuelles - noir, blanc et or mat. Source de lumière - la lampe GX53 (non incluse) fournit un éclairage efficace de l'espace.

B W MG





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GX53	BLACK	C088CL-GX53-B	12 W	IP 20
1 x GX53	WHITE	C088CL-GX53-W	12 W	IP 20
1 x GX53	MATTE GOLD	C088CL-GX53-MG	12 W	IP 20



C088CL-GX53-B
SONY

Slim

[EN] Metal body. Some models with a lamp recessed deep into the body. Light source with GU10 base (not included).
[DE] Metallrahmen. Einige Modelle haben ein im Rahmen versenktes Leuchtmittel. Eine Lichtquelle mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Alcuni modelli con una lampadina incassata in profondità nel corpo. Sorgente luminosa con attacco GU10 (non inclusa).
[FR] Corps en métal. Partie des modèles avec ampoule profondément encastrée dans le corps. Source de lumière à culot GU10 (non comprise dans le lot).


Read more on the website

B W





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
2 x GU10	BLACK	C015CL-02B	10 W	IP 20
2 x GU10	WHITE	C015CL-02W	10 W	IP 20






1 x GU10	BLACK	C014CL-01B	10 W	IP 20
1 x GU10	WHITE	C014CL-01W	10 W	IP 20

Slim

[EN] Metal body. Some models with a lamp recessed deep into the body. Light source with GU10 base (not included).
[DE] Metallrahmen. Einige Modelle haben ein im Rahmen versenktes Leuchtmittel. Eine Lichtquelle mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Alcuni modelli con una lampadina incassata in profondità nel corpo. Sorgente luminosa con attacco GU10 (non inclusa).
[FR] Corps en métal. Partie des modèles avec ampoule profondément encastrée dans le corps. Source de lumière à culot GU10 (non comprise dans le lot).


Read more
on the website

B W





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
2 x GU10	WHITE	C013CL-02W	10 W	IP 20





1 x GU10	BLACK	C012CL-01B	10 W	IP 20
1 x GU10	WHITE	C012CL-01W	10 W	IP 20

Planet

[EN] Metal body. Wide scattering angle is 120°. Two LED light sources for basic and decorative lighting.
[DE] Metallrahmen. Breiter Lichtstreuwinkel 120°. Zwei LED-Lichtquellen für Haupt- und dekorative Beleuchtung.
[IT] Corpo in metallo. Ampio angolo di diffusione 120°. Due sorgenti luminose a LED per l'illuminazione di base e decorativa.
[FR] Corps métallique. Grand angle de diffusion de 120°. Deux sources de lumière LED pour l'éclairage principal et décoratif.


Read more
on the website

B W LED CRI >90 120°


LEDS BRIDGELUX



1



2



1 CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C009CW-L12B	12 W	550 LM	NO	IP 20
3K WARM WHITE	WHITE	C009CW-L12W	12 W	750 LM	NO	IP 20
4K WHITE	BLACK	C009CW-L12B4K	12 W	500 LM	NO	IP 20
2						
3K WARM WHITE	BLACK	C009CW-L16B	16 W	800 LM	NO	IP 20


C009CW-L16B4K


Yin

[EN] Metal body. Swivel mechanism for adjusting the light flux. Some models are dimmable. LED light source.
[DE] Metallrahmen. Schwenkvorrichtung zur Einstellung des Lichtstroms. Einige Modelle sind dimmbar. LED-Lichtquelle.
[IT] Corpo in metallo. Meccanismo girevole per la regolazione del flusso luminoso. Alcuni modelli sono dimmerabili. Sorgente luminosa LED.
[FR] Corps métallique. Mécanisme pivotant pour le réglage du flux lumineux. Partie des modèles avec variateur. Source de lumière LED.

Read more on the website

B W LED CRI >90 TRIAC 24°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C084CL-15W3K-B	15 W	950 LM	NO	IP 20
3K WARM WHITE	WHITE	C084CL-15W3K-W	15 W	1070 LM	NO	IP 20
4K WHITE	BLACK	C084CL-15W4K-B	15 W	1030 LM	NO	IP 20
4K WHITE	WHITE	C084CL-15W4K-W	15 W	1120 LM	NO	IP 20
3K WARM WHITE	BLACK	C084CL-15W3K-D-B	15 W	700 LM	TRIAC	IP 20
3K WARM WHITE	WHITE	C084CL-15W3K-D-W	15 W	1200 LM	TRIAC	IP 20
4K WHITE	BLACK	C084CL-15W4K-D-B	15 W	970 LM	TRIAC	IP 20
4K WHITE	WHITE	C084CL-15W4K-D-W	15 W	1060 LM	TRIAC	IP 20
3-4-6K ADJUSTABLE	BLACK	C084CL-15W3K-D-B-DE	15 W	1207 LM	NO	IP 20
3-4-6K ADJUSTABLE	WHITE	C084CL-15W3K-D-W-DE	15 W	1359 LM	NO	IP 20


C084CL-15W4K-W
Chair
SAUNA


Zon

Universal accessory for Zon pendant mounting.

Read more
on the website


B W MG

SYSTEM ELEMENT	COLOR	ARTICLE
ACCESSORIES	☐ WHITE	DLA032-TRS12-W






SYSTEM ELEMENT	COLOR	ARTICLE
ACCESSORIES	☐ WHITE	DLA032-TRS24-W






SYSTEM ELEMENT	COLOR	ARTICLE
ACCESSORIES	☐ WHITE	DLA032-TRS36-W






SYSTEM ELEMENT	COLOR	ARTICLE
UNIVERSAL ACCESSORY FOR ZON PENDANT MOUNTING	■ BLACK	C032C-04-B-1
	MATTE GOLD	C032C-04-MG-1
	☐ WHITE	C032C-04-W-1




SYSTEM ELEMENT	COLOR	ARTICLE
ACCESSORIES	☐ WHITE	DLA032-TRS45-W





SYSTEM ELEMENT	COLOR	ARTICLE
ACCESSORIES	☐ WHITE	DLA032-TRS90-W





Zon


[EN] Metal body. Five power and size options.High color rendering index and no pulsation. Possibility of suspended installation.
[DE] Metallrahmen. Hoher Farbwiedergabeindex und Pulsationsfreiheit. Möglichkeit der aufgehängten Montage.
[IT] Corpo e' in metallo. L'alto indice di resa cromatica e nessuna ondulazione. La possibilità di montaggio a sospensione.
[FR] Boîtier métallique. Indice de rendu des couleurs élevé et aucune ondulation. Possibilité de montage à suspension.

Read more
on the website

B W MG LED 120°

LEDS EPISTAR





COMPATIBLE WITH DRIVER

TRIAC	DALI
*PSL-TR40-300MA-DE	*PSL-DL40-S-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C032CL-12W3K-RD-B	12 W	560 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C032CL-12W3K-RD-MG	12 W	600 LM	NO	IP 20
3K WARM WHITE	WHITE	C032CL-12W3K-RD-W	12 W	660 LM	NO	IP 20

Zon


[EN] Metal body. Five power and size options.High color rendering index and no pulsation. Possibility of suspended installation.
[DE] Metallrahmen. Hoher Farbwiedergabeindex und Pulsationsfreiheit. Möglichkeit der aufgehängten Montage.
[IT] Corpo e' in metallo. L'alto indice di resa cromatica e nessuna ondulazione. La possibilità di montaggio a sospensione.
[FR] Boîtier métallique. Indice de rendu des couleurs élevé et aucune ondulation. Possibilité de montage à suspension.

Read more
on the website

B W MG LED 120°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C032CL-24W3K-RD-B	24 W	1240 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C032CL-24W3K-RD-MG	24 W	1420 LM	NO	IP 20
3K WARM WHITE	WHITE	C032CL-24W3K-RD-W	24 W	1690 LM	NO	IP 20

Zon


[EN] Metal body. Five power and size options.High color rendering index and no pulsation. Possibility of suspended installation.
[DE] Metallrahmen. Hoher Farbwiedergabeindex und Pulsationsfreiheit. Möglichkeit der aufgehängten Montage.
[IT] Corpo e' in metallo. L'alto indice di resa cromatica e nessuna ondulazione. La possibilità di montaggio a sospensione.
[FR] Boîtier métallique. Indice de rendu des couleurs élevé et aucune ondulation. Possibilité de montage à suspension.

Read more
on the website

B W MG LED 120°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C032CL-36W3K-RD-B	36 W	1800 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C032CL-36W3K-RD-MG	36 W	2220 LM	NO	IP 20
3K WARM WHITE	WHITE	C032CL-36W3K-RD-W	36 W	2610 LM	NO	IP 20




C032CL-45W3K-RD-B

Zon


[EN] Metal body. Five power and size options.High color rendering index and no pulsation. Possibility of suspended installation.
[DE] Metallrahmen. Hoher Farbwiedergabeindex und Pulsationsfreiheit. Möglichkeit der aufgehängten Montage.
[IT] Corpo e' in metallo. L'alto indice di resa cromatica e nessuna ondulazione. La possibilità di montaggio a sospensione.
[FR] Boîtier métallique. Indice de rendu des couleurs élevé et aucune ondulation. Possibilité de montage à suspension.

Read more
on the website

B W MG LED 120°

LEDS EPISTAR





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C032CL-45W3K-RD-B	45 W	2540 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C032CL-45W3K-RD-MG	45 W	2880 LM	NO	IP 20
3K WARM WHITE	WHITE	C032CL-45W3K-RD-W	45 W	3160 LM	NO	IP 20

Zon


[EN] Metal body. Five power and size options.High color rendering index and no pulsation. Possibility of suspended installation.
[DE] Metallrahmen. Hoher Farbwiedergabeindex und Pulsationsfreiheit. Möglichkeit der aufgehängten Montage.
[IT] Corpo e' in metallo. L'alto indice di resa cromatica e nessuna ondulazione. La possibilità di montaggio a sospensione.
[FR] Boîtier métallique. Indice de rendu des couleurs élevé et aucune ondulation. Possibilité de montage à suspension.

Read more
on the website

B W MG LED 120°

LEDS EPISTAR






CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C032CL-90W3K-RD-B	90 W	4900 LM	NO	IP 20
3K WARM WHITE	MATTE GOLD	C032CL-90W3K-RD-MG	90 W	4970 LM	NO	IP 20
3K WARM WHITE	WHITE	C032CL-90W3K-RD-W	90 W	7410 LM	NO	IP 20

Zoom

[EN] Metal body. High protection class IP65. Light source - GU10 lamp (not included).
[DE] Metallrahmen. Hohe Schutzart IP65. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Classe di protezione elevata IP65. Sorgente luminosa - Lampadina GU10 (non inclusa).
[FR] Corps en métal. Haute classe de protection IP65. Source de lumière: ampoule GU10 (non comprise dans le lot).

Read more
on the website

B W






LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C029CL-01B	10 W	IP 54
1 x GU10	WHITE	C029CL-01W	10 W	IP 54

Zoom

[EN] Metal body. High protection class IP65. Light source - GU10 lamp (not included).
[DE] Metallrahmen. Hohe Schutzart IP65. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo. Classe di protezione elevata IP65. Sorgente luminosa - Lampadina GU10 (non inclusa).
[FR] Corps en métal. Haute classe de protection IP65. Source de lumière: ampoule GU10 (non comprise dans le lot).


Read more
on the website

B W





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C029CL-01-S-B	10 W	IP 65
1 x GU10	WHITE	C029CL-01-S-W	10 W	IP 65





1 x GU10	BLACK	C030CL-01B	10 W	IP 54
1 x GU10	WHITE	C030CL-01W	10 W	IP 54

Lens


[EN] Housing material: Metal. The luminaire includes a clear lens, providing a studio-like effect.
[DE] Metallgehäuse. Die Leuchte hat eine transparente Linse, die einen studioähnlichen Effekt erzeugt.
[IT] Corpo in metallo. La lampadacomprende una lente trasparente, che crea un effetto studio. Con l'anello di messa a fuoco è possibile regolare la chiarezza della macchia luminosa.
[FR] Boîtier en métal. Le luminaire est doté d'une lentille transparente, offrant un effet semblable à celui d'un studio.

Read more
on the website

B W LED 70°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C217CL-15W3K-B	15 W	600 LM	NO	IP 20
3K WARM WHITE	WHITE	C217CL-15W3K-W	15 W	600 LM	NO	IP 20

Lens


[EN] Housing material: Metal. The luminaire includes a clear lens, providing a studio-like effect.
[DE] Metallgehäuse. Die Leuchte hat eine transparente Linse, die einen studioähnlichen Effekt erzeugt.
[IT] Corpo in metallo. La lampadacomprende una lente trasparente, che crea un effetto studio. Con l'anello di messa a fuoco è possibile regolare la chiarezza della macchia luminosa.
[FR] Boîtier en métal. Le luminaire est doté d'une lentille transparente, offrant un effet semblable à celui d'un studio.

Read more
on the website

B W LED 70°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C220CL-12W3K-B	12 W	970 LM	NO	IP 20
3K WARM WHITE	WHITE	C220CL-12W3K-W	12 W	970 LM	NO	IP 20





Alfa LED


EN Metal body. Some models are dimmable. LED light source.
DE Metallrahmen. Einige Modelle sind dimmbar. LED-Lichtquelle.
IT Corpo in metallo. Alcuni modelli sono dimmerabili. Sorgente luminosa LED.
FR Corps métallique. Partie des modèles avec variateur. Source de lumière LED.

Read more
on the website

B W LED CRI >90 TRIAC DC 24V 24°

LEDS BRIDGELUX





WHITE	C064-01W
MATTE GOLD	C064-01MG

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	WHITE/BLACK	C064CL-L12W3K	12 W	840 LM	NO	IP 20

Alfa LED


EN Metal body. Some models are dimmable. LED light source.
DE Metallrahmen. Einige Modelle sind dimmbar. LED-Lichtquelle.
IT Corpo in metallo. Alcuni modelli sono dimmerabili. Sorgente luminosa LED.
FR Corps métallique. Partie des modèles avec variateur. Source de lumière LED.

Read more
on the website

B W LED CRI >90 TRIAC DC 24V 24°

LEDS BRIDGELUX





WHITE	C065-01W
MATTE GOLD	C065-01MG

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C065CL-L12B3K-D	12 W	840 LM	TRIAC	IP 20

Alfa LED


[EN] Metal body. Some models are dimmable. LED light source.
[DE] Metallrahmen. Einige Modelle sind dimmbar. LED-Lichtquelle.
[IT] Corpo in metallo. Alcuni modelli sono dimmerabili. Sorgente luminosa LED.
[FR] Corps métallique. Partie des modèles avec variateur. Source de lumière LED.

Read more
on the website

B W LED CRI >90 TRIAC DC 24V 60°

LEDS BRIDGELUX





CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
4K WHITE	BLACK	C064CL-01-25W4K-D-RD-B	25 W	2130 LM	TRIAC	20


Focus Design

[EN] Textured metal body. Swivel mechanism. The light source is a lamp with a GU10 base (not included).
[DE] Rahmen aus Metall mit strukturiertem Muster. Schwenkvorrichtung. Lichtquelle: Ein Leuchtmittel mit einer Fassung GU10 (nicht im Lieferumfang enthalten).
[IT] Corpo in metallo con motivo strutturato. Meccanismo girevole. Sorgente luminosa – lampadina con attacco GU10 (non inclusa)
[FR] Corps métallique avec motif texturé. Mécanisme pivotant. Source de lumière: ampoule à culot GU10 (non comprise dans le lot).

Read more
on the website

B W G





LIGHT SOURCE	COLOR	ARTICLE	MAX W LAMPS	IP
1 x GU10	BLACK	C034CL-01B	10 W	IP 20
1 x GU10	WHITE	C034CL-01W	10 W	IP 20
1 x GU10	GOLD	C034CL-01G	10 W	IP 20

Orlo


EN Metal body. Decorative light ring. Wide scattering angle is 120°. LED light source.
DE Metallrahmen. Dekorativer Lichtring. Breiter Lichtstreuwinkel 120°. LED-Lichtquelle.
IT Corpo in metallo. Anello luminoso decorativo. Ampio angolo di diffusione 120°. Sorgente luminosa LED.
FR Corps métallique. Anneau lumineux décoratif. Grand angle de diffusion de 120°. Source de lumière LED.

Read more
on the website

B W LED CRI >90 120°

LEDS BRIDGELUX





COMPATIBLE WITH DRIVER

TRIAC	DALI
PSL-TR40-300MA-DE	PSL-DL40-S-300MA-DE

CCT	COLOR	ARTICLE	MAX W LAMPS	LIGHT FLUX	DIMMABLE	IP
3K WARM WHITE	BLACK	C085CL-9W3K-B	9W	250 LM	NO	IP 20
3K WARM WHITE	WHITE	C085CL-9W3K-W	9W	350 LM	NO	IP 20
4K WHITE	BLACK	C085CL-9W4K-B	9W	300 LM	NO	IP 20
4K WHITE	WHITE	C085CL-9W4K-W	9W	400 LM	NO	IP 20

C085CL-9W4K-W




On
Off
Color
1
2
Scene
3
4
MAYTONI




REMOTES
DRC034-B

At the flick of a switch

The capabilities of contemporary luminaires are profoundly elevated through the integration of smart control functions. These systems' components can be seamlessly embedded in the luminaires themselves or deployed within the electrical network. The key distinguishing factor lies in the protocols upon which they operate. Light control protocols, similar to distinct languages, vary significantly. Luminaires operating within the same protocol work together seamlessly, while those operating on divergent protocols require auxiliary devices and systems to work together.

Schematic Options of
Light Control Protocols



By selecting DALI, you unlock a myriad of possibilities, enabling you to:

— Administer addresses and amalgamate luminaires into distinct groups;
— Formulate and manage scenarios;
— Fine-tune brightness levels to a remarkable precision of 0.1%;
— Adjust color temperatures, affording you the capacity to institute "Biodynamic lighting.";
— Personalize operational modes, encompassing timer functionalities.

**Smart homes are precisely that – smart. Daily tasks can be carried out without the need for human intervention.
Light controls operated through Wi-Fi and Bluetooth are most common, and the choice is dependent on the specific application and requirements.**


The concept of the Smart Home is becoming ever more popular and seeing widespread adoption. Central to this is lighting control, which plays an instrumental role in making homes comfortable. DALI, with its adaptability to each light source, offers an optimal solution for orchestrating lighting across diverse environments, ranging from residential spaces to industrial complexes and entire urban landscapes.

Maytoni Smart Hub

Smart Home Control Center

WIFI | ZigBee

[EN] The Maytoni Smart Hub connects to Bluetooth, Bluetooth Mesh, Zigbee smart products (devices) and is capable of connecting up to 50 devices such as Exility Smart track lights, DRC034-B remote control, and MOD147FL-L20BK floor lamp to a single smart network.
[DE] Maytoni Smart Hub verbindet sich mit Smart-Geräten, die Bluetooth, Bluetooth Mesh oder Zigbee unterstützen, und kann bis zu 50 Geräte, wie z. B. die smarten Strahler Exility, die Fernbedienung DRC034-B und die Stehlampe MOD147FL-L20BK, in ein einziges intelligentes Netzwerk integrieren.
[IT] Maytoni Smart Hub si connette a dispositivi intelligenti che supportano Bluetooth, Bluetooth Mesh, Zigbee e può connettere in un'unica rete intelligente fino a 50 dispositivi, come le luci da binario smart Exility, il telecomando DRC034-B e la lampada da terra MOD147FL-L20BK.
[FR] Maytoni Smart Hub prend en charge les appareils compatibles Bluetooth, Bluetooth Mesh et Zigbee et peut connecter jusqu'à 50 appareils, tels que les éclairages sur rail Smart Exility, la télécommande DRC034-B et le lampadaire MOD147FL-L20BK, au sein d'un seul réseau intelligent.

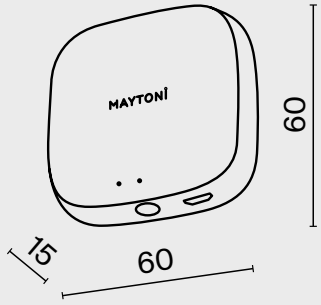




ARTICLE	MD-TRA034-W
PRODUCT TYPE	MAYTONI SMART HUBCCT+DIM SMART HOME CONTROL CENTER
NUMBER OF SUPPORTED CONNECTED WIRELESS DEVICES	UP TO 50
WIFI STANDARD	5 V 2A
DEGREE OF PROTECTION AGAINST DUST AND MOISTURE	IP20
OPERATING TEMPERATURE	-10° C +45° C
RELATIVE HUMIDITY	10% -90% OF RELATIVE HUMIDITY
COMPATIBILITY WITH VOICE CONTROL SYSTEMS	ALEXA ECHO, GOOGLE HOME
WIRELESS COMMUNICATION PROTOCOL	ZIGBEE 3.0, BLUETOOTH
APP FOR IOS AND ANDROID	MAYTONI SMART
COLOR	WHITE
MATERIAL	PLASTIC

Remotes

[EN] Smart Exility lighting remote control.
[DE] Fernbedienung zur Steuerung der Beleuchtung Smart Exility.
[IT] Pannello di controllo dell'illuminazione Smart Exility.
[FR] Télécommande de l'éclairage Smart Exility.





ARTICLE	DRC034-B
PRODUCT TYPE	REMOTE CONTROL FOR SMART EXILITY
VOLTAGE	AC 100-240 B
DEGREE OF PROTECTION AGAINST DUST AND MOISTURE	IP20
DIMMABLE	+
ADJUSTMENT OF COLOR TEMPERATURE	+
CREATION OF GROUPS	4
COLOR	BLACK/B
MATERIAL	PLASTIC

Power Supply Dali

Dali power supplies are designed for dimming indoor lighting equipment using the DALI digital protocol, with extensive lighting control capabilities from wall panels and controllers.

DALI | 220V





ARTICLE	CONTROL PROTOCOL	MAX W LAMPS	OUTPUT VOLTAGE RANGE	OUTPUT CURRENT	SIZE	IP
PSL-DL40-S-150-300MA-DE	DALI CCT (DT6)	5-12W	23-40V	150-300MA	130*30*20MM	IP 20





PSL-DL40-S-350-500MA-DE	DALI (DT6)	15-20W	23-40V	350-500MA	152*40*30MM	IP 20

Power Supply Dali

Dali power supplies are designed for dimming indoor lighting equipment using the DALI digital protocol, with extensive lighting control capabilities from wall panels and controllers.

DALI | 220V





ARTICLE	CONTROL PROTOCOL	MAX W LAMPS	OUTPUT VOLTAGE RANGE	OUTPUT CURRENT	SIZE	IP
PSL-DL40-3CCT-150-300MA-DE	DALI CCT (DT8)	5-12W	23-40V	150-300MA	130*30*20MM	IP 20



PSL-DL40-S-300MA-DE	DALI (DT6)	12W	23-40V	300MA	∅ 45*25MM	IP 20

Power Supply Triac

Triac power supplies are controlled via 230 V mains and dim the luminaires via a wall-mounted dimmer. Convenient protocol without additional wires: it is enough to replace a standard switch with a dimmer. TRIAC is a simple and affordable solution for flats and small spaces.

TRIAC | **220V**



ARTICLE	CONTROL PROTOCOL	MAX W LAMPS	OUTPUT VOLTAGE RANGE	OUTPUT CURRENT	SIZE	IP
PSL-TR40-300MA-DE	TRIAC	12W	23-40V	300MA	∅ 45*25MM	IP54





PSL-TR40-150-300MA-DE	TRIAC	5-12W	23-40V	150-300MA	130*30*20MM	IP20





PSL-TR40-350-500MA-DE	TRIAC	15-20W	23-40V	350-500MA	152*40*30MM	IP20

Alphabetical index

30-220-240-24-G2 134
60-220-240-24-G2 134

C

C009CW-L12B 368
C009CW-L12B4K 368
C009CW-L12W 368
C009CW-L16B 368
C010CL-01B 340
C010CL-01MG 340
C010CL-01W 340
C012CL-01B 367
C012CL-01W 367
C013CL-02W 367
C014CL-01B 366
C014CL-01W 366
C015CL-02B 366
C015CL-02W 366
C016CL-01B 330
C016CL-01W 330
C017CL-02B 331
C017CL-02W 331
C017CW-01B 338
C017CW-01MG 338
C017CW-01W 338
C018CL-01B 325
C018CL-01MG 325
C018CL-01W 325
C020CL-01B 335
C020CL-01GB 335
C020CL-01W 335
C021CL-02B 335
C021CL-02W 335
C024CL-12W2.7K-B-1 360
C024CL-12W2.7K-W-1 360
C024CL-12W3K-B-1 360
C024CL-12W3K-W-1 360
C024CL-18W3K-B-1 361
C024CL-18W3K-W-1 361
C024CL-L12B3K 360
C024CL-L12B4K 360
C024CL-L18B4K 361
C024CL-L18W4K 361
C027CL-L10B 336
C027CL-L10B4K 336
C027CL-L10W 336
C027CL-L10W4K 336
C029CL-01B 380
C029CL-01-S-B 381
C029CL-01-S-W 381
C029CL-01W 380
C030CL-01B 381
C030CL-01W 381
C032C-04-B-1 372
C032C-04-MG-1 372
C032C-04-W-1 372
C032CL-12W3K-RD-B 373
C032CL-12W3K-RD-MG 373
C032CL-12W3K-RD-W 373
C032CL-24W3K-RD-B 374
C032CL-24W3K-RD-MG 374
C032CL-24W3K-RD-W 374
C032CL-36W3K-RD-B 375
C032CL-36W3K-RD-MG 375
C032CL-36W3K-RD-W 375
C032CL-45W3K-RD-B 378
C032CL-45W3K-RD-MG 378
C032CL-45W3K-RD-W 378
C032CL-90W3K-RD-B 379
C032CL-90W3K-RD-MG 379
C032CL-90W3K-RD-W 379
C034CL-01B 389
C034CL-01G 389
C034CL-01W 389
C044CL-01-15GU10-B 358
C044CL-01-15GU10-W 358
C048CL-U-1B 324
C048CL-U-1BMG 324
C048CL-U-1BS 324
C048CL-U-1W 324
C048CL-U-1WMG 324
C048CL-U-1WS 324
C050CL-U-1B 348
C050CL-U-1MG 348
C050CL-U-1W 348
C051CL-01B 346
C051CL-01BS 346
C051CL-01G 346
C051CL-01MG 346
C051CL-01W 346
C051CL-U-2B 349
C051CL-U-02BMG 349
C051CL-U-02BS 349
C051CL-U-2W 349
C051CL-U-2WMG 349
C051CL-U-2WS 349
C052CL-01B 346
C052CL-01BS 346
C052CL-01MG 346
C052CL-01W 346
C053CL-L12W3K-W-B 316
C053CL-L12W3K-W-W 316
C053CL-L12W4K-W-B 316
C053CL-L12W4K-W-W 316
C055CL-L12B3K-W-B 342
C055CL-L12B3K-W-D-B 342
C055CL-L12B4K-W-B 342
C055CL-L12B4K-W-D-B 342
C055CL-L12W3K-W-BS 342
C055CL-L12W3K-W-D-W 342
C055CL-L12W3K-W-W 342
C055CL-L12W3K-Z-B 354
C055CL-L12W3K-Z-W 354
C055CL-L12W4K-W-D-W 342
C055CL-L12W4K-W-W 342
C055CL-L12W4K-Z-B 354
C055CL-L12W4K-Z-W 354
C056CL-L12B3K-W-B 344
C056CL-L12B3K-W-D-B 344
C056CL-L12B4K-W-B 344
C056CL-L12B4K-W-D-B 344
C056CL-L12W3K-W-BS 344
C056CL-L12W3K-W-D-W 344
C056CL-L12W3K-W-W 344
C056CL-L12W4K-W-D-W 344
C056CL-L12W4K-W-W 344
C064-01MG 386
C064-01W 386
C064CL-01-25W4K-D-RD-B 388
C064CL-L12W3K 386
C065-01MG 387
C065-01W 387
C065CL-L12B3K-D 387
C080CL-01-GU10-B 329
C080CL-01-GU10-MG 329
C080CL-01-GU10-W 329
C081CL-01-GU10-B 312
C081CL-01-GU10-MG 312
C081CL-01-GU10-W 312
C082CL-01-GU10-B 328
C082CL-01-GU10-MG 328
C082CL-01-GU10-W 328
C084CL-15W3K-B 370
C084CL-15W3K-D-B 370
C084CL-15W3K-D-B-DE 370
C084CL-15W3K-D-W 370
C084CL-15W3K-D-W-DE 370
C084CL-15W3K-W 370
C084CL-15W4K-B 370
C084CL-15W4K-D-B 370
C084CL-15W4K-D-W 370
C084CL-15W4K-W 370
C085CL-9W3K-B 390
C085CL-9W3K-W 390
C085CL-9W4K-B 390
C085CL-9W4K-W 390
C086CL-GX53-SRD-B 356
C086CL-GX53-SRD-BG 356
C086CL-GX53-SRD-W 356
C086CM-GX53-MRD-B 356
C086CM-GX53-MRD-BG 356
C086CM-GX53-MRD-W 356
C087CL-GX53-B 362
C087CL-GX53-W 362
C088CL-GX53-B 364
C088CL-GX53-MG 364
C088CL-GX53-W 364
C089CL-8W3K-B 363
C089CL-8W3K-BMG 363
C089CL-8W3K-W 363
C089CL-12W3K-B 363
C089CL-12W3K-BMG 363
C089CL-12W3K-W 363
C089CL-15W3K-B 363
C089CL-15W3K-BMG 363
C089CL-15W3K-W 363
C090CL-10W3K-B 357
C090CL-10W3K-MG 357
C090CL-10W3K-W 357

Alphabetical index

C090CL-15W3K-B 357
C090CL-15W3K-MG 357
C090CL-15W3K-W 357
C106CL-01-GU10-B 332
C106CL-01-GU10-BS 332
C106CL-01-GU10-W 332
C108CL-01-GU10-B 334
C108CL-01-GU10-BS 334
C108CL-01-GU10-W 334
C110CL-01-GU10-B 314
C110CL-01-GU10-BS 314
C110CL-01-GU10-W 314
C140RS-L200-7W3K-B 320
C140RS-L200-7W3K-BBS 320
C140RS-L200-7W3K-W 320
C140RS-L300-7W3K-W 321
C140TRS-L200-7W3K-B 318
C140TRS-L300-7W3K-B 311, 319
C140TRS-L300-7W3K-BBS 319
C140TRS-L300-7W3K-W 319
C141CL-L125-6W3K-B 351
C141CL-L125-6W3K-BBS 351
C141CL-L125-6W3K-W 351
C141CL-L300-6W3K-B 350
C141CL-L300-6W3K-W 350
C141RS-L125-6W3K-B 322
C141RS-L125-6W3K-BBS 322
C141RS-L125-6W3K-W 322
C141RS-L300-6W3K-B 323
C141RS-L300-6W3K-W 323
C142CL-6W3K-B 352
C142CL-6W3K-BS 352
C150CL-13W3K-B 24
C151CL-13W3K-B 25
C152PL-13W3K-B 26
C153CL-13W3K-B 27
C217CL-15W3K-B 382
C217CL-15W3K-W 382
C220CL-12W3K-B 383
C220CL-12W3K-W 383

D

DL003-01-W 250
DL008-2-01-B 264
DL008-2-01-W 264
DL008-2-02-B 264
DL008-2-02-W 264
DL015-6-L7W 296
DL016-6-L12W 296
DL017-6-L18W3-4-6K 297
DL023-2-01B 252
DL023-2-01W 252
DL024-2-01B 253
DL024-2-01W 253
DL024-2-02B 252
DL024-2-02W 252
DL024-12W-DTW-B 276
DL024-12W-DTW-BMG 276
DL024-12W-DTW-W 276
DL025-2-01B 250
DL025-2-01W 250
DL027-2-01B 293
DL027-2-01-MG 293
DL027-2-01-S 293
DL027-2-01W 293
DL028-2-01B 255
DL028-2-01W 255
DL029-2-01B 255
DL029-2-01W 255
DL029-2-02B 256
DL029-2-02W 256
DL030-2-01B 302
DL030-2-01W 302
DL031-2-L12B 303
DL031-L12W3K-D-B 303
DL031-L12W3K-D-W 303
DL031-L12W4K-B 303
DL031-L12W4K-D-B 303
DL031-L12W4K-D-W 303
DL031-L12W4K-W 303
DL032-2-01B 304
DL032-2-01W 304
DL033-2-01B 305
DL033-2-01W 305
DL033-2-02B 305
DL033-2-02W 305
DL034-01-06W3K-B 308
DL034-01-06W3K-D-B 308
DL034-01-06W3K-D-W 308
DL034-01-06W3K-W 308
DL034-01-06W4K-B 308
DL034-01-06W4K-D-B 308
DL034-01-06W4K-D-W 308
DL034-01-06W4K-W 308
DL034-L12W3K-D-B 309
DL034-L12W3K-D-W 309
DL034-L12W4K-B 309
DL034-L12W4K-D-B 309
DL034-L12W4K-D-W 309
DL034-L12W4K-W 309
DL042-01-RD-B 254
DL042-01-RD-W 254
DL042-01-SQ-B 254
DL042-01-SQ-W 254
DL043-01-10W2.7K-RD-WB-DE 244
DL043-01-10W2.7K-RD-W-DE 244
DL043-01-10W4K-D-RD-WB 244
DL043-01-10W4K-D-SQ-WB 246
DL043-01-15W2.7K-RD-WB-DE 245
DL043-01-15W2.7K-RD-W-DE 245
DL043-02-10W3K-D-SQ-WB 248
DL043-02-10W4K-D-SQ-W 248
DL043-02-10W4K-SQ-WB 248
DL043-02-15W3K-D-SQ-WB 249
DL043-02-15W3K-SQ-W 249
DL043-02-15W3K-SQ-WB 249
DL043-02-15W4K-SQ-W 249
DL049-01B 280
DL049-01GB 280
DL049-01W 280
DL049-01WG 280
DL050-01B 281
DL050-01GB 281
DL050-01W 281
DL050-01WG 281
DL051-01-GU10-RD-W 289
DL051-01-GU10-RD-WB 289
DL051-01-GU10-RD-WMG 289
DL051-01-GU10-RD-WS 289
DL051-U-2W 288
DL051-U-2WB 288
DL051-U-2WMG 288
DL053-01B 290
DL053-01BMG 290
DL053-01W 290
DL053-01WB 290
DL053-01WMG 290
DL055-12W3-4-6K-W 268
DL055-18W3-4-6K-W 270
DL055-18W4K-W 270
DL055-24W3-4-6K-W 271
DL055-24W3K-W 271
DL056-12W3-4-6K-W 272
DL056-18W3-4-6K-W 273
DL056-24W3-4-6K-W 274
DL057-7W3K-B 298
DL057-7W3K-W 298
DL057-10W3K-B 300
DL057-10W3K-W 300
DL058-7W3K-B 282
DL058-7W3K-BS 282
DL058-7W3K-TRS-B 286
DL058-7W3K-TRS-BS 286
DL058-7W3K-TRS-W 286
DL058-7W3K-W 282
DL058-12W3K-B 283
DL058-12W3K-BS 283
DL058-12W3K-TRS-B 287
DL058-12W3K-TRS-BS 287
DL058-12W3K-TRS-W 287
DL058-12W3K-W 283
DL083-01-GU10-RD-B 294
DL083-01-GU10-RD-S 294
DL083-01-GU10-RD-W 294
DL083-01-GU10-SQ-B 294
DL083-01-GU10-SQ-S 294
DL083-01-GU10-SQ-W 294
DL086-02-GX53-SQ-B 262
DL086-02-GX53-SQ-BG 262
DL086-02-GX53-SQ-W 262
DL086-GX53-RD-B 260
DL086-GX53-RD-BG 260
DL086-GX53-RD-W 260
DL086-GX53-SQ-B 261
DL086-GX53-SQ-BG 261
DL086-GX53-SQ-W 261
DL087-GX53-RD-B 277
DL087-GX53-RD-W 277
DL088-GU10-RD-B 292

Alphabetical index

DL088-GU10-RD-MG 292
DL088-GU10-RD-W 292
DL089-5W3K-BW 266
DL089-9W3K-BW 266
DL093-01-10W3K-B 265
DL093-01-10W3K-W 265
DL093-02-10W3K-B 265
DL093-02-10W3K-W 265
DL094-02-7W3K-B 263
DL094-02-7W3K-W 263
DL095-01-10W3K-B 258
DL095-01-10W3K-W 258
DL095-02-10W3K-B 259
DL095-02-10W3K-W 259
DL105-12W3K-B 242
DL105-12W3K-W 242
DL105-12W4K-B 242
DL105-12W4K-W 242
DL115-10W-2.7K-B 236
DL115-10W-2.7K-W 236
DL115-10W-3K-B 236
DL115-10W-3K-W 236
DL118-15W-2.7K-B 235, 237
DL118-15W-2.7K-W 237
DL118-15W-3K-B 237
DL118-15W-3K-W 237
DL119-10W-2.7K-TRS-B 238
DL119-10W-2.7K-TRS-W 238
DL119-10W-3K-TRS-B 238
DL119-10W-3K-TRS-W 238
DL122-15W-2.7K-TRS-B 239
DL303-L7W 278
DL303-L12B 278
DL2001-L12W 278
DLA032-TRS12-W 372
DLA032-TRS24-W 372
DLA032-TRS36-W 372
DLA032-TRS45-W 372
DLA032-TRS90-W 372

G

GLASS001-D35 240
GLASS001-D45 241

H

HONEYCOMB001-D32 240
HONEYCOMB001-D41.5 241
HONEYCOMB-D24 350, 351, 352
HONEYCOMB-D26 282, 286, 299
HONEYCOMB-D31 301
HONEYCOMB-D38 71, 81, 87, 189, 283, 287
HONEYCOMB-D45 214, 216, 312, 314, 318, 319, 320, 321, 322, 332
HONEYCOMB-D50 91

L

LENS001D35-15W 240
LENS001D45-15W 241
LENS002D35-15W 240
LENS002D45-15W 241
LENS003D35-15W 240
LENS003D45-15W 241
LENSD29-15 299
LENSD29-24 299
LENSD29-36 299
LENSD29-50 299
LENSD31-15 301
LENSD31-24 301
LENSD31-36 301
LENSD31-50 301
LENSD38-15 71, 81, 87, 189
LENSD38-24 71, 81, 87, 189
LENSD38-36 71, 81, 87, 189
LENSD38-50 71, 81, 87, 189
LENSD50-15 91
LENSD50-24 91
LENSD50-36 91
LENSD50-50 91

R

RING057-7-MG 299
RING057-10-MG 301
RINGL-20-W 91
RINGLACR-12-W 71, 81, 87, 189
RINGM-12-W 71, 81, 87, 189
RINGMACR-12-W 71, 81, 87, 189
RINGSACR-12-W 71, 81, 87, 189

T

TR002-1-GU10-B 212
TR003-1-6W3K-B 205
TR003-1-6W3K-S-B 205
TR003-1-6W3K-S-W 205
TR003-1-6W3K-W 205
TR003-1-6W4K-S-B 205
TR003-1-10W3K-S-B 205
TR003-1-10W3K-S-W 205
TR003-1-10W4K-S-B 205
TR003-1-12W4K-W 205
TR003-1-15W3K-S-B 205
TR003-1-15W3K-S-W 205
TR003-1-15W4K-S-B 205
TR003-1-15W4K-S-W 205
TR003-1-26W3K-S-B 206
TR003-1-26W4K-S-B 206
TR003-1-26W4K-S-W 206
TR003-1-40W3K-W 206
TR004-1-GU10-B 184
TR004-1-GU10-GF 184
TR004-1-GU10-MG 184
TR004-1-GU10-W 184
TR005-1-GU10-B 214
TR005-1-GU10-BG 214
TR005-1-GU10-W 214
TR005-2-2X12W3K-B 82
TR005-2-2X12W3K-BBS 82
TR005-2-2X12W3K-BW 82
TR005-2-12W3K-B 80
TR005-2-12W3K-BBS 80
TR005-2-12W3K-BW 80
TR005-4-2X12W-DS-B 82
TR005-4-2X12W-DS-BBS 82
TR005-4-2X12W-DS-BW 82
TR005-4-12W-DS-B 80
TR005-4-12W-DS-BBS 80
TR005-4-12W-DS-BW 80
TR007-1-12W2.7K-B-1 196
TR007-1-12W2.7K-W-1 196
TR007-1-12W3K-B 196
TR007-1-12W3K-B-1 196
TR007-1-12W3K-W 196
TR007-1-12W3K-W-1 196
TR007-1-12W4K-B 196
TR007-1-12W4K-W 196
TR007-1-18W3K-B 197
TR007-1-18W3K-B-1 197
TR007-1-18W3K-B4K 197
TR007-1-18W3K-W 197
TR007-1-18W3K-W-1 197
TR007-1-18W3K-W4K 197
TR008-1-GU10-W 213
TR010-1-10W3K-M-B-DE 200
TR010-1-10W3K-M-W-DE 200
TR010-1-10W4K-M-B-DE 200
TR010-1-10W4K-M-W-DE 200
TR010-1-22W3K-M-B-DE 200
TR010-1-22W3K-M-W-DE 200
TR010-1-22W4K-M-B-DE 200
TR010-1-22W4K-M-W-DE 200
TR011-1-GU10-B 216
TR011-1-GU10-G 216
TR011-1-GU10-W 216
TR020-1-GU10-B 190
TR020-1-GU10-W 190
TR020-1-U-GU10-BG 190
TR020-1-U-GU10-BGF 190
TR020-1-U-GU10-BMG 190
TR020-1-U-GU10-BS 190
TR020-1-U-GU10-WG 190
TR020-1-U-GU10-WGF 190
TR020-1-U-GU10-WMG 190
TR020-1-U-GU10-WS 190
TR021-1-12B3K-W-B 188
TR021-1-12B3K-W-D-B 188
TR021-1-12B3K-Z-B 192
TR021-1-12B3K-Z-D-B 192
TR021-1-12B3K-Z-D-W 192
TR021-1-12B3K-Z-W 192
TR021-1-12B4K-W-B 188
TR021-1-12B4K-W-D-B 188
TR021-1-12B4K-Z-D-B 192
TR021-1-12B4K-Z-D-W 192
TR021-1-12B4K-Z-W 192

Alphabetical index

TR021-1-12W3K-W-BBS 188
TR021-1-12W3K-W-D-W 188
TR021-1-12W3K-W-W 188
TR021-1-12W4K 188
TR021-1-12W4K-W-D-W 188
TR021-1-12W4K-W-W 188
TR021-1-124K-Z-B 192
TR022-1-GU10-B 211
TR022-1-GU10-W 211
TR028-3-GU10-B 228
TR028-3-GU10-MG 228
TR028-3-GU10-W 228
TR029-3-10W3K-B 231
TR029-3-10W3K-S-B 231
TR029-3-10W3K-S-W 231
TR029-3-10W4K-B 231
TR029-3-10W4K-S-B 231
TR029-3-10W4K-S-W 231
TR029-3-20W3K-B 231
TR029-3-20W3K-S-B 231
TR029-3-20W3K-S-W 231
TR029-3-20W4K-S-B 231
TR029-3-20W4K-S-W 231
TR029-3-26W3K-S-B 231
TR029-3-26W3K-S-W 231
TR029-3-26W4K-S-B 231
TR029-3-26W4K-S-W 231
TR029-3-30W4K-B 231
TR029-3-30W4K-W 231
TR030-2-12W2.7K-B 73
TR030-2-12W3K-B 73
TR030-2-12W3K-W 73
TR030-2-12W4K-B 73
TR030-2-12W4K-W 73
TR030-2-24W2.7K-B 73
TR030-2-24W3K-B 73
TR030-2-24W3K-W 73
TR030-2-24W4K-B 73
TR030-2-24W4K-W 73
TR030-4-12W3K-WW-DS-B 73
TR030-4-12W3K-WW-DS-W 73
TR030-4-12WTW-DD2-B 73
TR030-4-12WTW-DD2-W 73
TR030-4-12WTW-DD-B 73
TR030-4-12WTW-DD-W 73
TR030-4-24W3K-WW-DS-B 73
TR030-4-24W3K-WW-DS-W 73
TR030-4-24WTW-DD2-B 73
TR030-4-24WTW-DD2-W 73
TR030-4-24WTW-DD-B 73
TR030-4-24WTW-DD-W 73
TR030-4-30WTW-DD2-B 73
TR030-4-30WTW-DD2-W 73
TR030-4-30WTW-DD-B 73
TR030-4-30WTW-DD-W 73
TR031-2-12W2.7K-B 113
TR031-2-12W3K-B 113
TR031-2-12W3K-W 113
TR031-2-12W4K-B 113
TR031-2-12W4K-W 113
TR031-2-18W2.7K-B 113
TR031-2-18W3K-B 113
TR031-2-18W3K-W 113
TR031-2-18W4K-B 113
TR031-2-18W4K-W 113
TR031-4-12W3K-S-DS-B 113
TR031-4-12W3K-S-DS-W 113
TR031-4-12WTW-DD2-B 113
TR031-4-12WTW-DD2-W 113
TR031-4-12WTW-DD-B 113
TR031-4-12WTW-DD-W 113
TR031-4-18W3K-S-DS-B 113
TR031-4-18W3K-S-DS-W 113
TR031-4-18WTW-DD2-B 113
TR031-4-18WTW-DD2-W 113
TR031-4-18WTW-DD-B 113
TR031-4-18WTW-DD-W 113
TR031-4-24WTW-DD2-B 113
TR031-4-24WTW-DD2-W 113
TR031-4-24WTW-DD-B 113
TR031-4-24WTW-DD-W 113
TR032-2-12W3K-M-BBS 86
TR032-2-12W3K-S-B 86
TR032-2-12W3K-S-W 86
TR032-2-12W4K-S-B 86
TR032-2-12W4K-S-W 86
TR032-2-20W3K-S-B 90
TR032-2-20W3K-S-W 90
TR032-2-20W4K-S-B 90
TR032-2-20W4K-S-W 90
TR032-4-12W3K-M-DS-BBS 86
TR032-4-12W3K-S-DS-B 86
TR032-4-12W3K-S-DS-W 86
TR032-4-12WTW-S-DD2-B 86
TR032-4-12WTW-S-DD2-W 86
TR032-4-12WTW-S-DD-B 86
TR032-4-12WTW-S-DD-W 86
TR032-4-20W3K-S-DS-B 90
TR032-4-20W3K-S-DS-W 90
TR032-4-20WTW-S-DD2-B 90
TR032-4-20WTW-S-DD2-W 90
TR032-4-20WTW-S-DD-B 90
TR032-4-20WTW-S-DD-W 90
TR033-4-12WTW-DD2-B 114
TR033-4-12WTW-DD2-W 114
TR033-4-12WTW-DD-B 114
TR033-4-12WTW-DD-W 114
TR036-4-12WTW-DD2-B 78
TR036-4-12WTW-DD2-W 78
TR036-4-12WTW-DD-B 78
TR036-4-12WTW-DD-W 78
TR038-2-5W3K-1 103
TR038-2-5W3K-W-1 103
TR038-2-5W4K-1 103
TR038-2-5W4K-W-1 103
TR038-4-5W3K-WW-DS-1 103
TR038-4-5W3K-WW-DS-W-1 103
TR038-4-5WTW-DD2-B 103
TR038-4-5WTW-DD-B 103
TR039-2-5W3K-1 102
TR039-2-5W3K-W-1 102
TR039-2-5W4K-1 102
TR039-2-5W4K-W-1 102
TR039-4-5W3K-WW-DS-1 102
TR039-4-5W3K-WW-DS-W-1 102
TR039-4-5WTW-DD2-B 102
TR039-4-5WTW-DD-B 102
TR040-2-18W3K 118
TR040-2-18W3K-BBS 118
TR040-2-18W3K-W 118
TR040-2-18W4K 118
TR040-2-18W4K-W 118
TR040-4-18W3K-DS 118
TR040-4-18W3K-DS-BBS 118
TR040-4-18W3K-DS-W 118
TR040-4-18WTW-DD2-B 118
TR040-4-18WTW-DD2-W 118
TR040-4-18WTW-DD-B 118
TR040-4-18WTW-DD-W 118
TR041-2-12W3K-B 92
TR041-2-12W3K-BBS 92
TR041-2-12W3K-W 92
TR041-2-12W4K-B 92
TR041-2-12W4K-W 92
TR041-4-12W3K-M-DS-B 92
TR041-4-12W3K-M-DS-BBS 92
TR041-4-12W3K-M-DS-W 92
TR041-4-12WTW-DD2-B 92
TR041-4-12WTW-DD2-W 92
TR041-4-12WTW-DD-B 92
TR041-4-12WTW-DD-W 92
TR042-2-24W3K-1 76
TR042-2-24W3K-W 76
TR042-2-24W4K-1 76
TR042-2-24W4K-W 76
TR042-4-24W3K-WW-DS-1 76
TR042-4-24W3K-WW-DS-W 76
TR043-1-12W3K-B 210
TR043-1-12W4K-B 210
TR044-1-12W3K-B 220
TR080-1-6W3K-B 166
TR080-1-6W3K-W 166
TR080-1-6W4K-B 166
TR080-1-6W4K-W 166
TR080-1-12W3K-B 166
TR080-1-12W3K-W 166
TR080-1-12W4K-B 166
TR080-1-12W4K-W 166
TR080-1-18W3K-B 166
TR080-1-18W3K-W 166
TR080-1-18W4K-B 166
TR080-1-18W4K-W 166
TR082-1-6W3K-M-B 169
TR082-1-6W3K-M-W 169
TR082-1-6W4K-M-B 169
TR082-1-6W4K-M-W 169
TR082-1-12W3K-M-B 169
TR082-1-12W3K-M-W 169
TR082-1-12W4K-M-B 169
TR082-1-12W4K-M-W 169

Alphabetical index

TR082-1-18W3K-M-B 169
TR082-1-18W3K-M-W 169
TR082-1-18W4K-M-B 169
TR082-1-18W4K-M-W 169
TR084-1-6W3K-B 167
TR084-1-6W3K-W 167
TR084-1-6W4K-B 167
TR084-1-6W4K-W 167
TR084-1-12W3K-B 167
TR084-1-12W3K-W 167
TR084-1-12W4K-B 167
TR084-1-12W4K-W 167
TR084-1-15W3K-B 208
TR084-1-15W3K-D-B 208
TR084-1-15W3K-D-B-DE 208
TR084-1-15W3K-D-W 208
TR084-1-15W3K-D-W-DE 208
TR084-1-15W3K-W 208
TR084-1-15W4K-D-W 208
TR086-2-25W3K-B 98
TR086-2-25W3K-W 98
TR086-2-25W4K-B 98
TR086-2-25W4K-W 98
TR086-4-25W-DS-B 98
TR086-4-25W-DS-W 98
TR087-1-GU10-B 194
TR087-1-GU10-W 194
TR088-1-GX53-B 202
TR088-1-GX53-MG 202
TR088-1-GX53-W 202
TR089-1-GU10-BB 180
TR089-1-GU10-BMG 180
TR089-1-GU10-WW 180
TR090-2-6W3K-B 104
TR090-4-6W-DS-B 104
TR097-2-12W2.7K-M-BB 70
TR097-2-12W3K-M-BB 70
TR097-2-12W3K-M-BMG 70
TR097-2-12W3K-M-BW 70
TR097-2-12W4K-M-BB 70
TR097-2-12W4K-M-BMG 70
TR097-2-12W4K-M-BW 70
TR100-2-2W3K-S-B 115
TR100-2-2W3K-S-W 115
TR100-2-2W4K-S-B 115
TR100-2-2W4K-S-W 115
TR102-24W3K-B-1 77
TR102-24W3K-W 77
TR102-24W4K-B-1 77
TR102-24W4K-W 77
TR102-24W-DS-B-1 77
TR102-24W-DS-W 77
TR103-1-5W3K-M-B 168
TR103-1-5W3K-M-W 168
TR103-1-5W4K-M-B 168
TR103-1-5W4K-M-W 168
TR103-1-12W3K-M-B 168
TR103-1-12W3K-M-W 168
TR103-1-12W4K-M-B 168
TR103-1-12W4K-M-W 168
TR104-1-12W3K-B-DE 182
TR104-1-12W3K-W-DE 182
TR104-1-12W4K-B-DE 182
TR104-1-12W4K-W-DE 182
TR104-1-24W3K-B-DE 182
TR104-1-24W3K-W-DE 182
TR104-1-24W4K-B-DE 182
TR104-1-24W4K-W-DE 182
TR106-2-12W3K-B 106
TR106-2-12W3K-W 106
TR106-2-18W3K-B 106
TR106-2-18W3K-W 106
TR106-4-12W-DS-B 106
TR106-4-12W-DS-W 106
TR106-4-18W-DS-B 106
TR106-4-18W-DS-W 106
TR107-2-5W3K-B 116
TR107-2-5W3K-BS 116
TR107-2-5W3K-W 116
TR107-4-5W-DS-B 116
TR107-4-5W-DS-BS 116
TR107-4-5W-DS-W 116
TR108-2-10W3K-B 94
TR108-4-10W3K-DS-B 94
TR122-2-7W3K-B 68
TR122-2-7W3K-BS 68
TR122-2-7W3K-W 68
TR122-4-7W-DS-B 68
TR122-4-7W-DS-BS 68
TR122-4-7W-DS-W 53, 68, 69
TR123-2-15W3K-B 108
TR123-4-15W-DS-B 108
TR131-2-15W3K-B 108
TR131-4-15W-DS-B 108
TR132-2-7W3K-B 69
TR132-2-7W3K-BS 69
TR132-2-7W3K-W 69
TR132-4-7W-DS-B 69
TR132-4-7W-DS-BS 69
TR141-2-6W3K-M-B 93
TR141-2-6W3K-M-BS 93
TR141-2-6W3K-M-W 93
TR142-1-6W3K-B 186
TR142-1-6W3K-BS 186
TR142-1-6W3K-W 186
TR143-1-5W2.7K-W-BS-DE 136
TR143-1-5W3K-W-B-DE 136
TR144-1-5W2.7K-W-BS-DE 136
TR144-1-5W3K-W-B-DE 136
TR145-1-3W2.7K-W-BS-DE 138
TR145-1-3W3K-W-B-DE 138
TR146-1-5W2.7K-BS-DE 147
TR146-1-5W3K-B-DE 147
TR147-1-3W2.7K-BS-DE 148
TR147-1-3W3K-B-DE 148
TR148-1-3W2.7K-BS-DE 144
TR148-1-3W3K-B-DE 144
TR149-1-5W2.7K-BS-DE 146
TR149-1-5W3K-B-DE 146
TR150-1-12W2.7K-M-BS-DE 142
TR150-1-12W3K-M-B-DE 142
TR151-1-12W2.7K-BS-DE 140
TR151-1-12W3K-B-DE 140
TR152-1-7W2.7K-BS-DE 152
TR152-1-7W3K-B-DE 152
TR153-1-10W2.7K-BS-DE 150
TR153-1-10W3K-B-DE 150
TR217-2-15W3K-B 96
TR217-4-15WTW-DD2-B 96
TR217-4-15WTW-DD-B 96
TR218-1-GU10-BK 181
TR218-1-GU10-BS 181
TR218-1-GU10-W 181
TR230-1-10W2.7K-BS-DE 154
TR230-1-10W3K-B-DE 154
TR240-18W2.7-6K-B-DE 40
TR243-18W2.7-6K-B-DE 41
TR246-5W2.7-6K-B-DE 42
TR247-5W2.7-6K-B-DE 43
TR248-5W2.7-6K-B-DE 48
TR249-5W2.7-6K-B-DE 44
TR250-30W3K-B 233
TR250-30W3K-BS 233
TR250-30W3K-W 233
TR251-30W2.7-5K-B 232
TR251-30W2.7-5K-W 232
TR251-40W2.7-5K-B 232
TR251-40W2.7-5K-W 232
TR252-5W2.7-6K-B-DE 45
TR253-5W2.7-6K-B-DE 49
TRA001B-11B 172
TRA001B-11W 172
TRA001C-11B 174
TRA001C-11W 174
TRA001CB-11B 178
TRA001CB-11W 178
TRA001CF-11B 174
TRA001CF-11W 174
TRA001CL-11B 174
TRA001CL-11W 174
TRA001CT-11B 174
TRA001CT-11W 174
TRA001CW-11B 174
TRA001CW-11W 174
TRA001CX-11B 174
TRA001CX-11W 174
TRA001EC-11B 172
TRA001EC-11W 172
TRA002B-11B 178
TRA002B-11W 178
TRA002C-11B 178
TRA002C-11W 178
TRA002CL-11B 176
TRA002CL-11W 176
TRA002CT-11B 178
TRA002CT-11W 178
TRA002CX-11B 178
TRA002CX-11W 178
TRA002EC-11B 176
TRA002EC-11W 176

Alphabetical index

TRA002HR-11B 178
TRA004DR-100S 64, 162
TRA004DR-150S 64, 162
TRA004DR-200S 64, 162
TRA004DR-320S 64, 162
TRA005B-31B-L 226
TRA005B-31B-R 226
TRA005B-31W-L 226
TRA005B-31W-R 226
TRA005C-31B 226
TRA005C-31W 226
TRA005CF-31B 227
TRA005CF-31W 227
TRA005CI-31B 226
TRA005CI-31W 226
TRA005CL-31B-L 227
TRA005CL-31B-R 227
TRA005CL-31W-L 227
TRA005CL-31W-R 227
TRA005CS-31B 227
TRA005CS-31W 227
TRA005CT-31B-L 227
TRA005CT-31B-R 227
TRA005CT-31W-L 227
TRA005CT-31W-R 227
TRA005CX-31B 227
TRA005CX-31W 227
TRA005EC-31B 224
TRA005EC-31W 224
TRA005TL-31B 227
TRA005TL-31W 227
TRA005WS-31B 226
TRA005WS-31W 226
TRA011-1-A-B 178
TRA011-1-A-W 178
TRA034B-42B-1 62
TRA034B-42W-1 62
TRA034C-21B 54
TRA034C-21W 54
TRA034C-42S 58
TRA034CL-42.12B 60
TRA034CL-42.12W 60
TRA034CL-42B 60
TRA034CPC-42B-15-1 62
TRA034CPC-42B-50 62
TRA034CPC-42W-15-1 62
TRA034CS-B-DE 62
TRA034CS-W-DE 62
TRA034CT-41B-DE 56
TRA034CT-41W-DE 56
TRA034CT-42.12B 60
TRA034CT-42.12W 60
TRA034CWT-42B-DE 62
TRA034CWT-42W-DE 62
TRA034DR-100W-DD-B-DE 64
TRA034DR-100W-DD-W-DE 64
TRA034DR-200W-DD-B-DE 64
TRA034DR-200W-DD-W-DE 64
TRA034EC-41B 54
TRA034EC-41W 54
TRA034EC-42B 58
TRA034EC-42W 58
TRA034HCL-41B 54
TRA034HCL-41W 54
TRA034HS-21B 56
TRA034HS-21W 56
TRA034ICL-41B 56
TRA034ICL-41W 56
TRA034ICL-42.12B 60
TRA034ICL-42.12W 60
TRA034PC-42B 62
TRA034PC-42W 62
TRA034SW-2B 56
TRA034SW-2W 56
TRA044-ANGLE.12B 60
TRA044-ANGLE.12W 60
TRA084B-11B 158
TRA084B-11W 158
TRA084C-11B 160
TRA084C-11W 160
TRA084CI-11B 160
TRA084CI-11W 160
TRA084CL-11B 160
TRA084CL-11W 160
TRA084CR-11B 160
TRA084CR-11W 160
TRA084CT-11B 160
TRA084CT-11W 160
TRA084CX-11B 160
TRA084CX-11W 160
TRA084DR-100B-1 162
TRA084DR-100W-1 162
TRA084DR-200B-1 162
TRA084DR-200W-1 162
TRA084EC-111B 158
TRA084EC-111W 158
TRA084EC-112B 158
TRA084EC-112W 158
TRA084FC-11LB 163
TRA084FC-11LW 163
TRA084FC-11SB 163
TRA084FC-11SW 163
TRA154C-SB1-BS 123
TRA154SW-BB-R-BS 123
TRA155CW-BB-B 124
TRA155CW-BB-BS 124
TRA155CW-D1-B 124
TRA155CW-D1-BS 124
TRA155CW-S1-B 124
TRA155CW-S1-BS 124
TRA155CW-SL1-B 124
TRA155CW-SL1-BS 124
TRA156C-BB1-B 126
TRA156C-BB1-BS 126
TRA156C-D1-B 126
TRA156C-D1-BS 126
TRA156C-IPC1-B 126
TRA156C-IPC1-BS 126
TRA156C-S1-B 126
TRA156C-SL1-B 126
TRA156C-SL1-BS 126
TRA156C-B1-B 126
TRA156C-B1-BS 126
TRA157SW-B1-B 132
TRA157SW-B1-BS 132
TRA157SW-D1-B 132
TRA157SW-D1-BS 132
TRA157SW-IPC1-B 132
TRA157SW-IPC1-BS 132
TRA157SW-S1-B 132
TRA157SW-S1-BS 132
TRA239B-42B 38
TRA239C-21B 38
TRA239CL-41B 34
TRA239CL-41B1 34
TRA239CLS-42.12B 36
TRA239CS-42B 38
TRA239DC-1B 36
TRA239EC-41B 34
TRA239ICL-42.12B 36
TRA239PC-42B 38
TRACL034-42B-R 60
TRX001-111B 172
TRX001-111W 172
TRX001-112B 172
TRX001-112W 172
TRX004-111B 176
TRX004-111W 176
TRX004-112B 176
TRX004-112W 176
TRX005-311B 224
TRX005-311W 224
TRX005-312B 224
TRX005-312W 224
TRX034-411B 54
TRX034-411W 54
TRX034-412B 54
TRX034-412W 54
TRX034-421.12B 58
TRX034-421.12W 58
TRX034-421B 58
TRX034-422.12B 58
TRX034-422.12W 58
TRX034DR4-100B-1 64
TRX034DR4-100W-1 64
TRX034DR4-200B-1 64
TRX034DR4-200W-1 64
TRX154-111BS 122
TRX154-112BS 122
TRX154-R-D650-BS 122
TRX154-R-D800-BS 122
TRX154-SR-D650-BS 123
TRX154-SR-D800-BS 123
TRX239-411B 34
TRX239-412B 34
TRX239-421.12B 36
TRX239-422.12B 36
TRX239DR-100B 38
TRX239DR-150B 38

Explication

Beam angles

- 0-15° Super Spot
- 15-30° Spot
- 30-50° Medium
- 50-80° Wide
- >80° Wash Wide
- 360° Flood

Voltage

- DC 48 V DC 24V, DC 12V
- 220V 220V

LED / Base

- LED LED
- Base

Type of light scattering

- Direct
- Re-reflected
- Diffused
- Mixed

Control capability

- Control via phone
- Control via remote
- Voice control (Google, Alexa)
- Dimmable

Control protocols

- DALI DALI
- DALI 2 DALI 2
- TRIAC TRIAC
- BT Bluetooth
- WIFI Wi-Fi

Smart home ecosystems

- TUYA TUYA

CRI level

- CRI >90 CRI>90
- CRI >80 CRI>80

Color index

B	Black	CH / W	Chrome / White	MG	Matte gold
B / W	Black / White	G	Gold	MG / B	Matte gold / Black
W	White	G / B	Gold / Black	MG / W	Matte gold / White
W / B	White / Black	G / W	Gold / White	S	Silver
BS	Brass	GF	Graphite	MS / B	Matte Silver / Black
CH	Chrome	GF / B	Graphite / Black	MS / W	Matte Silver / White
CH / B	Chrome / Black	GF / W	Graphite / White	S / B	Silver / Black
				S / W	Silver / White

Shaping Spaces and Stories

Architectural 2026

Lighting for Projects and Architecture

MAYTONI

Feldstiege 98
48161 Münster

www.maytoni.de
@maytoni

4 099776 238614

LED Zona®
ОСВЕТИТЕЛНИ РЕШЕНИЯ

Харесахте ли нещо от каталога?

Разгледайте и поръчайте продукти на Maytoni онлайн
на led-zona.bg – с актуални цени и наличности.

Продукти Maytoni Technical

Сканирайте или кликнете

Разгледайте продуктите →

Каталози на Maytoni

Сканирайте или кликнете

Още каталози →

www.led-zona.bg

T: 0888 065 970 | E: sales@led-zona.bg

Сфера Лайт ООД · гр. София, ж.к. Банишора, ул. Опълченска, бл. 54 (до 7-ма поликлиника)