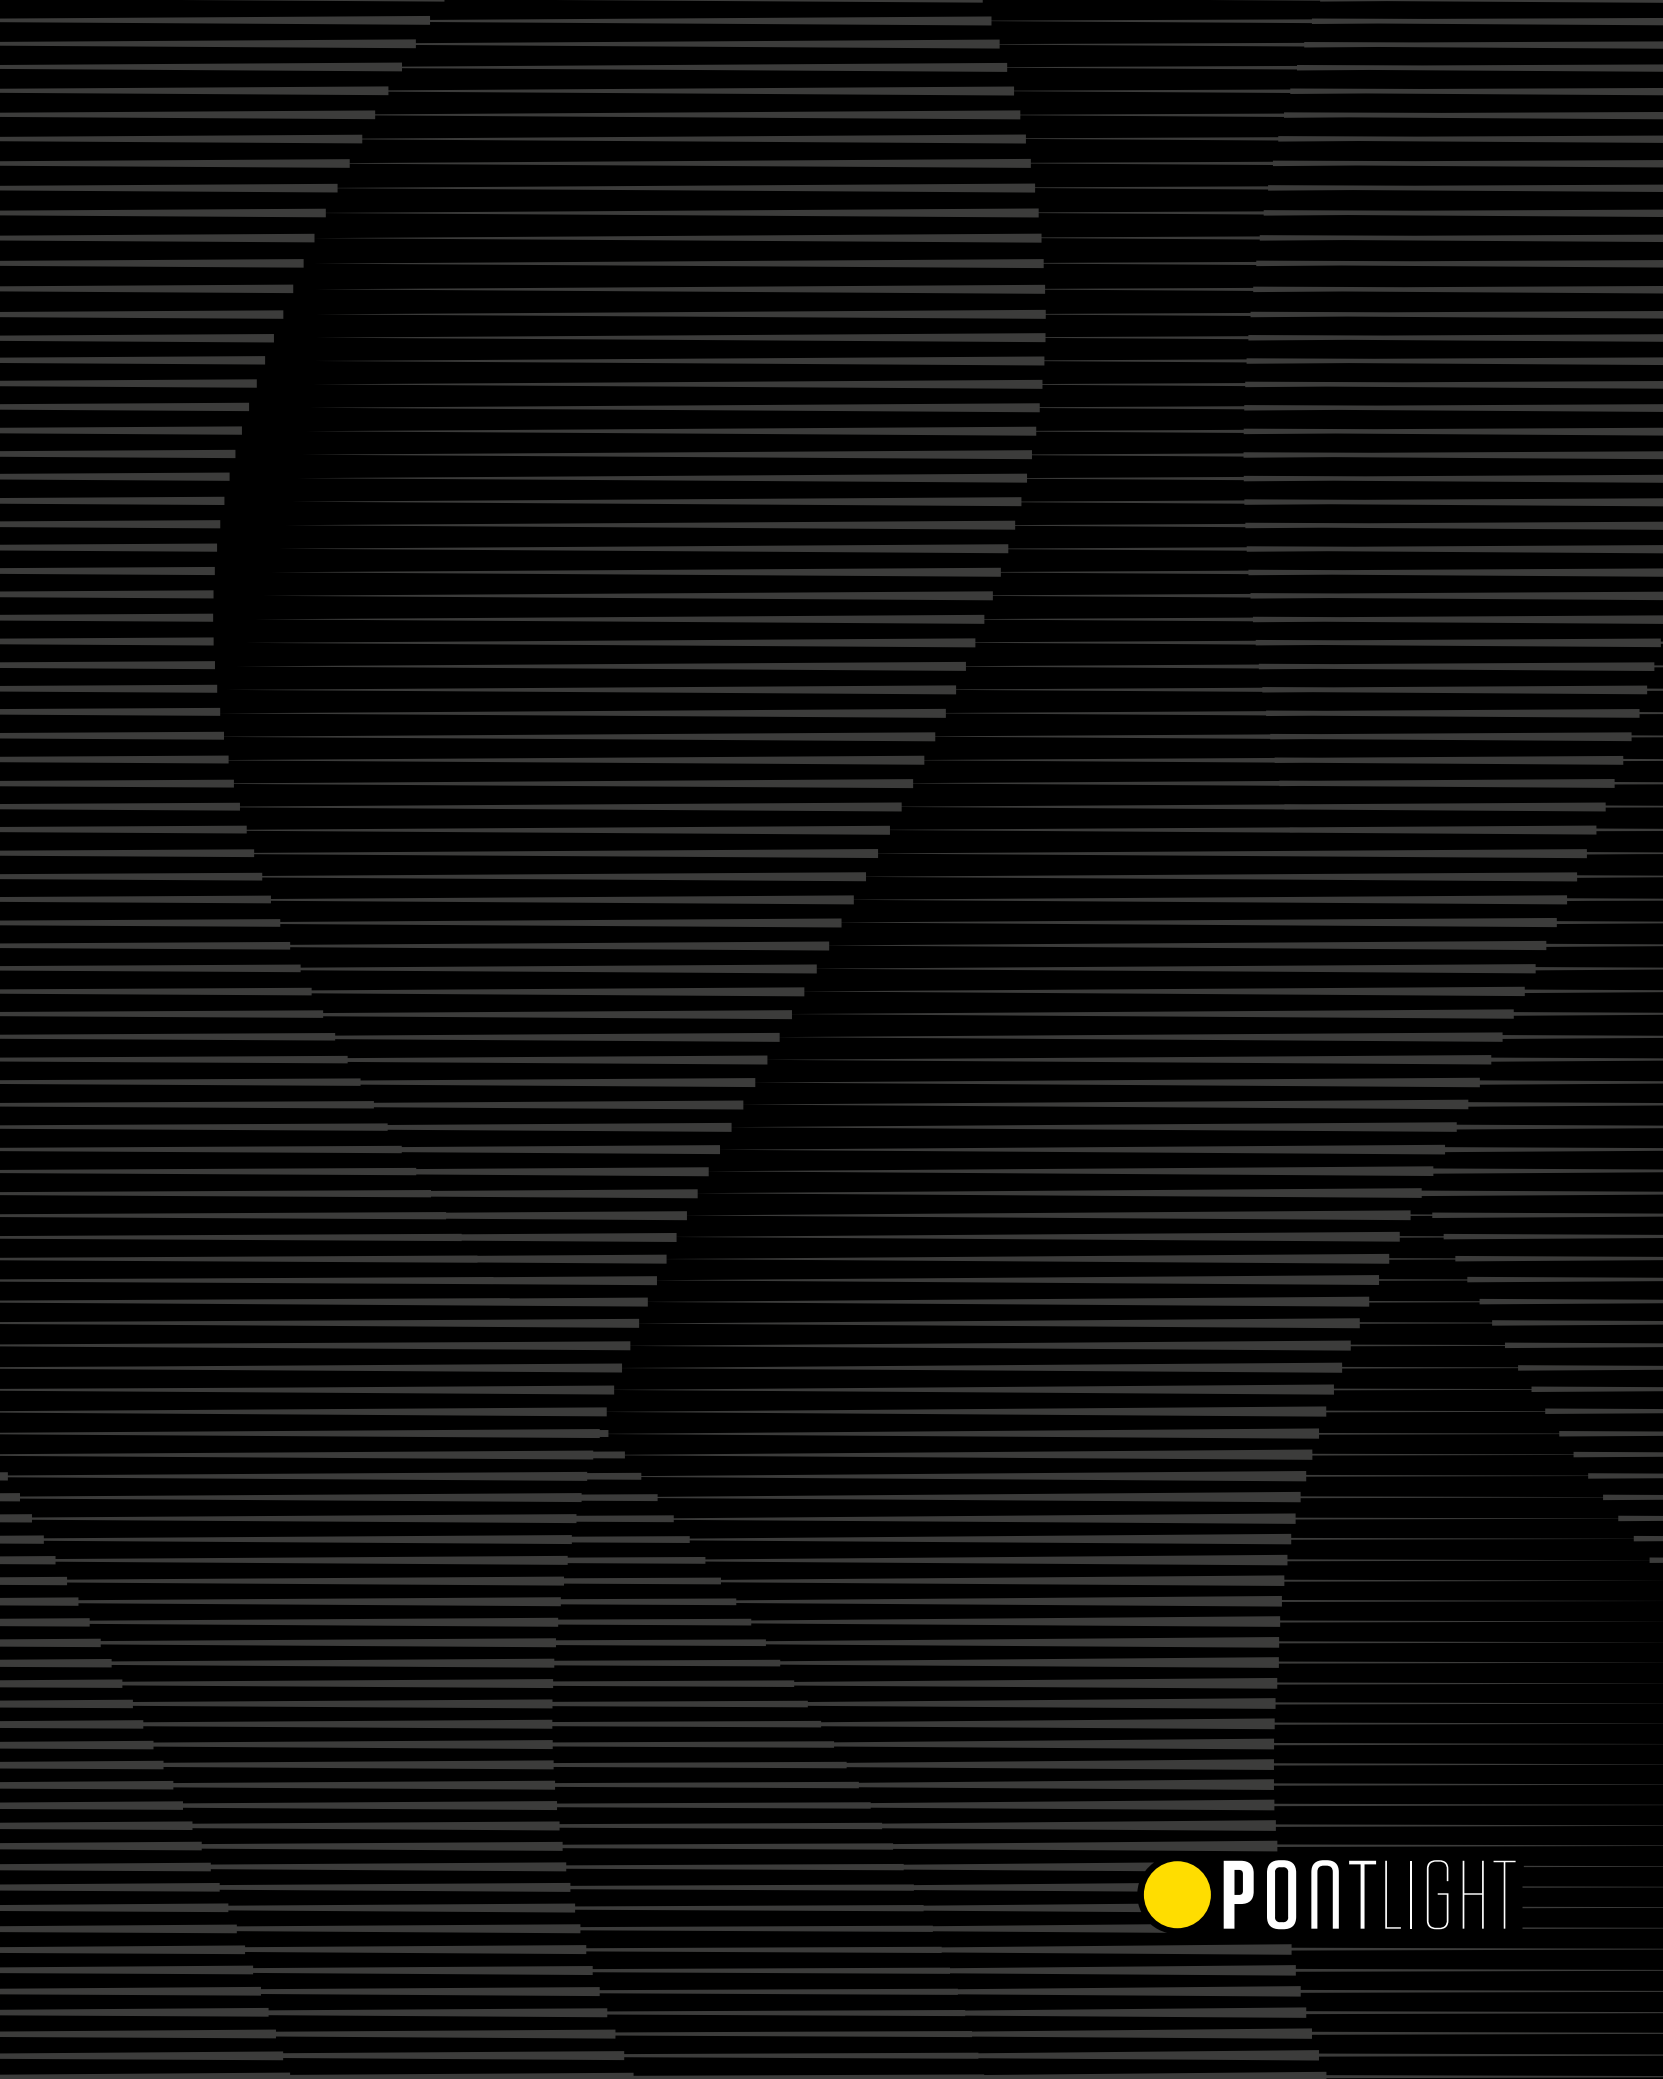
PONTLIGHT

ARCHITECTURAL CATALOGUE

by PONTLIGHT

H-1036 Budapest
Nagyszombat utca 1.

pontlight.com

TABLE OF CONTENTS

Introduction

About Us 6

References 8

Linear Profiles / Open shapes

Lina 12



Lyra 16



Alina Nova 20



Dotline 24



Boldline 28



Proline 32



Selena 36



Yumi 40



Anna spiral 44



Hannah spiral 46



Circular shapes

Olena 50

Olena Disk 54



Rina 58

Rina Deep 62

Rina Track 66





Ilona Dark 70



Ollie 74

Ellie 78



Anna O 82

Anna Inverse 86

Hannah O 90



Geometric shapes

Anna Triangle 94



Swan 98

Swella 102



Anna Rectangle 106



Tilia 110

Milia 114



Paula 118

Pamela 122



Anna Hexagon 126



Xara 130

Xenia 134



Recessed

Amy 136

Audrey 138



Lianna 140



Darcy 142



Dotline R 146



Colors and Codes

Colors 148

Coding System 149



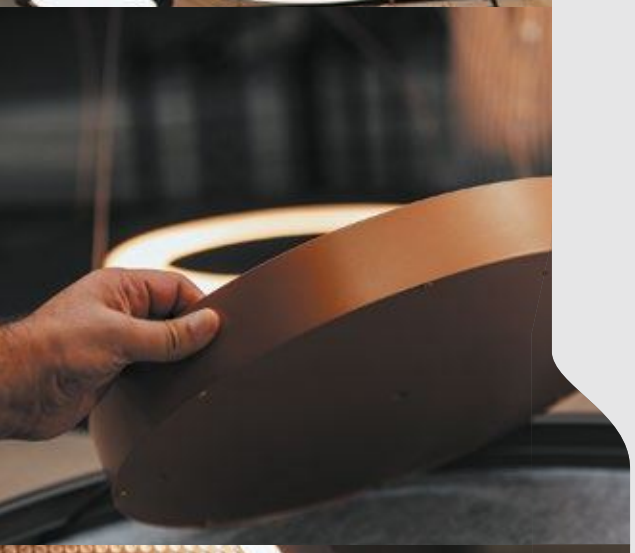



DESIGNED WITH YOU

Pont Light specializes in the manufacturing of high-quality aluminum profile luminaires featuring the latest LED technology.

Our diverse product range is designed to inspire creativity and support the vision of designers and architects. This acatalogue serves as a source of ideas and possibilities, presenting solutions that seamlessly combine aesthetics, performance, and innovation.

We deliver bespoke lighting solutions for retail spaces, hotels, office buildings,
and private residences - creating lighting concepts that reflect the unique identity and character of every project.



MANUFACTURING

All our luminaires are manufactured
in our own production facility, spanning nearly 1,500 m².

The majority of our manufacturing processes take place in-house - from the design and extrusion of aluminum profiles to final assembly and packaging. This integrated approach allows us to maintain full control over quality, precision, and performance at every stage of production.



BESPOKE PRODUCTS

Pont Light is fully equipped to handle both standard and customized production.
Precise project execution begins with careful product design, ensuring that every technical and aesthetic requirement is considered before manufacturing starts. For bespoke solutions, we often rely on specialized hand-operated machinery, allowing flexibility and meticulous attention to detail.
This approach enables us to produce a wide range of lighting fixtures tailored to the specific needs of each custom project.














LINA



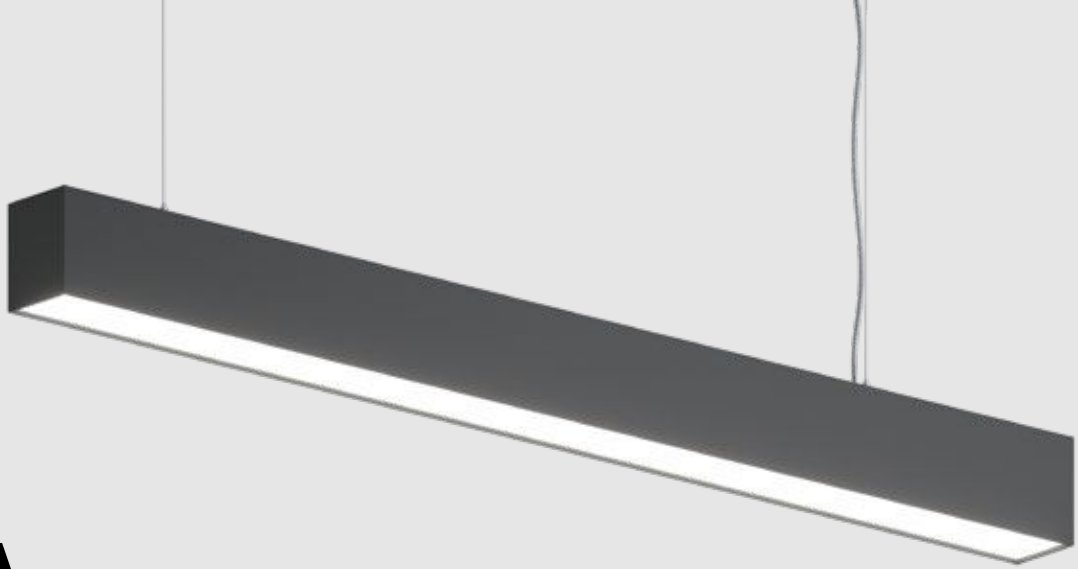

LINA

- Straight Linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

PROFILE SIZES

Direct/indirect options



1 Direct-only

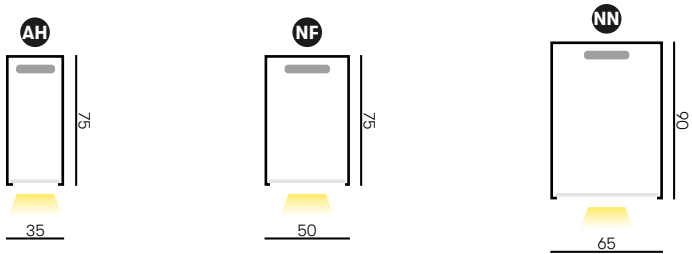

2 Direct-Indirect

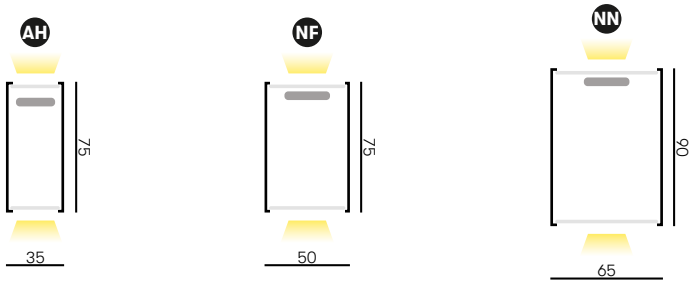

CE 220V 240V LEDs 50/60Hz

MOUNTING TYPES



M
Multi-Point Pendant



S
Spacers Surface



D
Direct Surface

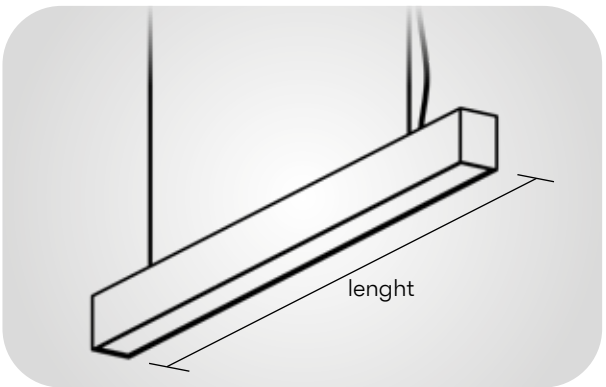

L	
N	Luminaire name
1	Lighting type
N	
F	Profile size
M	Mounting type
L	
Q	Size
8	CRI
2	Color temperature
B	Driver type
3	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

	Size	Power*	Light Flux**
LG	1140	26 W	2912 lm
LL	1420	33 W	3696 lm
LN	1700	39 W	4368 lm
LO	1980	46 W	5152 lm
LQ	2260	52 W	5824 lm

	Size	Power*	Light Flux**
LG	1140	39 W	4368 lm
LL	1420	49 W	5488 lm
LN	1700	59 W	6608 lm
LO	1980	68 W	7616 lm
LQ	2260	78 W	8736 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

BODY COLORS

B Black
G Grey
A Anthracite
W White
R RAL
S Special Colors





LYRA

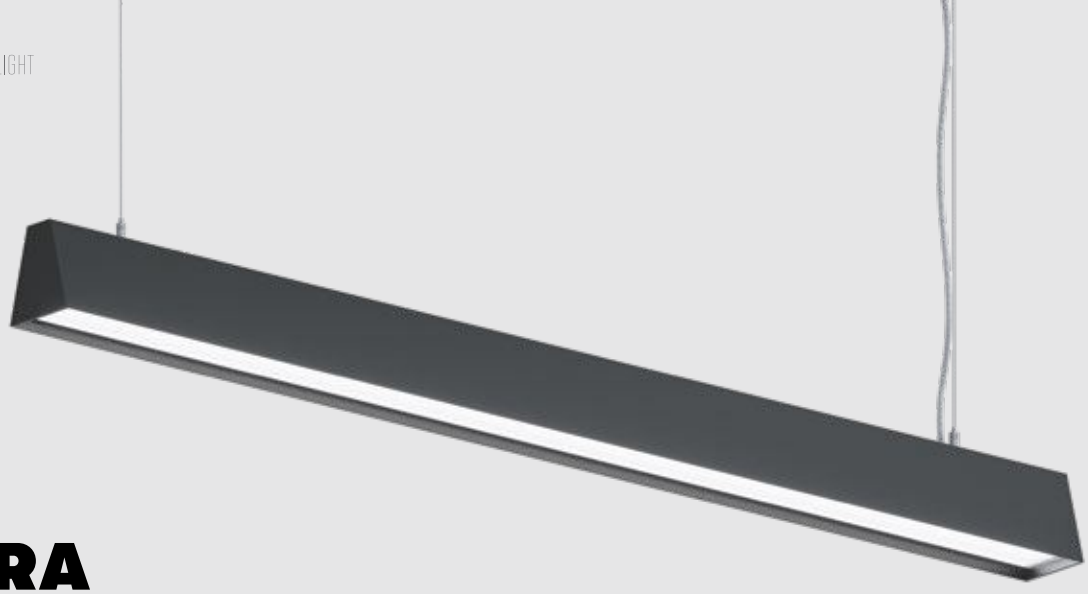

LYRA

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

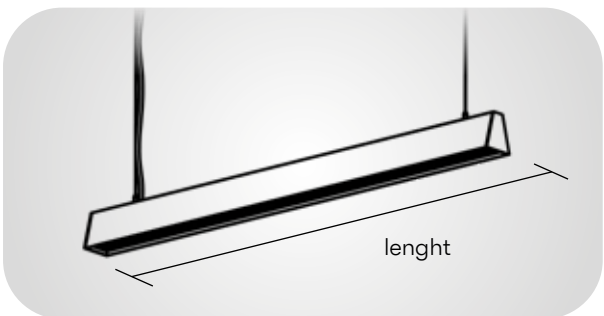

MOUNTING TYPES



M Multi-Point Pendant

PROFILE SIZES

Direct/indirect options

 internal driver

 external driver

1 Direct-only



2 Direct-Indirect



CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
LG	1140	26 W	2300 lm
LL	1420	32 W	2890 lm
LN	1700	39 W	3450 lm
LO	1980	45 W	4026 lm
LQ	2260	52 W	4595 lm
LG	1140	39 W	3415 lm
LL	1420	48 W	4340 lm
LN	1700	59 W	5200 lm
LO	1980	68 W	6036 lm
LQ	2260	78 W	6895 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

L
Y — Luminaire name
1 — Lighting type
N
X — Profile size
M — Mounting type
L
G — Size
8 — CRI
2 — Color temperature
N — Driver type
6 — Power
S — Diffuser type
B
B — Body color

CRI
- 8 80 CRI
- 9 90 CRI

COLOR TEMPERATURE
- 2 2700 K
- 3 3000 K
- 4 4000 K
- 1 RGBW
- 5 Tunable White

DRIVER TYPE
- N ON-OFF
- D DALI
- P Push DIM
- B Bluetooth

POWER
- 6 15 [W/m]
- 2 23 [W/m]
- 3 30 [W/m]

DIFFUSER
- M microprismatic
- S standard (opal)
- L lenses

CONFIGURATE PRODUCT

BODY COLORS

- B Black
- G Grey
- A Anthracite
- W White
- R RAL
- S Special Colors





ALINA NOVA



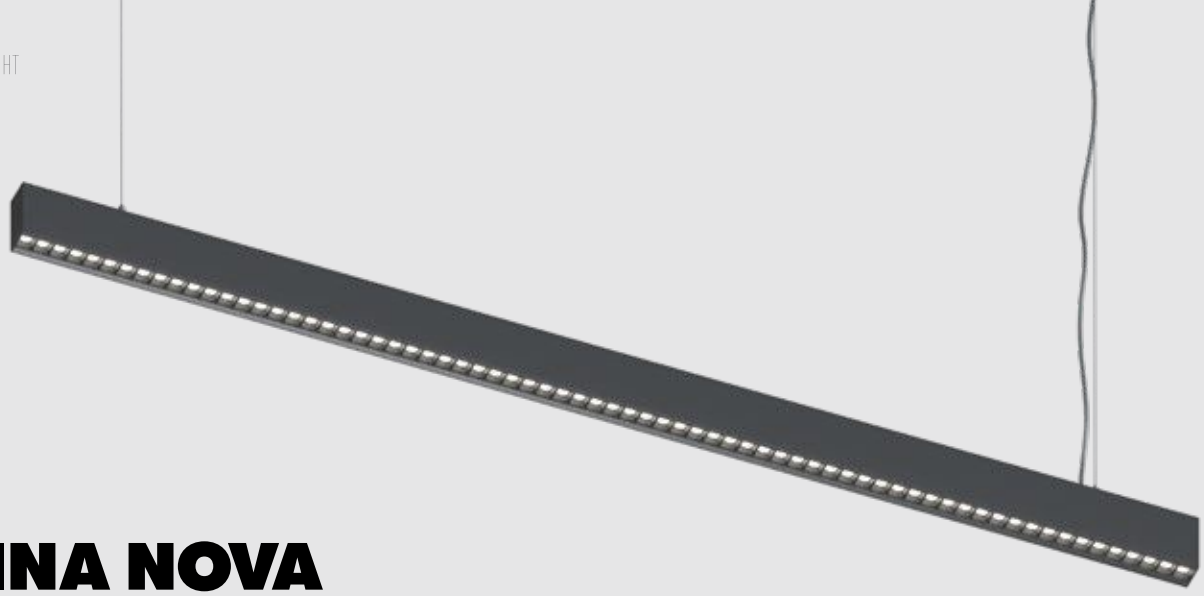

ALINA NOVA

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

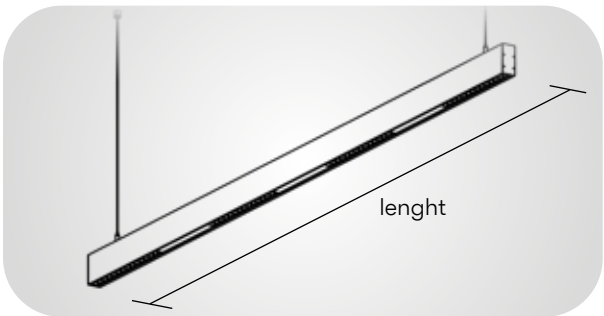

MOUNTING TYPES



M Multi-Point Pendant

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1 Direct-only



2 Direct-Indirect



CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
LC	845	21 W	1869 lm
LF	1122	28 W	2492 lm
LK	1400	35 W	3115 lm
LM	1680	42 W	3738 lm
LC	845	34 W	3026 lm
LF	1122	45 W	4005 lm
LK	1400	56 W	4984 lm
LM	1680	67 W	5963 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

AN	Luminaire name
1	Lighting type
AH	Profile size
ML	Mounting type
C	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
D	Diffuser type
BB	Body color

CRI	COLOR TEMPERATURE	DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	D DALI		S standard (opal)
	4 4000 K	P Push DIM		L lenses
	1 RGBW	B Bluetooth		
	5 Tunable White			

CONFIGURATE PRODUCT

BODY COLORS


B Black


G Grey


A Anthracite


W White



R RAL



S Special Colors

BODY COLORS





DOTLINE



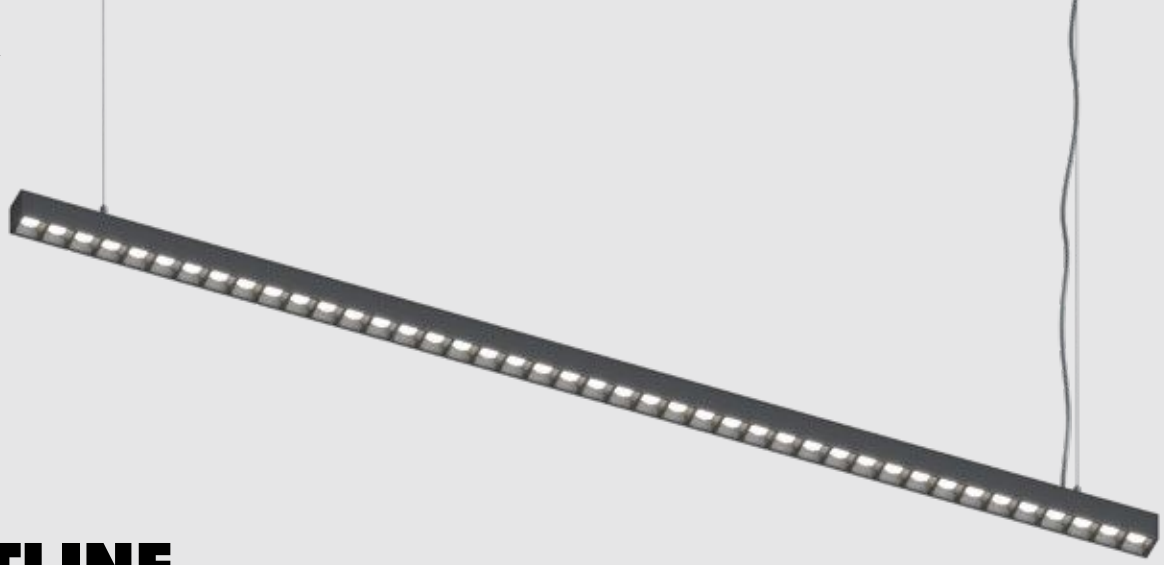

DOTLINE

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1

Direct-only

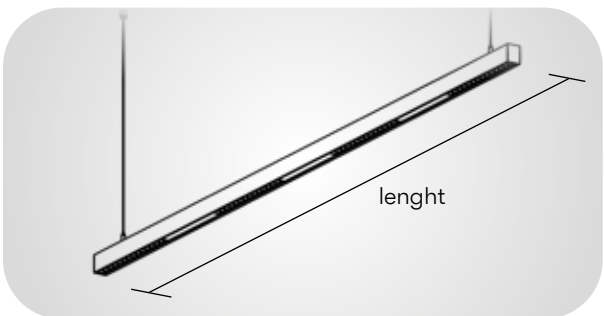

MOUNTING TYPES



M

Multi-Point
Pendant

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1

Direct-only



CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
LC	845	21 W	1869 lm
LF	1122	28 W	2492 lm
LK	1400	35 W	3115 lm
LM	1680	42 W	3738 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS


B Black


G Grey


A Anthracite


W White



R RAL



S Special Colors

D
O Luminaire name
1 Lighting type
A
L Profile size
M Mounting type
L
C Size
8 CRI
2 Color temperature
N Driver type
C Power
D Diffuser type
B
B Body color

CONFIGURATE PRODUCT

BODY COLORS





BOLDLINE



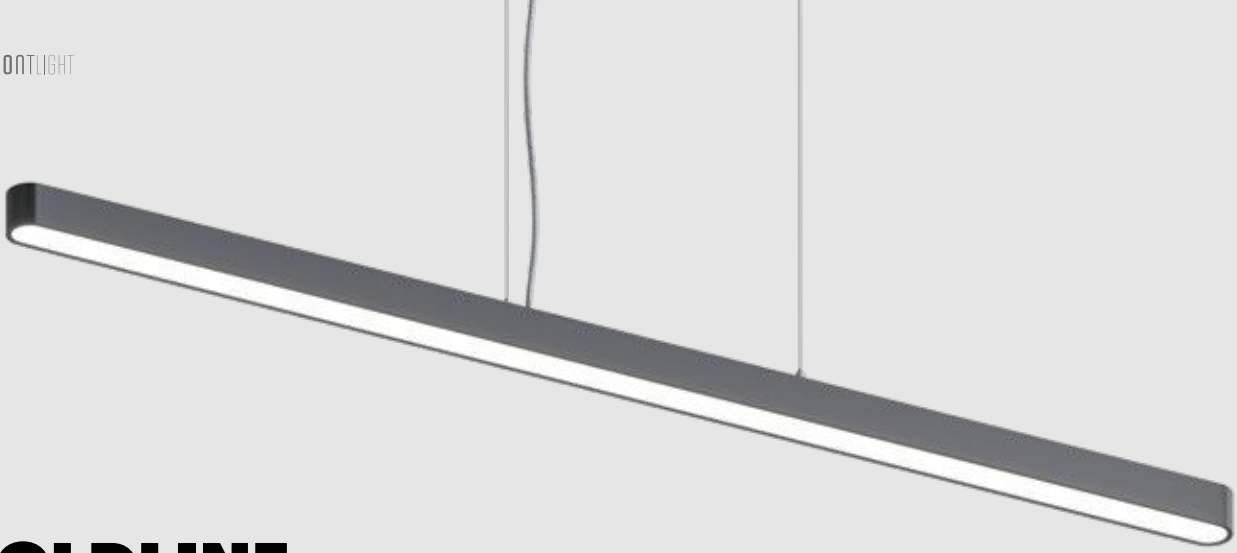

BOLDLINE

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

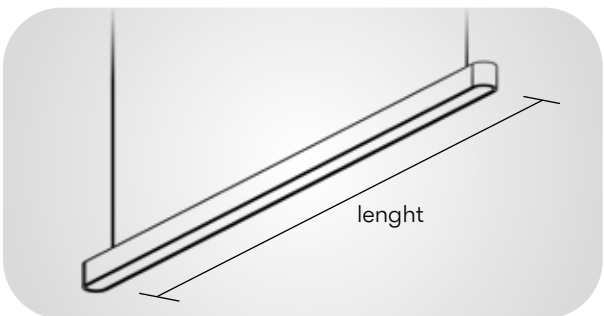

MOUNTING TYPES



M Multi-Point Pendant

PROFILE SIZES

Direct/indirect options



internal driver



external driver

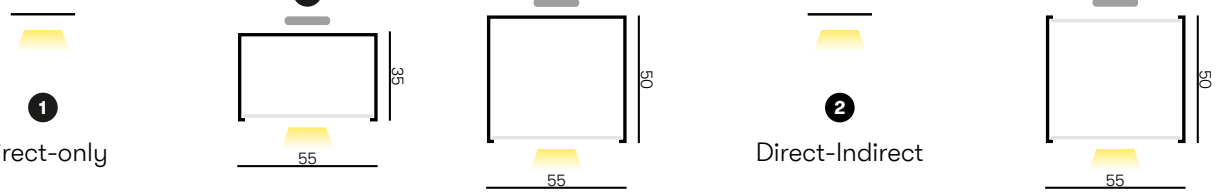

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
L5	1500	42W	4200 lm
L5	1500	65 W	6400 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

BL	Luminaire name
1	Lighting type
NU	Profile size
ML	Mounting type
5	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT




PROLINE





PROLINE

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1
Direct-only

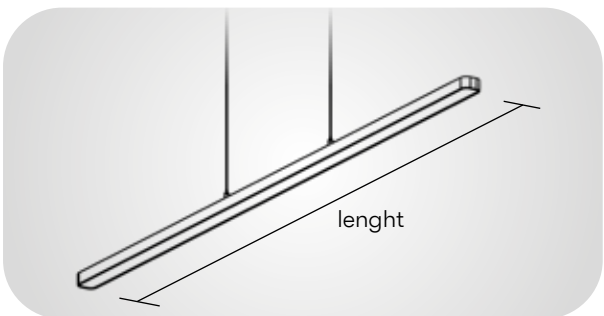

MOUNTING TYPES



M
Multi-Point
Pendant

PROFILE SIZES

Direct/indirect options

 internal driver

 external driver

1
Direct-only





CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
L5	1500	42W	4200 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

P	
R	Luminaire name
1	Lighting type
N	
G	Profile size
M	Mounting type
L	
5	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT





SELENA





SELENA

- Curved Linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1 Direct-only

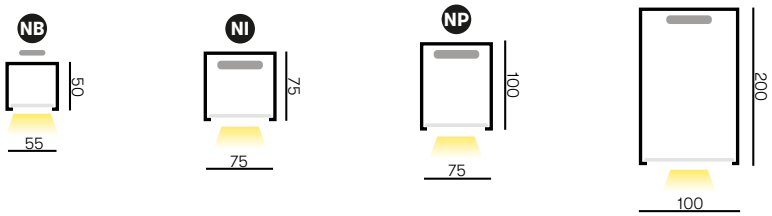

2 Direct-Indirect

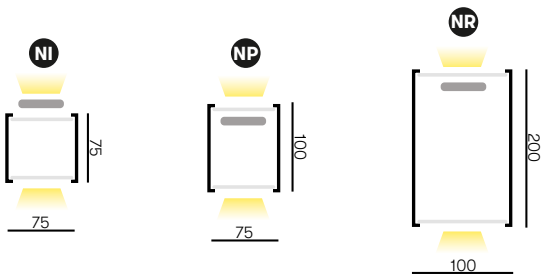

CE 220V 240V LEDs 50/60Hz

MOUNTING TYPES



M
Multi-Point Pendant



S
Spacers Surface



D
Direct Surface

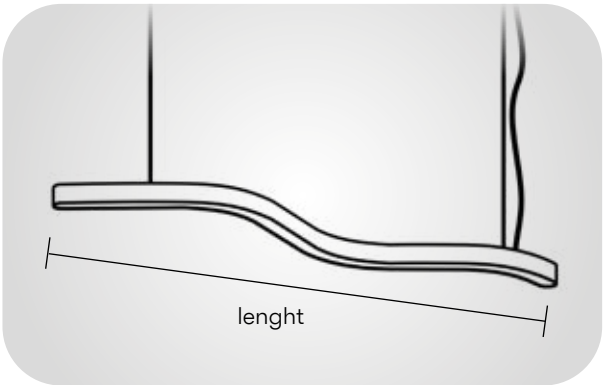

S	
E	Luminaire name
1	Lighting type
N	
B	Profile size
M	Mounting type
L	
E	Size
8	CRI
2	Color temperature
N	Driver type
6	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

	Size	Power	Light Flux*
LE	1000	15 W	1680 lm
	1000	23 W	2576 lm
	1000	30 W	3360 lm

	Size	Power*	Light Flux**
LE	1000	23 W	2576 lm
	1000	35 W	3920 lm
	1000	45 W	5040 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

BODY COLORS



B Black | G Grey | A Anthracite | W White | R RAL | S Special Colors


YUMI





YUMI

- Y-shaped LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

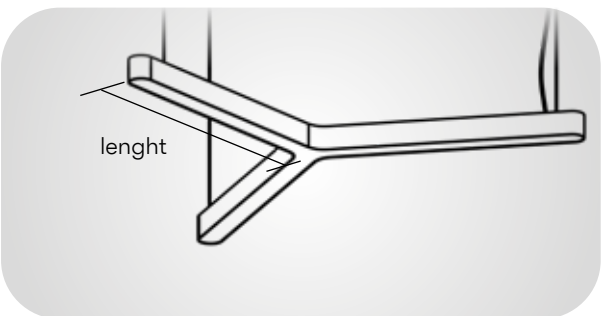

MOUNTING TYPES



M Multi-Point Pendant

T Rod Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



internal driver

external driver

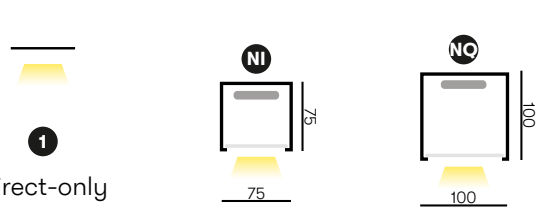

Direct-only

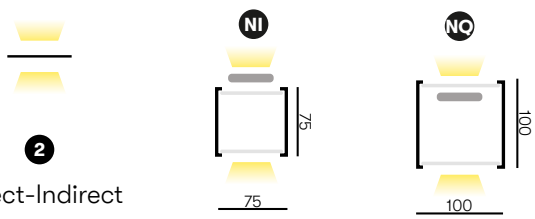

Direct-Indirect

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
LA	L600	41 W	4592 lm
LH	L1200	83 W	9296 lm
LA	L600	62 W	6944 lm
LH	L1200	124 W	13888 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

yM	Luminaire name
1	Lighting type
NQ	Profile size
ML	Mounting type
H	Size
8	CRI
2	Color temperature
N	Driver type
2	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT





ANNA SPIRAL



HANNAH SPIRAL

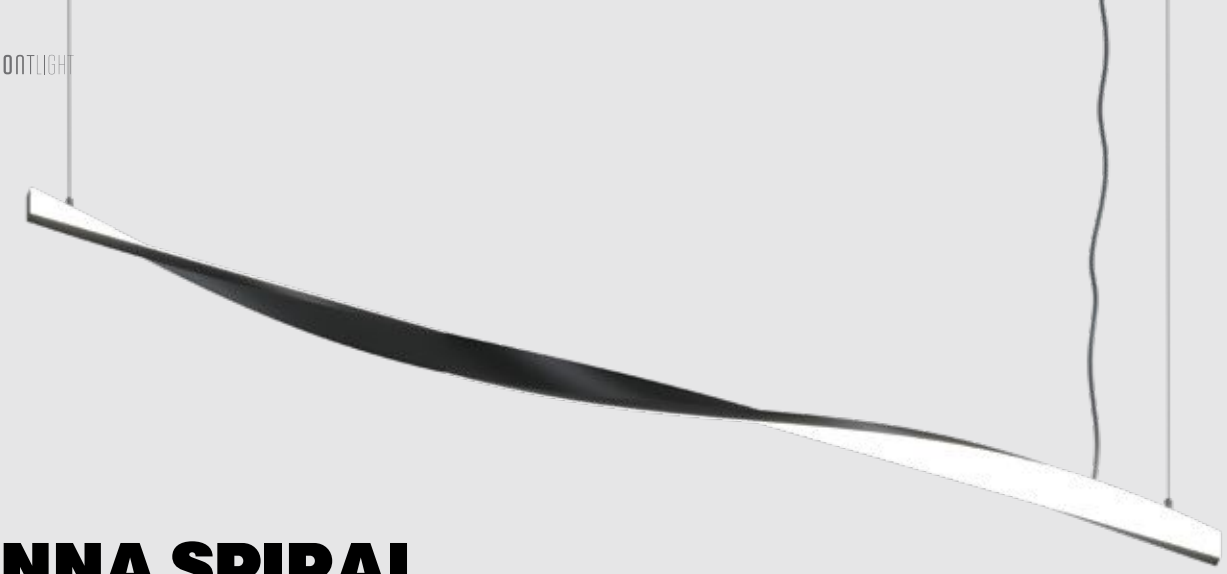

ANNA SPIRAL

- Special shaped luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

2
Direct-Indirect

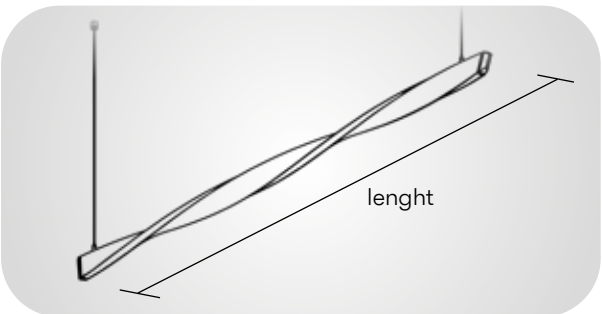

MOUNTING TYPES



M
Multi-Point
Pendant



S
Spacers
Surface

PROFILE SIZES

Direct/indirect options



internal driver



external driver

2
Direct-Indirect

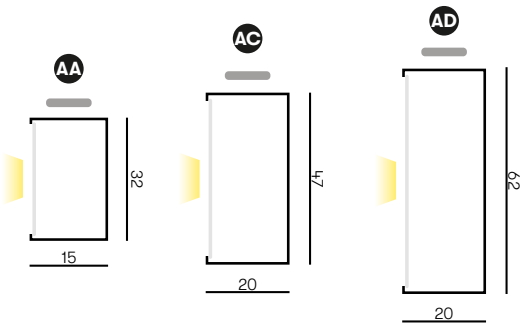

CE 220V 240V LEDs 50/60Hz

	Size	Power	Light Flux*
LP	2000	55 W	4950 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	3 30 [W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

OD	Luminaire name
1	Lighting type
NW	Profile size
MQ	Mounting type
P	Size
8	CRI
2	Color temperature
N	Driver type
8	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT



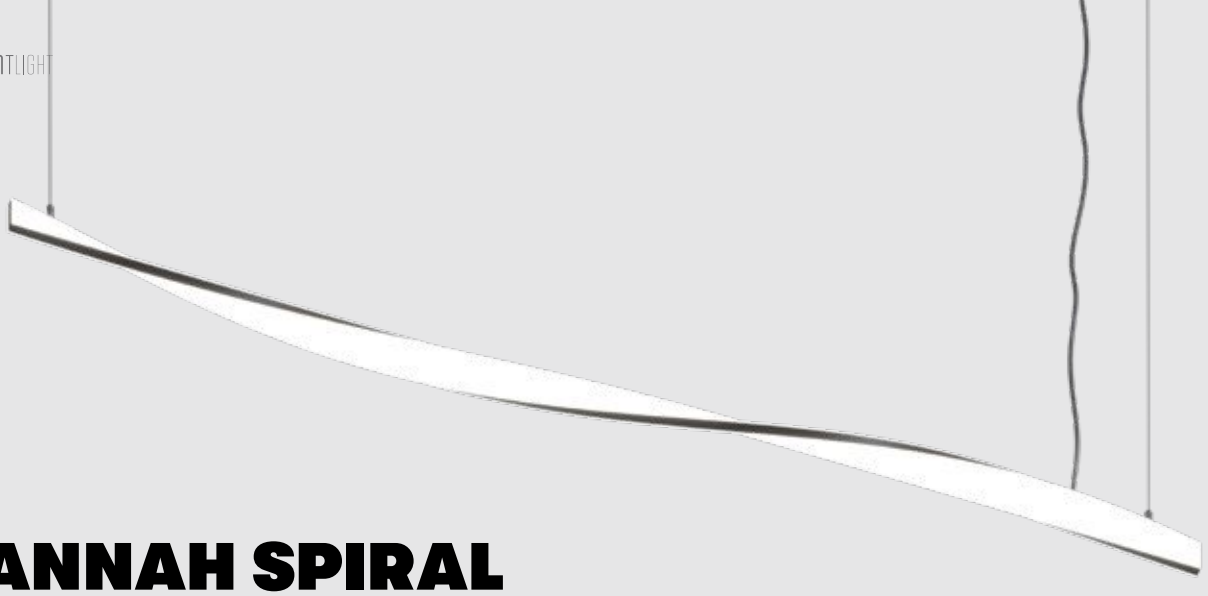

HANNAH SPIRAL

- Special shaped luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

2
Direct-Indirect

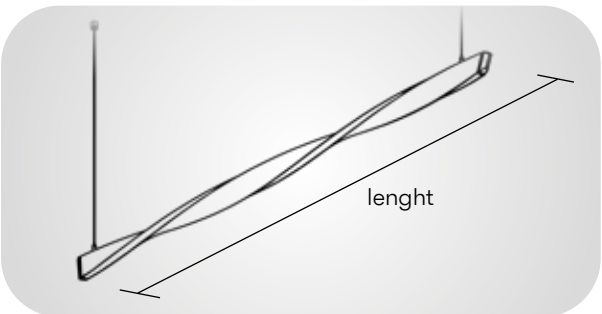

MOUNTING TYPES



M
Multi-Point
Pendant



S
Spacers
Surface

PROFILE SIZES

Direct/indirect options



internal driver



external driver

2
Direct-Indirect





CE 220V 240V LEDs 50/60Hz

	Size	Power	Light Flux*
LP	2000	55 W	4950 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	3 30 [W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

H	
S	Luminaire name
2	Lighting type
A	
B	Profile size
M	Mounting type
L	
P	Size
8	CRI
2	Color temperature
N	Driver type
2	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

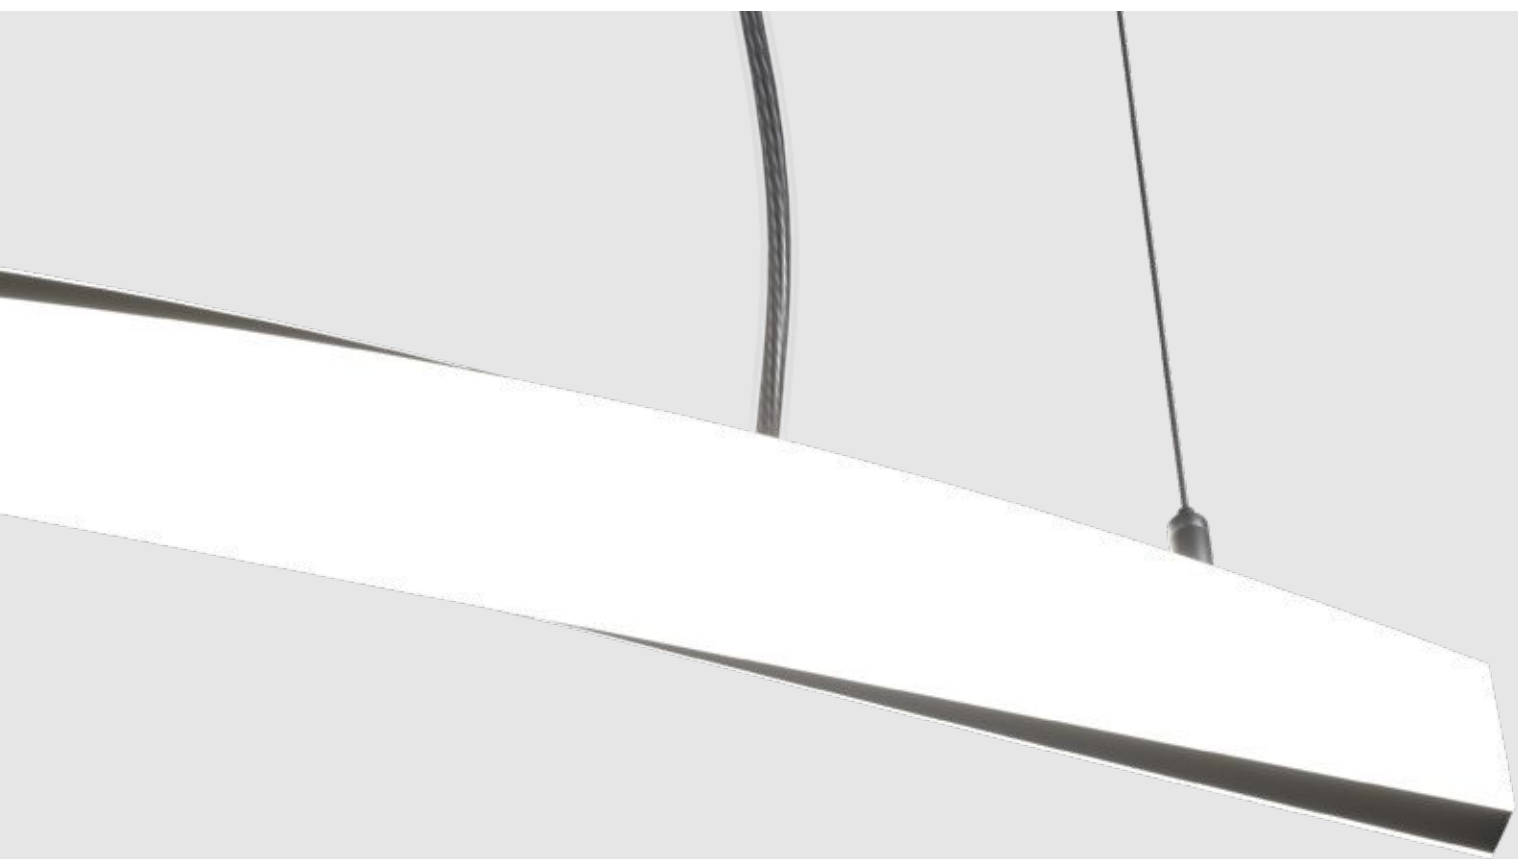



OLENA





OLENA

- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

PROFILE SIZES

Direct/indirect options



internal driver

external driver

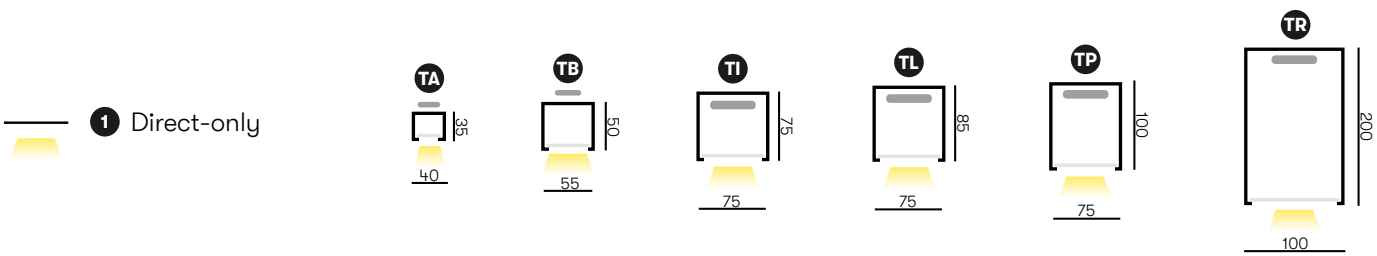

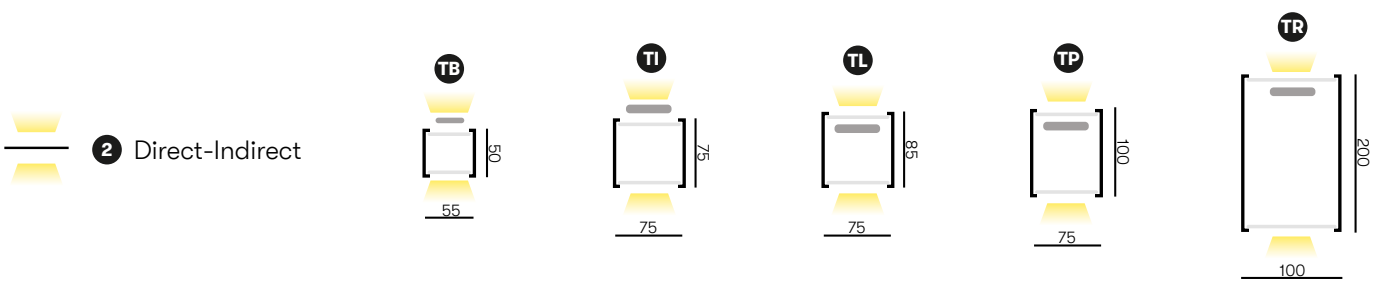

CE 220V 240V LEDs 50/60Hz

MOUNTING TYPES



M
Multi-Point Pendant



P
Single-Point Pendant



S
Spacers Surface



D
Direct Surface

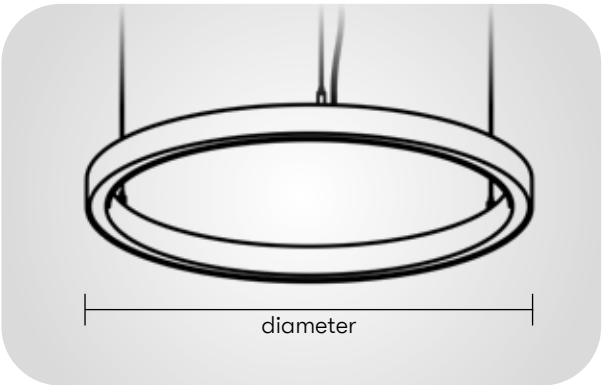

O	
L	Poduct name
1	Lighting type
T	
I	Profile size
M	Mounting type
D	
H	Size
8	CRI
2	Color temperature
N	Driver type
6	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

	Size	Power*	Light Flux**
DH	Ø450	33 W	3696 lm
DJ	Ø600	43 W	4816 lm
DM	Ø750	54 W	6048 lm
QA	Ø800	58 W	6496 lm
QC	Ø1000	72 W	8064 lm
QF	Ø1200	87 W	9744 lm
QJ	Ø1500	108 W	12096 lm
QK	Ø1800	130 W	14560 lm
QL	Ø2000	145 W	16240 lm

	Size	Power*	Light Flux**
DH	Ø450	49 W	5488 lm
DJ	Ø600	65 W	7280 lm
DM	Ø750	81 W	9072 lm
QA	Ø800	87 W	9744 lm
QC	Ø1000	108 W	12096 lm
QF	Ø1200	130 W	14560 lm
QJ	Ø1500	163 W	18256 lm
QK	Ø1800	195 W	21840 lm
QL	Ø2000	217 W	24304 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

OLENA DISK





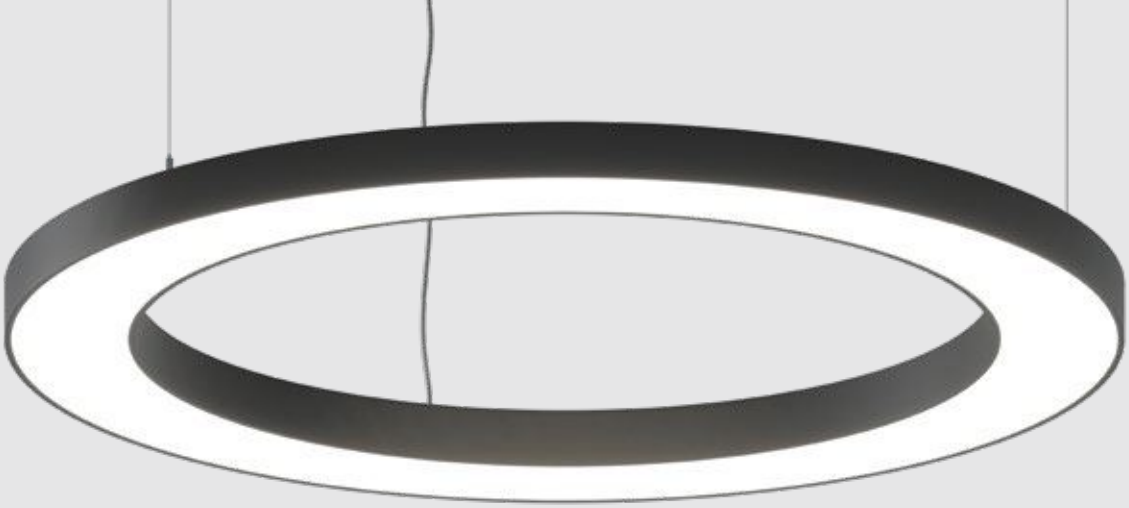

OLENA DISK

- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1

Direct-only

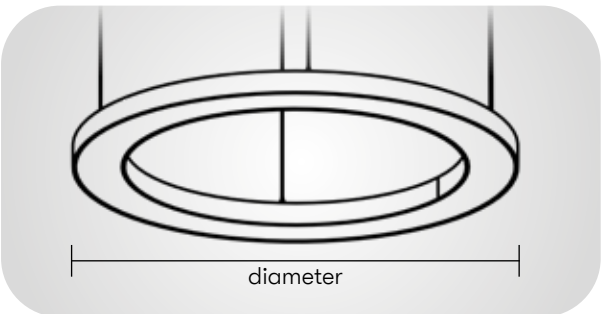

MOUNTING TYPES



M

Multi-Point Pendant



P

Single-Point Pendant

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1

Direct-only



CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
QP	Ø980	74 W	8806 lm

* Calculated with 24 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	8 12 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	9 17 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	0 24 [W/m]	L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

OD	Poduct name
1	Lighting type
NW	Profile size
MQ	Mounting type
P	Size
8	CRI
2	Color temperature
N	Driver type
8	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT






RINA



RINA

- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

PROFILE SIZES

Direct/indirect options



internal driver

external driver

1 Direct-only

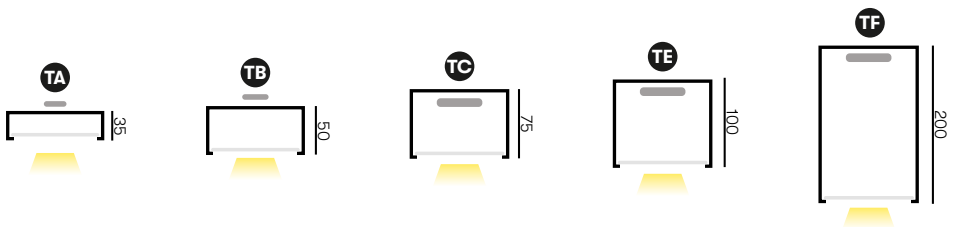

2 Direct-Indirect

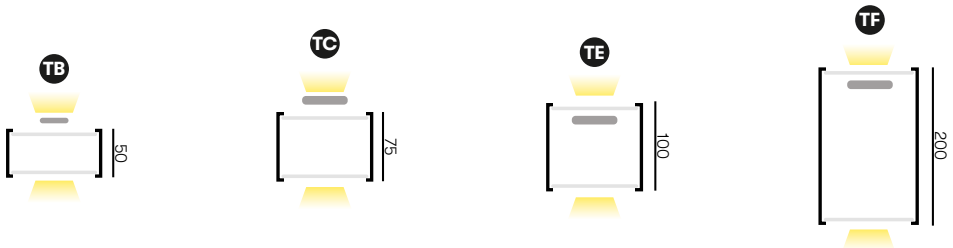

220V 240V LEDs 50/60Hz

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

T Rod Pendant

S Spacers Surface

D Direct Surface

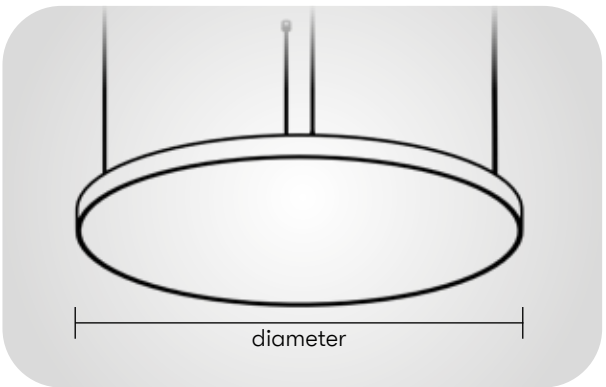

R	
N	Poduct name
1	Lighting type
T	
F	Profile size
M	Mounting type
Q	
F	Size
8	CRI
3	Color temperature
B	Driver type
C	Power
M	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

	Size	Power	Light Flux*
DC	Ø300	23 W	2875 lm
DF	Ø400	36 W	4500 lm
DJ	Ø600	60 W	7500 lm
QA	Ø800	80 W	10000 lm
QC	Ø1000	100 W	125000 lm

	Size	Power	Light Flux*
DC	Ø300	35 W	4313 lm
DF	Ø400	54 W	5750 lm
DJ	Ø600	90 W	11250 lm
QA	Ø800	120 W	15000 lm
QC	Ø1000	150 W	18750 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B Black

G Grey

A Anthracite

W White

R RAL

S Special Colors




RINA DEEP



RINA DEEP

- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

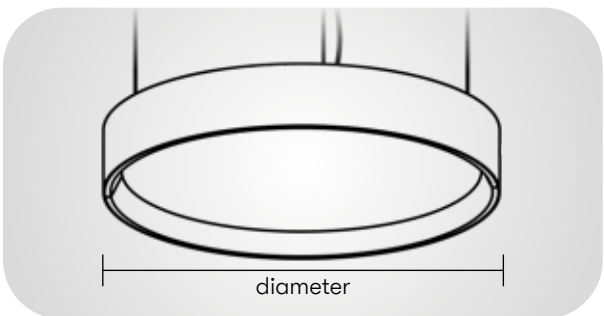

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

D Direct Surface

S Spacers Surface

PROFILE SIZES

Direct/indirect options

internal driver

external driver

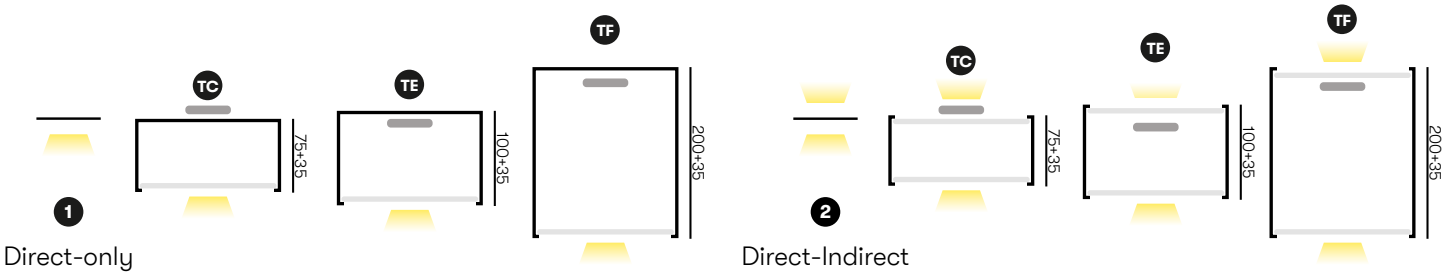

CE 220V 240V LEDs 50/60Hz

	Size	Power	Light Flux*
DC	Ø300	23 W	2875 lm
DF	Ø400	36 W	4500 lm
DJ	Ø600	60 W	7500 lm
QA	Ø800	80W	10000 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS



B Black | G Grey | A Anthracite | W White | R RAL | S Special Colors

R	
D	Poduct name
1	Lighting type
T	
C	Profile size
S	Mounting type
Q	
A	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

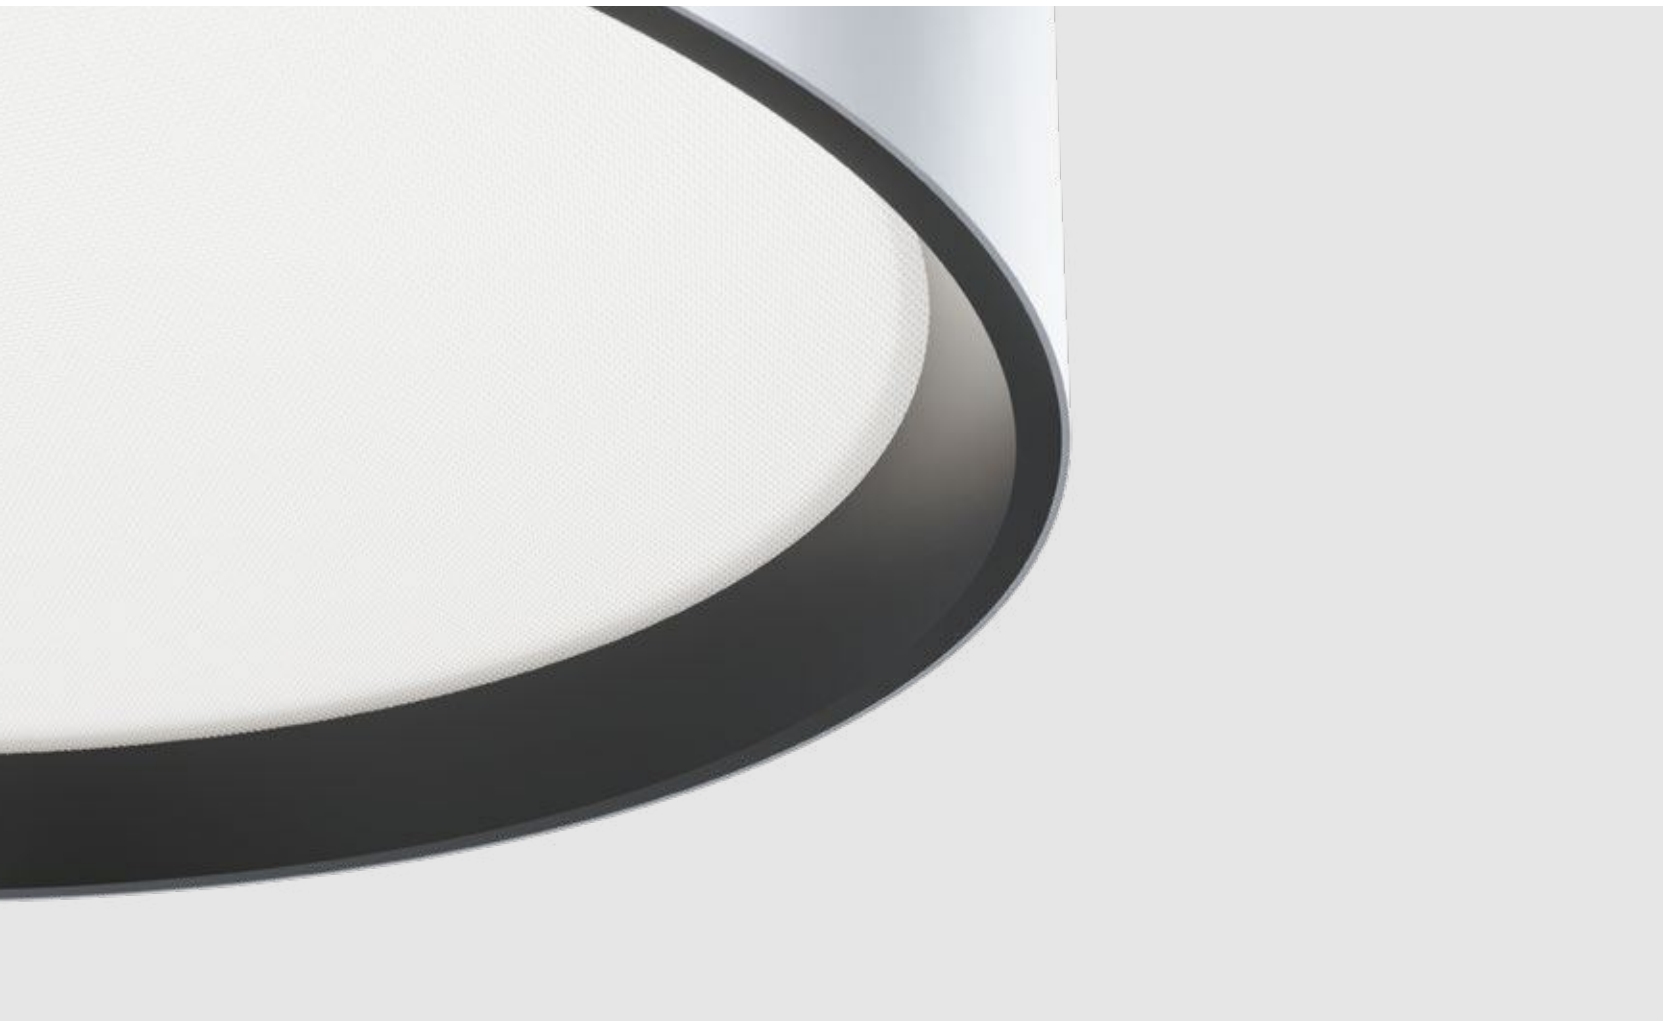



RINA TRACK





RINA TRACK

LIGHTING TYPES

- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

1
Direct-only

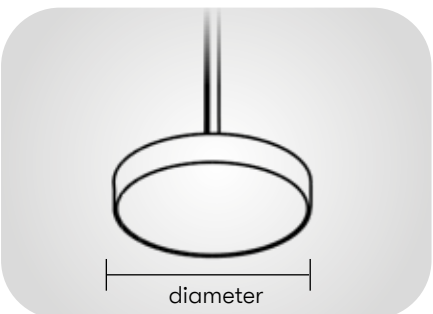

MOUNTING TYPES



T
Track-mounted

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1
Direct-only



CE 220V 240V LEDs 50/60Hz

	Size	Power	Light Flux*
DU	180	18W	1800 lm
DS	220	18W	1980 lm
DS	280	23W	2530 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

R	
M	Luminaire name
1	Lighting type
T	
A	Profile size
M	Mounting type
D	
S	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT




ILONA
DARK





ILONA DARK

- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other Special colors on Request

LIGHTING TYPES

1

Direct-only

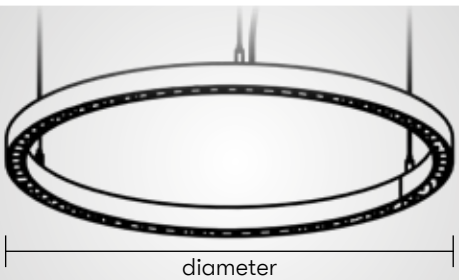

MOUNTING TYPES



M

Multi-Point Pendant



P

Single-Point Pendant

PROFILE SIZES

Direct/indirect options



external driver

1

Direct-only



CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
DJ	Ø600	34 W	4700 lm
QF	Ø1200	46 W	6300 lm
QK	Ø1800	68 W	9400 lm

* Calculated with 15 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

I	
D	Poduct name
1	Lighting type
A	
K	Profile size
M	Mounting type
D	
J	Size
8	CRI
2	Color temperature
N	Driver type
6	Power
D	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT




OLLIE





OLLIE

- Elliptical LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1 Direct-only







2 Direct-Indirect





CE 220V 240V LEDs 50/60Hz

MOUNTING TYPES



M
Multi-Point Pendant



P
Single-Point Pendant



S
Spacers Surface



D
Direct Surface

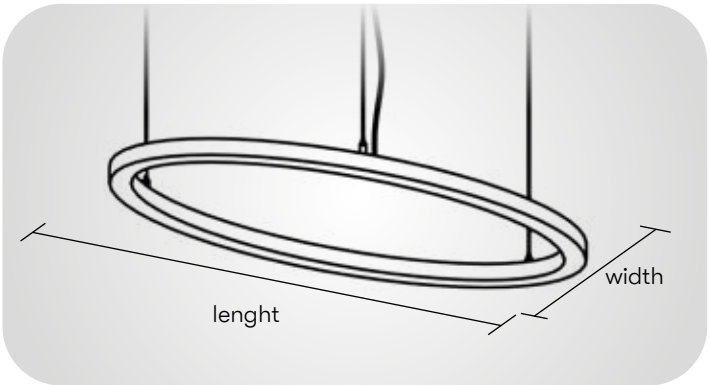

O			
E			Poduct name
1			Lighting type
N			
P			Profile size
M			Mounting type
B			
G			Size
8			CRI
2			Color temperature
N			Driver type
2			Power
S			Diffuser type
B			
B			Body color

CONFIGURATE PRODUCT

	Size	Power*	Light Flux**
BD	1200x600	67 W	7504 lm
BF	1800x900	100 W	11200 lm
BG	2000x1000	111 W	12432 lm

	Size	Power*	Light Flux**
BD	1200x600	100 W	11200 lm
BF	1800x900	151 W	16912 lm
BG	2000x1000	167 W	18704 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B Black | G Grey | A Anthracite | W White | R RAL | S Special Colors



ELLIE



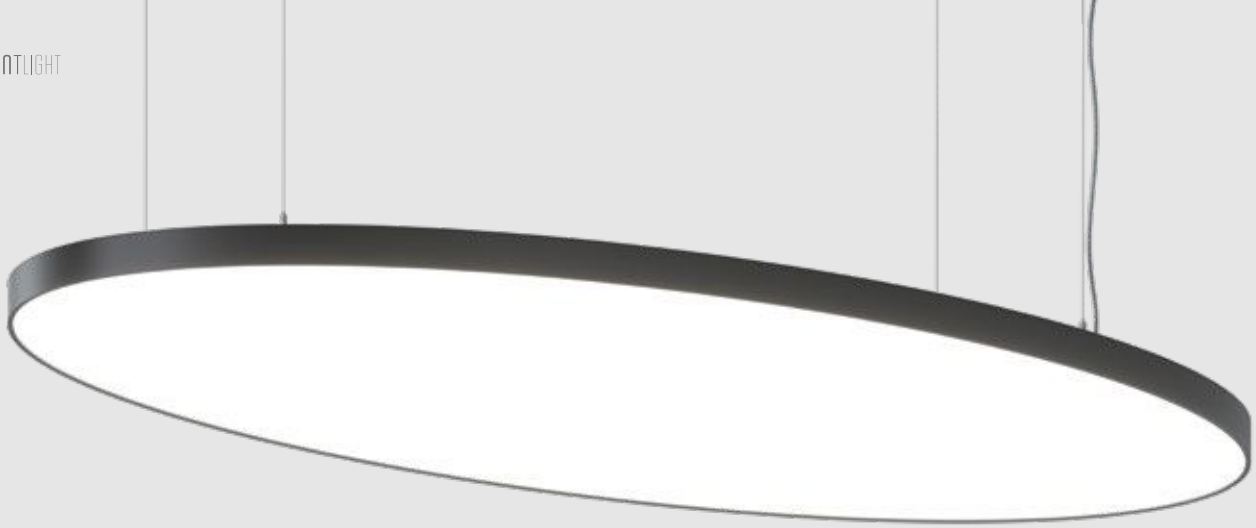

ELLIE

- Elliptical LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

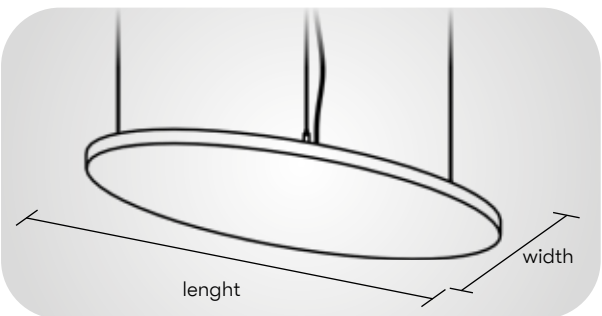

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



internal driver

external driver

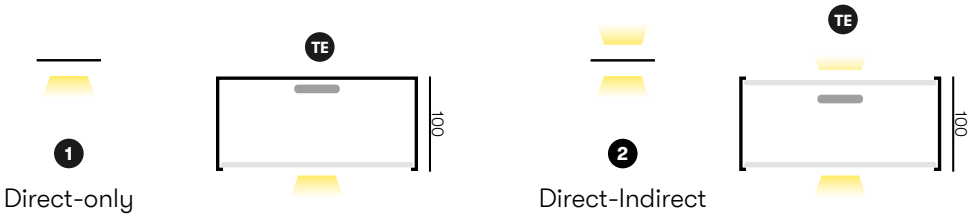

1 Direct-only

2 Direct-Indirect

CE 220V 240V LEDs 50/60Hz

		Size	Power*	Light Flux**
	BB	1000x500	65 W	5850 lm
	BE	1400x700	80 W	7200 lm
	BB	1000x500	98 W	5850 lm
	BE	1400x700	120 W	7200 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS



B Black | G Grey | A Anthracite | W White | R RAL | S Special Colors

E	
E	Poduct name
1	Lighting type
T	
E	Profile size
M	Mounting type
B	
E	Size
8	CRI
3	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT





ANNA O





ANNA O

- Ring LED luminaire
- Aluminum body
- Inward light
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

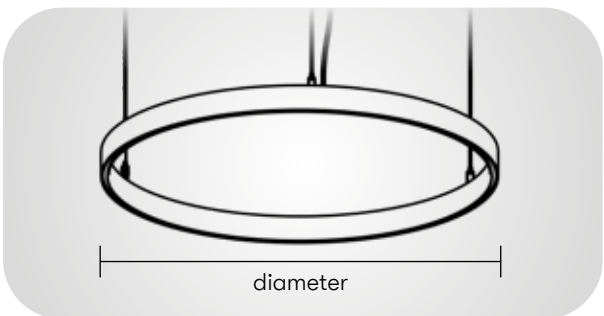

LIGHTING TYPES

2
Direct-Indirect

MOUNTING TYPES



M
Multi-Point Pendant



P
Single-Point Pendant



S
Spacers Surface

PROFILE SIZES

Direct/indirect options



internal driver



external driver

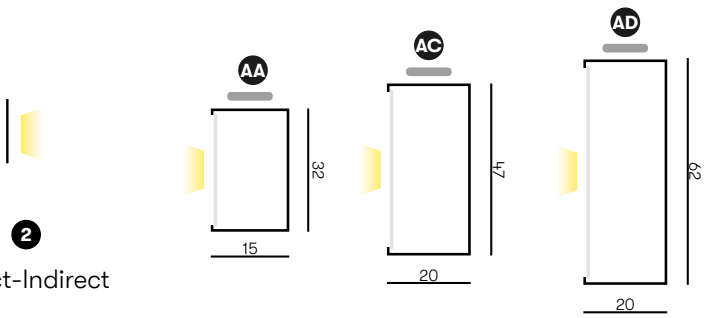

2
Direct-Indirect

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
QA	Ø800	75 W	6750 lm
QC	Ø1000	94 W	8460 lm
QF	Ø1200	113 W	10170 lm
QJ	Ø1500	141 W	12690 lm
QK	Ø1800	170 W	15300 lm

* Calculated with 30 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	3 30[W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS



B Black | G Grey | A Anthracite | W White | R RAL | S Special Colors

A	
O	Luminaire name
2	Lighting type
A	
C	Profile size
M	Mounting type
Q	
K	Size
8	CRI
2	Color temperature
N	Driver type
3	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT




ANNA INVERSE


ALGEBRA



ANNA INVERSE

- Ring LED luminaire
- Aluminum body
- Outward Light
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

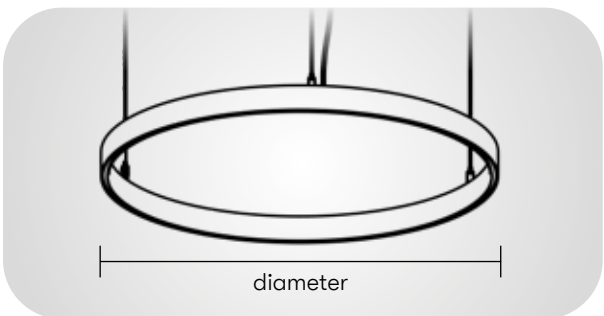

LIGHTING TYPES

2
Direct-Indirect

MOUNTING TYPES



M
Multi-Point Pendant



P
Single-Point Pendant



S
Spacers Surface

PROFILE SIZES

Direct/indirect options


internal driver


external driver

2
Direct-Indirect

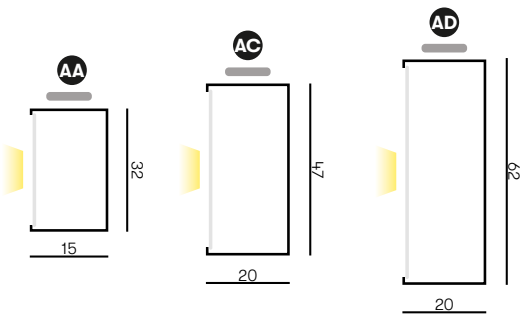

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
QA	Ø800	75 W	6750 lm
QC	Ø1000	94 W	8460 lm
QF	Ø1200	113 W	10170 lm
QJ	Ø1500	141 W	12690 lm
QK	Ø1800	170 W	15300 lm

* Calculated with 30 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	3 30[W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B Black
G Grey
A Anthracite
W White
R RAL
S Special Colors

A	
I	Luminaire name
2	Lighting type
A	
C	Profile size
M	Mounting type
Q	
K	Size
8	CRI
2	Color temperature
N	Driver type
3	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT





HANNAH O





HANNAH O

- Ring LED luminaire
- Aluminum body
- Inward & outward light
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

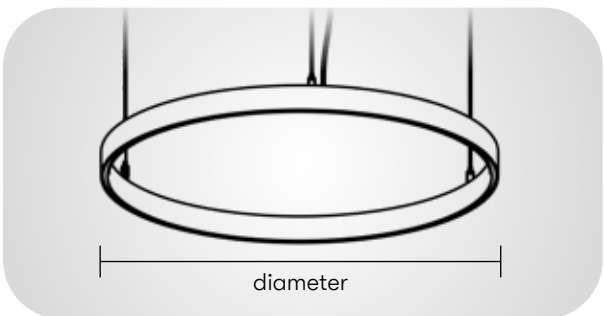

LIGHTING TYPES

2
Direct-Indirect

MOUNTING TYPES



M
Multi-Point Pendant



P
Single-Point Pendant



S
Spacers Surface

PROFILE SIZES

Direct/indirect options


internal driver


external driver

2
Direct-Indirect





CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
QA	Ø800	58 W	5220 lm
QC	Ø1000	72 W	6480 lm
QF	Ø1200	87 W	7830 lm
QJ	Ø1500	108 W	9720 lm
QK	Ø1800	130 W	11700 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	2 23 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	3 30[W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

H	
O	Luminaire name
2	Lighting type
A	
B	Profile size
M	Mounting type
Q	
K	Size
8	CRI
2	Color temperature
N	Driver type
3	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT





ANNA TRIANGLE



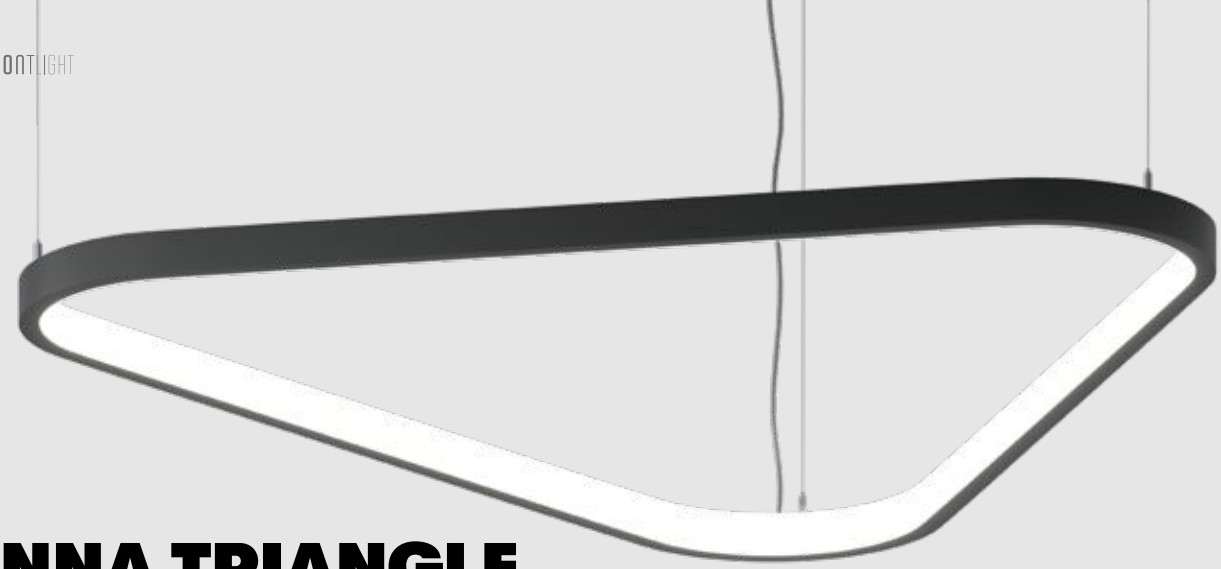

ANNA TRIANGLE

- Triangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

2

Direct-Indirect

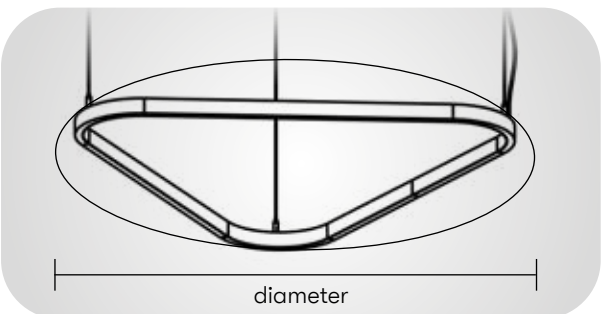

MOUNTING TYPES



M

Multi-Point Pendant



P

Single-Point Pendant



S

Spacers Surface

PROFILE SIZES

Direct/indirect options



internal driver



external driver

2

Direct-Indirect





CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
QA	Ø800	50 W	4500 lm
QF	Ø1200	75 W	6750 lm
QH	Ø1400	88 W	7920 lm
QK	Ø1800	113 W	10170 lm

* Calculated with 20 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	4 20 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	5 25 [W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B Black

G Grey

A Anthracite

W White

R RAL

S Special Colors

A	
A	Poduct name
2	Lighting type
A	
A	Profile size
M	Mounting type
Q	
A	Size
8	CRI
2	Color temperature
N	Driver type
4	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT





SWAN





SWAN

- Triangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

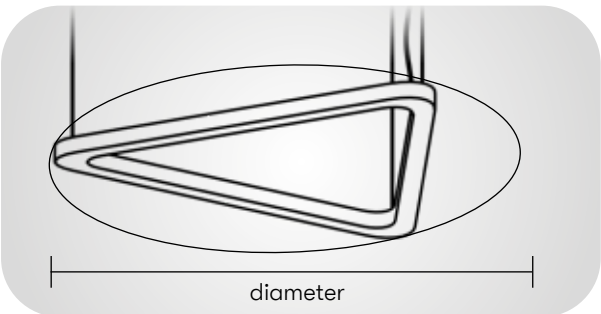

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



internal driver

external driver

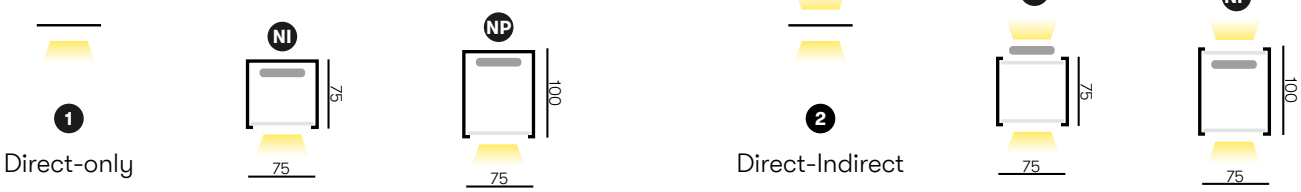

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
DN	Ø771	46 W	4140 lm
QE	Ø1033	62 W	5580 lm
QI	Ø1426	86 W	7740 lm
DN	Ø771	69 W	6210 lm
QE	Ø1033	93 W	8370 lm
QI	Ø1426	128 W	11520 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

S	
W	Luminaire name
1	Lighting type
N	
I	Profile size
M	Mounting type
D	
N	Size
8	CRI
2	Color temperature
N	Driver type
6	Power
S	Diffuser type
B	
B	Body color

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

CONFIGURATE PRODUCT

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors







SWELLA



SWELLA

- Triangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

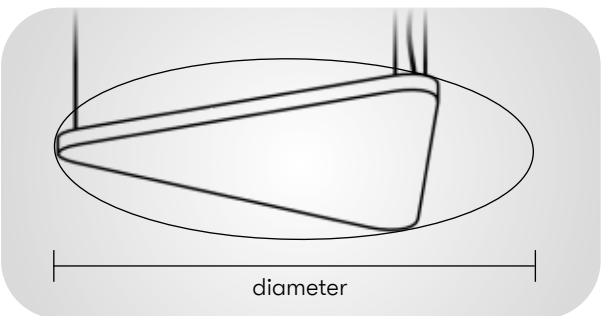

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



internal driver

external driver

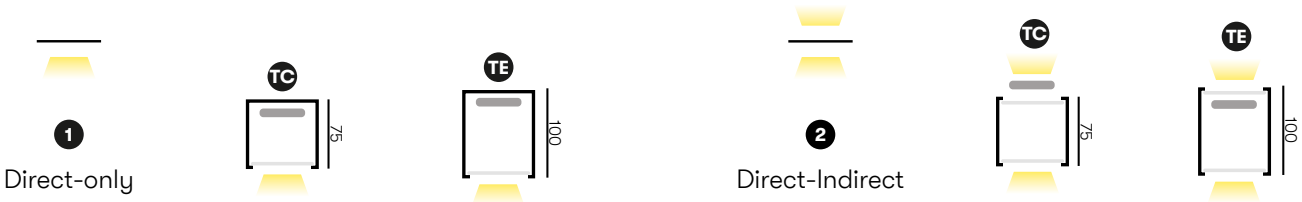

 CE 220V 240V LEDs 50/60Hz

	Size	Power	Light Flux*
DN	Ø771	60 W	7500 lm
QE	Ø1033	80 W	10000 lm
DN	Ø771	90 W	7500 lm
QE	Ø1033	120 W	10000 lm

* Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B Black

G Grey

A Anthracite

W White

R RAL

S Special Colors

S	
L	Luminaire name
1	Lighting type
T	
E	Profile size
M	Mounting type
D	
N	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT




ANNA
RECTANGLE





ANNA RECTANGLE

- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

2

Direct-Indirect

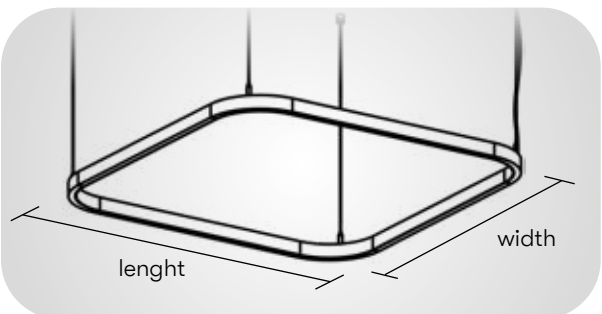

MOUNTING TYPES



M

Multi-Point Pendant



P

Single-Point Pendant



S

Spacers Surface

PROFILE SIZES

Direct/indirect options



internal driver



external driver

2

Direct-Indirect





CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
AO	800x800	60 W	4500 lm
AL	1000x1000	76 W	5700 lm
AM	1200x1200	92 W	6900 lm
AN	1500x1500	116 W	8700 lm
	2000x2000	156 W	11700 lm

* Calculated with 20 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	4 20 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	5 25 [W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

A	
R	Poduct name
2	Lighting type
A	
A	Profile size
M	Mounting type
A	
O	Size
8	CRI
2	Color temperature
N	Driver type
4	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT




TILIA





TILIA

- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

3 Indirect

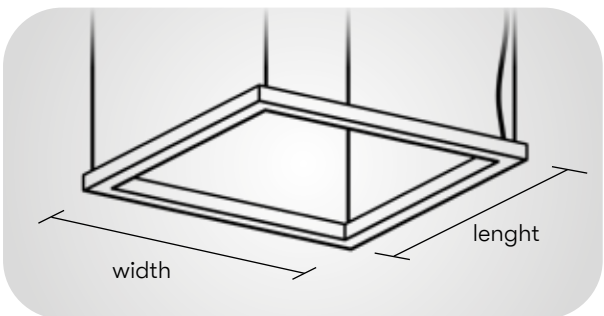

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options

internal driver

external driver

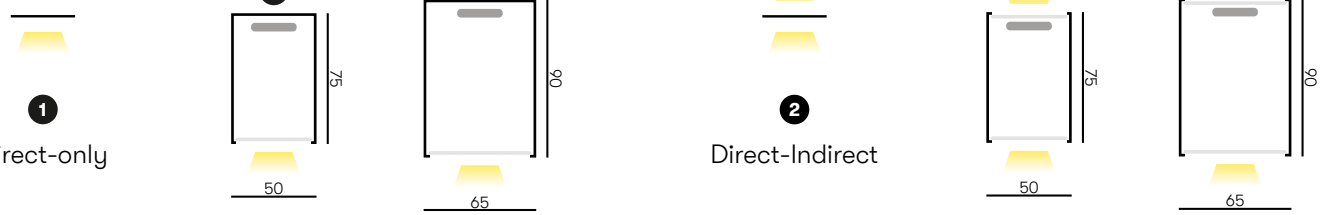

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
AA	600X600	55 W	6160 lm
BD	1200X600	83 W	9296 lm
AA	600X600	83 W	9296 lm
BD	1200X600	124 W	13888 lm
AA	600X600	55 W	6160 lm
BD	1200X600	83 W	9296 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

T	
L	Luminaire name
1	Lighting type
N	
F	Profile size
M	Mounting type
A	
A	Size
8	CRI
2	Color temperature
N	Driver type
3	Power
S	Diffuser type
B	
B	Body color

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

CONFIGURATE PRODUCT

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors




GAMMA SCHOOL A1


MILIA



MILIA

- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

3 Indirect

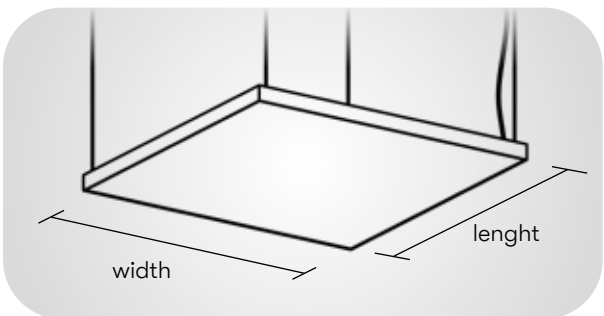

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



internal driver

external driver

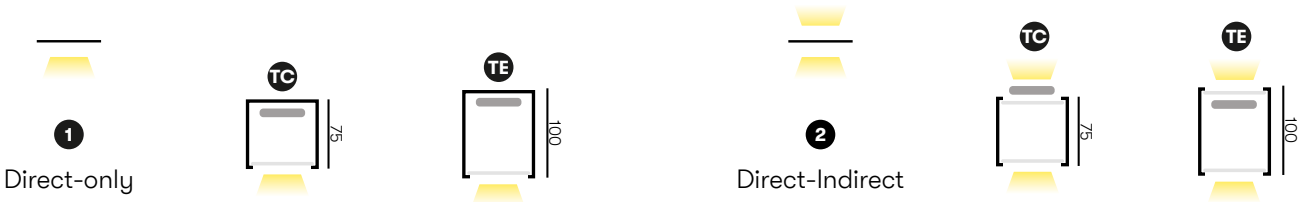

CE 220V 240V LEDs 50/60Hz

		Size	Power	Light Flux*
	AA	600X600	60 W	7500 lm
	AC	880X880	80 W	10000 lm
	AF	1160X1160	100 W	12503 lm
	AA	600X600	90 W	7500 lm
	AC	880X880	120 W	10000 lm
	AF	1160X1160	150 W	12503 lm
	AA	600X600	60 W	7500 lm
	AC	880X880	80 W	10000 lm
	AF	1160X1160	100 W	12503 lm

* Calculated at 4000K color temperature

M	
L	Luminaire name
1	Lighting type
T	
C	Profile size
M	Mounting type
A	
F	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

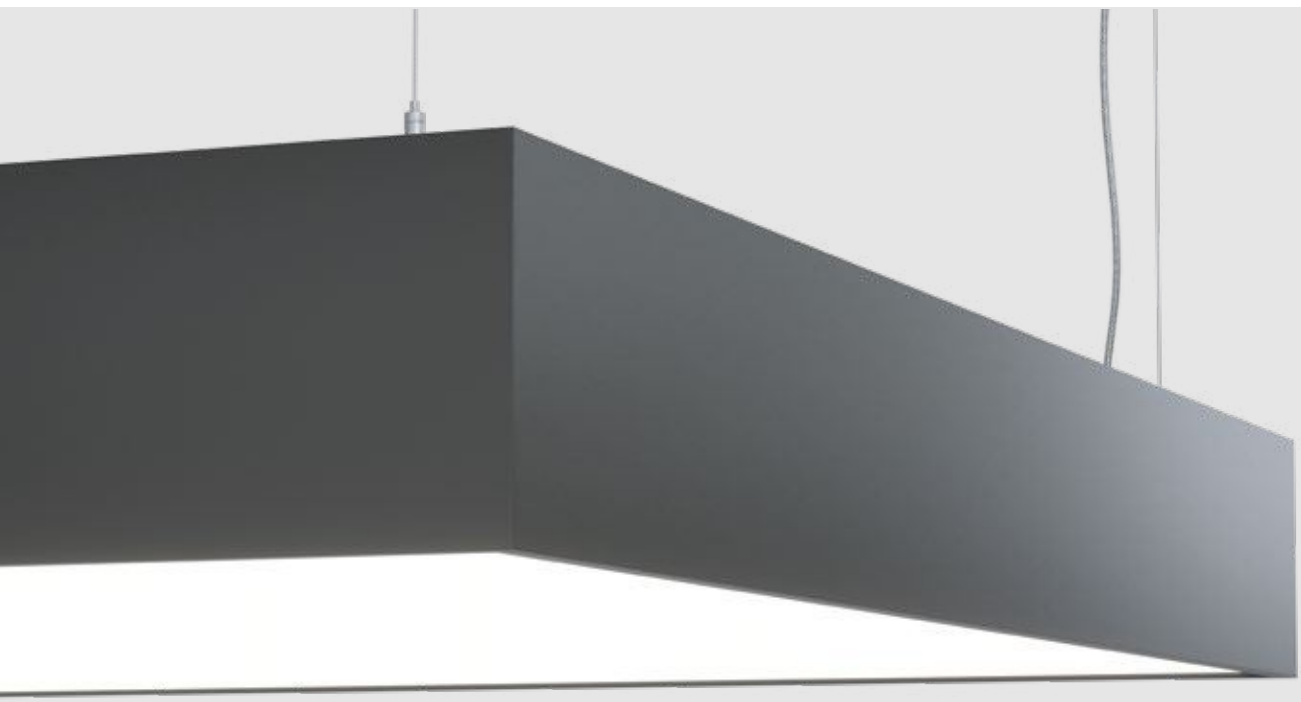


PAULA





PAULA

- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

3 Indirect

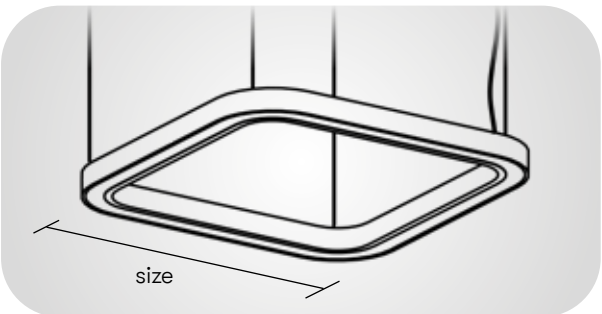

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



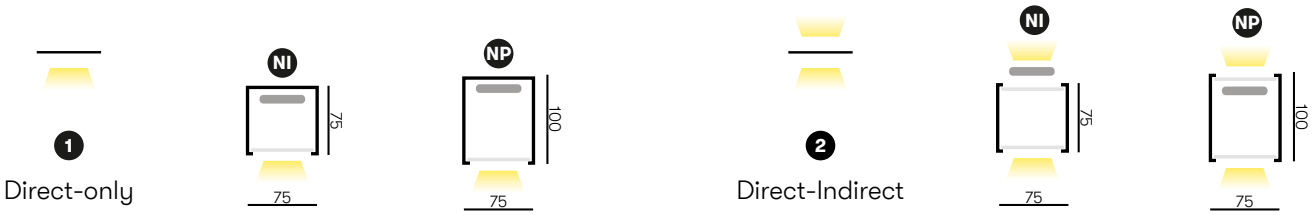

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
AB	670X670	62 W	6944 lm
AD	950X950	87 W	9744 lm
AG	1230X1230	113 W	12656 lm
AB	670X670	92 W	10304 lm
AD	950X950	131 W	14672 lm
AG	1230X1230	170 W	19040 lm
AB	670X670	62 W	6944 lm
AD	950X950	87 W	9744 lm
AG	1230X1230	113 W	12656 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

PL	Luminaire name
1	Lighting type
NI	Profile size
MA	Mounting type
B	Size
8	CRI
2	Color temperature
N	Driver type
6	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors





PAMELA





PAMELA

- Rectangular LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

3 Indirect

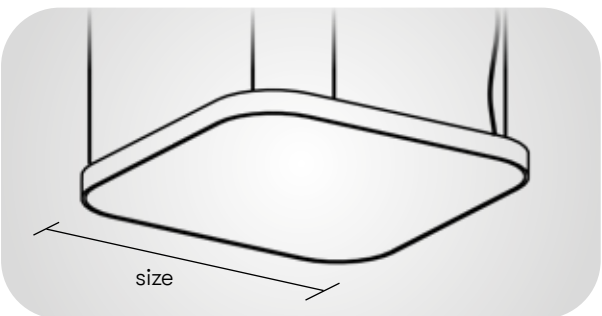

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



internal driver

external driver

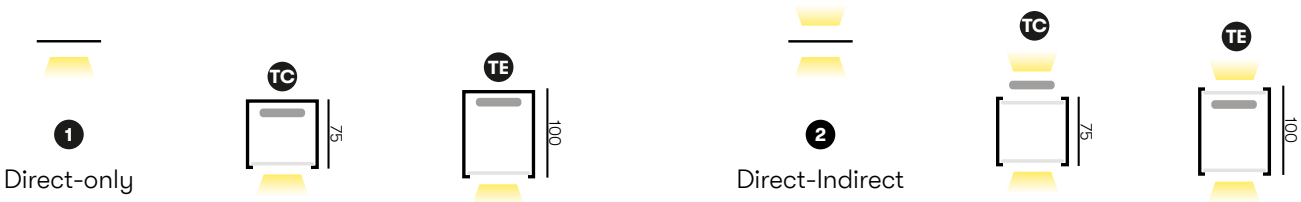

Direct-only

Direct-Indirect

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux*
AA	600X600	60 W	7500 lm
AC	880X880	80 W	10000 lm
AF	1160X1160	100 W	12503 lm
AA	600X600	90 W	7500 lm
AC	880X880	120 W	10000 lm
AF	1160X1160	150 W	12503 lm
AA	600X600	60 W	7500 lm
AC	880X880	80 W	10000 lm
AF	1160X1160	100 W	12503 lm

* Calculated at 4000K color temperature

PM	Luminaire name
1	Lighting type
TC	Profile size
M	Mounting type
AA	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors







ANNA
HEXAGON



ANNA HEXAGON

- Hexagonal LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

2
Direct-Indirect

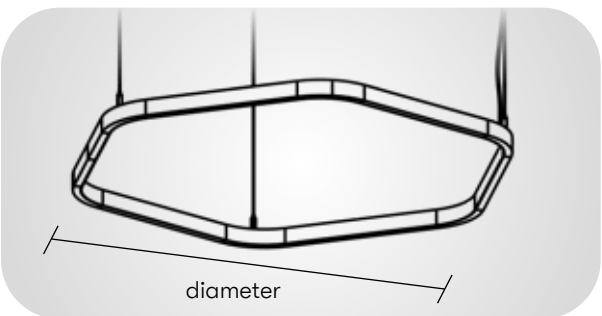

MOUNTING TYPES



M
Multi-Point Pendant



P
Single-Point Pendant



S
Spacers Surface

PROFILE SIZES

Direct/indirect options



internal driver



external driver

2
Direct-Indirect

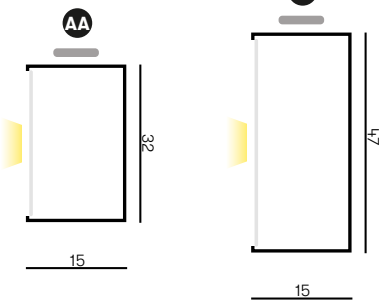

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
QA	Ø800	50 W	4500 lm
QF	Ø1200	75 W	6750 lm
QH	Ø1400	88 W	7920 lm
QK	Ø1800	113 W	10170 lm

* Calculated with 20 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	4 20 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	5 25 [W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

AH	Poduct name
2	Lighting type
AA	Profile size
M	Mounting type
QK	Size
8	CRI
2	Color temperature
N	Driver type
4	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT





XARA





XARA

- Hexagonal LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

3 Indirect

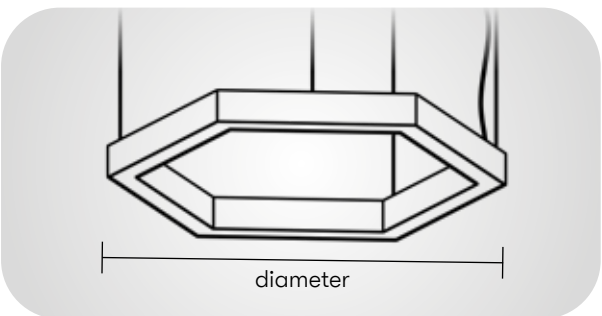

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options

internal driver

external driver

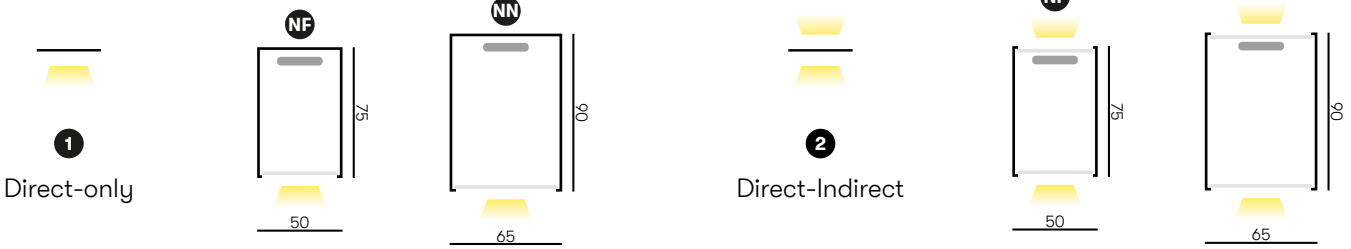

CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
DP	Ø625	43 W	4816 lm
QG	Ø1250	86 W	9632 lm
QK	Ø1800	124 W	13888 lm
QM	Ø2370	164 W	18368 lm
DP	Ø625	65 W	7280 lm
QG	Ø1250	129 W	14448 lm
QK	Ø1800	186 W	20832 lm
QM	Ø2370	245 W	27440 lm
DP	Ø625	43 W	4816 lm
QG	Ø1250	86 W	9632 lm
QK	Ø1800	124 W	13888 lm
QM	Ø2370	164 W	18368 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

XA	Luminaire name
1	Lighting type
NN	Profile size
M	Mounting type
DP	Size
8	CRI
2	Color temperature
N	Driver type
6	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

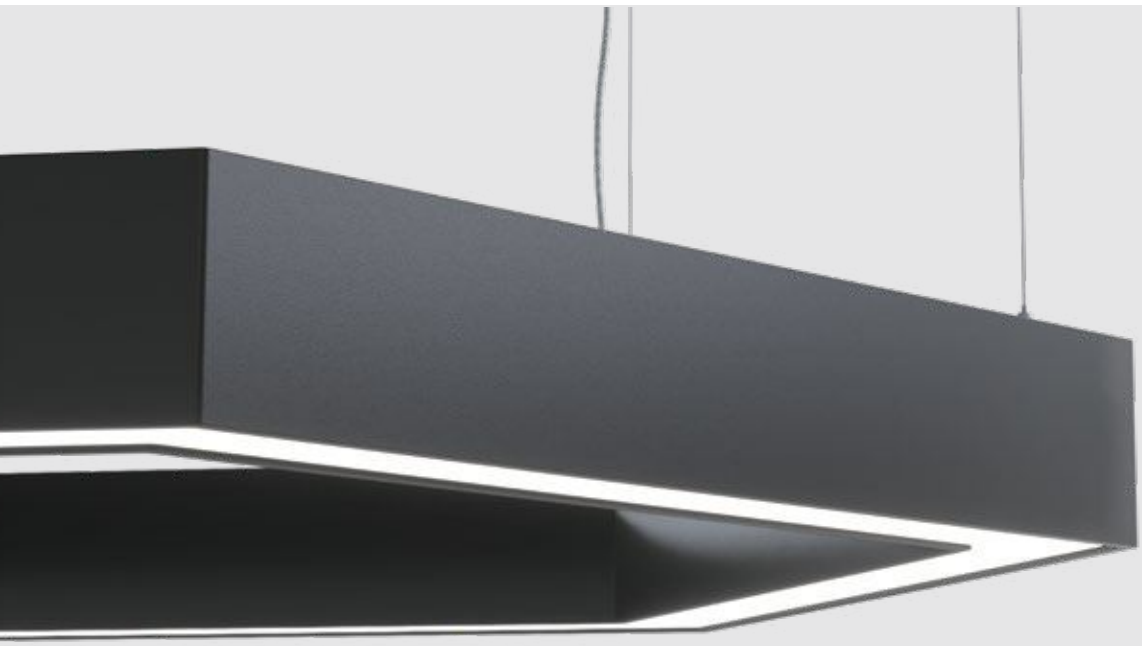



XENIA



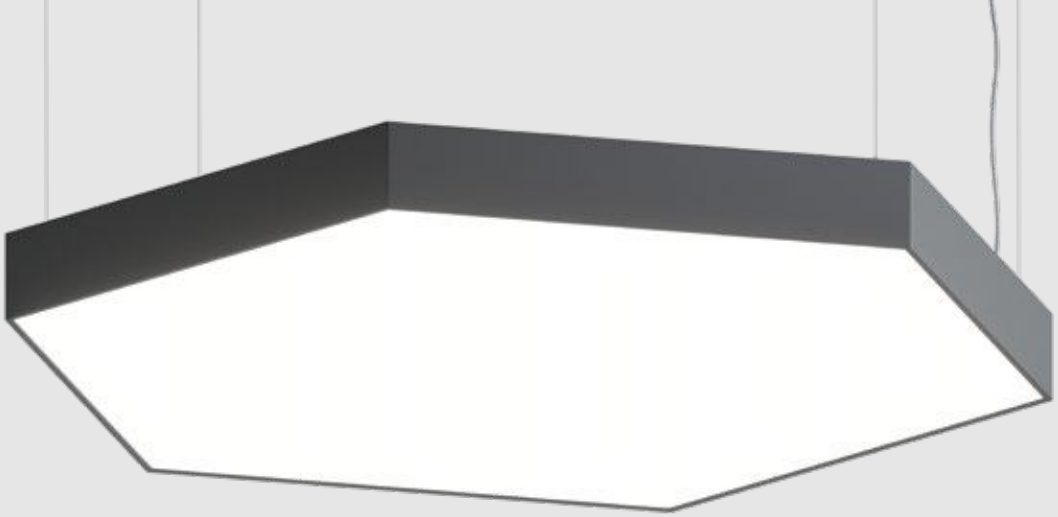

XENIA

- Hexagonal LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1 Direct-only

2 Direct-Indirect

3 Indirect

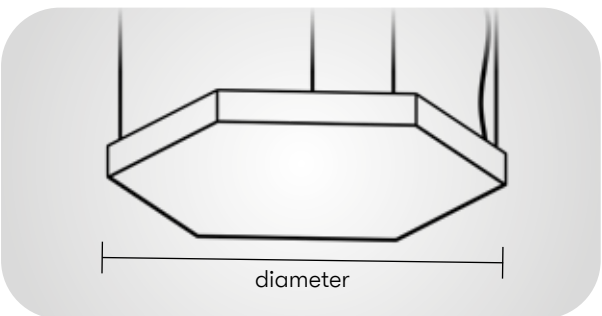

MOUNTING TYPES



M Multi-Point Pendant

P Single-Point Pendant

S Spacers Surface

D Direct Surface

PROFILE SIZES

Direct/indirect options



internal driver

external driver

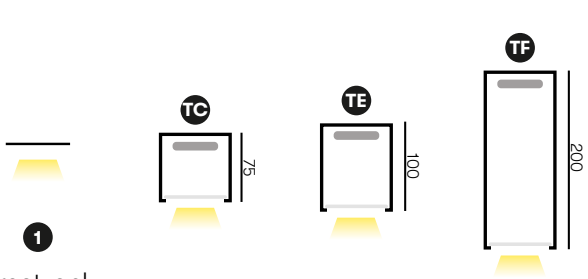

Direct-only

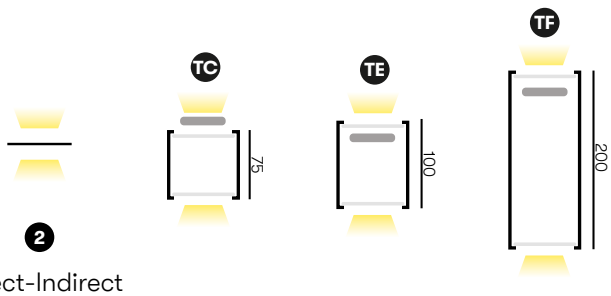

Direct-Indirect

CE 220V 240V LEDs 50/60Hz

		Size	Power	Light Flux*
	QA	Ø800	75 W	7500 lm
	QC	Ø1000	95 W	9500 lm
	QF	Ø1200	110 W	11000 lm
	QA	Ø800	113 W	7500 lm
	QC	Ø1000	143 W	9500 lm
	QF	Ø1200	165 W	11000 lm
	QA	Ø800	75 W	7500 lm
	QC	Ø1000	95 W	9500 lm
	QF	Ø1200	110 W	11000 lm

* Calculated at 4000K color temperature

X	
E	Luminaire name
1	Lighting type
T	
F	Profile size
M	Mounting type
Q	
F	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors





AMY

- Ring LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1

Direct-only

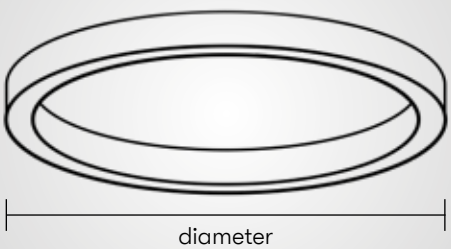

MOUNTING TYPES



R

Recessed

PROFILE SIZES

Direct/indirect options

 internal driver

 external driver



1

Direct-only





CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
DL	Ø620	45 W	5040 lm
DM	Ø750	54 W	6048 lm
QC	Ø1000	72 W	8064 lm
QF	Ø1200	87 W	9744 lm
QJ	Ø1500	108 W	12096 lm
QK	Ø1800	130 W	14560 lm
QL	Ø2000	145 W	16240 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

AM	Luminaire name
1	Lighting type
NI	Profile size
RQ	Mounting type
L	Size
8	CRI
2	Color temperature
N	Driver type
6	Power
S	Diffuser type
BB	Body color

CONFIGURATE PRODUCT





AUDREY

- Round LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1

Direct-only

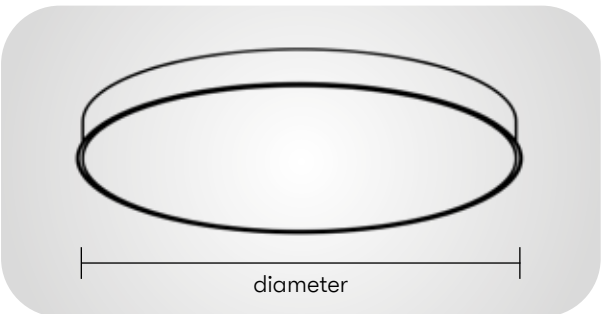

MOUNTING TYPES



R

Recessed

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1

Direct-only





CE 220V 240V LEDs 50/60Hz

	Size	Power	Light Flux*
DD	Ø315	23 W	1900 lm
DG	Ø415	36 W	3300 lm
DK	Ø615	60 W	5500 lm
QB	Ø815	80 W	7500 lm
QD	Ø1015	100 W	9300 lm

** Calculated at 4000K color temperature

A					
M					Luminaire name
1					Lighting type
T					
C					Profile size
R					Mounting type
Q					
D					Size
8					CRI
2					Color temperature
N					Driver type
C					Power
S					Diffuser type
B					
B					Body color

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

CONFIGURATE PRODUCT



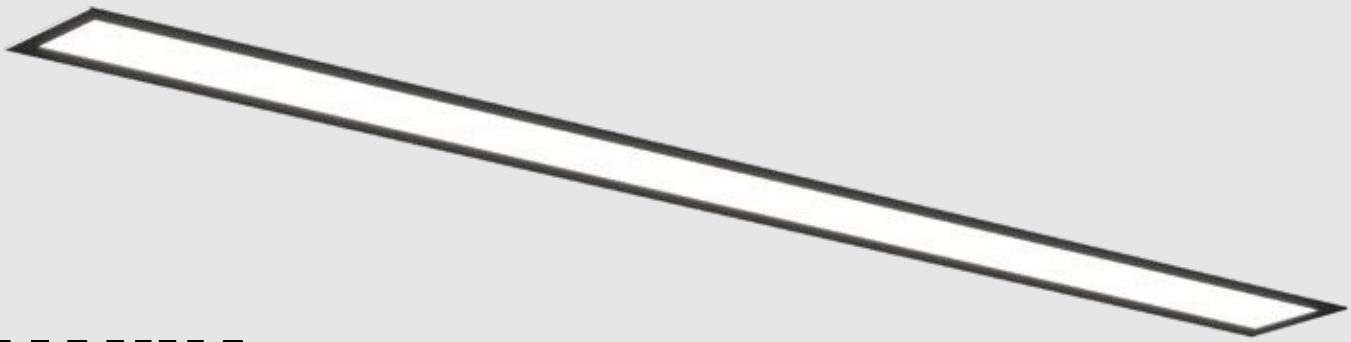

LIANNA

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1

Direct-only

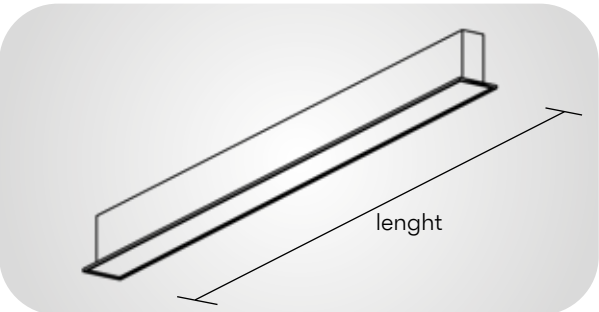

MOUNTING TYPES



R

Recessed

PROFILE SIZES

Direct/indirect options

 internal driver

 external driver

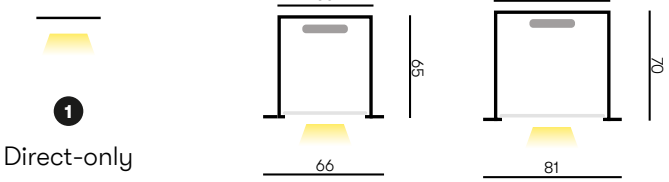

	Size	Power*	Light Flux**
LG	1140	26 W	2912 lm
LL	1420	33 W	3696 lm
LO	1980	46 W	5152 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

L	
A	Luminaire name
1	Lighting type
N	
J	Profile size
R	Mounting type
L	
G	Size
8	CRI
2	Color temperature
N	Driver type
2	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT



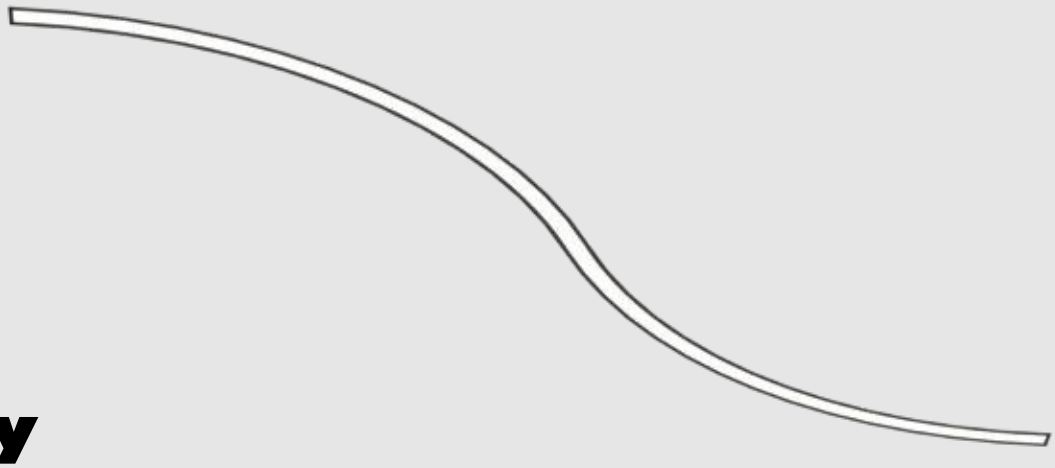

DARCY

- Curved linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1
Direct-only

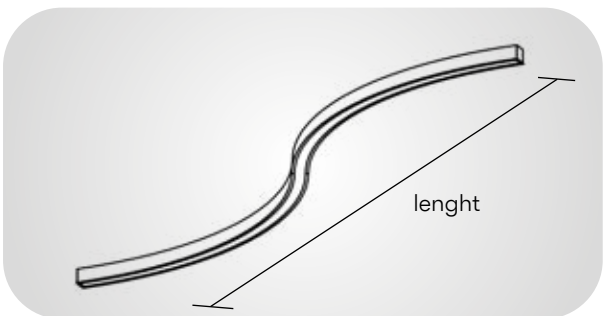

MOUNTING TYPES



R
Recessed

PROFILE SIZES

Direct/indirect options


internal driver


external driver

1
Direct-only





CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
LE	1000	23 W	2576 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	6 15 [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI	2 23 [W/m]	S standard (opal)
	4 4000 K		P Push DIM	3 30 [W/m]	L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

D	
A	Luminaire name
1	Lighting type
N	
I	Profile size
R	Mounting type
L	
E	Size
8	CRI
2	Color temperature
N	Driver type
2	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT





DOTLINE R





DOTLINE R

- Straight linear LED luminaire
- Aluminum body
- Custom sizes available on request
- Surface in white/black/grey/anthracite
- RAL & other special colors on request

LIGHTING TYPES

1

Direct-only

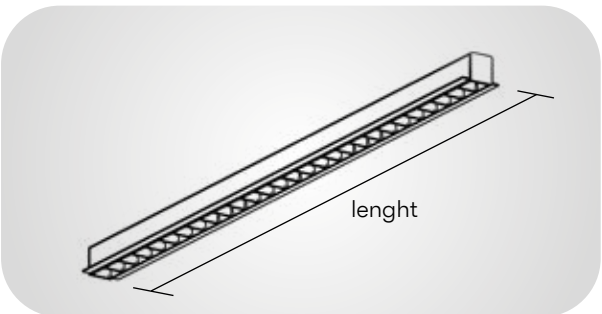

MOUNTING TYPES



R

Recessed

PROFILE SIZES

Direct/indirect options



internal driver



external driver

1

Direct-only



CE 220V 240V LEDs 50/60Hz

	Size	Power*	Light Flux**
LC	845	21 W	1869 lm
LF	1122	28 W	2492 lm
LK	1400	35 W	3115 lm
LM	1680	42 W	3738 lm

* Calculated with 23 W/m
** Calculated at 4000K color temperature

CRI	COLOR TEMPERATURE		DRIVER TYPE	POWER	DIFFUSER
8 80 CRI	2 2700 K	1 RGBW	N ON-OFF	C Custom [W/m]	M microprismatic
9 90 CRI	3 3000 K	5 Tunable White	D DALI		S standard (opal)
	4 4000 K		P Push DIM		L lenses
			B Bluetooth		

BODY COLORS

B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

D	
R	Luminaire name
1	Lighting type
A	
M	Profile size
R	Mounting type
L	
C	Size
8	CRI
2	Color temperature
N	Driver type
C	Power
S	Diffuser type
B	
B	Body color

CONFIGURATE PRODUCT

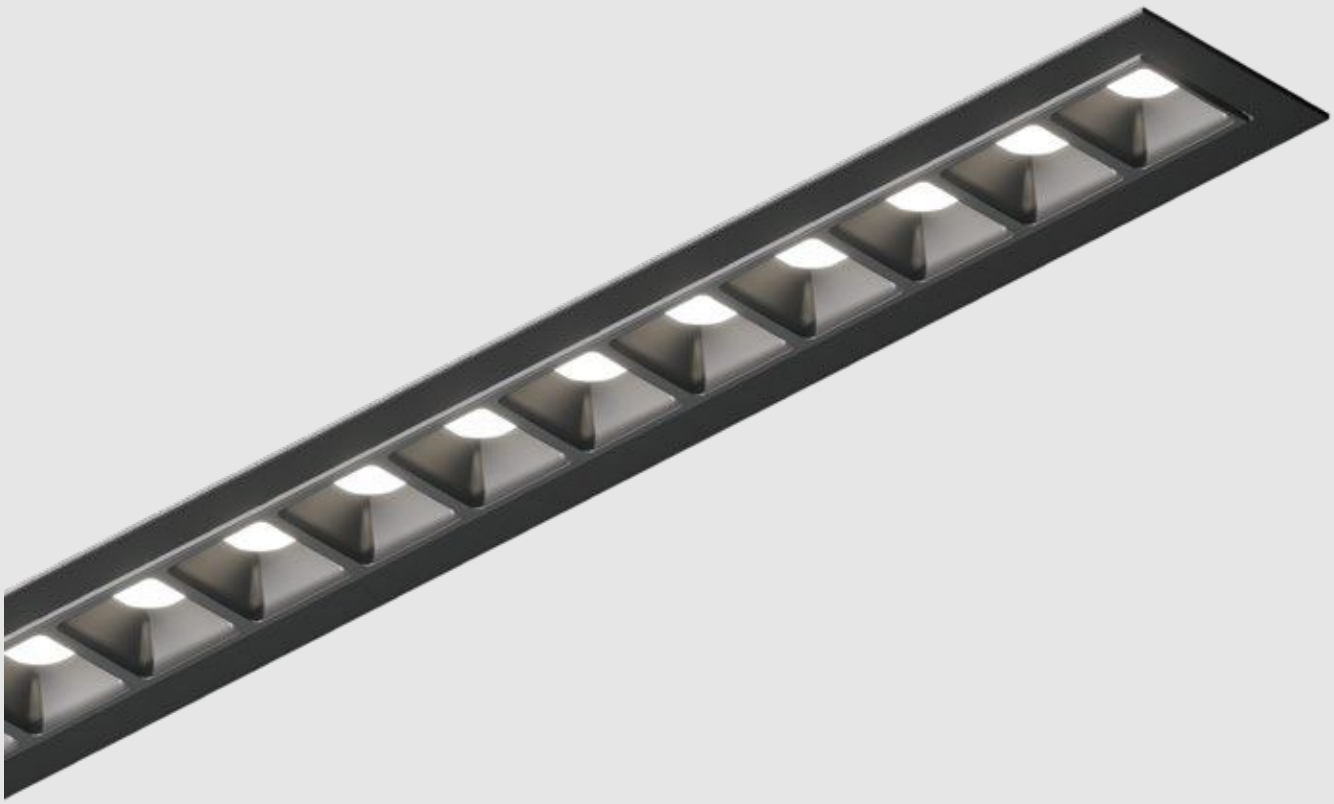

COLORS

AVAILABLE COLORS & CODES

B	G	A	W	RAL	SPE
Black	Grey	Anthracite	White	RAL	Special Colors

SPECIAL COLOR SELECTION

Arctic Ice



Fox Silver



Volcanic Ash



Brown



Medium Bronze



Dark Bronze



Halo



Timeless Gold



Sunny Gold



Gold



Light Bronze



Champagne



Lotus



Aubergine



Cocoa Brown



Amber Gold

PRODUCT ORDER CODE

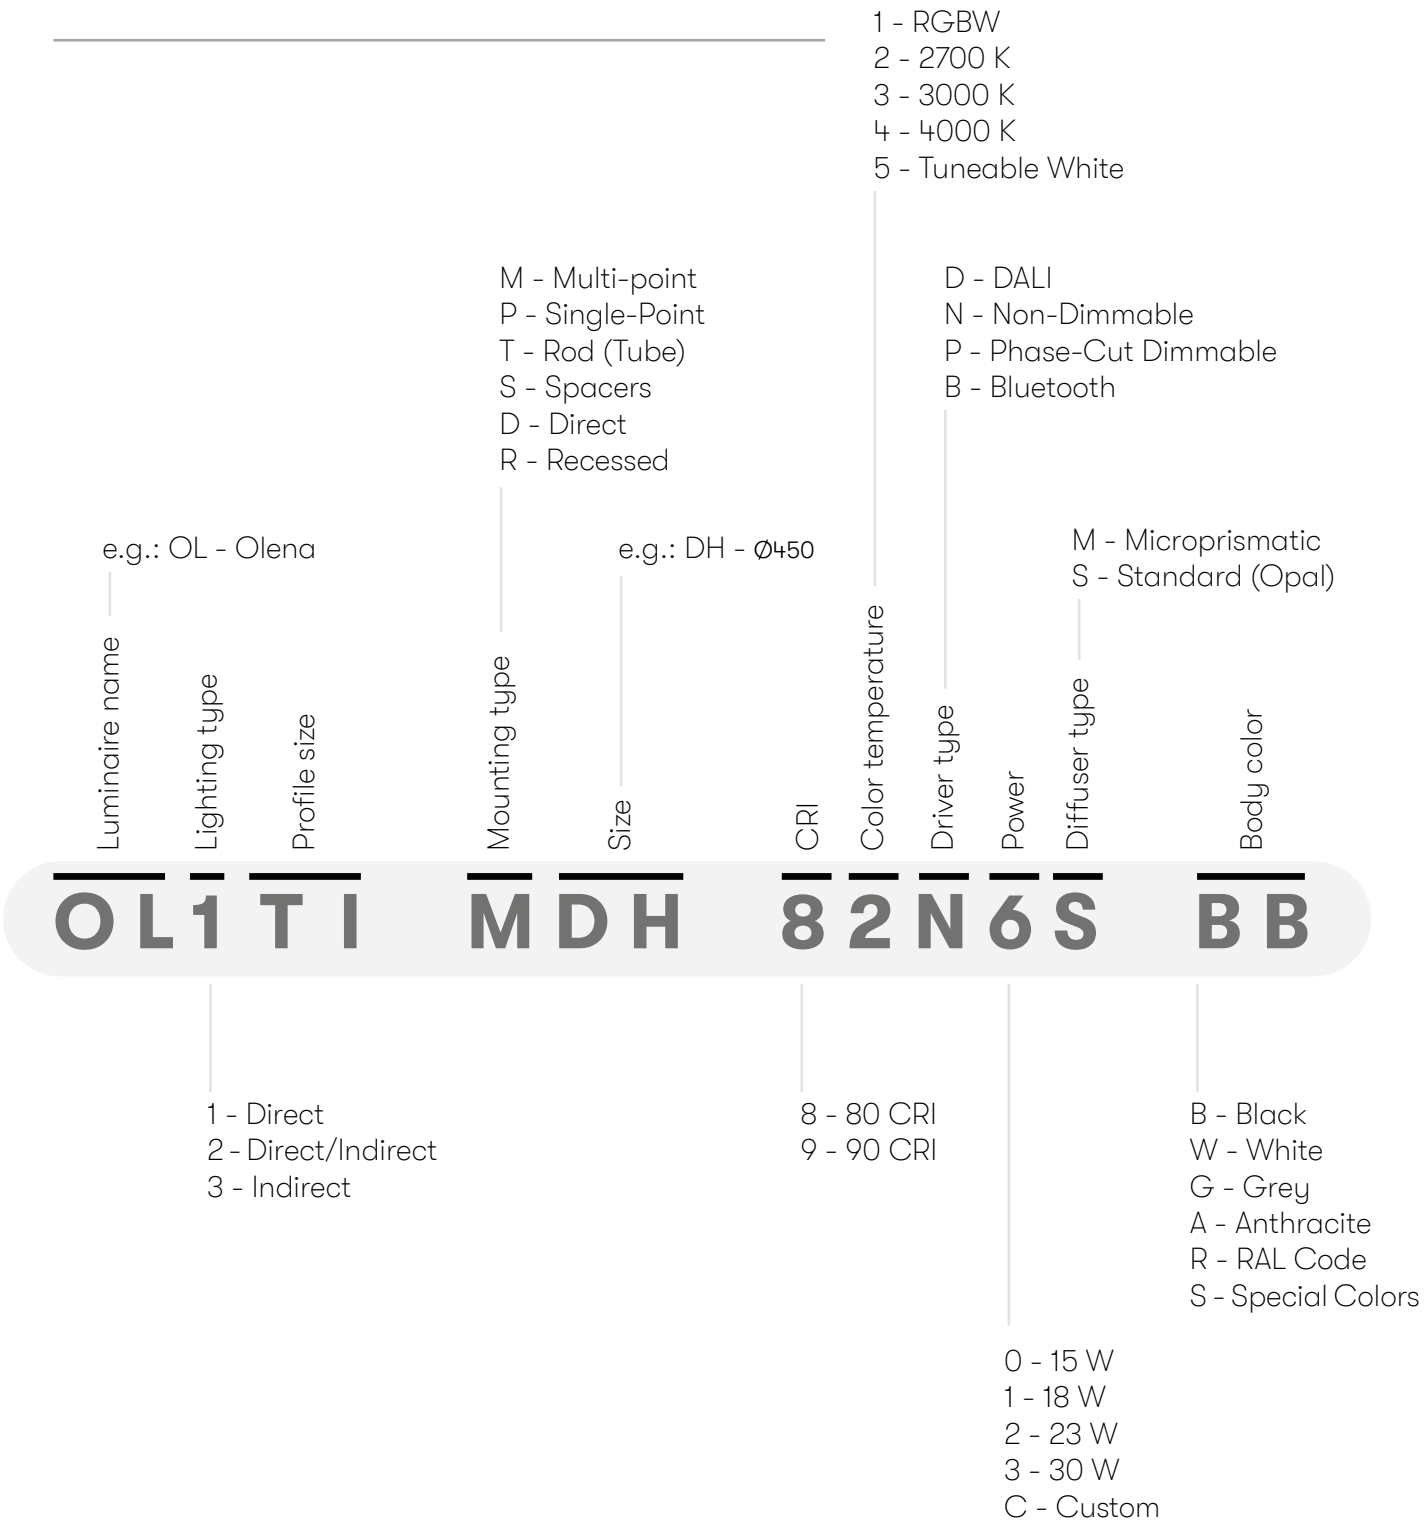

H-1036 Budapest
Nagyszombat utca 1.

pontlight.com

LED Zona®
ОСВЕТИТЕЛНИ РЕШЕНИЯ

Харесахте ли нещо от каталога?

Разгледайте и поръчайте продукти на Pont Light онлайн
на led-zona.bg – с актуални цени и наличности.

Продуктите на Pont Light

Сканирайте или кликнете

Разгледайте продуктите →

Каталози на Pont Light

Сканирайте или кликнете

Още каталози →

www.led-zona.bg

T: 0888 065 970 | E: sales@led-zona.bg

Сфера Лайт ООД · гр. София, ж.к. Банишора, ул. Опълченска, бл. 54 (до 7-ма поликлиника)