Unica

Catalog 2021

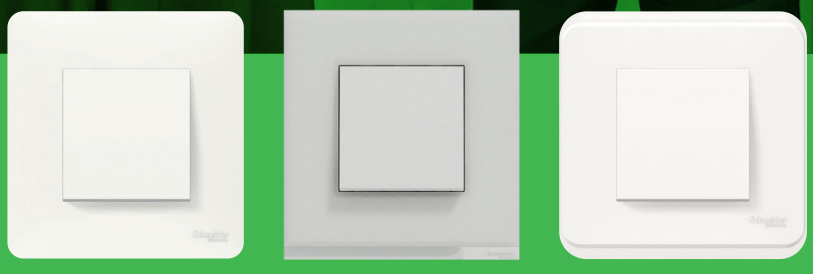

Unica Studio | Unica Pure | Unica Pro

se.com/unica



General content

Presentation	4
Unica Inserts	48
Unica Inserts with Fixing Frame	70
Unica Inserts with Fixing Frame and claws	84
Unica Complete offer: Inserts with Fixing Frame and Cover Frame	92
Unica Installation: Fixing Frame and Box	98
Unica Cover Frames	104
Unica Wiser	112
Unica KNX	120
Unica Antibacterial offer	124
Unica System+	140
Unica Technical Information	148
Unica Index	170

Deliver the exceptional, every day

Wiring devices may not be as top-of-mind as other elements of interior décor, but they have a significant impact on comfort and convenience in living and working spaces. To fulfill that potential, Unica products are designed to be:

Everyday beautiful, adding style to interiors with elegant design.

Everyday simple, enabling quick and easy mounting through clever product design.

Everyday your way, providing great flexibility of application and use through modularity and wireless control.

Quality that lasts

Manufactured in Schneider Electric's Puente la Reina smart factory in Spain, a center of excellence and expertise for wiring devices, Unica products meet the highest quality standards. They deliver the high reliability, durability, and aesthetics that are signature for the brand.





Sustainable through the lifecycle

At the design stage, the devices are made easily dismountable to facilitate recycling.

At the manufacturing stage, more than 50% of the raw material used for our devices comes from recycled sources and 100% of the material is internally reused to generate zero waste.

At the packaging stage, we're taking steps to optimize product packaging sizes and materials to avoid waste.

Green Premium™

Bearing the Green Premium ecolabel, Unica products exceed the sustainability standards of the industry.

Wiring devices that complement any lifestyle

With user-friendly designs and a broad assortment of functions, Unica products help make everyday home life more comfortable and convenient.

Crafted with the latest aesthetic trends in mind – with an array of sophisticated materials including metal, slate, and glass – Unica products are made to win hearts and turn heads.

For clients interested in smart home technology, Unica devices connectivity-ready. They're compatible with Wiser, our smart, sustainable home technology, and can be controlled with KNX automation devices.



Workspaces that work

Creating a fully functional workspace requires a bit of imagination and creatively designed products. Unica - together with Unica System+ and OptiLine 45 - is ready for the challenge.

Whether your customer is working in a small studio or a massive office building, with our workspace-dedicated portfolio you can create spaces that are fully functional, from floor to ceiling.

Unica, Unica System+, and OptiLine 45 bring you the flexibility and ingenuity to elevate offices from work-ready to future-ready.



Wiring devices



Horizontal and vertical workstations



Trunking



Floor sockets and boxes



Stand-alone desk units



Modular desk units



Poles and posts



Cable management



Unica Studio

Add character to interiors with signature rounded frames.



Enjoy timeless, universal design

The Unica Studio range gives you a selection of frames to easily match different types of interiors, from minimalist to traditional. Made from high-performance thermoplastic, they're robust and long lasting.

The Unica Studio range comes in two versions. Single-volume frames are available in solid colors (white, beige, aluminum, and anthracite).

The double-skin version has frames composed of a colored or metal layer over a white, beige, or anthracite base (see Unica Studio Color and Unica Studio Metal).

Single-volume frames

The white and beige frames have a mirror-polished surface for a nice glossy finish and are a perfect fit for lighter interiors with brighter wall colors.

The anthracite and aluminum finishings work for darker interiors or as bold color accents. The anthracite frames have a soft-touch perception, while the aluminum ones add a bit of shine.



Unica Studio
White



Unica Studio
Beige



Unica Studio
Anthracite



Unica Studio
Aluminium

Unica Studio Color

Invigorate any room with a splash of color.

With nine colors available – from soft and light, to bold and lively – the Unica Studio Color range offers a hue to complement any décor or style. Add to that a modern shape and smooth, curved surface, and you get perfect switches for energetic interiors.



Unica Studio Color White



Unica Studio Color Beige



Unica Studio Color Light grey



Unica Studio Color Taupe



Unica Studio Color Light green



Unica Studio Color Red



Unica Studio Color Plum



Unica Studio Color Dark grey



Unica Studio Color Chocolate

Unica Studio Color double-skin frames have metallic particles added to the two layers of paint to add depth to the colors and create a more dynamic appearance.

Unica Studio Outline

Add a dash of character.

At first glance, Unica Studio Outline frames play it safe, with neutral white frames and switches. A closer look reveals a flirtation of color. Ten outline colors, from vibrant yellow to moderate grey and taupe, help elevate interior designs while keeping them well balanced.



Unica Studio Outline White



Unica Studio Outline Yellow



Unica Studio Outline Red



Unica Studio Outline Plum



Unica Studio Outline Chocolate



Unica Studio Outline Light grey



Unica Studio Outline Grey



Unica Studio Outline Aluminium



Unica Studio Outline Beige



Unica Studio Outline Anthracite

Unica Studio Metal

Give home interiors a modern edge.

The Unica Studio Metal range features five ultra-modern metal finishes that combine quality and robustness with an elegant design.



Unica Studio Metal Copper



Unica Studio Metal Gold



Unica Studio Metal White aluminium



Unica Studio Metal Bronze



Unica Studio Metal Dark aluminium

The frames are made of sheet metal with an anodized finishing to create a bright smooth surface. An additional high-resistance treatment helps ensure a lasting look by minimizing the impact of aging and environmental conditions.

Unica Pure

When it comes to elegance and sophistication, there's no match for Unica Pure.

With a selection of faceplates manufactured from exquisite materials – wood, slate, glass, rubber, metal, Unica Pure offers an array of finishes for premium interiors.

The sleek, clean frame design highlights a faceplate that rests on a sculpted ledge like a piece of art. The supporting surface is white or anthracite, matching the tone of the faceplate.



Unica Pure
Translucid white



Unica Pure
Glass frosted black



Unica Pure
Glass frosted white



Unica Pure
Slate



Unica Pure
Aluminium



Unica Pure
Rubber



Unica Pure
Nordic wood



Unica Pure
Oak wood

Unica Pro

Achieve the perfect balance.

The Unica Pro range provides the perfect balance of style and functionality. Its signature design, with a ring surrounding the frame, makes the frames stand out from the wall and adds a smooth, light perception to them.

The inclined top and bottom edges of the frame prevent the accumulation of dust and make it difficult for non-professionals to remove the switch from the wall, helping to improve safety in the workplace.

Available in white, aluminum, and anthracite, Unica Pro frames satisfy all essential style needs.



Unica Pro
White



Unica Pro
Aluminium



Unica Pro
Anthracite

Antibacterial

The Unica Pro range also includes a white antibacterial finish for those mindful of hygiene and safety.









Antibacterial for greater hygiene and safety

For areas of homes and offices where hygiene is a concern – like a baby's room, the kitchen, or the common spaces – the Unica range provides devices with antibacterial properties.

To enable these properties, the raw plastic material has been enriched with silver ions. All external surfaces of devices are made from antibacterial material that's fully compliant with the latest international standard, ISO 22196:2011*.

87%

of tested bacteria gone after 8 hours*

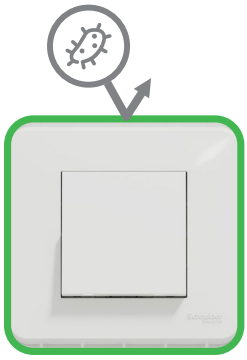

Silver ion technology

Silver ions act as a long-term barrier against bacteria, stopping their growth and spread.

ISO® 22196:2011

*Testing done by an external laboratory. As per ISO 22196:2011 requirement, the microorganisms tested were Escherichia coli and Staphylococcus aureus.

Unique in the market, the antibacterial range includes a wide variety of functions needed in an office, from switches and sockets, to workstations and connected devices. What's more, you don't have to compromise on aesthetics for greater safety. The range features the same elegant design as the regular white Unica devices.

Other functions also available in the antibacterial finishing:

Antibacterial

All products have the antibacterial logo visible.



Switch



Universal dimmer



Shutter control



Flush mounting workstation



Side earth socket

Convenient ways to personalize homes

The new Unica range includes all the wiring devices you need to enhance the style, comfort, and safety of your customers' homes. From lighting control to entertainment system connections and smart home functions, Unica is ready to meet your clients' current and future needs.

Lighting control

Automatic light control with motion sensors improves safety and energy efficiency.

Rotary and pushbutton dimmers, compatible with both conventional and LED lighting, help easily adjust the ambiance.

Connectivity-ready switches, dimmers, and motion sensors can be easily integrated with the Wiser smart home system. A connected wireless switch can be used with Wiser to control lights and shutters from anywhere.



Switch



Bedside lamp with USB



Motion sensor (connected and non-connected)

Works with Wiser™



Connected pushbutton dimmer



Connected wireless switch



Rotary dimmer (connected and non-connected)

Shutter control

Manual-at-a-push control or fully automatic via a time controller increases convenience.

Shutters can also protect home interiors from excessive sunlight and help discourage unwanted interest from strangers.



Shutter control



Connected shutter control



One-module shutter control

Temperature control

Unica thermostats can set a temperature and maintain it at a comfortable level as the outside temperature fluctuates, while also helping to reduce energy costs.



Thermostat



A worldwide range

To cater to different standards worldwide and diverse homeowner needs, Unica provides a broad selection of socket outlets.

All socket outlets have integrated child protection. The self-sealing shutters sit behind the electrode holes and close when the plug is removed, reducing the risk of a child inserting something into the holes.

Socket outlets for diverse needs and standards

Unica features standard socket outlets with lid and surface socket outlets that provide high aesthetics and prevent dust allocation inside the outlet. For extra safety, socket outlets with surge protection are available. The IP44 devices can be used outdoors (see the “Robust and weather resilient” section). The range features socket outlet versions available in almost all of the
local standards.



Side earth outlet



Side earth socket with lid



Surface pin earth socket



Socket with surge protection



Multistandard socket



British socket



American socket



Euroamerican socket 3 modules



Connected socket outlets

These outlets enable energy use monitoring for reducing costs.



Connected socket

Socket outlets with USB

Sockets with an added USB-C port provide maximized flexibility and use of space.



Surface pin earth socket with USB



Side earth socket with USB

Technology that connects

With an array of devices facilitating connectivity, Unica helps ensure your customers can use digital technologies in every corner of their house, without having to worry about low battery levels or network reach.

USB chargers

USB chargers include a quick charging option up to 18 W (3 A), with type A and type C ports that can charge a battery up to 75 percent in as little as 30 minutes.



USB quick charger type A+C



USB charger type A



Side earth socket with USB type C



Surface pin earth socket with USB type C



1-module USB charger type A

Connectivity everywhere

The Wi-Fi repeater makes the internet available throughout the house. The range also includes R/TV sockets, RJ45 inserts, and central plates as well as HDMI sockets to neatly connect HDTV and AV components.



Wi-Fi repeater



HDMI outlet



R-TV/SAT outlet



RJ45 data socket

Robust and weather resilient

With Unica, you can provide convenient power access and connectivity even outdoors.

Outdoor devices

From IP44 switches and sockets to IP55 frames and compatibility with Mureva boxes, the range has devices that can be installed on balcony, a terrace, or a garden.



IP44 switch



IP44 socket outlet



IP55 Mureva Box with Unica function



IP55 cover frame



Make homes smart and sustainable with Wiser and Unica

By choosing connected Unica devices and integrating them into the Wiser smart home system, you can offer your customers enhanced comfort, energy savings, and greater safety.

Wiser allows homeowners to conveniently control lighting, shutters, heating, and more, both locally and remotely, through the Wiser by SE app, voice assistants, or the Unica wireless switch.



Wiser is compatible with Amazon Alexa™, Google Assistant™, and Apple's Siri®.

Moments

Wiser helps personalize a home by creating scenarios that combine several settings. For example, switching off all the lights and closing all the shutters for a Sleep Moment. A pre-set moment can be activated with just one tap in the Wiser by SE app or a voice command.

Automations

Moments can activate automatically at a scheduled time or when predefined conditions are detected. For example, lights can be switched off in a room when no presence is detected for 10 minutes.

Notifications

Wiser keeps homeowners aware of what's going on at home, even when they're away; the system sends notifications when issues are detected, such as water leakages or open windows or doors.



Safety and security


Gateway


IP Camera


Sensors

Lights, shutters, and appliances


Gateway


Switches


Dimmers


Sockets


Smart Plug


Free Located Switch


Voice control device


Wiser by SE app




Free Located Switch



Temperature


Gateway


Radiator Thermostat


IR Converter

Energy


Gateway


Sockets


Smart Plug


PowerTag

Introduce your customers the benefits of Wiser living

Wiser gives homeowners a convenient way of managing home settings and adjusting them to their preferences. The system also helps spot and cut energy waste and protect homes from potential intruders, faults, or simple forgetfulness.



Greater comfort

Welcome moment

"My home 'Welcomes' me as soon as I open the door. Lights on, shutters up, and my favorite music on."

Voice control

"When my hands are full, a voice assistant turning on the lights for me is a blessing."

Cinema moment

"One tap and the perfect mood is set: dimmed lights, closed shutters, and a cozy temperature."



Enhanced safety

Presence simulation

“When I’m away, Wiser simulates my presence at home with lights on and shutters open at pre-set times.”

Remote control

“Did I switch off the iron this morning? No worries, I can just check the Wiser app.”

Peace of mind

“I feel safer knowing Wiser will notify me about a water leakage so I can turn all nearby sockets off.”

Energy savings

Appliance control

“After I leave home, I can easily turn off non-essential electrical appliances with one click not to waste energy.”

Automations

“Kids forget about everything! Fortunately, Wiser turns off the lights and A/C when it detects no presence in the room or a window is open.”

Protection from external conditions

“I use the ‘Summer’ moment to automatically close the shutters during the sunny hours to optimize energy use on cooling.”





Workspaces tailored to any need

The Unica range provides the full scope of functions needed in a modern office. Socket outlets, network connectivity, multimedia outlets, and more. What your client needs, Unica delivers.



Single, double, and triple socket outlets

A selection of different outlet configurations lets you flexibly adapt to customer demands. Choose from socket outlets with screw and screwless mounting and double socket outlets with an IPT connection. All are simple to install. Color options are available.



Surface-mounted socket outlets

For areas with no dust allowed, surface-mounted sockets are a perfect choice. With an enhanced design, the outlets have a sleeker look for improved workspace aesthetics.

All Unica functions are compatible with Unica System+ devices, including workstations, floor boxes, desk units, poles and posts, and cable management solutions. Function modules can also be directly clipped into OptiLine 45 trunking for a seamless and highly aesthetic look.



Motion sensor



Rotary dimmer

Light control functions

Rotary and pushbutton LED dimmers enable your customers to adjust the brightness of lights in areas like meeting rooms.

Motion sensors installed in areas like corridors or toilets help ensure the lights are on only when needed.

For more energy savings, a programmable timer can be used to switch off office devices, such as printers, during non-working hours.

Light control functions

From devices dedicated to USB charging to regular sockets with in-built USB slots, the Unica range provides powerful flexibility.

A quick charger with USB A and C can charge a battery up to 75 percent in as little as 30 minutes. Two different slots mean customers can charge diverse types of devices. The compact design and dual-charging options help maximize the use of space.

Another space-saving option is a one-module USB charger that can be used in workstations, for example.

A regular socket outlet with a USB-C port pulls double duty, powering electrical equipment and charging USB devices simultaneously.







HDMI outlet

Multimedia outlets

Unica provides a complete set of multimedia outlets to cover any functionality needed in a meeting room. The devices are quick and easy to install and can be seamlessly integrated into the environment.

Network connectivity

The full Unica network connectivity offer works with any Schneider Electric S-One connector and is also compatible with Keystone and SYSTIMAX connectors. Available in different sizes and two versions, inclined and flat, the modules can fit any application. Narrow modules are available in 45x45 mm size and standard modules in 45x90 mm size perfect for vertical workstations or poles and posts.



Flush mounting workstation



With a broad selection of modules, you can easily find a solution for a specific application.

Switches and socket outlets for outdoor and special areas

Unica devices are also available with IP44-rated protection. They have the same stylish appearance as regular switches and sockets but are more resistant to dust, water, etc.

IP55-rated frames are perfect for bathroom installations, while Unica devices combined with Mureva Boxes can be used for example in parking lots.





Maximized functionality, minimized space

When space is at a premium and you have multiple functions to fit, Unica System+ workstations come to the rescue.

Available in multiple sizes, in vertical or horizontal formats, for flush or surface mounting, these workstations help you deliver flexibility and convenience for office occupants.

Three color options – white (also available in antibacterial finish), aluminum, and anthracite – perfectly match Unica frames and help you create a uniform interior aesthetic. Unica System+ workstations are compatible with all function inserts offered by the Unica range.

Antibacterial

Unica System+ workstations are also available in a white antibacterial finish (find out more in the “Make the office a safer space” section).



Flush mounting workstation
White



Flush mounting workstation
Aluminium



Flush mounting workstation
Anthracite

	Vertical	Horizontal
Surface		
Flush		

Ingenious design

Unica fixing frames as well as modular switches and sockets are designed to make installation smoother than ever.

Easy installation

More compact inserts with extra space for wiring and easy-to-access
release buttons are just two examples of the clever features that help
you save time on mounting.

Easy clipping

The size of Unica inserts allows for direct clipping in the OptiLine 45 trunking. This major simplification means one insert type can now be used for both homes and commercial buildings.

> “One of the most important features we instilled in Unica is ingenuity so the electrician could install more devices faster through the simplicity of design. ”

Frédéric Beuvry,
Vice President Industrial Design & Ergonomics
at Schneider Electric



Install faster and smarter

Speed up your work with the ingenious features of Unica wiring devices.

Fixing frames

Flexible installation
Thanks to symmetric fixing frame sides.

Secure fixing
Finer tolerance between the fixing frame and the insert. Less dangling, as the insert sits securely in the fixing frame.

Robust design
The Unica fixing frame is bigger and more rigid due to the smaller 40 x 40 mm insert window. This provides extra strength to the frame to help prevent distortion during fastening the clips.

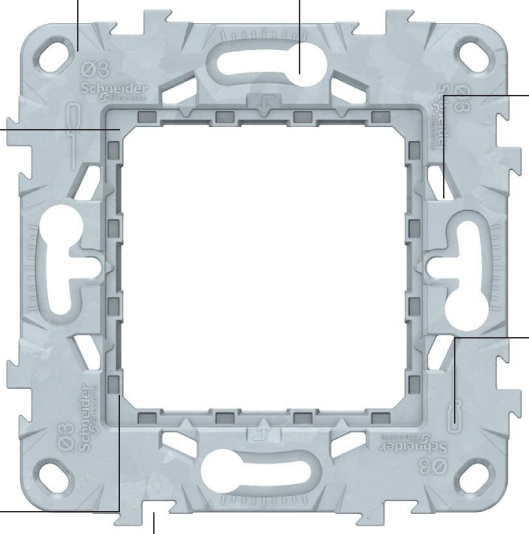



Perfect alignment
Unica's interlocking system helps avoid misalignment and slipping when installing two or more products in a multi-gang frame.

Easy adjustment
The screw slots allow rotation of the fixing frame in either direction, so the frame can be correctly mounted even if the installation box is misaligned. These slots are a perfect fit for flush-mounted box standard screws, so fixing is now even easier and more secure.

Stronger connection
Finer tolerances between the fixing frame and the cover create a stronger connection for more reliable installation.

Intuitive mounting
Slots for the screwdriver on the front and back of the fixing frame enable removing the insert without leaving a mark on the product. They also help avoid injuries from placing the screwdriver in the wrong position. Inserts can be easily removed from the front and back.

Safe handling
The claws are protected with a plastic cover to prevent harm during installation.

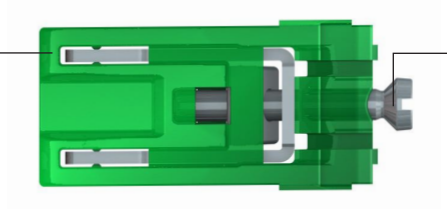

Reliable fixing
The claw length has been increased for better fixation in the box. When you hear a click sound, you know the claws are perfectly placed in the fixing frame.



Multiple versions

Fixing frames are available in plastic and zamak and with or without claws included.
Available also for 1 to 7 module installations, and also for Double British Standard boxes.



Plastic fixing frame
2 modules



Plastic fixing frame
3 modules



Plastic fixing frame
4 modules



Plastic fixing frame for Double British Box



Zamak fixing frame
2 modules



Zamak fixing frame
3 modules



Zamak fixing frame
4 modules

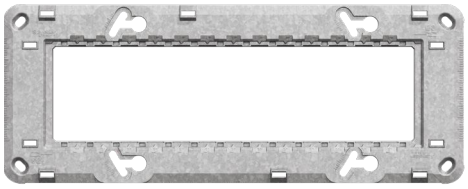

Zamak fixing frame
7 modules

Switch to smart design

Extra space
A low mounting depth of 21 mm provides more space for wiring.

Easy removal
Inserts can be removed from the front and back thanks to the clearly visible notches.



Secure clipping
The insert is more secure in the fixing frame due to the improved design of the clipping system.

Clear on/off status
The large rocker clearly indicates the status of the switch in the ‘on’ and ‘off’ positions. When switched off, the rocker angle is wider for increased separation of the contacts. This helps avoid electrical arc, makes the switch more secure, and improves its electrical performance.

Quick wiring
Prominent quick release buttons are easily accessible, so securing and releasing wires is quick and easy.

Simple connection
A wiring diagram is printed on the rear of the switch and pushbutton base to make connection options clearly visible.



Effortless wiring
Conical cable entries make it easier to feed the connection wires into the terminal blocks. Even thicker wires can be connected in less time thanks to the larger openings.



Easy indicator conversion

Add an indicator lamp to any switch, easily. Simply remove the standard rocker and add the accessory lamp and the rocker with a light window.

Convenient testing from the front

Checkpoints at the front allow convenient functions testing and measuring. Plus, there’s no need to disassemble the switch – the rocker can be easily removed to access the checkpoints.



Special functions



One-way switches and pushbuttons

For one-way switches and pushbuttons, the phase and neutral cable entries are on the top. This allows for simpler and faster wiring, without having to turn the insert to wire the other cable.

Slim insert

All white switch inserts come with a smaller housing which offers more space for fast and easy wiring.



Intermediate switch

Different colors indicating the two circuits make it easy to distinguish between them for simpler installation.

Upgradable pushbutton

All switch inserts with aluminum or anthracite rockers can be upgraded to a pushbutton thanks to a larger housing and a pushbutton spring.

Sockets with screw terminals

Extra space
A shallow mounting depth of 21 mm provides extra space for wiring.

Unclipped center plate
The center plate is unclipped, enabling easy removal of wiring.



Easy removal
Inserts can be removed from the front and back thanks to the clearly visible notches. The center plate can also be removed easily.

Shock protection
Integrated shutters protect against accidental contact and the ingress of foreign objects.

Large cable entries
Entries allow for wiring rigid and flexible cables of 2.5 mm² and 4 mm².

Improved protection
Cable entries are clearly separated to make wiring more intuitive and help avoid short-circuit risk when flexible wires are used.

Fast wiring
With the cable entries beside each other, you can cut all wires to the same length. The screws are unfixed, so you don't have to unscrew them before you start to wire the cables.



Sockets with screwless terminals

Extra space
A low mounting depth of 21 mm provides extra space for wiring.



Easy removal
Inserts can be removed from the front and back thanks to the clearly visible notches.
The center plate is also easy to remove.

Shock protection
Integrated shutters protect against accidental contact and the ingress of foreign objects.

Effortless wiring
Conical cable entries make it easier to feed the connection wires into the terminal blocks. Thanks to larger openings, even thicker wires can be easily connected.



Quick wiring
Screwless socket outlet terminals and color-coded quick-release buttons make securing and releasing wires quick and easy, without removing the center plate.

Special socket outlets



Socket outlet with lid which can be opened to 180°



Double socket outlet

The new Unica range includes socket outlets for a variety of applications, including single, double, and multi-gang outlets. They offer screw and screwless options, with extra room and wider openings for quicker, simpler wiring.

Versatile workstations

With Unica System+ workstations, available as both flush- and surface-mounted, in vertical or horizontal orientation, in several sizes and finishes, you will easily deliver the right solutions for any workspace.

Flush-mounted box

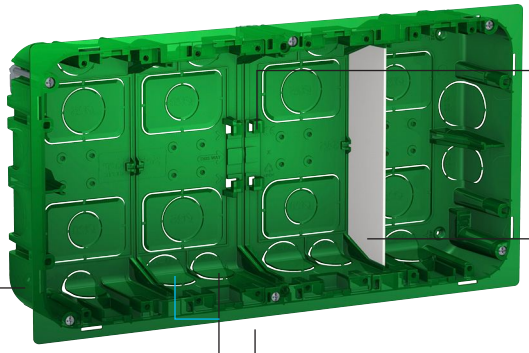

Surface-mounted box

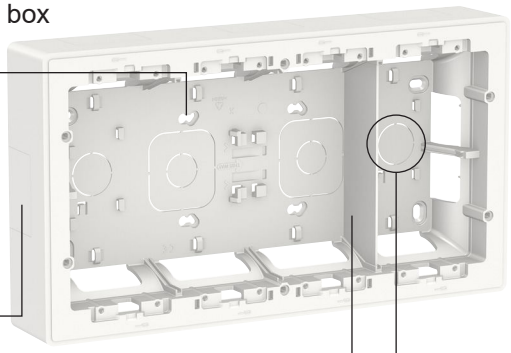

Easy adjustment
The mounting holes allow vertical and horizontal movement to balance the boxes for perfect alignment every time.

Flexible installation
Several entrances allow mounting without drilling.

Holes for 25 mm Ø and 20 mm Ø tubes.

Broad flat frame
Enabling perfect installation, even when the walls are uneven. The broad frame also stands proud of slightly larger holes to avoid “falling”.

Easier data cable installation
Box depth of 50 mm for easier installation of Cat6 and 6 A data cables.

Added security
Slide-in dividers keep power and data cables separated for extra safety.

Flush-mounted box compatibility
Workstations can be placed in a flush-mounted installation box instead of bringing the cables in via the mini-trunking. The box features entry holes for the cables.

Faster installs
The boxes come with pre-mounted and unscrewed screws to speed up installation.

Easy fixing
The fixing frames can be clipped directly to workstations, without tools.



Fixing frame

No adaptors needed
The removable bar on the fixing frame allows secure fixing of single functions without an adaptor. You can also clip in one- or two-module inclined RJ45 connectors to the workstation.

Mini-trunking compatible
Unica System+ products are compatible with Schneider Electric mini-trunking.

Flexible clipping
Small bars allow single inserts to be clipped in and removed with greater flexibility. The bars allow any Unica insert to be fitted into the boxes.

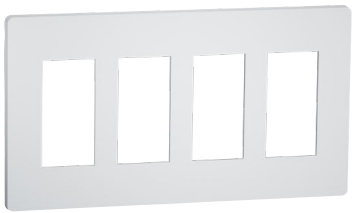

Design frame

DIN-rail ready
The use of an adaptor allows mounting of DIN-rail products such as Acti9.

Connect multiple boxes
A small adaptor allows connecting of several boxes.

Special functions for commercial applications

Unica System+ and OptiLine 45 trunking accept all Unica inserts. For faster installation, double- and triple-socket outlets and RJ45 inserts with two or four connectors are available. Even DIN rail products such as Acti9 can be fitted in with an adaptor.

Double socket outlet

Screw IPT terminal
Double socket outlets feature insulated piercing terminals. You don't have to insulate the wires with a tool – just insert them, close the levers, and insulation is done automatically. Disassembling is also easy, and the inserts can be reused.

Flexible cable sizes
Inserts accept 1.5 mm^2 and 2.5 mm^2 rigid and flexible cables.

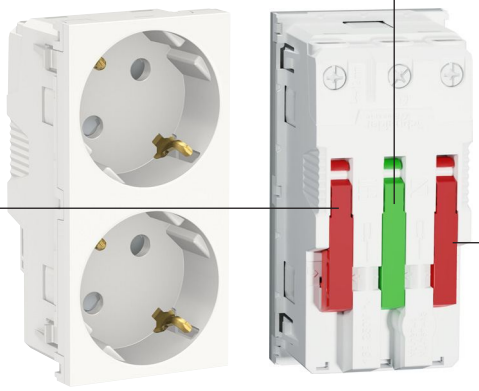

Screws on the back
There's no need to remove the center plate to screw – the center plate is simply clipped in.

Easy installation
The big levers can be opened up to 90° for easy wiring and removing cables.

RJ45

Time-saving installation
Unica offers several designs of RJ45 center plates. The double and quadruple versions speed up installation as you only need one device and less space for up to four connectors.

Label holders
A convenient solution to help you identify the connected devices.



Protective shutters
They prevent the ingress of dust and other objects when the port is not in use.

Installation flexibility
The center plates can be used with any S-One Schneider Electric connector.

Clever solutions for flexible fixing

Multifix flush mounting boxes

The perfect way to fit Unica in plasterboard walls.

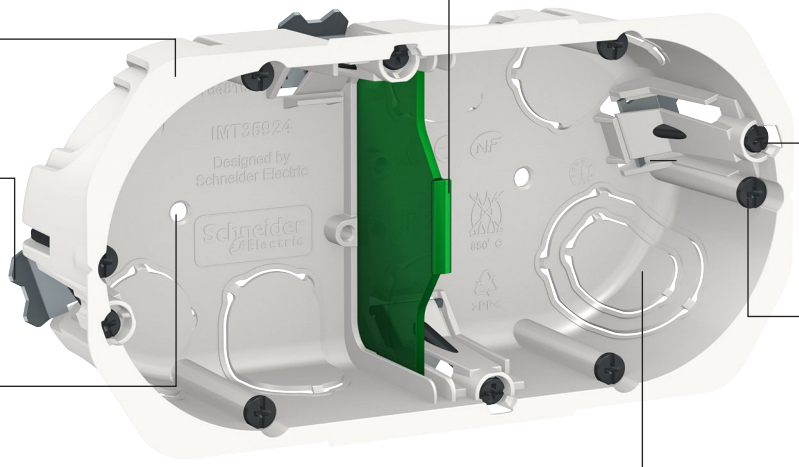

Robust
design and material.

Solid fixing
to plasterboard with metal claws.

Perfect fit to the wall
with markings at the back of the box.

Flexible installation
thanks to screwless dividers (option with screws also available).

Quick mounting
of the frame with only two screws needed.

The best levelling compensation
in the market.

Ergonomic shape
for easy fitting in plasterboard.

Multi-gang fixing frame

Adaptable to diverse needs.

The fixing frame can be used both for gang installations and, thanks to the movable dividers, for full window installations. In the latter case, the dividers are moved to the sides to cover wired parts for greater safety.





Standard gang installation



Full window installation

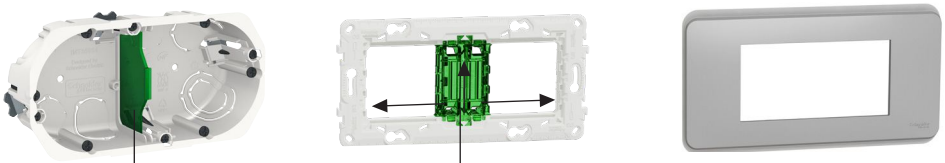

Remove the divider by hand to get a full window.

The dividers can be easily removed from the front or the back and clipped on the sides to keep inserts and wires completely covered for greater safety.



Backward compatibility

Because Unica has long been a popular choice for homes and buildings throughout Europe, it was a priority to make all of the new additions to the range backward compatible to easily integrate with legacy installations where necessary.

How the backward compatibility works

The new Unica inserts are more compact than the old Unica inserts*, so the fixing frame window in the new Unica is smaller. The back part of the new Unica insert is also smaller, but the old and new rockers have the same outer dimension (45x45 mm).



The old Unica fixing frame (44x44 mm)



The new Unica fixing frame (40x40 mm)



The new Unica insert (40x40 mm) and the rocker (45x45 mm)

You can fit new Unica inserts in the old Unica fixing frames with the adaptor.



The old Unica fixing frame (44x44 mm)



The adaptor



The New Unica insert (40x40 mm). The rocker is still 45x45 mm.

The old and new Unica frames are 100% compatible with inserts, fixing frames, and rockers from both the old and the new range.





*The old insert cannot be placed in the new fixing frame.

Unica

Inserts

Content

Switches 50

Specialized controls 54

Comfort devices 56

Sockets 58

USB Chargers 62

Data / Phone / TV 63

Other functions 67

Dedicated trunking applications 69

Inserts

Switches

10 AX - 250 V AC switches

	One-way	One-way with indication lamp and symbol	Two-way	Two-way with indication lamp and symbol	Two-way with neutral terminal	Intermediate	Double one-way	Double two-way	IP44
									
2 modules									
									
white	**NU320118**	-	**NU320318**[1] **NU320318F**[2] **NU320318P**[3]	-	**NU320318S**	**NU320518**	**NU321118**	**NU321318** **NU321318F**	**NU528218**
aluminium	**NU320130**	-	**NU320330**	-	**NU320330S**	**NU320530**	**NU321130**	**NU321330**	**NU528230**
beige	**NU320144**	-	**NU320344**	-	-	**NU320544**	**NU321144**	**NU321344**	**NU528244**
anthracite	**NU320154**	-	**NU320354**	-	**NU320354S**	**NU320554**	**NU321154**	**NU321354**	**NU528254**
1 module									
									
white	**NU310118**	**NU310118SMUR**	**NU310318** **NU310318F**	**NU310318SDND**	**NU310318S**	**NU310518**	-	-	-
aluminium	**NU310130**	-	**NU310330**	-	**NU310330S**	**NU310530**	-	-	-
beige	**NU310144**	-	**NU310344**	-	-	**NU310544**	-	-	-
anthracite	**NU310154**	-	**NU310354**	-	**NU310354S**	**NU310554**	-	-	-

Characteristics

- Connection: screwless terminals
- Cables: 1 to 2.5 mm² rigid/flexible

Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

(1) flow-pack
(2) no individual, flow-pack
(3) pack of 100 in a box

	One-way	Two-way	Intermediate
			
2 modules			
		-	-
white	**NU320118SC**	-	-
aluminium	-	-	-
beige	**NU320144SC**	-	-
anthracite	-	-	-
1 module			
white	**NU310118SC**	**NU310318SC**	**NU310518SC**
beige	**NU310144SC**	**NU310344SC**	-

Characteristics

- Connection: screw terminals
- Cables: 1 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

Inserts

Switches

10 A - 250 V AC push-buttons

	NO			NO/NC		NO with location lamp		
	without symbol	with bell symbol	with light symbol	without symbol	with label holder	without symbol	with bell symbol	with light symbol
								
2 modules								
								
white	**NU320618**[1] **NU320618F**[2]	**NU320618C**	**NU320618L**	**NU323618**	**NU324620**	**NU320618N**[1] **NU320618FN**[2]	**NU320618CN**	**NU320618LN**
aluminium	**NU320630**	**NU320630C**	**NU320630L**	**NU323630**	**NU324630**	**NU320630N**	**NU320630CN**	**NU320630LN**
beige	**NU320644**	-	-	-	-	**NU320644N**	**NU320644CN**	-
anthracite	**NU320654**	**NU320654C**	**NU320654L**	**NU323654**	**NU324654**	**NU320654N**	**NU320654CN**	**NU320654LN**
1 module								
								
white	**NU310618**[1] **NU310618F**[2]	**NU310618C**	**NU310618L**	**NU313618**	-	**NU310618N**	**NU310618CN**	-
aluminium	**NU310630**	**NU310630C**	**NU310630L**	**NU313630**	-	**NU310630N**	-	-
beige	**NU310644**	-	-	-	-	**NU310644N**	**NU310644CN**	-
anthracite	**NU310654**	**NU310654C**	**NU310654L**	**NU313654**	-	**NU310654N**	-	-

Characteristics

- Connection: screwless terminals
- Cables: 1 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

(1) flow-pack
(2) no individual, flow-pack

	NO	NO with location lamp
	without symbol	without symbol
		
1 module		
		
white	**NU310618SC**	**NU310618NSC**
aluminium	-	-
beige	-	**NU310644NSC**
anthracite	-	-

Characteristics

- Connection: screw terminals
- Cables: 1 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

Inserts

Switches

16 AX - 250 V AC switches

	One-way	One-way with indication lamp	Two-way	2 poles	2 poles with indication lamp	3 poles
						
2 modules						
						
white	**NU326118**	**NU326118N**	**NU326318**	**NU326218**	**NU326218S**	**NU328118**
aluminium	-	-	**NU326330**	**NU326230**	**NU326230S**	-
beige	**NU326144**	-	-	-	-	-
anthracite	-	-	**NU326354**	**NU326254**	**NU326254S**	-
1 module						
						
white	**NU316118**	**NU316118S**	**NU316318**	**NU316218**	**NU316218S**	-
aluminium	**NU316130**	-	**NU316330**	-	-	-
beige	**NU316144**	**NU316144S**	**NU316344**	-	**NU316244S**	-
anthracite	**NU316154**	-	**NU316354**	-	-	-
Characteristics						
• Connection: screw terminals • Cables: 1 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor	• Connection:screw terminals • Cables: 1 to 4 mm² rigid/f	• Connection: screw terminals • Cables: 1 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor				

High rating switches

	20 A 2 poles	30 A 2 poles with indication lamp
		
2 modules		
		
white	**NU322518**	**NU323218S**
aluminium	-	**NU323230S**
beige	-	**NU323244S**
anthracite	-	**NU323254S**
Characteristics		
• Connection: screw terminals • Cables: up to 4 mm² rigid/flexible	• Connection: screw terminals • Cables: up to 6 mm² rigid/flexible	

Inserts

Switches

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	White	Red	White
			
	NU9823AM	**NU9825A**	**NU9825AZ**
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button



S520299

Characteristics

- 10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor	for Unica MGU●.●●●.●●
2 modules			
			
white	**NU920018**	**NU920018N**	**NU920018U**
aluminium	**NU920030**	**NU920030N**	**NU920030U**
beige	**NU920044**	**NU920044N**	**NU920044U**
anthracite	**NU920054**	**NU920054N**	**NU920054U**
1 module			
			
white	**NU910018**	**NU910018N**	**NU910018U**
aluminium	**NU910030**	**NU910030N**	**NU910030U**
beige	**NU910044**	**NU910044N**	**NU910044U**
anthracite	**NU910054**	**NU910054N**	**NU910054U**

Inserts

Specialized controls

Fan controls

	Two-way 10 A	Two-way - On/Off - 10 A
2 modules		
		
☐ white	**NU320320VMC**	**NU321418**
▒ aluminium	**NU320330VMC**	**NU321430**
■ anthracite	**NU320354VMC**	**NU321454**

Shutter controls

10 A	Push-button	Switch	2 poles Push-button	2 poles Switch
1 modules				
				
☐ white	**NU310718SC**	**NU310818SC**	**NU312718SC**	**NU310918SC**
▒ aluminium	**NU310730SC**	**NU310830SC**	-	-
▒ beige	**NU310744SC**	**NU310844SC**	**NU312744SC**	**NU310944SC**
■ anthracite	**NU310754SC**	**NU310854SC**	-	-
Characteristics				
• Connection: screw terminals • Cables: 1 to 2.5 mm² rigid/flexible				

	Push-button 6 A	Push-button 10 A	Switch 6 A
2 modules			
			
☐ white	**NU320718**	**NU323718**	**NU320818**
▒ aluminium	**NU320730**	**NU323730**	**NU320830**
▒ beige	**NU320744**	-	**NU320844**
■ anthracite	**NU320754**	**NU323754**	**NU320854**
Characteristics			
• Connection: screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible			

Cord push-buttons

	NO/NC - 10 A
2 modules	
	
☐ white	**NU322620**
▒ aluminium	**NU322630**
▒ beige	**NU322644**
■ anthracite	**NU322654**
Characteristics	
• Connection: screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible	

Key switches

	Push-button - 16 A	Switch - 16 A
2 modules		
		
☐ white	**NU373118**	**NU370118**
▒ aluminium	**NU373130**	-
■ anthracite	**NU373154**	-
Characteristics		
• 3 positions		

Inserts

Specialized controls

Card push-buttons

	NO/NC - 10 A
2 modules	
	
white	**NU328318**
aluminium	**NU328330**
beige	**NU328344**
anthracite	**NU328354**

Emergency stop

	Key switch - 10 A	Mushroom - 10 A
2 modules		
		
yellow	**ALB45032**	**ALB45033**

Inserts

Comfort devices

Dimmers

	Universal	Compensation module LED
2 modules		
		
☐ white	**NU351418**	
aluminium	**NU351430**	
anthracite	**NU351454**	
Load compensation module		
		CCT90501
Maximum loads		
LED lamp 230 V	RC: 5...100 VA RL : 5...20 VA	
incandescent lamp 230 V	5...200 W	
halogen lamp 230 V	5...150 W	
LV halogen lamps 12 V – electronic transformer	5...150 VA	
LV halogen lamps 12 V – wound transformer	5...150 VA	
Characteristics		
• Remote control by unlimited number of auxiliary push-button • Automatic load detection • Wire configuration without neutral • Screw terminals connection • Memory function • Automatic overload protection, overheating protection, short-circuit protection		• Rated voltage: 230 VAC • Frequency range: 50 - 60 Hz • Power loss: 2 W max. • Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Thermostats

	Room - 8 A	Floor - 10 A
2 modules		
		
☐ white	**NU350118**	**NU350318**
aluminium	**NU350130**	**NU350330**
beige	**NU350144**	**NU350344**
anthracite	**NU350154**	**NU350354**
Characteristics		
	• For heating or air-conditioning • Settings range: + 5 to + 30 °C • Blue and red LED's for conditioning or heating indication	• For floor heating • Settings range: + 5 to + 45 °C • Green LED for voltage supply indication • Red LED for heating indication • Delivered with a 4 m temperature sensor

Inserts

Comfort devices

Motion sensors

		10 A
2 modules		
		
	white	**NU352518**
	aluminium	**NU352530**
	anthracite	**NU352554**
Maximum loads		
LED lamp 230 V		200 W
incandescent lamp 230 V		2200 W
halogen lamp 230 V		2000 W
motor (single-phase) 230 V		1000 VA
LV halogen lamps 12 V	electronic transformer	1050 VA
	wound transformer	500 VA

Characteristics

- Screw terminals connection
- Wire configuration with neutral
- Detection angle: 160 °
- Movement detection area: 8 m frontal, 8 m lateral
- Remote control by unlimited number of auxiliary push-button
- Automatic load detection
- Built-in on/off push-button switch
- Time delay range: 1...30 min
- Master/slave option; two sensors can be connected together to cover larger area

Timers

	Countdown timer relay - 10 A
2 modules	
	
white	**NU353518**
aluminium	**NU353530**
anthracite	**NU353554**

Characteristics

- Time delay range: 5 min to 8 h
- Integrated status LED
- 3-wires (neutral required)

Electronic card switch

8 A	
	
white	**NU354018**
aluminium	**NU354030**
anthracite	**NU354054**

Characteristics

- 8 A
- Timed 10 seconds

Inserts

Sockets

Side Earth sockets

90°	With shutters screwless	With shutters screw	Without shutters screw	With lid & shutters screw	IP44 frame with shutters	IP44 with shutters	Single socket+USB
2 modules							
							
white	**NU305718**	**NU303718**	**NU303618**	**NU303718TA**	**NU003718**	**NU508218**	**NU301718**
aluminium	**NU305730**	**NU303730**	-	**NU303730TA**	-	**NU508230**	**NU301730**
beige	**NU305744**	**NU303744**	**NU303644**	**NU303744TA**	**NU003744**	**NU508244**	**NU301744**
anthracite	**NU305754**	**NU303754**	-	**NU303754TA**	-	**NU508254**	**NU301754**
orange	-	**NU303761**	-	-	-		-
red	**NU305703**	**NU303703**	-	-	-		-
green	-	**NU303706**	-	-	-		-
Characteristics							
• 2P+E - 16 A - 250 V						• Screwless terminals • 2P+E - 16 A - 250 V • Shuttered	• 2P+E - 16 A - 250 V • Screwless terminals • Output power USB: 5 V

45°	Standard		With lamp
4 modules	**Screwless**	**Screw ***	**Screw ***
			
white	**NU306618**	**NU306718A** **NU306718**(1)	**NU306718AS** **NU306718S**
aluminium	**NU306630**	**NU306730A**	**NU306730AS**
anthracite	**NU306654**	**NU306754A**	**NU306754AS**
red	**NU306603**	**NU306703A** **NU306703**(1)	**NU306703AS** **NU306703S**(1)
green	-	-	**NU306706AS**
orange	-	-	**NU306761AS**
Characteristics			
• 2P+E - 16 A - 250 V • * for Screw devices - Screw-IPT terminals (except (1): screw terminals in one side) • With shutters			

45°	Standard
6 modules	**Screwless**
	
white	**NU307618**
aluminium	**NU307630**
anthracite	-
red	**NU307603**
Characteristics	
• 2P+E - 16 A - 250 V • With shutters	

	Double Socket
	
white	**NU206718**
aluminium	**NU206730**
beige	**NU206744**
anthracite	**NU206754**
Characteristics	
• Screw terminals • 2P+E - 16 A - 250 V	

Inserts

Sockets

Pin Earth sockets

90°	Standard screwless	Standard screw	Surface screwless	Tamperproof screw	Sockets with surge protection	Single socket+USB
2 modules						
						
white	NU305918 NU305918E(1) NU305918P(2)	NU303918 NU303918E(1)	NU305218 NU305218E(1) NU305218P(2)	NU305118	NU305918EP	NU301518 NU301518E(1)
aluminium	NU305930 NU305930E(1)	NU303930 NU303930E(1)	NU305230 NU305230E(1)	-	NU305930EP	NU301530 NU301530E(1)
beige	NU305944E(1)	NU303944E(1)	NU305244E(1)		-	-
anthracite	NU305954 NU305954E(1)	NU303954 NU303954E(1)	NU305254 NU305254E(1)	-	NU305954EP	NU301554 NU301554E(1)
red	NU305903	NU303903E(1)	NU305203	NU305103	-	-
green	NU305906	-	NU305206	-	-	-
orange	NU305961	-	-	-	-	-
Characteristics						
	• 2P+E - 16 A - 250 V • With shutters					• 2P+E - 16 A - 250 V • Screwless terminals • Output power USB: 5 V

(1) For Czech Republic, Slovakia and Spain
(2) Pack of 100

45°	Standard			With lamp	Tamperproof		Tamperproof with lamp
	2 modules	4 modules	6 modules	4 modules	4 modules	6 modules	4 modules
							
white	NU304918	NU306918	NU307918	NU306918S NU306918SE(1)	-	-	-
aluminium	NU304930	NU306930	NU307930	NU306930S	-	-	-
anthracite	NU304954	NU306954	NU307954	NU306954S	-	-	-
red	NU304903	NU306903	NU307903	NU306903S NU306903SE	NU306103	NU307103	NU306103S
green	NU304906	NU306906	NU307906	-	-	-	-
Characteristics							
	• 2P+E - 16 A - 250 V • Screwless terminals • With shutters						

(1) For Czech Republic, Slovakia and Spain

Inserts

Sockets

Pin Earth double sockets

	Double with cover frame	Double socket
		
white	NU406918	NU206518
aluminium	NU406930	NU206530
beige	-	NU206544
anthracite	NU406954	NU206554
Characteristics		
• 2P - 16 A - 250 V • Screw terminals • With shutters • Installation in 1 gang box		• 2P - 16 A - 250 V • Screw terminals • Installation in 1 gang box

European sockets

Simple	16 A	10 A	Double
	2 modules	1 modules	
			
white	NU303318	NU303118	NU206318
aluminium	NU303330	NU303130	-
beige	NU303344	NU303144	NU206344
anthracite	NU303354	NU303154	-
Characteristics			
• 2P - 250 V • Screw terminals			• 2P - 16 A - 250 V • Screw terminals • Installation in 1 gang box

*A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.

Euroamerican sockets

		Shuttered		Shuttered
	1 module	1 module	2 modules	3 modules
				
white	NU302018	NU302118	NU304118	NU306818
aluminium	-	NU302130	NU304130	-
beige	NU302044	NU302144	-	-
anthracite	-	NU302154	NU304154	-
Characteristics				
• 16 A - 250 V AC for cylindrical pins • 15 A - 125 V AC for flat pins • Screw terminals				

*A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.

American sockets

15 A	Single	Double
	2 modules	3 module
		
white	NU302818	NU306018
aluminium	NU302830	NU306030
anthracite	NU302854	NU306054
Characteristics		
• 2P+E - 15 A • Screw terminals • Shuttered		

Italian sockets

16 A	
1 module	
	
white	NU302318
aluminium	NU302330
beige	NU302344
anthracite	NU302354
Characteristics	
• 2P+E - 16 A • Screw terminals • Shuttered	

British sockets

13A	
2 modules	
	
white	NU304518
aluminium	NU304530
beige	NU304544
anthracite	NU304554
Characteristics	
• 2P+E - 13 A • Screw terminals • Shuttered	

Inserts

Sockets

Danish sockets

90°	Single	Double	Single EDB	Double EDB
	2 modules	4 modules	2 modules	4 modules
				
white	NU308818	NU309818	NU308918	NU309918
aluminium	NU308830	NU309830	NU308930	NU309930

Characteristics

- 2P+E - 16 A - 250 V
- EDB (Elektronisk Data Behandling) for electronic data processing

Multistandard sockets

	2 modules	3 modules
		
white	NU308418	NU308518
aluminium	NU308430	-
anthracite	NU308454	-

Characteristics

- Screw terminals
- Shuttered

*A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.

Israel sockets

2 modules	
	
white	NU304718
aluminium	NU304730
beige	NU304744
anthracite	NU304754
red	NU304703

Characteristics

- 2P+E - 16 A
- Screw terminals
- Shuttered

Shaver sockets

20 VA	
	
white	MGU5.064.18
aluminium	MGU5.064.30

Characteristics

- 3 modules
- Input: 240 V
- Output: 115/240 V

Accessories

Jumper for Side and Pin Earth sockets-outlets	Jumper for Danish sockets-outlets	Tamperproof accessory	Red LED lamp
			
NU9091	NU9092	ALB45290	NU9830
Characteristics			
• Set of 10 jumpers for multiple Side and Pin Earth screwless sockets-outlets	• Set of 10 jumpers for multiple Danish screwless sockets-outlets		• Plug & play

Centres plates for Side Earth Sockets	
2 modules	
	
white	NU903718
aluminium	NU903730
beige	NU903744
anthracite	NU903754

For Unica MGU●.●●●.●●	
2 modules	
	
white	NU903718U
aluminium	NU903730U
beige	NU903744U
anthracite	NU903754U

Inserts

USB Chargers

USB chargers

	Chargers type A	Chargers type A+C			Charger type C		
2 modules							
							
white	**NU341818**	**NU301818**	**NU301918**	**NU501318**	**NU501418**	**NU301518** **NU301518E**	**NU301718**
aluminium	**NU341830**	**NU301830**	**NU301930**	**NU501330**	**NU501430**	**NU301530** **NU301530E**	**NU301730**
beige	**NU341844**	-	**NU301944**	**NU501344**	**NU501444**	-	**NU301744**
anthracite	**NU341854**	**NU301854**	**NU301954**	**NU501354**	**NU501454**	**NU301554** **NU301554E**	**NU301754**
1 module							
							
white	**NU342818**	**NU301618**	-	-	-	-	-
aluminium	**NU342830**	**NU301630**	-	-	-	-	-
beige	**NU342844**	**NU301644**	-	-	-	-	-
anthracite	**NU342854**	**NU301654**	-	-	-	-	-
Characteristics							
	• NU3418●● Output power: 5 V DC - max 2.1 A • NU3428●● Output power: 5 V DC - 1 A	• NU3018●● output power: 5 V DC - max 2.4 A • NU3016●● • Output power: 12 W 5V DC - 2.4 Max each port	• Output power: 18W 5V DC - 2.4 Max each port	• Output power: Tyep C 45W + Type A 7.5W	• Output power: 65W	• 2P+E - 16 A - 250 V • Screw terminals • Output power USB: 5 V • Output power: 10.5 W	

Inserts

Data / Phone / TV

RJ45 data sockets

	Cat. 5e UTP straight	Cat. 5e STP straight	Cat. 6 UTP straight	Cat. 6 STP straight	Cat. 6 STP inclined	Cat. 6 FTP straight	Cat. 6A UTP straight	Cat. 6A FTP straight
2 modules								
								
white	**NU341118**	**NU341318**	**NU341518**	**NU341718**	**NU340718**	**NU341918** **NU341918P**(1)	-	**NU344918**
aluminium	**NU341130**	**NU341330**	**NU341530**	**NU341730**	**NU340730**	**NU341930**	-	**NU344930**
beige	**NU341144**	**NU341344**	**NU341544**	-	-	-	-	**NU344944**
anthracite	**NU341154**	-	**NU341554**	**NU341754**	**NU340754**	**NU341954**	-	**NU344954**
								
white	**NU342018**	-	-	**NU342618**	-	-	-	-
aluminium	**NU342030**	-	-	**NU342630**	-	-	-	-
anthracite	**NU342054**	-	-	**NU342654**	-	-	-	-
1 module								
								
white	**NU341018**	**NU341218**	**NU341418**	**NU341618**	**NU340618**	**NU344718**	-	**NU344818**
aluminium	**NU341030**	**NU341230**	**NU341430**	**NU341630**	**NU340630**	**NU344730**	-	**NU344830**
beige	**NU341044**	**NU341244**	**NU341444**	**NU341644**	-	-	-	**NU344844**
anthracite	**NU341054**	-	**NU341454**	**NU341654**	**NU340654**	**NU344754**	-	**NU344854**
4 modules								
								
white	**NU347818**	-	**NU348218**	-	-	-	**NU348418**	-
								
white	**NU347918**	-	**NU348318**	-		-	**NU348518**	

Characteristics

- Connector Actassi S-One
- Straight : with shutter and label space
- Inclined : with label space

(1) pack of 100

Inserts

Data / Phone / TV

RJ45 centre plates

	For S-One RJ45 connector		For Keystone/Systimax RJ45 connector	
	straight	inclined	straight	inclined
2 modules				
				
white	**NU941118**	**NU940718**	**NU946118**	**NU946418**
aluminium	**NU941130**	**NU940730**	**NU946130**	**NU946430**
beige	**NU941144**	-	**NU946144**	-
anthracite	**NU941154**	**NU940754**	**NU946154**	**NU946454**
				
white	**NU942218***	**NU942418***	-	-
aluminium	**NU942230***	**NU942430***	-	-
anthracite	**NU942254***	**NU942454***	-	-
				
white	**NU942018**	-	-	-
aluminium	**NU942030**	-	-	-
anthracite	**NU942054**	-	-	-
1 module				
				
white	**NU941018**	**NU940618**	**NU946018**	-
aluminium	**NU941030**	**NU940630**	**NU946030**	-
beige	**NU941044**	-	**NU946044**	-
anthracite	**NU941054**	**NU940654**	**NU946054**	-
4 modules				
				
white	**NU947818**	-	**NU946218**	-
aluminium	**NU947830**	-	**NU946230**	-
anthracite	**NU947854**	-	**NU946254**	-
				
white	**NU947918**	-	**NU946318**	-
aluminium	**NU947930**	-	**NU946330**	-
anthracite	**NU947954**	-	**NU946354**	-

Characteristics

- Straight: with shutter and label space
- Inclined: with label space
- Type: SLIM, except * DPM
- * Type: DPM

Optical fibre centre plates

	SC/SC APC Simplex	SC/SC APC duplex
2 modules		
		
white	**NU943918**	**NU943818**
aluminium	**NU943930**	**NU943830**
anthracite	**NU943954**	**NU943854**

Characteristics

- Support to receive any SC simplex and duplex adapters
- Support to receive Actassy optical fibre adapters:
- SC Duplex multi mode adapters: ref. n° VDIB6031001 and VDIB6031002
- SC Duplex single mode adapters: ref. n° VDIB6032001 and VDIB6032002
- SC APC Duplex single mode adapter: ref. n° VDIB6082001
- SC APC Simplex single mode adapter: ref. n° VDIB6072001.

Inserts

Data / Phone / TV

Telephone sockets

	RJ12 connector	French standard phone jack	British telephone socket
2 modules			
			
white	**NU349718**	**NU349618**	**-**
aluminium	**NU349730**	**NU349630**	**-**
beige	**NU349744**	**-**	**-**
anthracite	**NU349754**	**NU349654**	**-**
1 module			
			
white	**NU349118**	**-**	**NU349918**
aluminium	**NU349130**	**-**	**NU349930**
beige	**NU349144**	**-**	**NU349944**
anthracite	**NU349154**	**-**	**NU349954**

Multimedia sockets

	VGA	Mini Jack	HDMI	RCA	Data Sockets
1 module					
					
white	**NU343218**	**NU343318**	**NU343018**	**NU343118**	**NU342918**
aluminium	**NU343230**	**NU343330**	**NU343030**	**NU343130**	**NU342930**
beige	**-**	**-**	**NU343044**	**-**	**-**
anthracite	**NU343254**	**NU343354**	**NU343054**	**NU343154**	**NU342954**
Characteristics					
					• USB 2.0

Inserts

Data / Phone / TV

TV sockets

	TV		TV/FM			R-TV/SAT			FM/TV/SAT
	male, individual	female, individual	individual	intermediate	terminal	individual	intermediate	terminal	individual (1 cable)
2 modules									
									
white	**NU346218**	**-**	**NU345118**	**NU345318**	**NU345218**	**NU345418**	**NU345618**	**NU345518**	**NU345018**
aluminium	**NU346230**	**-**	**NU345130**	**NU345330**	**NU345230**	**NU345430**	**NU345630**	**NU345530**	**NU345030**
beige	**NU346244**	**-**	**NU345144**	**-**	**-**	**NU345444**	**-**	**-**	**NU345044**
anthracite	**NU346254**	**-**	**NU345154**	**NU345354**	**NU345254**	**NU345454**	**NU345654**	**NU345554**	**NU345054**
1 module									
									
white	**NU346118**	**NU346818**	**-**			**-**			**-**
aluminium	**NU346130**	**NU346830**	**-**			**-**			**-**
beige	**-**	**NU346844**							
anthracite	**NU346154**	**NU346854**	**-**			**-**			**-**

	M-S
2 modules	
	
white	**NU545718**
aluminium	**NU545730**
anthracite	**NU545754**

TV centre plates

	TV/FM	R-TV/SAT
2 modules		
		
white	**NU944018**	**NU944118**
aluminium	**NU944030**	**NU944130**
beige	**NU944044**	**-**
anthracite	**NU944054**	**NU944154**

Inserts

Other functions

Sound inserts

Loudspeakers connectors			Loudspeakers (for Bluetooth)	In-wall Bluetooth receiver	Volume control
	2 modules	1 module			
					
white	NU348618	NU348718		NU360118	NU360218
aluminium	NU348630	NU348730		NU360130	NU360230
beige	NU348644	NU348744		-	NU360244
anthracite	NU348654	NU348754		NU360154	NU360254
			NU3488		
Characteristics					
			• 2 loudspeakers delivered with 2 cables (5 m, Φ 0.5 mm², red and white) • Impedance: 8 Ω	• Audio receiver - 2 modules - voltage: 15-16 V DC • Power supply - voltage: 93-265 V AC - frequency: 47-63 Hz Delivered with: • audio receiver device • power supply	

Light signaling

Signaling light	
12-24 V DC	230 V AC
2 modules	
	
NU3773	NU3772
1 module	
	
NU3774	NU3775
• Delivered with green and red papers to include under the centre plate.	

Emergency light
2 modules

NU3776
Characteristics
• 45 lux / 25 cm • Integrated battery • 230 V AC

Sound signaling

	Buzzer	Electronic doorbell
2 modules		
		
white	NU378518	NU378618
aluminium	NU378530	NU378630
beige	NU378544	NU378644
anthracite	NU378554	NU378654
Characteristics		
	• 230 V AC, 50/60 Hz	
	• Acoustic level: adjustable from 76 to 80 dB/1 m	• Acoustic level: 70 dB/1m • 5 melodies • Maximum connected in parallel to the output: - 10 without lamp - or 3 with lamp

Inserts

Other functions

WiFi repeater

	WiFi repeater
2 modules	
	
white	**NU360518**
Characteristics	
	• Repeats the WiFi signal received from the Internet box to extend its receiving coverage in housing • Time programming to define ranges for signal on and signal off • Signal coverage: 15 m (indoor) • Data speed: max 300 Mbps • Communication standard: WiFi 802.11 b/g/n 2.4 GHz • 100-240 V AC - 50/60 Hz • Pairing mode: WPS (pairing method also featured on most routers) and through HTML pages

Bed side lamp

	Lamp+USB charger type A
	
white	**NU360318**
aluminium	**NU360330**
beige	**NU360344**
anthracite	**NU360354**
Characteristics	
	• Lamp 2 W • USB 5 V DC - max 2.1 A

Cable Outlets

16 A	
2 modules	
	
white	**NU386218**
aluminium	**NU386230**
beige	**NU386244**
anthracite	**NU386254**
Characteristics	
• cable diameter: from 6 to 12 mm	

Protection

16 A	Fuse hoder	Residual current device switch
1 module		
		
white	**NU363118**	**NU361218**
aluminium	**NU363130**	-
anthracite	**NU363154**	-

Blind covers

Blind covers			
	2 modules	**1 module**	**1/2 module (2 x)**
			
white	**NU986618**	**NU986518**	**NU986418**
aluminium	**NU986630**	**NU986530**	**NU986430**
beige	**NU986644**	**NU986544**	**NU986444**
anthracite	**NU986654**	**NU986554**	**NU986454**

Inserts

Dedicated trunking applications

Sockets

	90°	45°			Surface	Tamperproof		
	2 modules	2 modules	4 modules	6 modules	2 modules	2 modules	4 modules	6 modules
								
☐ white	NU305920T	NU304918T	NU306918T	NU307918T	NU305218T	-	-	-
■ red	NU305903T	NU304903T	NU306903T	NU307903T	NU305203T	NU305103T	NU306103T	NU307103T

Characteristics

- 2P+E - 16 A - 250 V
- With shutters
- Screwless terminals (except NU305103T)

RJ45 centre plates

	For S-One RJ45 connector straight
2 modules	
	
☐ white	NU941118T

Characteristics

- With shutter and label space

Unica Inserts with Fixing Frame



Content

Switches 73

Specialized controls 75

Comfort devices 76

Sockets 78

USB chargers 79

Data / Phone / TV 80

Other functions 82

Inserts with fixing frame

Switches

10 AX - 250 V AC switches

	Standard			With location lamp			IP44
	one-way	two-way	intermediate	one-way	two-way	intermediate	
							
2 modules							
							
☐ white	**NU520118**	**NU520318**	**NU520518**	**NU520118N**	**NU520318N**	**NU520518N**	**NU528218**
aluminium	**NU520130**	**NU520330**	**NU520530**	**NU520130N**	**NU520330N**	**NU520530N**	**NU528230**
beige	**NU520144**	**NU520344**	**NU520544**	**NU520144N**	**NU520344N**	**NU520544N**	**NU528244**
■ anthracite	**NU520154**	**NU520354**	**NU520554**	**NU520154N**	**NU520354N**	**NU520554N**	**NU528254**
2 x 1 module							
							
☐ white	**NU521118**	**NU521318**	**NU521518**	**NU521118N**	**NU521318N**	-	-
aluminium	**NU521130**	**NU521330**	**NU521530**	**NU521130N**	**NU521330N**	-	-
beige	**NU521144**	**NU521344**	**NU521544**	**NU521144N**	**NU521344N**	-	-
■ anthracite	**NU521154**	**NU521354**	**NU521554**	**NU521154N**	**NU521354N**	-	-
Characteristics							
• Connection: screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible							• Screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible

10 AX - 250 V AC switches

	Control unit
2 modules	
	
☐ white	**NU521718**
aluminium	**NU521730**
beige	**NU521744**
■ anthracite	**NU521754**

10 A - 250 V AC push-buttons

	NO	NO with location lamp
		
2 modules		
		
☐ white	**NU520618**	**NU520618N**
aluminium	**NU520630**	**NU520630N**
beige	**NU520644**	**NU520644N**
■ anthracite	**NU520654**	**NU520654N**
Characteristics		
• Connection: screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor		

Inserts with fixing frame

Switches

16 AX - 250 V AC switches

	Standard 2 poles	With indication lamp 2 poles
		
2 modules		
		
white	**NU526218**	**NU526218S**
aluminium	**NU526230**	**NU526230S**
beige	**NU526244**	**NU526244S**
anthracite	**NU526254**	**NU526254S**

Characteristics

- Connection: screw terminals
- Cables: 1 to 2,5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

Accessories - Lamps

LED lamps	12-24 V DC white	250 V AC red	 white
			
	NU9823AM	**NU9825A**	**NU9825AZ**
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button



S520299

Characteristics

- 10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor	for Unica with MGUx.xxx.xx references
2 modules			
white	**NU920018**	**NU920018N**	**NU920018U**
aluminium	**NU920030**	**NU920030N**	**NU920030U**
beige	**NU920044**	**NU920044N**	**NU920044U**
anthracite	**NU920054**	**NU920054N**	**NU920054U**
1 module			
white	**NU910018**	**NU910018N**	**NU910018U**
aluminium	**NU910030**	**NU910030N**	**NU910030U**
beige	**NU910044**	**NU910044N**	**NU910044U**
anthracite	**NU910054**	**NU910054N**	**NU910054U**

Inserts with fixing frame

Specialized controls

Shutters control

	Push-button - 6 A	Switch - 6 A
2 modules		
		
white	**NU520718**	**NU520818**
aluminium	**NU520730**	**NU520830**
beige	**NU520744**	**NU520844**
anthracite	**NU520754**	**NU520854**

Cord push-buttons

	10 A NO/NC
2 modules	
	
white	**NU522618**
beige	**NU522644**

Card push-buttons

	10 A NO/NC
2 modules	
	
white	**NU528318**
aluminium	**NU528330**
beige	**NU528344**
anthracite	**NU528354**

Inserts with fixing frame

Comfort devices

Dimmers

Universal		Compensation module LED
2 modules		
		
☐ white	**NU551418**	
▒ aluminium	**NU551430**	
▒ beige	**NU551444**	
■ anthracite	**NU551454**	
Load compensation module		
		CCT90501
Maximum loads		
LED lamp 230 V	RC: 5...100 VA RL : 5...20 VA	
incandescent lamp 230 V	5...200 W	
halogen lamp 230 V	5...150 W	
LV halogen lamps 12 V — electronic transformer	5...150 VA	
LV halogen lamps 12 V — wound transformer	5...150 VA	
Characteristics		
• Remote control by unlimited number of auxiliary push-button • Automatic load detection • Wire configuration without neutral • Screw terminal connection • Memory function • Automatic overload protection, overheating protection, short-circuit protection		• Rated voltage: 230 VAC • Frequency range: 50 - 60 Hz • Power loss: 2 W max • Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Thermostats

	Room - 8 A	Floor - 10 A
2 modules		
		
☐ white	**NU550118**	**NU550318**
▒ aluminium	**NU550130**	**NU550330**
▒ beige	**NU550144**	**NU550344**
■ anthracite	**NU550154**	**NU550354**
Characteristics		
	• For heating and air-conditioning • Settings range: + 5 to + 30 °C • Blue and red LED's for conditioning or heating indication	• For floor heating • Settings range: + 5 to + 45 °C • Green LED for voltage supply indication • Red LED for heating indication • Delivered with a 4 m temperature sensor

Inserts with fixing frame

Comfort devices

Motion sensors

With push-button

2 modules



white	**NU552518**
aluminium	**NU552530**
beige	**NU552544**
anthracite	**NU552554**

Maximum loads

LED lamp 230 V	200 W
incandescent lamp 230 V	2200 W
halogen lamp 230 V	2000 W
motor (single-phase) 230 V	1000 VA
LV halogen lamps 12 V – electronic transformer	1050 VA
LV halogen lamps 12 V – wound transformer	500 VA

Characteristics

- Rated current: 10 A
- Screw terminal connection
- Wire configuration without neutral
- Movement detection area: 8 m frontal, 8 m lateral
- Remote control by unlimited number of auxiliary push-button
- Automatic load detection
- Time delay range: 1...30 min
- Master/slave option; connecting two sensors together for covering larger area

Timers

Countdown timer relay - 10 A

2 modules



white	**NU553518**
aluminium	**NU553530**
beige	**NU553544**
anthracite	**NU553554**

Characteristics

- Time delay range: 5 min to 8 h
- Integrated status LED
- 3-wires (neutral required)

Inserts with fixing frame

Sockets

Side Earth sockets

	With shutters			Without shutters	
	screwless terminal	screw terminal	with lid	screwless terminal	screw terminal
2 modules					
					
white	NU505718	NU503718	NU503718TA	NU505618	NU503618
aluminium	NU505730	NU503730	NU503730TA	NU505630	NU503630
beige	NU505744	NU503744	NU503744TA	NU505644	NU503644
anthracite	NU505754	NU503754	NU503754TA	NU505654	NU503654
red	-	NU503703	-	-	-
Characteristics					
• 2P+E - 16 A - 250 V					

	With cover frame	
	simple	double
		
white	NU203718	NU206718
aluminium	-	NU206730
beige	-	NU206744
anthracite	-	NU206754
Characteristics		
• Screw terminal • Installation in 1 gang box		

90°	IP44 frame	With USB charger
2 modules		
		
white	NU508218	NU501718
aluminium	NU508230	-
beige	NU508244	-
anthracite	NU508254	-
Characteristics		
- 2P+E - 16 A - 250 V - Screwless terminals - Shuttered	- Screwless terminals - Cables: 1 to 2.5 mm² rigid/flexible	

Centres plates for Side Earth Sockets
2 modules

white NU903718
aluminium NU903730
beige NU903744
anthracite NU903754

For Unica MGU•.•••.••
2 modules

white NU903718U
aluminium NU903730U
beige NU903744U
anthracite NU903754U

European sockets

Simple	16 A	2 x 10 A
2 modules		
		
white	NU503318	NU503118
aluminium	NU503330	NU503130
beige	NU503344	NU503144
anthracite	NU503354	NU503154
Characteristics		
• 2P - 250 V • Screw terminal		

Double	with cover frame
	
white	NU206318
beige	NU206344
Characteristics	
• 2P - 16 A - 250 V • Screw terminal • Installation in 1 gang box	

Shaver sockets

20 VA

white MGU5.064.18
aluminium MGU5.064.30
Characteristics
• 3 modules • Input: 240 V • Output: 115/240 V

Inserts with fixing frame

USB chargers

USB chargers

	Charger type A	Charger type A+C			Charger type C	
2 modules						
						
☐ white	**NU541818**	**NU501818**	**NU501918**	**NU501318**	**NU501418**	**NU501718**
aluminium	**NU541830**	**NU501830**	**NU501930**	**NU501330**	**NU501430**	**-**
beige	**NU541844**	**NU501844**	**NU501944**	**NU501344**	**NU501444**	**-**
anthracite	**NU541854**	**NU501854**	**NU501954**	**NU501354**	**NU501454**	**-**
Characteristics						
	• USB 2.0					
	• Output power: - NU5418●●: 5 V DC - 1.1 A + 2 A	• Output power: - NU5018●●: 5 V DC - 1.2 A + 2.4 A	• Output power:18 W 5V DC - 2.4 Max each port	• Output power: Type C 45W + Type A 7.5W	• Output power: 65 W	• Socket outlet: 2P+E - 16 A - 250 V • Output power USB: 5V • Screwless terminals

Inserts with fixing frame

Data / Phone / TV

RJ45 data sockets

RJ45	Cat. 5e UTP zamak fixing frame	Cat. 6 UTP zamak fixing frame
2 modules		
		
white	**NU541118**	**NU541518**
aluminium	**NU541130**	**NU541530**
beige	**NU541144**	**NU541544**
anthracite	**NU541154**	**NU541554**
2 x1 module		
		
white	**NU542018**	**NU542418**
aluminium	**NU542030**	**NU542430**
beige	**NU542044**	**NU542444**
anthracite	**NU542054**	**NU542454**
Characteristics		
• Connector Actassi S-One • With shutter and label space		

RJ45 Centre plates

	For Keystone/Systimax RJ45 connector straight
2 modules	
	
white	**NU546118**
aluminium	**NU546130**
beige	**NU546144**
anthracite	**NU546154**
Characteristics	
• With shutter and label space	

Telephone sockets

RJ11
2 modules

white **NU549218**
aluminium **NU549230**
beige **NU549244**
anthracite **NU549254**

Multimedia sockets

	HDMI	VGA + mini Jack	RCA	Data socket
2 x 1 module				
				
white	**NU543018**	**NU593218**	**NU543118**	**NU542718**
aluminium	**NU543030**	**NU593230**	**NU543130**	**NU542730**
beige	**NU543044**	**NU593244**	**NU543144**	**NU542744**
anthracite	**NU543054**	**NU593254**	**NU543154**	**NU542754**
Characteristics				
	• Connector prewired	• Connector prewired • HD15 female • 3,5 mm connector	• Video & audio • 3 connectors	• Data transfer • Screws terminals

Inserts with fixing frame

Data / Phone / TV

TV sockets

	TV male			R-TV/SAT		
	individual	intermediate	terminal	individual	intermediate	terminal
2 modules						
						
white	**NU546218**	**NU546318**	**NU546418**	**NU545418**	**NU545618**	**NU545518**
aluminium	**NU546230**	**NU546330**	**NU546430**	**NU545430**	**NU545630**	**NU545530**
beige	**NU546244**	**NU546344**	**NU546444**	**NU545444**	**NU545644**	**NU545544**
anthracite	**NU546254**	**NU546354**	**NU546454**	**NU545454**	**NU545654**	**NU545554**

TV centre plates

	TV/FM	R-TV/SAT
2 modules		
		
white	**NU944018**	**NU944118**
aluminium	**NU944030**	**NU944130**
beige	**NU944044**	**-**
anthracite	**NU944054**	**NU944154**

Data and TV sockets

Simple	RJ45 + TV
2 x 1 module	
	
white	**NU547018**
aluminium	**NU547030**
anthracite	**NU547054**

Characteristics

- RJ45 cat. 6 UTP
- TV male individual

Inserts with fixing frame

Other functions

Sound inserts

	Simple
	2 modules
	
white	NU548618
aluminium	NU548630
beige	NU548644
anthracite	NU548654

Light signalling

	Lamp and bell push-button
2 modules	
	
white	NU577718
aluminium	NU577730
beige	NU577744
anthracite	NU577754

Sound signalling

	Electronic programmable
2 modules	
	
white	NU578618
aluminium	NU578630
beige	NU578644
anthracite	NU578654

Characteristics

- 230 V AC, 50/60 Hz
- Acoustic level: 70 dB/1m
- 5 melodies
- Maximum connected in parallel to the output:
  - 10 without lamp
  - or 3 with lamp

Cable Outlets

2 modules	
	
white	NU586218
aluminium	NU586230
beige	NU586244
anthracite	NU586254

Characteristics

- cable outer diameter: 12 mm

Blind covers

2 modules	
	
white	NU586618
aluminium	NU586630
beige	NU586644
anthracite	NU586654

Unica

Inserts with Fixing Frame & Claws



Content

Switches 87

Sockets 89

Data / Phone / TV 90

Inserts with fixing frame and claws

Switches

10 AX - 250 V AC switches

	Standard			With location lamp	
	one-way	two-way	intermediate	one-way	two-way
					
2 modules					
					
☐ white	**NU520118Z**	**NU520318Z**	**NU520518Z**	**NU520118NZ**	**NU520318NZ**
beige	**NU520144Z**	**NU520344Z**	-	-	-
2 x 1 module					
					
☐ white	**NU521118Z**			**NU521118NZ**	
beige	**NU521144Z**			-	
Characteristics					

- Connection: screwless terminals
- Cables: 1 to 2,5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

10 AX - 250 V AC push-buttons

	NO
	
2 modules	
	
☐ white	**NU520618Z**
beige	**NU520644Z**
Characteristics	

- Connection: screwless terminals
- Cables: 1 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

Inserts with fixing frame and claws

Switches

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	white	red	white
			
	NU9823AM	**NU9825A**	**NU9825AZ**
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button



S520299

Characteristics

- 10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor	for Unica with MGUx.xxx.xx references
2 modules			
white	**NU920018**	**NU920018N**	**NU920018U**
aluminium	**NU920030**	**NU920030N**	**NU920030U**
beige	**NU920044**	**NU920044N**	**NU920044U**
anthracite	**NU920054**	**NU920054N**	**NU920054U**
1 module			
white	**NU910018**	**NU910018N**	**NU910018U**
aluminium	**NU910030**	**NU910030N**	**NU910030U**
beige	**NU910044**	**NU910044N**	**NU910044U**
anthracite	**NU910054**	**NU910054N**	**NU910054U**

Inserts with fixing frame and claws

Sockets

Side Earth sockets

	With Shutter Screw terminal	Without Shutter Screw terminal
2 modules		
		
white	**NU503718Z**	**NU503618Z**
beige	-	**NU503644Z**
Characteristics		
• 2P+E - 16 A - 250 V		

Centres plates for Side Earth Sockets	
2 modules	
	
white	**NU903718**
aluminium	**NU903730**
beige	**NU903744**
anthracite	**NU903754**

For Unica MGU●.●●●.●●	
2 modules	
	
white	**NU903718U**
aluminium	**NU903730U**
beige	**NU903744U**
anthracite	**NU903754U**

Inserts with fixing frame and claws

Data / Phone / TV

RJ 45 data sockets

RJ45	Cat. 5e UTP zamak fixing frame
2 modules	
	
☐ white	**NU541118Z**
beige	**NU541144Z**
Characteristics	
• Connector Actassi S-One • With shutter and label space	

TV sockets

	TV male individual
2 modules	
	
☐ white	**NU546218Z**
beige	**NU546244Z**

Unica

Complete offer:

Inserts with Fixing Frame & Cover Frame



Content

Switches 95

Sockets 96

Inserts with fixing frame and cover frame

Switches

10 AX - 250 V AC switches

	One-way	Two-way	Double one-way
	1 — L	1 — L 2 — L	1 — L 1 —
with studio frame			
			
☐ white	**NU220118D**	**NU220318D**	**NU221118D**
aluminium	**NU220130D**	**NU220330D**	**NU221130D**
beige	**NU220144D**	**NU220344D**	**NU221144D**
anthracite	**NU220154D**	**NU220354D**	**NU221154D**

Characteristics

- Connection: screwless terminals
- Cables: 1 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

10 AX - 250 V AC push-buttons

	NO
	1 — L
2 modules	
	
☐ white	**NU220618D**
beige	**NU220644D**

Characteristics

- Connection: screwless terminals
- Cables: 1 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	White	Red	White
			
	NU9823AM	**NU9825A**	**NU9825AZ**
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button



S520299

Characteristics

- 10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor	for Unica MGU●.●●●.●●
2 modules			
☐ white	**NU920018**	**NU920018N**	**NU920018U**
aluminium	**NU920030**	**NU920030N**	**NU920030U**
beige	**NU920044**	**NU920044N**	**NU920044U**
anthracite	**NU920054**	**NU920054N**	**NU920054U**
1 module			
☐ white	**NU910018**	**NU910018N**	**NU910018U**
aluminium	**NU910030**	**NU910030N**	**NU910030U**
beige	**NU910044**	**NU910044N**	**NU910044U**
anthracite	**NU910054**	**NU910054N**	**NU910054U**

Inserts with fixing frame and cover frame

Sockets

Side Earth sockets

90°	IP44 frame with SO screws	WIth studio frame	With shutter and outer plate
2 modules			
			
white	**NU003718**	**NU203618D**	**NU203718**
aluminium	**-**	**NU203630D**	
beige	**NU003744**	**NU203644D**	
anthracite	**-**	**NU203654D**	
Characteristics			
• 2P+E - 16 A - 250 V			

Unica Installation: Fixing Frame & Box

Content

Fixing frames 100

Boxes 102

Fixing frame and Box

Fixing frames

Fixing frames for CE60 boxes

1 gang or 2 modules			
Zamak	Plastic	Zamak with paint protector	Plastic with paint protector
			
NU7002	NU7002P	NU7002C	NU7002PC NU7002PCP (1)

(1) pack of 100 units

Zamak with claws	Plastic with claws
	
NU7002G	NU7002PG

2 gangs or 4 modules	3 gangs or 6/8 modules	4 gangs or 10 modules
Plastic with paint protector	Zamak with paint protector	Zamak with paint protector
		
NU7004PC	NU7006C	NU7008C

Fixing frames for rectangular boxes

3 modules		4 modules		7 modules
Zamak	Plastic	Zamak	Plastic	zamak
				
NU7103	NU7103P	NU7104	NU7104P	NU7107

Characteristics

- Delivered with paint protection

Fixing frames for British boxes

4 modules

NU7404

Fixing frame and Box

Fixing frames

Accessories

Claws	Paint protector	Adaptor
		
NU7892	**NU7802**	**U0.582**
Characteristics		
• For zamak fixing frames • With green plastic protection	• For 2 modules	• For MGU7.●●● fixing frames

Support for vertical installations
2 modules

☐ white — **NU9580**
Characteristics
• to install inserts in vertical trunking in right position

Fixing frame and Box

Boxes

Surface boxes

	1 gang	2 gangs	3 gangs	3 modules	4 modules
For Unica Studio cover frames					
					
white	NU800218	NU800418	NU800618	NU810318	NU810418
beige	NU800244	NU800444	NU800644	-	-
For Unica Pro cover frames					
					
white	NU840218	NU840418	NU840618		
aluminium	NU840230	NU840430	NU840630		
anthracite	NU840254	NU840454	NU840654		

Multifix flush mounting boxes

1 gang	2 gangs	3 gangs	4 gangs
40 mm depth			
			
IMT35914[1] IMT35914P[2]	IMT35924	IMT35934	IMT35944
50 mm depth			
			
IMT35915	IMT35925	IMT35935	IMT35945

(1) pack of 50 units.
(2) pack of 300 units.

Flush mounting boxes

1 module	3 modules	4 modules
		
MGU8.601	MGU8.603	MGU8.604

Accessories

Divider	
	
IMT35994	IMT35995
Characteristics	
• for 40 mm depth boxes	• for 50 mm depth boxes

Unica
Cover Frames

Content

Standard cover frames 106

Special cover frames 111

Cover frames

Standard cover frames

Unica Studio

	white	aluminium	beige	anthracite
				
1 gang (2 mod.)	**NU200218**	**NU200230**	**NU200244**	**NU200254**
2 gangs (2 x 2 mod.)	**NU200418**	**NU200430**	**NU200444**	**NU200454**
3 gangs (4 x 2 mod.)	**NU200618**	**NU200630**	**NU200644**	**NU200654**
4 gangs (4 x 2 mod.)	**NU200818**	**NU200830**	**NU200844**	**NU200854**
5 gangs (4 x 2 mod.)	**NU201018**	**NU201030**	**NU201044**	**NU201054**
1 module	**NU210118**	**NU210130**	**NU210144**	**NU210154**
2 modules	**NU210218**	**NU210230**	**NU210244**	**NU210254**
3 modules	**NU210318**	**NU210330**	**NU210344**	**NU210354**
4 modules	**NU210418**	**NU210430**	**NU210444**	**NU210454**
7 modules	**NU210718**	**NU210730**	**NU210744**	**NU210754**

Cover frames

Standard cover frames

Unica Studio Color

Front colour	light green		red	plum		chocolate		
Back colour	white	beige	white	white	beige	white	black	beige
								
1 gang (2 mod.)	NU280211	NU280212	NU280213	NU280214	NU280215	NU280216	NU280217	NU280219
2 gangs (2 x 2 mod.)	NU280411	NU280412	NU280413	NU280414	NU280415	NU280416	NU280417	NU280419
3 gangs (4 x 2 mod.)	NU280611	NU280612	NU280613	NU280614	NU280615	NU280616	NU280617	NU280619
4 gangs (4 x 2 mod.)	NU280811	NU280812	NU280813	NU280814	NU280815	NU280816	NU280817	NU280819
3 modules	NU270311	NU270312	NU270313	NU270314	NU270315	NU270316	NU270317	-
4 modules	NU270411	NU270412	NU270413	NU270414	NU270415	NU270416	NU270417	-
7 modules	NU270711	NU270712	NU270713	NU270714	NU270715	NU270716	NU270717	-

Front colour	white	dark grey		light grey	taupe			beige
Back colour	white	white	black	white	white	beige	black	beige
								
1 gang (2 mod.)	NU280218	NU280221	NU280222	NU280224	NU280226	NU280227	NU280228	NU280244
2 gangs (2 x 2 mod.)	NU280418	NU280421	NU280422	NU280424	NU280426	NU280427	NU280428	NU280444
3 gangs (4 x 2 mod.)	NU280618	NU280621	NU280622	NU280624	NU280626	NU280627	NU280628	NU280644
4 gangs (4 x 2 mod.)	NU280818	NU280821	NU280822	NU280824	NU280826	NU280827	NU280828	NU280844
3 modules	NU270318	NU270321	NU270322	NU270324	NU270326	NU270327	NU270328	NU270344
4 modules	NU270418	NU270421	NU270422	NU270424	NU270426	NU270427	NU270428	NU270444
7 modules	NU270718	NU270721	NU270722	NU270724	NU270726	NU270727	NU270728	-

Cover frames

Standard cover frames

Unica Studio Metal

Front colour	bronze			dark aluminium	white aluminium		copper	
Back colour	white	beige	black	black	white	black	white	black
								
1 gang (2 mod.)	NU280250(1) NU280250M(2)	NU280251(1) NU280251M(2)	NU280252(1) NU280252M(2)	NU280253(1) NU280253M(2)	NU280255(1) NU280255M(2)	NU280256(1) NU280256M(2)	NU280257(1) NU280257M(2)	NU280258(1) NU280258M(2)
2 gangs (2 x 2 mod.)	NU280450(1) NU280450M(2)	NU280451(1) NU280451M(2)	NU280452(1) NU280452M(2)	NU280453(1) NU280453M(2)	NU280455(1) NU280455M(2)	NU280456(1) NU280456M(2)	NU280457(1) NU280457M(2)	NU280458(1) NU280458M(2)
3 gangs (4 x 2 mod.)	NU280650(1) NU280650M(2)	NU280651(1) NU280651M(2)	NU280652(1) NU280652M(2)	NU280653(1) NU280653M(2)	NU280655(1) NU280655M(2)	NU280656(1) NU280656M(2)	NU280657(1) NU280657M(2)	NU280658(1) NU280658M(2)
4 gangs (4 x 2 mod.)	NU280850(1) NU280850M(2)	NU280851(1) NU280851M(2)	NU280852(1) NU280852M(2)	NU280853(1) NU280853M(2)	NU280855(1) NU280855M(2)	NU280856(1) NU280856M(2)	NU280857(1) NU280857M(2)	NU280858(1) NU280858M(2)
4 modules for double gang box	NU281450(1)	-	NU281452(1)	NU281453(1)	NU281455(1)	NU281456(1)	-	-
3 modules	NU270350M(2)	NU270351M(2)	NU270352M(2)	NU270353M(2)	NU270355M(2)	NU270356M(2)	NU270357M(2)	NU270358M(2)
4 modules	NU270450M(2)	NU270451M(2)	NU270452M(2)	NU270453M(2)	NU270455M(2)	NU270456M(2)	NU270457M(2)	NU270458M(2)
7 modules	NU270750M(2)	NU270751M(2)	NU270752M(2)	NU270753M(2)	NU270755M(2)	NU270756M(2)	NU270757M(2)	NU270758M(2)

Front colour	gold		
Back colour	white	beige	black
			
1 gang (2 mod.)	NU280259(1) NU280259M(2)	NU280260(1) NU280260M(2)	NU280262(1) NU280262M(2)
2 gangs (2 x 2 mod.)	NU280459(1) NU280459M(2)	NU280460(1) NU280460M(2)	NU280462(1) NU280462M(2)
3 gangs (4 x 2 mod.)	NU280659(1) NU280659M(2)	NU280660(1) NU280660M(2)	NU280662(1) NU280662M(2)
4 gangs (4 x 2 mod.)	NU280859(1) NU280859M(2)	NU280860(1) NU280860M(2)	NU280862(1) NU280862M(2)
3 modules	NU270359M(2)	NU270360M(2)	NU270362M(2)
4 modules	NU270459M(2)	NU270460M(2)	NU270462M(2)
7 modules	NU270759M(2)	NU270760M(2)	NU270762M(2)

(1) Sand finish
(2) Mill finish

Cover frames

Standard cover frames

Unica Studio Outline

	white	yellow	red	plum	choclate	light grey	aluminium	grey
1 gang	NU230218	-	-	-	-	-	-	-
2 gangs	NU230418	-	-	-	-	-	-	-
3 gangs	NU230618	-	-	-	-	-	-	-
4 gangs	NU230818	-	-	-	-	-	-	-
5 gangs	NU231018	-	-	-	-	-	-	-
Inner frame								
								
	NU230018	NU230001	NU230013	NU230014	NU230016	NU230024	NU230030	NU230031

	beige	anthracite
		
Inner frame		
	NU230044	NU230054

Cover frames

Standard cover frames

Unica Pure

	aluminium	rubber	nordic Wood	wood oak	glass frosted white	glass frosted black	slate	translucide white
								
1 gang (2 mod.)	NU600280	NU600282	NU600283	NU600284	NU600285	NU600286	NU600287	NU600289
2 gangs (2 x 2 mod.)	NU600480	NU600482	NU600483	NU600484	NU600485	NU600486	NU600487	NU600489
	NU6004V80	NU6004V82	NU6004V83	NU6004V84	NU6004V85	NU6004V86	NU6004V87	NU6004V89
3 gangs (4 x 2 mod.)	NU600680	NU600682	NU600683	NU600684	NU600685	NU600686	NU600687	NU600689
4 gangs (4 x 2 mod.)	NU600880	NU600882	NU600883	NU600884	NU600885	NU600886	NU600887	NU600889
3 modules	NU610380	NU610382	NU610383	NU610384	NU610385	NU610386	NU610387	NU610389

Unica Pro

	white	aluminium	anthracite
			
1 gang (2 mod.)	NU400218 NU400218P(1)	NU400230	NU400254
2 gangs (2 x 2 mod.)	NU400418	NU400430	NU400454
3 gangs (4 x 2 mod.)	NU400618	NU400630	NU400654
4 gangs (4 x 2 mod.)	NU400818	NU400830	NU400854
4 modules for double gang box	NU411418	NU411430	NU411454
6 modules for triple gang box	NU411618	NU411630	NU411654
8 modules for triple gang box	NU411818	NU411830	NU411854
10 modules for quadruple gang box	NU411018	NU411030	NU411054

(1) pack of 100 units

Cover frames

Special cover frames

Thin panels cover frames

	white	aluminium	anthracite
			
1 module	NU200118	NU200130	NU200154

IP 44 cover frame

	white
	
1 gang (2 mod.)	NU044218

IP55 cover frame and boxes for CE60

Box cover with lid		Boxes for surface mounting			
		1 gang	2 gangs, horizontal	2 gangs, vertical	3 gangs, horizontal
					
☐ white	MUR39110	MUR39911	MUR39914	MUR39912	MUR39913
■ anthracite	MUR35110	MUR37911	MUR37914	MUR37912	MUR37713
Characteristics					
	• IP55 (1) - IK06	• IP55 (2) - IK08			

(1) when installed in a box or frame.
(2) when completed with covers.

Frames for flush mounting					
	1 gang	1 gang, with claws	2 gangs, horizontal	2 gangs, vertical	3 gangs, horizontal
					
☐ white	MUR39107	MUR39108	MUR39101	MUR39151	MUR39109
■ anthracite	MUR34107	MUR34108	MUR34101	MUR34151	MUR34109
Characteristics					
	• IP55 (2) (on flat/smooth walls only. IP44 (2) if mounted on uneven walls with MUR34007 ref.) / IK08.				

(2) when completed with covers.

IP55 cover frame for rectangular boxes

	white	beige
		
3 module	NU055318	NU055344
4 module	NU055418	NU055444

Unica Wiser



Content

Wiser by SE 115

Wiser Home 118

Download
Wiser App
Schneider Electric's connected technology for homes
Download on the App Store
GET IT ON Google Play

Relay switches

10 A	Modular	Assembled with Fixing Frame
2 modules		
		
white	**NU353818**	**NU553818**
aluminium	**NU353830**	**NU553830**
beige	-	**NU553844**
anthracite	**NU353854**	**NU553854**

Characteristics

- Relay switch for various purposes such as weekly scheduling using Wiser App, presence simulation, count down timer
- LED indicates when switch is on
- Remote control from smartphone or tablet using Wiser App
- Remote control by unlimited number of single mechanical push buttons

Via Wiser app

- Setting a timer: delay time (1 second - 24 hours), prewarning (with or without), manual switching (off or retrigger)
- Setting a time schedule (weekday switching, astro function, count-down timer, presence simulation).

Dimmers

			Modular		Assembled with Fixing Frame		Compensation module LED
2 modules			**Push-button**	**Rotary**	**Push-button**	**Rotary**	
							
white			**NU351718**	**NU351818**	**NU551718**	**NU551818**	
aluminium			**NU351730**	**NU351830**	**NU551730**	**NU551830**	
beige			-	-	**NU551744**	**NU551844**	
anthracite			**NU351754**	**NU351854**	**NU551754**	**NU551854**	
Load compensation module							
							CCT90501
Maximum loads							
LED lamp 230 V			RC: 7...100 VA RL : 7...20 VA	RC: 7...100 VA RL : 7...20 VA	RC: 7...100 VA RL : 7...20 VA	RC: 7...100 VA RL : 7...20 VA	
incandescent lamp 230 V			14...200 W	14...200 W	14...200 W	14...200 W	
halogen lamp 230 V			14...150 W	14...150 W	14...150 W	14...150 W	
LV halogen lamps 12 V	electronic transformer		14...150 W	14...150 W	14...150 W	14...150 W	
	wound transformer		14...150 W	14...150 W	14...150 W	14...150 W	
Characteristics							

- Remote control from auxiliary push-buttons
- Automatic load detection
- Wire configuration without neutral
- Memory function
- Automatic overload protection, overheating protection, short-circuit protection
- Additional functions like wake-up, fall asleep, scheduling and so on. Can be activated using the Wiser App
- Automatic load detection
- Brightness memory function
- Electronic overload, overheating and short-circuit protection

Via Wiser app

- Remote control by unlimited number of single mechanical push buttons
- Setting the switch-on brightness or memory function (default setting)
- Setting the dimming range: minimum and maximum brightness
- Setting the LED operating mode manually (RL LED mode)
- Setting a timer or a time schedule

- Rated voltage: 230 VAC
- Frequency range: 50 - 60 Hz
- Power loss: 2 W max
- Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Download
Wiser App
Schneider Electric's connected technology for homes
Download on the App Store
GET IT ON Google Play

Shutters control

	Modular	Assembled with Fixing Frame
2 modules		
		
white	**NU350918**	**NU550918**
aluminium	**NU350930**	-
beige	**NU350944**	-
anthracite	**NU350954**	-

Characteristics

- Control of blinds locally from the switch or remotely from smartphone or tablet using Wiser App
- Weekly scheduling
- Astro function
- Presence simulation
- Can be used for controlling up to 10 multiple relays, each controlling one blind motor
- Remote control by unlimited number of double push-buttons, distance: 50 m
- Protection of the motor against damage with two mutually electrically locked relay contacts
- Central control of multiple blind groups push buttons

Via Wiser app:
- Setting the blind movement time
- Management of blind and slat position
- Upgrade device firmware

Motion sensors

		Modular		Assembled with Fixing Frame	
2 modules		**with relay switch**	**with dimmer**	**with relay switch**	**with dimmer**
					
white		**NU352618**	**NU352718**	**NU552618**	**NU552718**
aluminium		**NU352630**	**NU352730**	-	-
beige		**NU352644**	**NU352744**	-	-
anthracite		**NU352654**	**NU352754**	-	-
Maximum loads					
LED lamp 230 V		200 W	RC: 7...100 VA RL : 7...20 VA	200 W	RC: 7...100 VA RL : 7...20 VA
compact fluorescent lamp		200 W	-	200 W	-
incandescent lamp 230 V		2200 W	14...200 W	2200 W	14...200 W
halogen lamp 230 V		2000 W	14...150 W	2000 W	14...150 W
LV halogen lamps 12 V	electronic transformer	1050 VA	14...150 W	1050 VA	14...150 W
	wound transformer	500 VA	14...150 W	500 VA	14...150 W

Characteristics

- Wire configuration with neutral
- Movement detection area 8 m frontal, 8 m lateral
- Movement detection angle: 160 °
- Configuration with time delay range, triggering light level… is done using the Wiser App
- Built-in push button switch for dim (only with dimmer version) and on/off switching
- Automatic mode: Automatic switching ON of loads when a motion is detected and dependent on the ambient brightness
- Manual operation: Local switching ON of loads when the switch is actuated, irrespective of the ambient brightness
- Semi-automatic mode: Manual switch-ON/automatic switch-OFF
- Remote control by unlimited number of single mechanical push buttons

Via Wiser app:
- Setting the detection brightness: 5 to 1000 lux (default setting 50 lux)
- Setting the detection sensitivity: High (default setting), medium or low
- Setting the detection sensitivity: High (default setting), medium or low
- Setting the overtravel time: 1 second to 30 minutes (default setting 5 minutes)
- Setting a timer or a time schedule

- See Dimmers for others characteristics

Download
Wiser App
Schneider Electric's connected technology for homes
Download on the App Store
GET IT ON Google Play

Connected wireless switches

Assembled with Fixing Frame	
1-2 gangs	
	
white	**NU557118**
aluminium	**NU557130**
beige	**NU557144**
anthracite	**NU557154**

Connected sockets

16 A	German socket
	
white	**NU555718**
aluminium	**NU555730**
beige	**NU555744**
anthracite	**NU555754**

Download
Wiser App
Schneider Electric's connected technology for homes
Download on the App Store
GET IT ON Google Play

Relay switches

10 A	Modular
2 modules	
	
white	**NU353718W**
aluminium	**NU353730W**
graphite	**NU353754W**

Characteristics

- Relay switch for various purposes such as weekly scheduling using Wiser App, presence simulation, count-down timer
- LED indicates when switch is on
- Remote control from smartphone or tablet using Wiser App
- Remote control by unlimited number of single mechanical push buttons

Via Wiser app

- Setting a timer: delay time (1 second - 24 hours), prewarning (with or without), manual switching (off or retrigger)
- Setting a time schedule (weekday switching, astro function, count-down timer, presence simulation).

Shutters control

	Modular
2 modules	
	
white	**NU350818W**
aluminium	**NU350830W**
anthracite	**NU350854W**

Characteristics

- Control of blinds locally from the switch or remotely from smartphone or tablet using Wiser App
- Weekly scheduling
- Astro function
- Presence simulation
- Can be used for controlling up to 10 multiple relays, each controlling one blind motor
- Remote control by unlimited number of double push-buttons, distance: 50 m
- Protection of the motor against damage with two mutually electrically locked relay contacts
- Central control of multiple blind groups push buttons

Via Wiser app:

- Setting the blind movement time
- Management of blind and slat position
- Upgrade device firmware

Dimmers

Modular			Compensation module LED
2 modules	**Push-button**	**Rotary**	
			
white	**NU351518W**	**NU351618W**	
aluminium	**NU351530W**	**NU351630W**	
graphite	**NU351554W**	**NU351654W**	
Load compensation module			
			CCT90501
Maximum loads			
LED lamp 230 V	RC: 7...100 VA RL : 7...20 VA	RC: 7...100 VA RL : 7...20 VA	
incandescent lamp 230 V	14...200 W	14...200 W	
halogen lamp 230 V	14...150 W	14...150 W	
LV halogen lamps 12 V – electronic transformer	14...150 W	14...150 W	
LV halogen lamps 12 V – wound transformer	14...150 W	14...150 W	

Characteristics

- Remote control from auxiliary push-buttons
- Automatic load detection
- Wire configuration without neutral
- Memory function
- Automatic overload protection, overheating protection, short-circuit protection
- Additional functions like wake-up, fall asleep, scheduling. Can be activated using the Wiser App
- Automatic load detection
- Brightness memory function
- Electronic overload, overheating and short-circuit protection
- Via Wiser app
- Remote control by unlimited number of single mechanical push buttons
- Setting the switch-on brightness or memory function (default setting)
- Setting the dimming range: minimum and maximum brightness
- Setting the LED operating mode manually (RL LED mode)
- Setting a timer or a time schedule

- Rated voltage: 230 VAC
- Frequency range: 50 - 60 Hz
- Power loss: 2 W max.
- Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Download
Wiser App
Schneider Electric's connected technology for homes
Download on the App Store
GET IT ON Google Play

Connected sockets

16 A	Pin Earth socket
	
white	**NU555918**
aluminium	**NU555930**
anthracite	**NU555954**

Connected wireless switches

Modular	
1-2 gangs	
	
white	**NU557118W**
aluminium	**NU557130W**
anthracite	**NU557154W**

Unica KNX

Content

Controls 122

The following Unica control devices have to be connected to KNX bus line.
The KNX bus line is laid in parallel to the 230 V power supply.
When Unica sensor is activated, an actuator (e.g. the roller shutter control) will carry out all the switching commands required.

Introduction

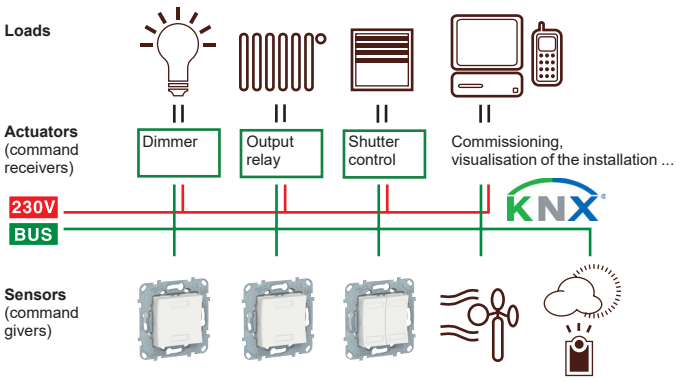

KNX Push-buttons

Push-buttons	2 buttons and 2 blue status LEDs, with screwless bus connecting terminals	4 buttons and 4 blue status LEDs, with screwless bus connecting terminals
2 modules		
		
☐ white	NU553018	**NU553118**
☐ white antibacterial	**NU553020**	**NU553120**
aluminium	**NU553030**	**NU553130**
anthracite	**NU553054**	**NU553154**
Characteristics		
	• The status LED is located under the symbol window which can be taken off. • With integrated bus coupler. The bus is connected using a bus connecting terminal. Contents: • With set of 10 symbols: - 2 x symbol with light opening, - 1 x symbol “1”, - 1 x symbol “0”, - 2 x symbol for dimming, - 2 x symbol for shutter, - 2 x symbol (neutral). • With bus connecting terminal.	• The status LED is located under the symbol window which can be taken off. • With integrated bus coupler. The bus is connected using a bus connecting terminal. Contents: • With set of 20 symbols: - 4 x symbol with light opening, - 2 x symbol “1”, - 2 x symbol “0”, - 4 x symbol for dimming, - 4 x symbol for shutter, - 4 x symbol (neutral). • With bus connecting terminal.
	KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.	

Unica

Antibacterial offer



Content

Switches 127

Specialized controls 129

Comfort devices 130

Sockets 131

Sockets 132

Data / Phone / TV 133

Other functions 134

Wiser Home functions 135

KNX functions 136

Cover frames 137

System+ 138

Antibacterial offer

Switches

10 AX - 250 V AC switches

	One-way	Two-way	Intermediate
			
2 modules			
			
☐ white antibacterial	**NU320120**	**NU320320**	**NU320520**
1 module			
			
☐ white antibacterial	**NU310120**	**NU310320**	**NU310520**
Characteristics			

- Connection: screwless terminals
- Cables: 1 to 2,5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

10 A - 250 V AC push-buttons

	NO without symbol	NO/NC with label holder	NO with location lamp without symbol
			
2 modules			
			
☐ white antibacterial	**NU320620**	**NU324620**	**NU320620N**
1 module			
			
☐ white antibacterial	**NU310620**		
Characteristics			

- Connection: screwless terminals
- Cables: 1.5 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

Antibacterial offer

Switches

Accessories - Lamps

LED lamps	12-24 V DC white	250 V AC red	250 V AC white
			
	NU9823AM	**NU9825A**	**NU9825AZ**
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button

S520299

Characteristics

- 10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor
2 modules		
☐ white antibacterial	**NU920020**	**NU920020N**
1 module		
☐ white antibacterial	**NU910020**	**NU910020N**

Antibacterial offer

Specialized controls

Fan control

	Two-way - 10 A
2 modules	
	
☐ white antibacterial	NU320320VMC

Roller blinds control

	One-way - 6 A
2 modules	
	
☐ white antibacterial	NU320820

Cord push-button

	NO/NC - 10 A
2 modules	
	
☐ white antibacterial	NU322620

Antibacterial offer

Comfort devices

Dimmer

		Universal	Compensation module LED
2 modules			
			
☐ white antibacterial		**NU351420**	
Load compensation module			
			CCT90501
Maximum loads			
LED lamp 230 V		RC: 5...100 VA RL : 5...20 VA	
incandescent lamp 230 V		5...200 W	
halogen lamp 230 V		5...150 W	
LV halogen lamps 12 V	electronic transformer 	5...150 VA	
	wound transformer 	5...150 VA	
Characteristics			
• Remote control by unlimited number of auxiliary push-button • Automatic load detection • Wire configuration without neutral • Screw terminal connection • Memory function • Automatic overload protection, overheating protection, short-circuit protection			• Rated voltage: 230 VAC • Frequency range: 50 - 60 Hz • Power loss: 2 W max. • Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Antibactrial offer

Sockets

Pin Earth sockets

90°	Standard	Surface	Tamperproof
2 modules			
			
white antibacterial	NU305920	NU305220	-
red	NU305903	NU305203	NU305103
green	NU305906	NU305206	-

Characteristics

- 2P+E - 16 A - 250 V
- With shutters
- Screwless terminals (except NU305103)

45°	Standard			With lamp	Tamperproof		Tamperproof with lamp
	2 modules	4 modules	6 modules	4 modules	4 modules	6 modules	4 modules
							
white antibacterial	NU304920		-		-	-	-
red	NU304903	NU306903	NU307903	NU306903S	NU306103	NU307103	NU306103S
green	NU304906	NU306906	NU307906	-	-	-	-

Characteristics

- 2P+E - 16 A - 250 V
- With shutters
- Screwless terminals

90°	Standard	Surface	Tamperproof
2 modules			
			
red	NU305903T	NU305203T	NU305103T

Characteristics

- 2P+E - 16 A - 250 V
- With shutters
- Screwless terminals (except NU305103T)

45°	Standard			Tamperproof	
	2 modules	4 modules	6 modules	4 modules	6 modules
					
red	NU304903T	NU306903T	NU307903T	NU306103T	NU307103T

Characteristics

- 2P+E - 16 A - 250 V
- With shutters
- Screwless terminals

Antibactrial offer

Sockets

Side Earth sockets

Standard		
2 modules		
		
☐ white antibacterial	**NU303720**	**NU305720**
Characteristics		
• 2P+E - 16 A - 250 V • With shutters • Screw terminals		• 2P+E - 16 A - 250 V • With shutters • Screwless terminals

45°	Standard	With lamp
4 modules	**Screw ***	**Screw ***
		
☐ white	**NU306720A**	**NU306720AS**
Characteristics		
• 2P+E - 16 A - 250 V • * for Screw devices - Screw-IPT terminals • With shutters		

Antibacterial offer

Data / Phone / TV

RJ45 Centre plates

	For S-One RJ45 connector		RJ45 Cover Keystone/ Systimax	RJ45 Cover 2 x Keystone/ Systimax	RJ45 Cover 4 x Keystone/ Systimax
	straight	inclined			
2 modules					
					
☐ white antibacterial	**NU941120**	**NU940720**	**NU946120**	**-**	**-**
					
☐ white antibacterial	**NU942020**	**-**	**-**	**-**	**-**
1 module					
					
☐ white antibacterial	**NU941020**	**NU940620**	**NU946020**	**-**	**-**
4 modules					
					
☐ white antibacterial	**-**	**-**	**-**	**NU946220**	**NU946320**
Characteristics					

- Straight : with shutter and label space
- Inclined : with label space

TV sockets

	TV Male, individual	FM/TV/SAT Individual (1 cable)
2 modules		
		
☐ white antibacterial	**NU346220**	**NU345020**
1 module		
		
☐ white antibacterial	**NU346120**	**-**

TV centre plates

	R-TV/SAT
	
☐ white antibacterial	**NU944120**

Antibacterial offer

Other functions

Blind covers

Blind covers	
2 modules	
	
☐ white antibacterial	**NU986620**
1 module	
	
☐ white antibacterial	**NU986520**

Antibacterial offer

Wiser Home functions

Download
Wiser App
Schneider Electric's connected technology for homes
Download on the App Store
GET IT ON Google Play

Relay switches

10 A

2 modules



☐ white antibacterial	**NU353720W**

Characteristics

- Relay switch for various purposes such as weekly scheduling using Wiser App, presence simulation, count-down timer
- LED indicates when switch is on
- Remote control from smartphone or tablet using Wiser App

Connected wireless switches

Modular

1-2 gangs



☐ white antibacterial	**NU557120W**

Dimmers

	Push-button	Rotary	Compensation module LED
2 modules			
			
☐ white antibacterial	**NU351520W**	**NU351620W**	
Load compensation module			
			CCT90501
Maximum loads			
LED lamp 230 V	RC: 7...100 VA RL : 7...20 VA	RC: 7...100 VA RL : 7...20 VA	
incandescent lamp 230 V	14...200 W	14...200 W	
halogen lamp 230 V	14...150 W	14...150 W	
LV halogen lamps 12 V – electronic transformer	14...150 W	14...150 W	
LV halogen lamps 12 V – wound transformer	14...150 W	14...150 W	

Characteristics

- Remote control from auxiliary push-buttons
- Automatic load detection
- Wire configuration without neutral
- Memory function
- Automatic overload protection, overheating protection, short-circuit protection
- Additional functions like wake-up, fall asleep, scheduling… can be activated using the Wiser App
- Rated voltage: 230 VAC
- Frequency range: 50 - 60 Hz
- Power loss: 2 W max.
- Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Shutters control

	Wiser France
2 modules	
	
☐ white antibacterial	**NU350820W**

Characteristics

- Control of blinds locally from the switch or remotely from smartphone or tablet using Wiser App
- Weekly scheduling
- Astro function
- Presence simulation
- Can be used for controlling up to 10 multiple relays, each controlling one blind motor

Antibacterial offer

KNX functions

Download
Wiser App
Schneider Electric's connected technology for homes
Download on the App Store
GET IT ON Google Play

KNX Push-buttons

Push-buttons	2 buttons and 2 blue status LEDs, with screwless bus connecting terminals	4 buttons and 4 blue status LEDs, with screwless bus connecting terminals
2 modules		
		
☐ white antibacterial	**NU553020**	**NU553120**
Characteristics		
	• The status LED is located under the symbol window which can be taken off. • With integrated bus coupler. The bus is connected using a bus connecting terminal. Contents: • With set of 10 symbols: - 2 x symbol with light opening, - 1 x symbol “1”, - 1 x symbol “0”, - 2 x symbol for dimming, - 2 x symbol for shutter, - 2 x symbol (neutral). • With bus connecting terminal.	• The status LED is located under the symbol window which can be taken off. • With integrated bus coupler. The bus is connected using a bus connecting terminal. Contents: • With set of 20 symbols: - 4 x symbol with light opening, - 2 x symbol “1”, - 2 x symbol “0”, - 4 x symbol for dimming, - 4 x symbol for shutter, - 4 x symbol (neutral). • With bus connecting terminal.
	KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.	

Antibacterial offer

Cover frames

Unica Pro

	white antibacterial
	
1 gang (2 mod.)	**NU400220**
2 gangs (2 x 2 mod.)	**NU400420**
3 gangs (3 x 2 mod.)	**NU400620**
4 modules	**NU411420**
6 modules	**NU411620**

Antibacterial offer

System+

Surface mounting workstations

	2 rows x 8 modules	2 rows x 10 modules	2 columns	3 columns	4 columns
					
☐ white antibacterial	**NU121820**	**NU121020**	**NU122420**	**NU123420**	**NU124420**

Flush mounting workstations

	2 rows x 8 modules	2 rows x 10 modules	3 columns
			
☐ white antibacterial	**NU171820**	**NU171020**	**NU173420**

Horizontal cover frames

	2 rows x 8 modules	2 rows x 10 modules
Cover frames		
		
☐ white antibacterial	**NU021820**	**NU021020**

Horizontal surface boxes

	2 rows x 8 modules	2 rows x 10 modules
Surface boxes		
		
☐ white antibacterial	**NU821820**	**NU821020**

Unica System+



Content

Complete workstations 143

Horizontal centralizations 144

Vertical centralizations 145

Accessories 146

Unica System+

Complete workstations

Horizontal surface mounting workstations

	2 rows x 8 modules	2 rows x 10 modules
		
white	NU121820	NU121020
aluminium	NU121830	NU121030
anthracite	NU121854	NU121054

Vertical surface mounting workstations

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
white	NU122418	NU123418	NU124418
aluminium	NU122430	NU123430	NU124430
anthracite	NU122454	NU123454	NU124454

Horizontal flush mounting workstations

	2 rows x 8 modules	2 rows x 10 modules
		
white	NU171820	NU171020
aluminium	NU171830	NU171030
anthracite	NU171854	NU171054

Vertical flush mounting workstations

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
white	NU172418	NU173418	NU174418
aluminium	NU172430	NU173430	NU174430
anthracite	NU172454	NU173454	NU174454

Unica System+

Horizontal centralizations

Surface mounting boxes

	3 gang 8 modules	4 gang 10 modules
		
white	**NU821820**	**NU821020**
aluminium	**NU821830**	**NU821030**
anthracite	**NU821854**	**NU821054**

Flush mounting boxes

	3 gang 8 modules	4 gang 10 modules
		
	NU8718	**NU8710**

Cover frames

	2 row x 8 module	2 row x 10 module
Cover frame with fixing frame		
		
white	**NU021820**	**NU021020**
aluminium	**NU021830**	**NU021030**
anthracite	**NU021854**	**NU021054**

Unica System+

Vertical centralizations

Surface mounting boxes

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
☐ white	**NU822418**	**NU823418**	**NU824418**

Flush mounting boxes

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
	NU8724	**NU8734**	**NU8744**

Cover frames

	2 columns	3 columns	4 columns
Cover frame with fixing frame			
			
☐ white	**NU022418**	**NU023418**	**NU024418**

Kits (inserts with cover frames)

	2 columns	3 columns	4 columns
			
☐ white	**NU112118**	**NU113118**	**NU114118**
	• 2 German sockets-outlets + 2 Centre plates without RJ45 connectors	• 2 German sockets-outlets + 2 German red sockets-outlets + 2 Centre plates without RJ45 connectors	• 4 German sockets-outlets + 2 German red sockets-outlets + 2 Centre plates without RJ45 connectors

Unica System+

Accessories

Mounting accessories

Link accessory for surface workstation	Fixing frame	Metal dividor for flush mounting boxes		DIN rail adapter
				
U22.805	**NU7204P**	**NU9802**	**NU9801**	**NU9800**
Characteristics				
	• for vertical solutions			• for Acti9 devices installation (1 or 2 modules of 18 mm)

Unica

Technical Information

Content

Dimensions **150**

Fixing frames 150

Cover frames 152

Fixing frames and Cover frames 153

Boxes 154

Connections **157**

Switches 157

Comfort devices 160

Sockets 161

Wiser 162

Data / Phone / TV 163

USB chargers 164

Other functions 165

RJ45 data sockets 167

Universal fixing frame

NU7002●●

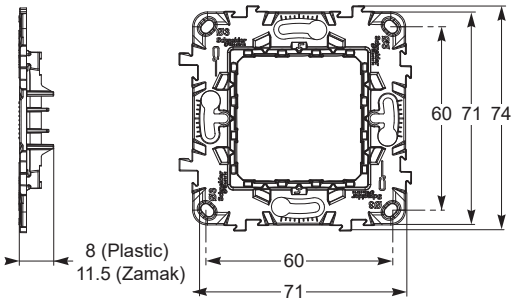

Zamak and plastic (2 modules)

NU7103●●

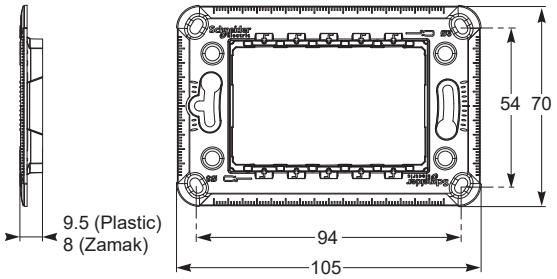

Zamak and plastic (3 modules)

NU7104●●

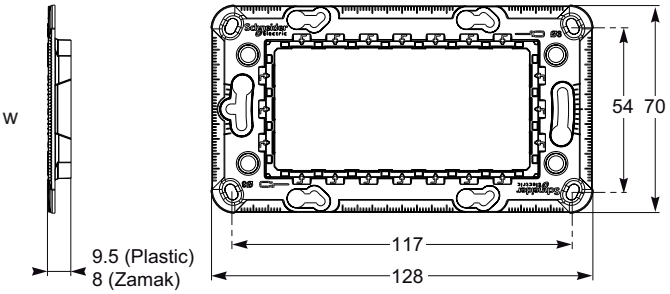

Zamak and plastic (4 modules)

NU7107

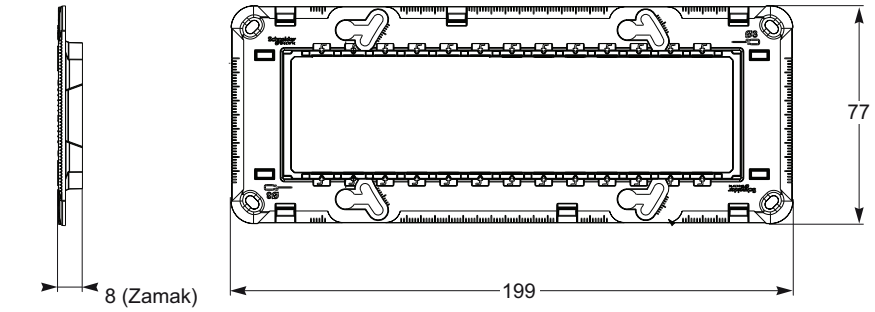

Zamak (7 modules)

Unica
Dimensions
Fixing frames

Multigang fixing frames

NU7004PC

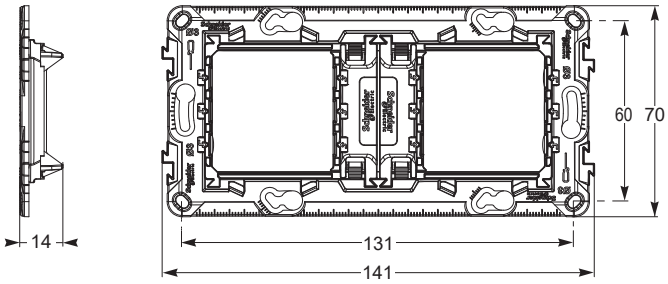

Plastic (2 gangs or 4 modules)

NU7006C

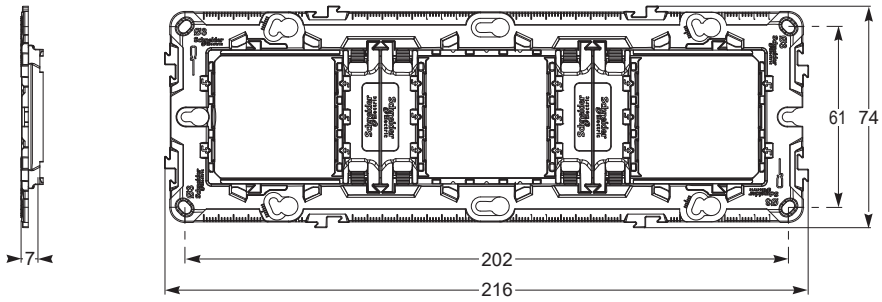

Zamak (3 gangs or 6/8 modules)

NU7008C

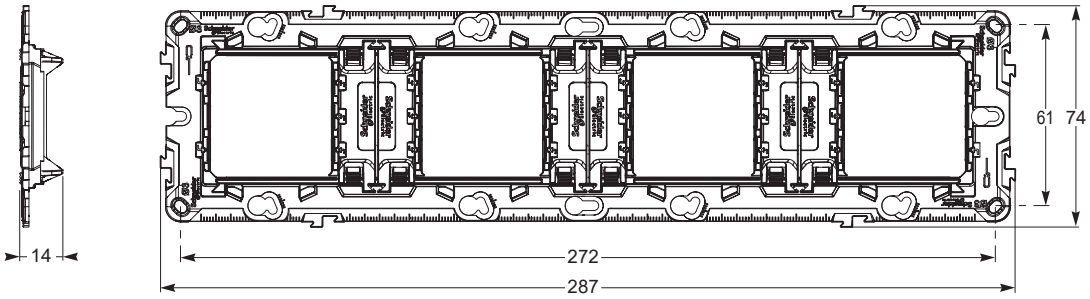

Zamak (4 gangs or 10 modules)

Dimensions
Cover frames

Gangs

NU200●●●
NU280●●●

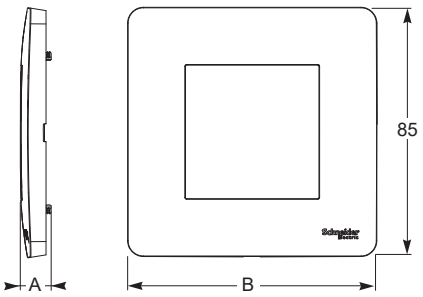

Unica Studio

NU600●●●

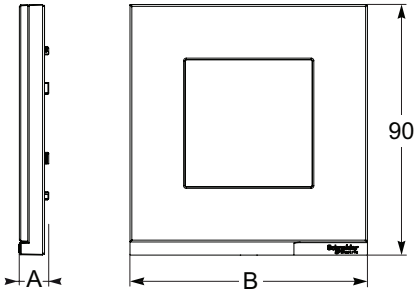

Unica Pure

NU400●●●

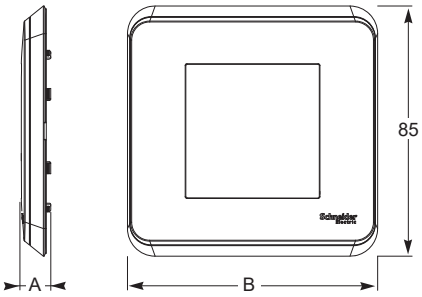

Unica Pro

Type	Depth	1 gang	2 gangs	3 gangs	4 gangs	5 gangs
	A	B	B	B	B	B
Unica Studio	10	85	156	227	298	369
Unica Pure	10	85	156	227	298	-
Unica Pro	10	85	156	227	298	-

Modules

NU210●●●
NU270●●●

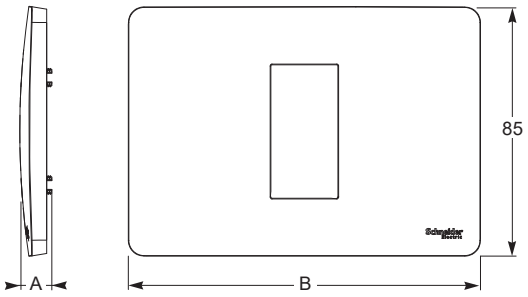

Unica Studio
Unica Studio Color
Unica Studio Metal

Type	Depth	1, 2, 3 modules	4 modules	7 modules
	A	B	B	B
Unica Studio	10	120	142	210

NU411●●●

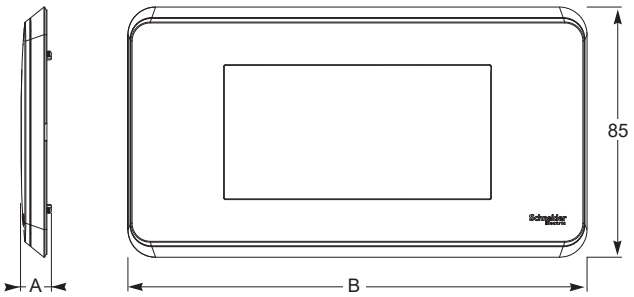

Unica Pro

Type	Depth	4 modules	6, 8 modules	10 modules
	A	B	B	B
Unica Pro	10	156	227	298

NU6103●●

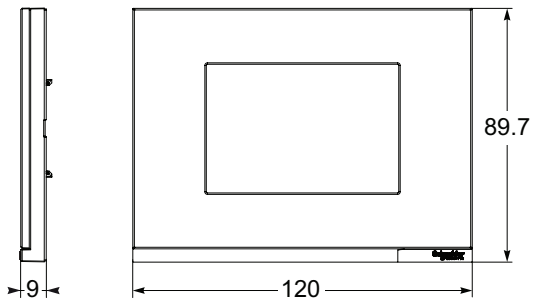

Unica Pure

IP55 frames

NU055●●●

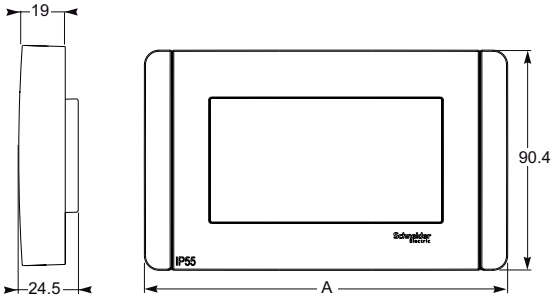

Type	3 modules	4 modules
	A	A
IP55	126	148.5

Dimensions

Fixing frames and Cover frames

Fixing frames

NU7204P



Cover frames

NU0218●●: 3 gangs - 6 or 8 modules
NU0210●●: 4 gangs - 10 modules

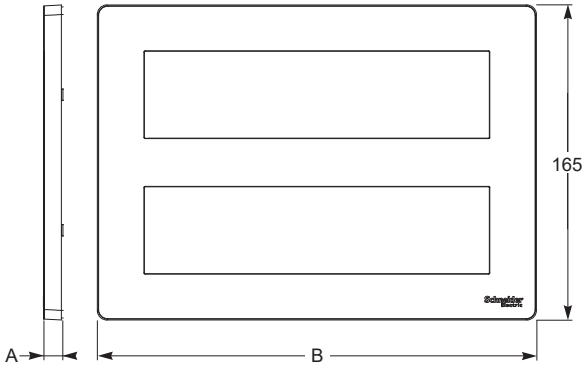

Horizontal cover frame

NU02●418: 2,3 and 4 columns - 4 modules

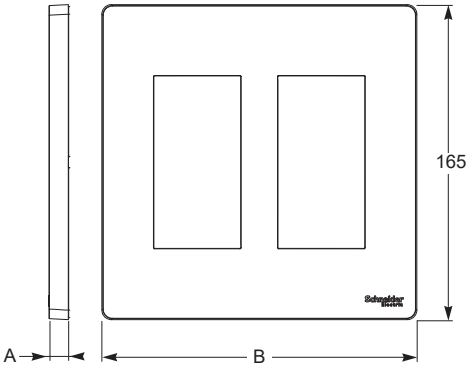

Vertical cover frame

Type	Depth	3 gangs 6 or 8 modules	4 gangs 10 modules	2 columns 4 modules	3 columns 4 modules	4 columns 4 modules
	A	B	B	B	B	B
Cover frames	10	230	300	165	230	300

Surface mounting boxes

NU800xyy

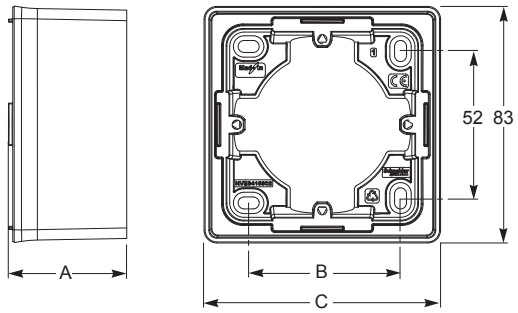

Unica Studio surface mounting boxes

NU840xyy

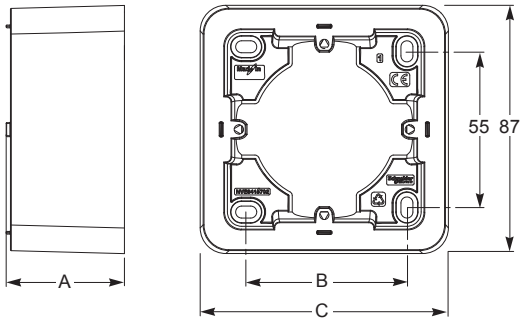

Unica Pro surface mounting boxes

Type	Depth	1 gang		2 gangs		3 gangs	
	A	B	C	B	C	B	C
Unica Studio	41.5	53	83	124	154	195	224
Unica Pro	41.5	56	87	128	158	199	229

Where x denotes the length of surface mounting boxes.
Where yy denotes the color of surface mounting boxes. .

Flush mounting boxes

IMT359●4: 40 mm depth
IMT359●5: 50 mm depth

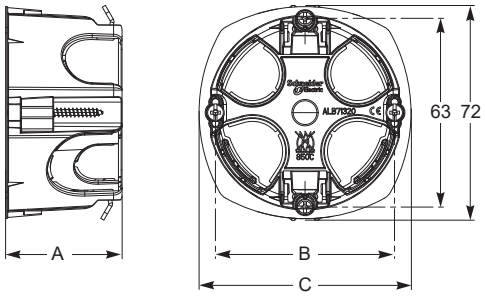

Multifix flush mounting boxes

Type	Depth		1 gang		2 gangs		3 gangs		4 gangs	
	IMT359●4	IMT359●5								
	A	A	B	C	B	C	B	C	B	C
Multifix	40	50	60	71	71	141.5	71 x 2	212,5	71 x 3	283

MGU8.601: 35 mm depth
MGU8.603, MGU8.604: 48 mm depth



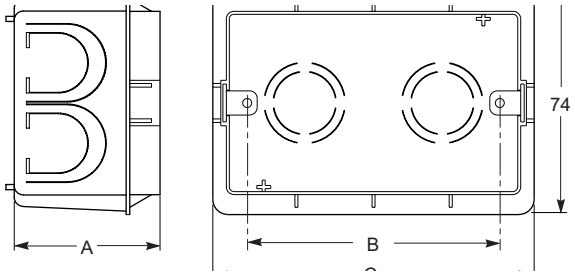

Flush mounting boxes

Type	Depth		1 module	3 modules		4 modules	
	MGU8.601	MGU8.603/604					
	A	A	C	B	C	B	C
Box	35	48	26.5	83.5	106	108	131

Flush mounting boxes

NU8718●●: 3 gangs - 6 or 8 modules
NU8710●●: 4 gangs - 10 modules

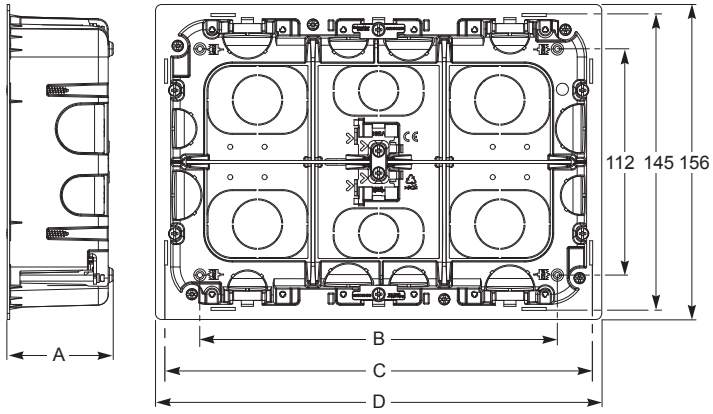

Horizontal flush centralization boxes

NU87●4: 2,3 and 4 columns - 8 modules

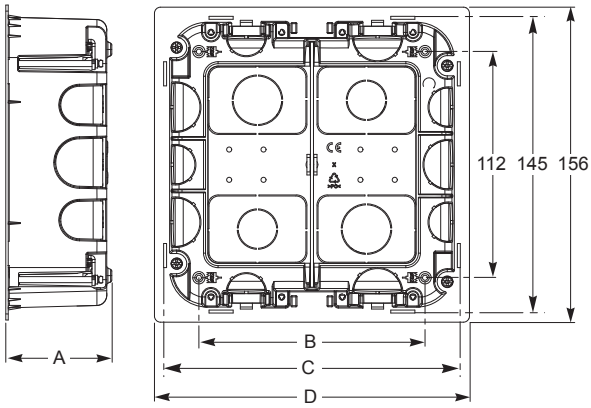

Vertical flush centralization boxes

Type	Depth	3 gangs 6 or 8 modules			4 gangs 10 modules			2 columns 4 modules			3 columns 4 modules			4 columns 4 modules		
	A	B	C	D	B	C	D	B	C	D	B	C	D	B	C	D
Flush mounting boxes	52.5	177	210	221	242	281	292	112	145	156	177	210	221	242	281	292

Centralization boxes

NU8218●●: 3 gangs - 6 or 8 modules
NU8210●●: 4 gangs - 10 modules

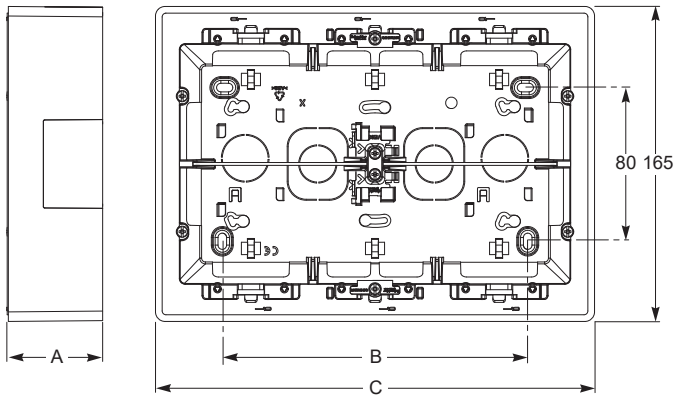

Horizontal centralization boxes

NU82●418: 2,3 and 4 columns - 8 modules

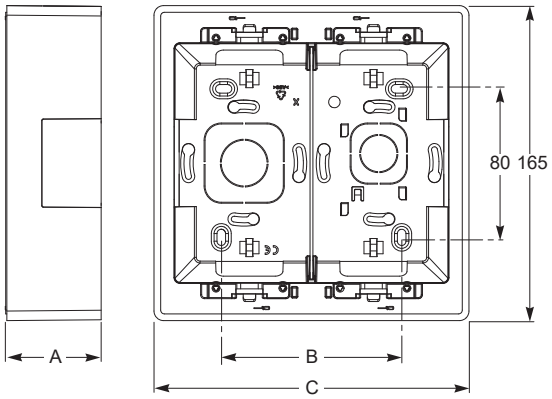

Vertical centralization boxes

Type	Depth	3 gangs 6 or 8 modules		4 gangs 10 modules		2 columns 4 modules		3 columns 4 modules		4 columns 4 modules	
	A	B	C	B	C	B	C	B	C	B	C
Centralization boxes	50	160	230	233	300	94.5	165	160	230	233	300

Flush mounting workstations boxes

NU171●20: 2 rows - 8 or 10 modules

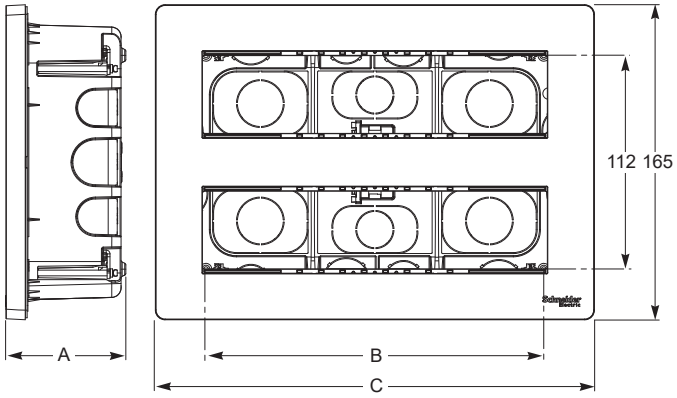

Horizontal flush mounting workstations boxes

NU17●418: 2,3 and 4 columns - 8 modules

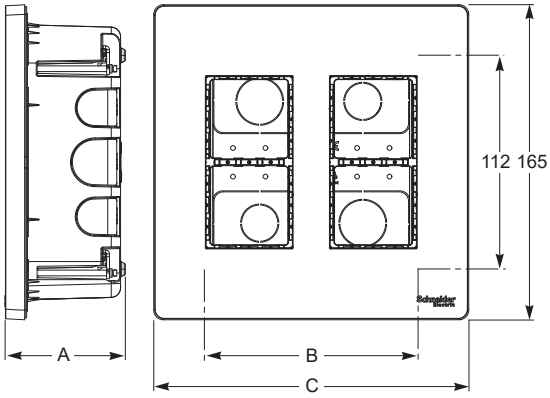

Vertical flush mounting workstations boxes

Type	Depth	2 rows 8 modules		2 rows 10 modules		2 columns 4 modules		3 columns 4 modules		4 columns 4 modules	
	A	B	C	B	C	B	C	B	C	B	C
Flush mounting workstations boxes	63	177	230	248	300	112	165	177	230	248	300

Surface workstations boxes

NU121●20: 2 rows - 8 or 10 modules

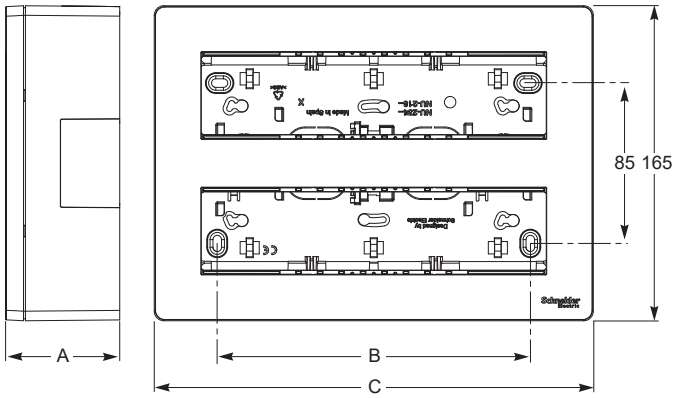

Horizontal surface workstations boxes

NU12●418: 2,3 and 4 columns - 8 modules

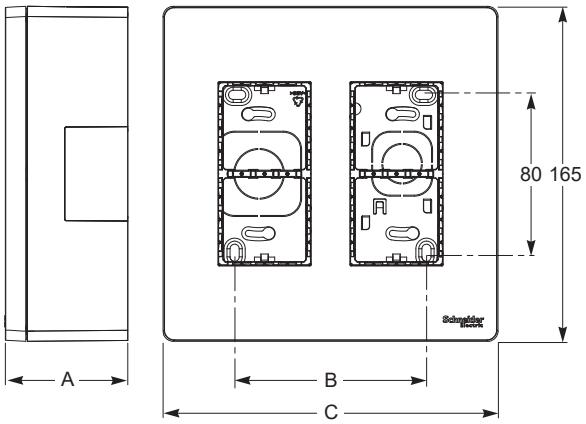

Vertical surface workstations boxes

Type	Depth	2 rows 8 modules		2 rows 10 modules		2 columns 4 modules		3 columns 4 modules		4 columns 4 modules	
	A	B	C	B	C	B	C	B	C	B	C
Surface workstations boxes	60	160	230	233	300	94.5	165	160	230	233	300

Switches and push-buttons

Connection examples



1 module - One-way switch
Push-button

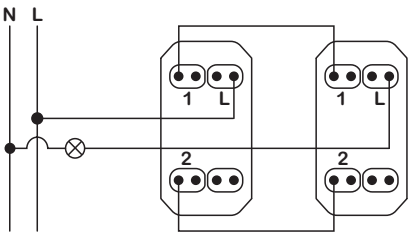

1 module - 2 two-way switches

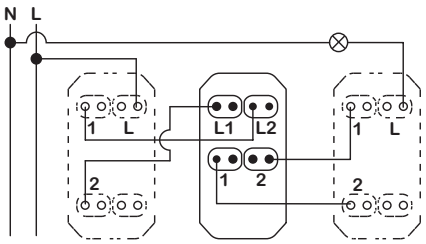

1 module - 2 two-way switches + 1 intermediate switch



2 modules - One-way switch
Push-button

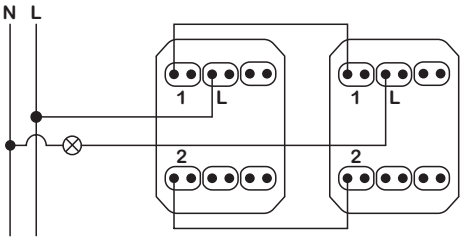

2 modules - Two-way switch



2 poles switch

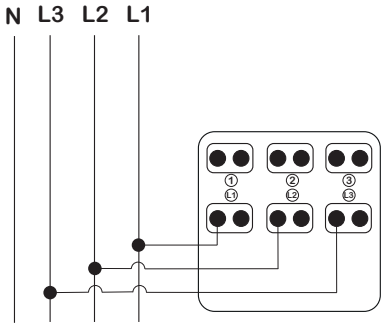

3 poles switch

Switches and push-buttons with indication lamp

Connection examples



1 module - One-way switch with indication lamp



1 module - 2 two-way switches with indication lamp



Double pole switch with indication lamp



2 modules - One-way switch with indication lamp

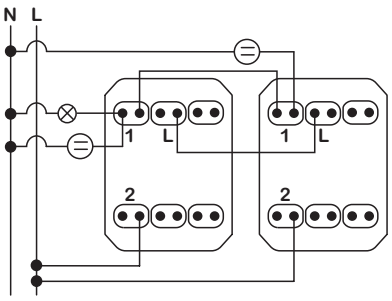

2 modules - 2 two-way switches with indication lamp



1 module - 2 two-way switches
with indication lamp and neutral connection

Switches and push-buttons with location lamp

Connection examples



1 module - One-way switch and push-button with location lamp

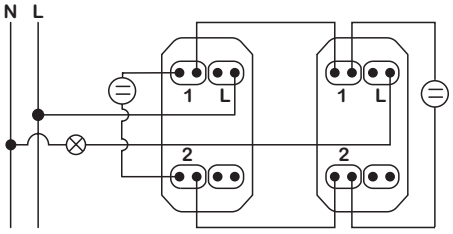

1 module - 2 two-way switches with location lamp

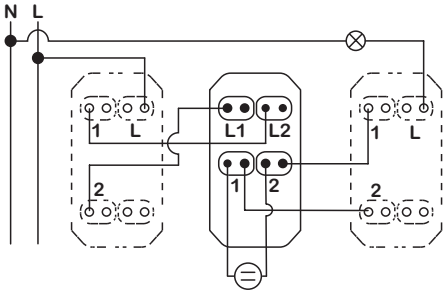

1 module - 2 two-way switches + 1 intermediate with location lamp



2 modules - One-way switch with location lamp



2 modules - Push-button with location lamp

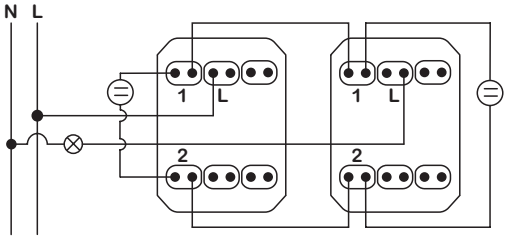

2 modules - Two way switch with location lamp

Room control

Room control unit and lamp & bell push-button

A: NU5217●● & B: NU5777●●

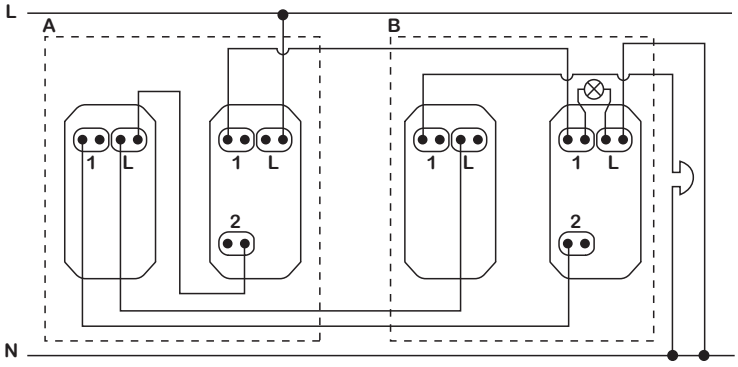

Control unit and lamp & bell push-button connection for room indication

Universal rotary dimmer LED

NU35141●●

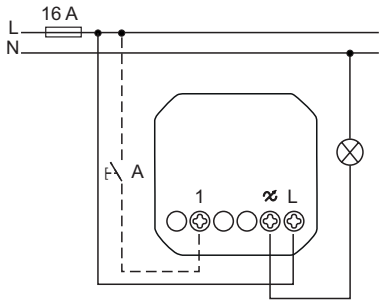

Controlling blinds locally

Motion sensor 10 A

NU3525●●

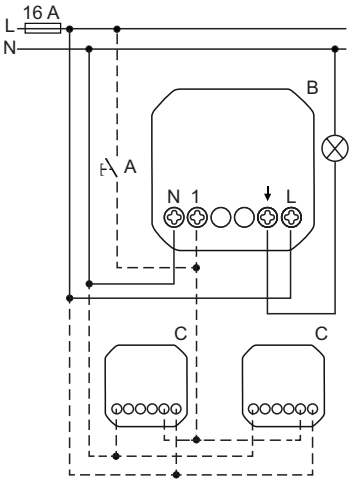

Detection moving heat sources (e.g. persons)

Timer 10 A

NU3535●●



Manual switching off or restarting the overtravel time with an activated overtravel time

Floor thermostats 10 A

NU3503●●



Room thermostats 8 A

NU3501●●

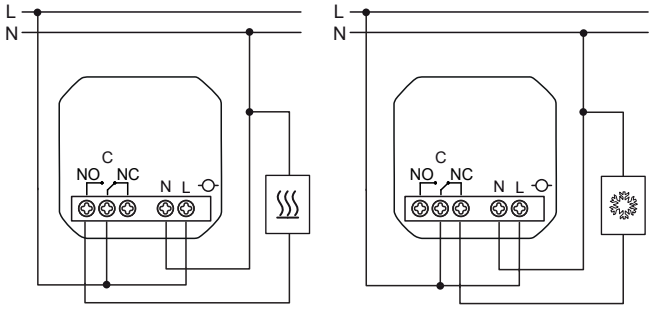

Electronic card switch 8 A

NU3540●●

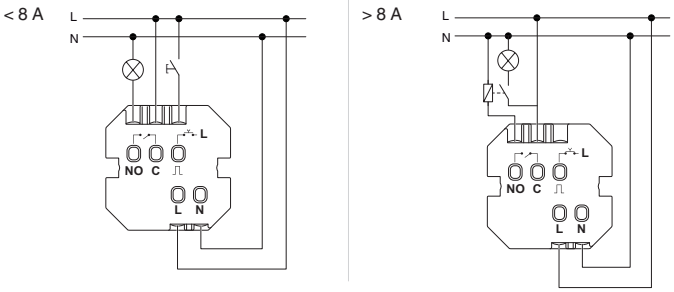

Multistandard socket outlet

NU3085●●
NU3084●●

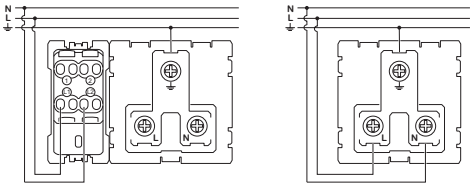

Plug compatibility table			
	Standard	Plug type	Nominal voltage/ current
1	Europlug	2P	250 V / 2,5 A
2	Argentinean / Australian	2P + E	250 V / 10 A
3	USA	2P + E	127 V / 15 A
4	British	2P + E	250 V / 13 A
5	Indian	2P + E	250 V / 6 A
6	Chinese	2P + E	250 V / 10 A

⚠ DANGER

The multistandard socket is not suitable for German and French 2P + E sockets as they do not provide ground continuity.

A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.

Surge protected socket outlet

NU3059●●EP

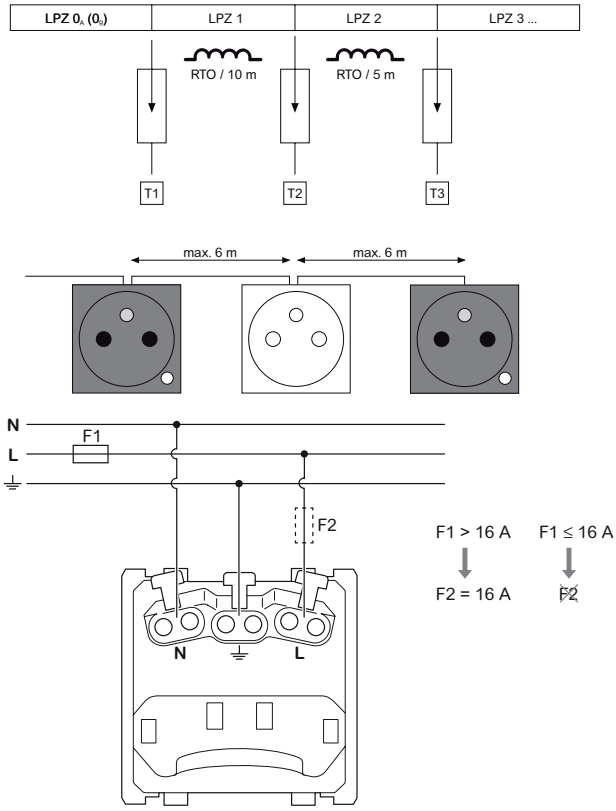

Wiser blind control switch

NU3508••
NU3509••

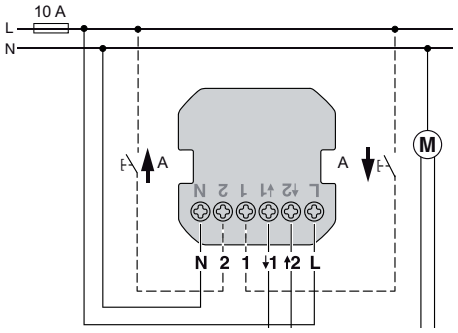

Wiser motion sensor 10 A

NU3526••

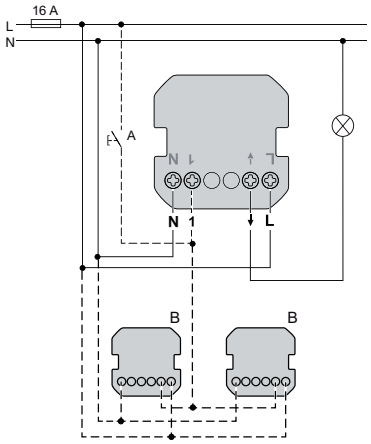

Wiser motion sensor with universal push-button dimmer LED

NU3527••



Wiser relay switch 10 A

NU3537••
NU3538••

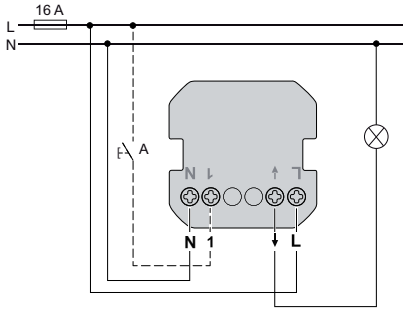

Wiser universal push-button dimmer LED

NU3515••
NU3517••



Wiser universal rotary dimmer LED

NU3516••
NU3518••



USB data connector

NU3429●●



1	Vbus (5V DC)
2	D-
3	D+
4	GND
5	⏚

USB Chargers

Type A: **NU3428●●** (1 module) - **NU3418●●** (2 modules)
Type A + C : **NU3018●●** (2 modules)



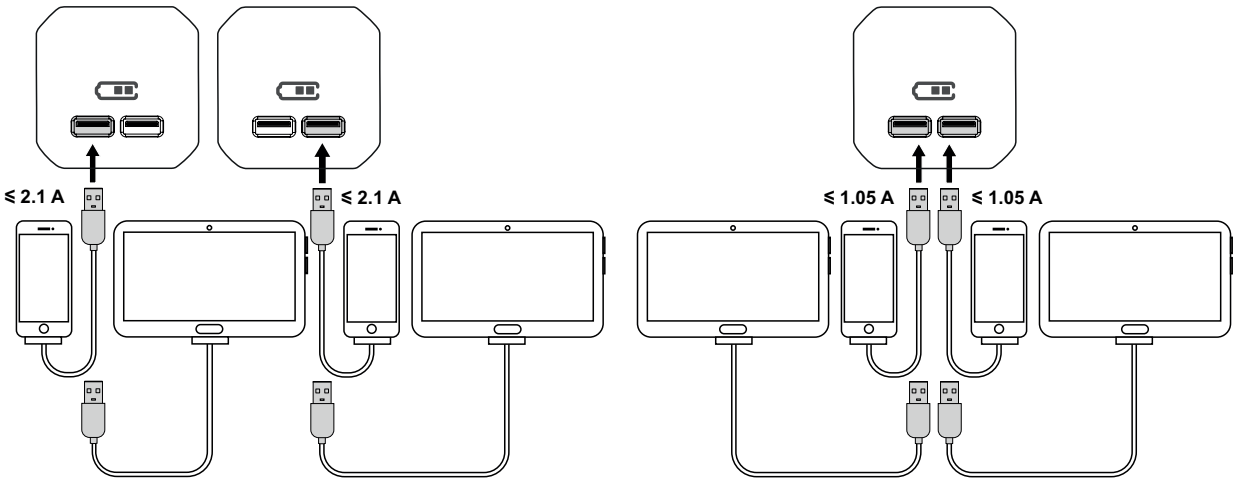

USB type A connection

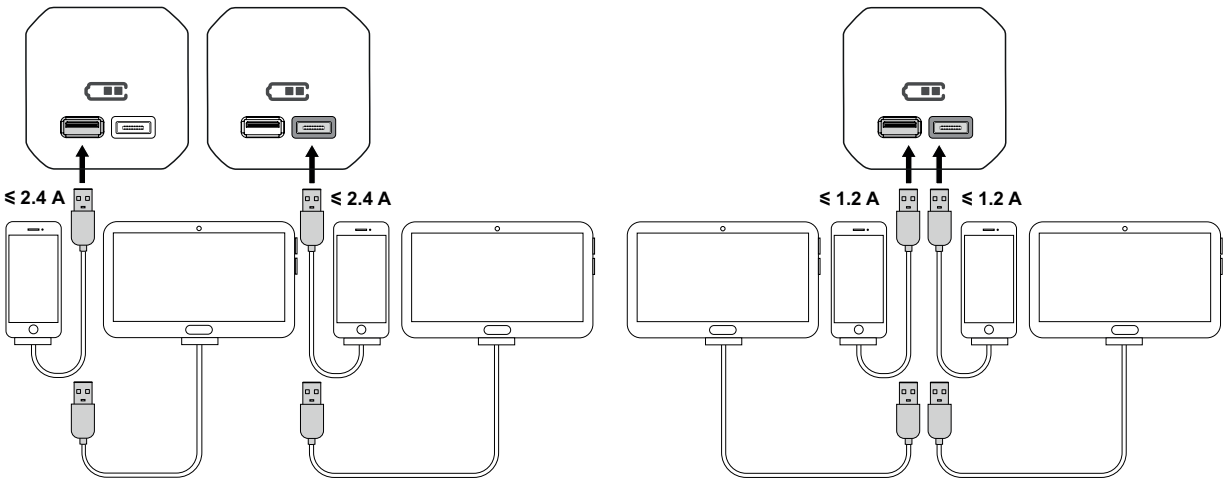

USB type A + C connection

Bed side lamp

NU3603●●

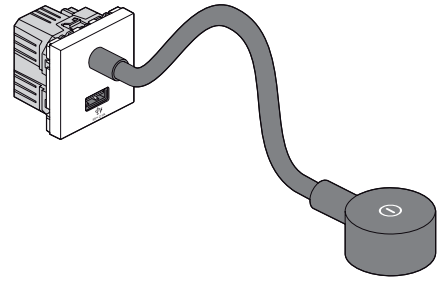

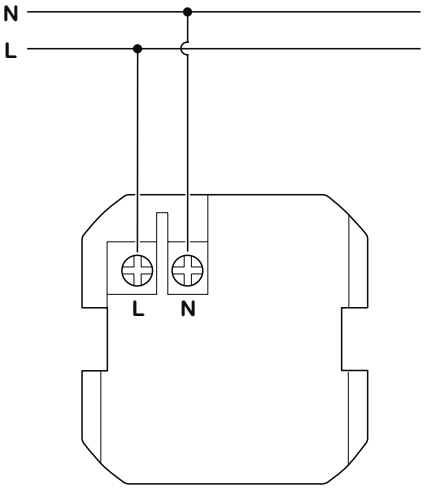

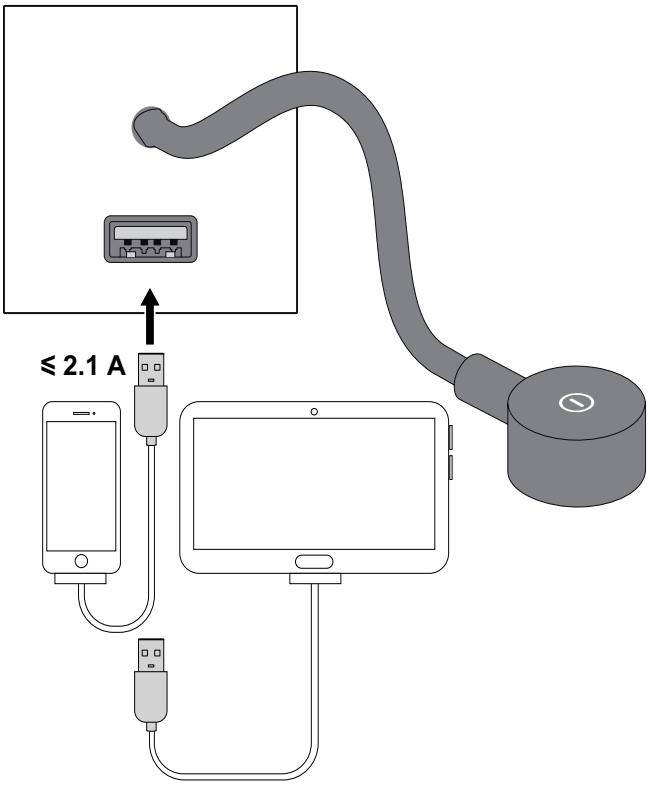

USB type A connection

Electronic door bell

NU3786••

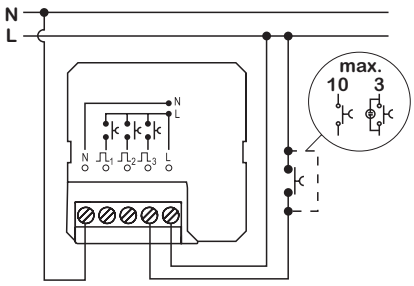

Manual switching off or restarting the overtravel time with an activated overtravel time

Volume control

NU3602••

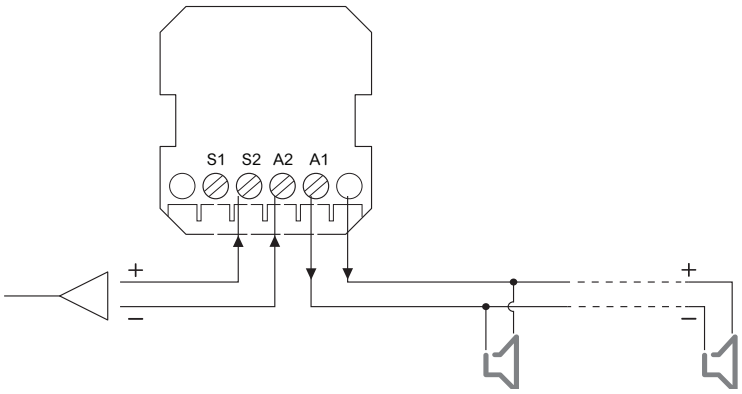

Bluetooth receiver

NU3601••

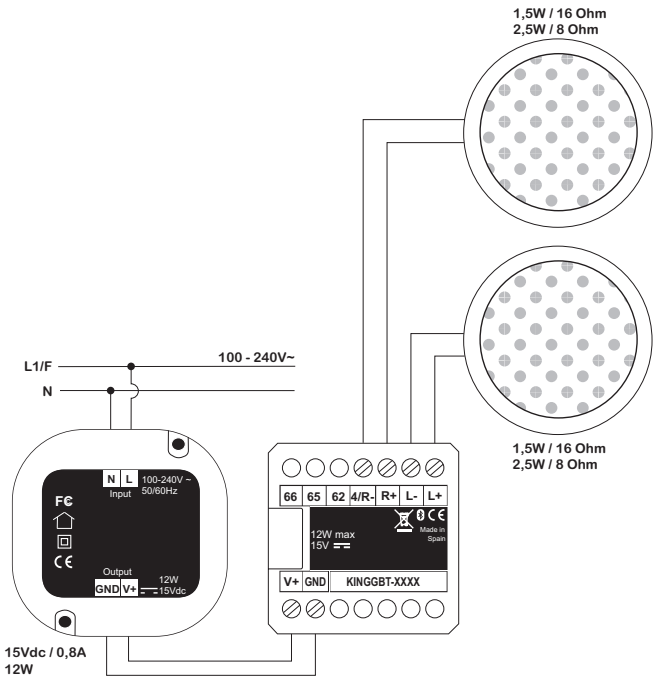

Connections
RJ45 data sockets

Installation

Example of unshielded punch down data socket installation

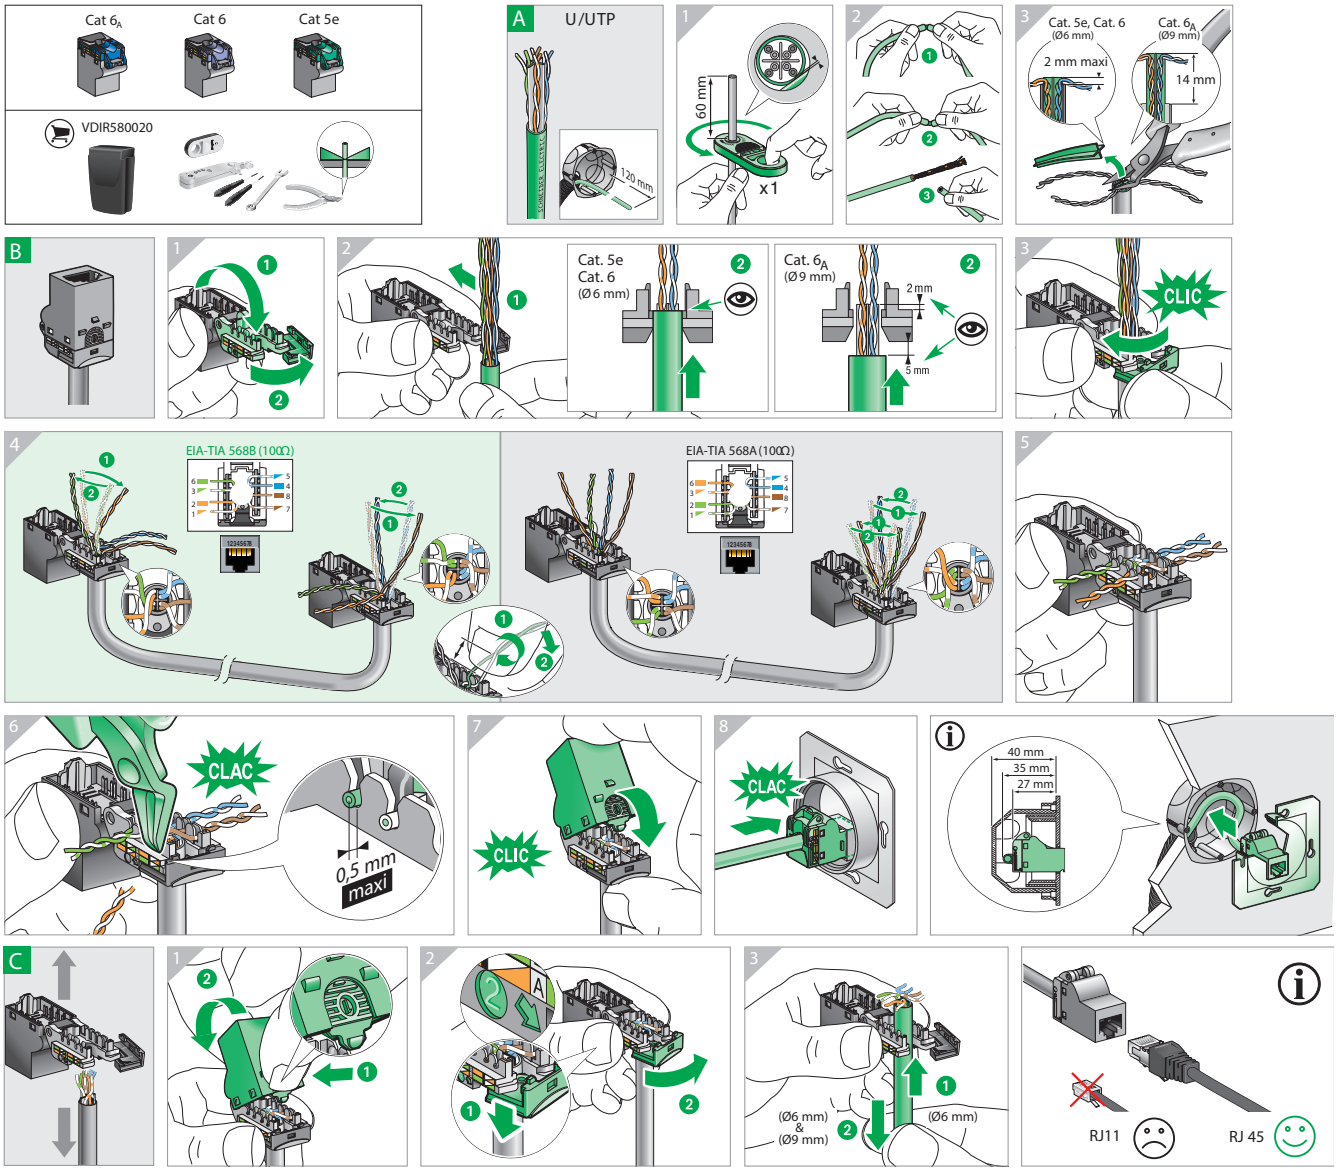

Technical data

Categories

- The most important property defining a data network is the speed at which information can circulate inside this network.
- According to this aspect, installations are classed into the following categories

Category	Transmission rate	Network type
Cat. 3	Up to 10 MHz	Ethernet 10 Base T, Token Ring 4 Mbps
Cat. 4	Up to 16 MHz	Token Ring 16 Mbps
Cat. 5_E	Up to 100 MHz	Ethernet 1000 Base T, ATM 155 Mbps
Cat. 6	Up to 250 MHz	Ethernet 1000 Base T, ATM 1200
Cat. 6_A	Up to 500 MHz	Ethernet full-duplex mode 1000 Base T

Installation

Example of unshielded punch down data socket installation

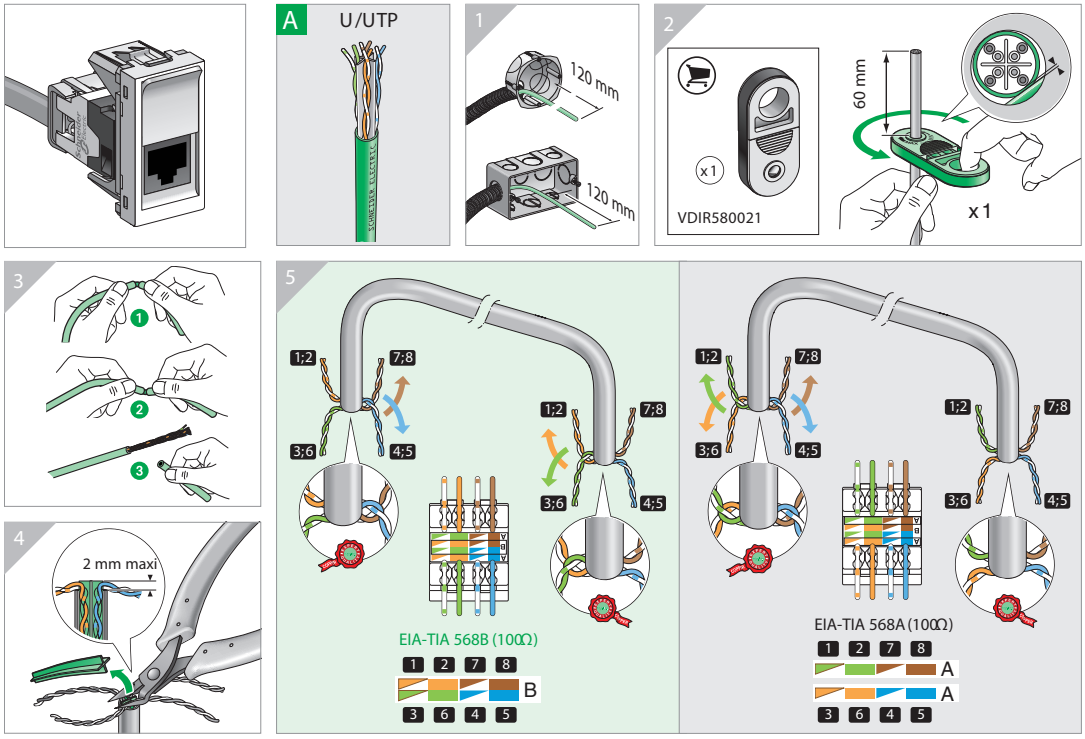

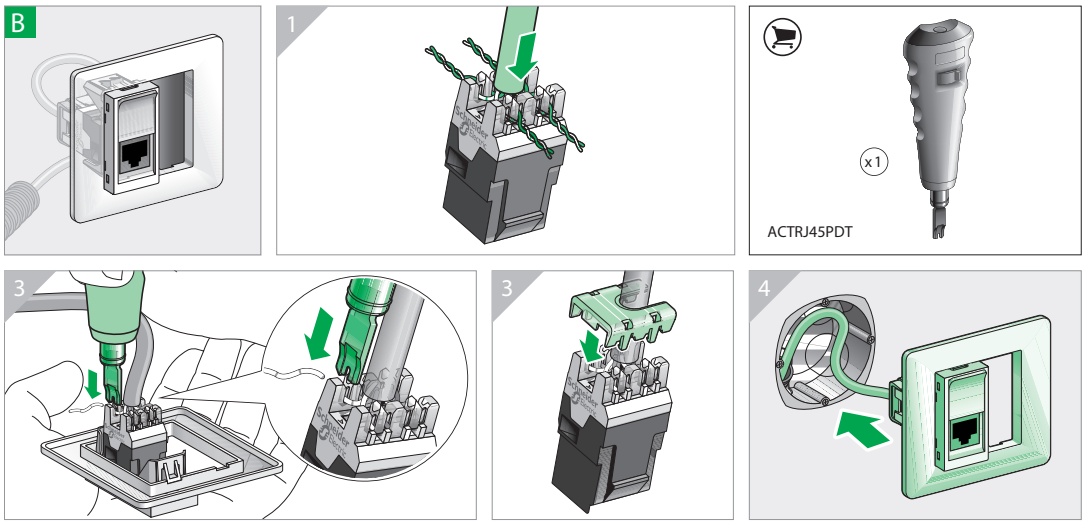

Unica Index

Reference number overview

Ref	Pg
A	
ALB45032	55
ALB45033	55
ALB45290	61
C	
CCT90501	56, 115, 118, 130, 135
I	
IMT35914	102
IMT35915	102
IMT35924	102
IMT35934	102
IMT35935	102
IMT35944	102
IMT35945	102
IMT35994	102
IMT35995	102
M	
MGU5.064.18	61
MGU5.064.30	61
MGU8.601	102
MGU8.603	102
MGU8.604	102
MT35925	102
MUR34101	111
MUR34107	111
MUR34108	111
MUR34109	111
MUR34151	111
MUR35110	111
MUR37713	111
MUR37911	111
MUR37912	111
MUR37914	111
MUR39101	111
MUR39107	111
MUR39108	111
MUR39109	111
MUR39110	111
MUR39151	111
MUR39911	111
MUR39912	111
MUR39913	111
MUR39914	111
N	
NU3488	67
NU003718	58, 96
NU003744	58, 96
NU3772	67
NU3773	67
NU3774	67
NU3775	67
NU3776	67
NU6004V80	110
NU6004V82	110
NU6004V83	110
NU6004V84	110
NU6004V85	110
NU6004V86	110
NU6004V87	110
NU6004V89	110
NU7002	100
NU7002C	100
NU7002G	100
NU7002P	100
NU7002PC	100
NU7002PCP	100
NU7002PG	100
NU7004PC	100
NU7006C	100
NU7008C	100
NU7103	100
NU7103P	100
NU7104	100
NU7104P	100
NU7107	100
NU7204P	146
NU7404	100
NU7802	101
NU7892	101
NU8710	144
NU8718	144
NU8724	145
NU8734	145
NU8744	145
NU9091	61
NU9092	61
NU9580	101
NU9800	146
NU9801	146
NU9802	146
NU9823AM	53, 74, 95, 128
NU9825A	53, 74, 95, 128
NU9825AZ	53, 74, 95, 128
NU9830	61
NU021020	138, 144
NU021030	144
NU021054	144
NU021820	138, 144
NU021830	144
NU021854	144
NU022418	145
NU023418	145
NU024418	145
NU044218	111
NU055318	111
NU055344	111
NU055418	111
NU055444	111
NU112118	145
NU113118	145
NU114118	145
NU121020	138, 143
NU121030	143
NU121054	143
NU121820	138, 143
NU121830	143
NU121854	143
NU122418	143
NU122420	138
NU122430	143
NU122454	143
NU123418	143
NU123420	138
NU123430	143
NU123454	143
NU124418	143
NU124420	138
NU124430	143
NU124454	143
NU171020	138, 143
NU171030	143
NU171054	143
NU171820	138, 143
NU171830	143
NU171854	143
NU172418	143
NU172430	143
NU172454	143
NU173418	143
NU173420	138
NU173430	143
NU173454	143
NU174418	143
NU174430	143
NU174454	143
NU200118	111
NU200130	111
NU200154	111
NU200218	106
NU200230	106
NU200244	106
NU200254	106
NU200418	106
NU200430	106
NU200444	106
NU200454	106
NU200618	106
NU200630	106
NU200644	106
NU200654	106
NU200818	106
NU200830	106
NU200844	106
NU200854	106
NU201018	106
NU201030	106
NU201044	106
NU201054	106
NU203618D	96
NU203630D	96
NU203644D	96
NU203654D	96
NU203718	96
NU206318	60
NU206344	60
NU206518	60
NU206530	60
NU206544	60
NU206554	60
NU206718	58
NU206730	58
NU206744	58
NU206754	58
NU210118	106
NU210130	106
NU210144	106
NU210154	106
NU210218	106
NU210230	106
NU210244	106
NU210254	106
NU210318	106
NU210330	106
NU210344	106
NU210354	106
NU210418	106
NU210430	106
NU210444	106
NU210454	106
NU210718	106
NU210730	106
NU210744	106
NU210754	106
NU220118D	95
NU220130D	95
NU220144D	95
NU220154D	95
NU220318D	95
NU220330D	95
NU220344D	95
NU220354D	95
NU220618D	95
NU220644D	95
NU221118D	95
NU221130D	95
NU221144D	95
NU221154D	95
NU230001	109
NU230013	109
NU230014	109
NU230016	109
NU230018	109
NU230024	109
NU230030	109
NU230031	109
NU230044	109
NU230054	109
NU230218	109
NU230418	109
NU230618	109
NU230818	109
NU231018	109
NU270311	107
NU270312	107
NU270313	107
NU270314	107
NU270315	107
NU270316	107
NU270317	107
NU270318	107
NU270321	107
NU270322	107
NU270324	107
NU270326	107
NU270327	107
NU270328	107
NU270344	107
NU270350M	108
NU270351M	108
NU270352M	108
NU270353M	108
NU270355M	108
NU270356M	108
NU270357M	108
NU270358M	108
NU270359M	108
NU270360M	108

Reference number overview

Ref	Pg
NU270362M	108
NU270411	107
NU270412	107
NU270413	107
NU270414	107
NU270415	107
NU270416	107
NU270417	107
NU270418	107
NU270421	107
NU270422	107
NU270424	107
NU270426	107
NU270427	107
NU270428	107
NU270444	107
NU270450M	108
NU270451M	108
NU270452M	108
NU270453M	108
NU270455M	108
NU270456M	108
NU270457M	108
NU270458M	108
NU270459M	108
NU270460M	108
NU270462M	108
NU270711	107
NU270712	107
NU270713	107
NU270714	107
NU270715	107
NU270716	107
NU270717	107
NU270718	107
NU270721	107
NU270722	107
NU270724	107
NU270726	107
NU270727	107
NU270728	107
NU270750M	108
NU270751M	108
NU270752M	108
NU270753M	108
NU270755M	108
NU270756M	108
NU270757M	108
NU270758M	108
NU270759M	108
NU270760M	108
NU270762M	108
NU280211	107
NU280212	107

Ref	Pg
NU280213	107
NU280214	107
NU280215	107
NU280216	107
NU280217	107
NU280218	107
NU280219	107
NU280221	107
NU280222	107
NU280224	107
NU280226	107
NU280227	107
NU280228	107
NU280244	107
NU280250	108
NU280250M	108
NU280251	108
NU280251M	108
NU280252	108
NU280252M	108
NU280253	108
NU280253M	108
NU280255	108
NU280255M	108
NU280256	108
NU280256M	108
NU280257	108
NU280257M	108
NU280258	108
NU280258M	108
NU280259	108
NU280259M	108
NU280260	108
NU280260M	108
NU280262	108
NU280262M	108
NU280411	107
NU280412	107
NU280413	107
NU280414	107
NU280415	107
NU280416	107
NU280417	107
NU280418	107
NU280419	107
NU280421	107
NU280422	107
NU280424	107
NU280426	107
NU280427	107
NU280428	107
NU280444	107
NU280450	108
NU280450M	108

Ref	Pg
NU280451	108
NU280451M	108
NU280452	108
NU280452M	108
NU280453	108
NU280453M	108
NU280455	108
NU280455M	108
NU280456	108
NU280456M	108
NU280457	108
NU280457M	108
NU280458	108
NU280458M	108
NU280459	108
NU280459M	108
NU280460	108
NU280460M	108
NU280462	108
NU280462M	108
NU280611	107
NU280612	107
NU280613	107
NU280614	107
NU280615	107
NU280616	107
NU280617	107
NU280618	107
NU280619	107
NU280621	107
NU280622	107
NU280624	107
NU280626	107
NU280627	107
NU280628	107
NU280644	107
NU280650	108
NU280650M	108
NU280651	108
NU280651M	108
NU280652	108
NU280652M	108
NU280653	108
NU280653M	108
NU280655	108
NU280655M	108
NU280656	108
NU280656M	108
NU280657	108
NU280657M	108
NU280658	108
NU280658M	108
NU280659	108
NU280659M	108

Ref	Pg
NU280660	108
NU280660M	108
NU280662	108
NU280662M	108
NU280811	107
NU280812	107
NU280813	107
NU280814	107
NU280815	107
NU280816	107
NU280817	107
NU280818	107
NU280819	107
NU280821	107
NU280822	107
NU280824	107
NU280826	107
NU280827	107
NU280828	107
NU280844	107
NU280850	108
NU280850M	108
NU280851	108
NU280851M	108
NU280852	108
NU280852M	108
NU280853	108
NU280853M	108
NU280855	108
NU280855M	108
NU280856	108
NU280856M	108
NU280857	108
NU280857M	108
NU280858	108
NU280858M	108
NU280859	108
NU280859M	108
NU280860	108
NU280860M	108
NU280862	108
NU280862M	108
NU281450	108
NU281452	108
NU281453	108
NU281455	108
NU281456	108
NU301518	62
NU301518E	59, 62
NU301530	62
NU301530E	59, 62
NU301554	62
NU301554E	59, 62
NU301618	62

Ref	Pg
NU301630	62
NU301644	62
NU301654	62
NU301718	58, 62
NU301730	58, 62
NU301744	58, 62
NU301754	58, 62
NU301818	62
NU301830	62
NU301854	62
NU301918	62
NU301930	62
NU301944	62
NU301954	62
NU302018	60
NU302044	60
NU302118	60
NU302130	60
NU302144	60
NU302154	60
NU302318	60
NU302330	60
NU302344	60
NU302354	60
NU302818	60
NU302830	60
NU302854	60
NU303118	60
NU303130	60
NU303144	60
NU303154	60
NU303318	60
NU303330	60
NU303344	60
NU303354	60
NU303618	58
NU303644	58
NU303703	58
NU303718	58
NU303718TA	58
NU303720	132
NU303730	58
NU303730TA	58
NU303744	58
NU303744TA	58
NU303754	58
NU303754TA	58
NU303761	58
NU303903E	59
NU303918	59
NU303918E	59
NU303930	59
NU303930E	59
NU303944E	59

Reference number overview

Ref	Pg
NU303954	59
NU303954E	59
NU304118	60
NU304130	60
NU304154	60
NU304518	60
NU304530	60
NU304544	60
NU304554	60
NU304703	61
NU304718	61
NU304730	61
NU304744	61
NU304754	61
NU304903	59, 131
NU304903T	69, 131
NU304906	59, 131
NU304918	59
NU304918T	69
NU304920	131
NU304930	59
NU304954	59
NU305103	59, 131
NU305103T	69, 131
NU305118	59
NU305203	59, 131
NU305203T	69, 131
NU305206	59, 131
NU305218	59
NU305218E	59
NU305218P	59
NU305218T	69
NU305220	131
NU305230	59
NU305230E	59
NU305244E	59
NU305254	59
NU305254E	59
NU305703	58
NU305706	58
NU305718	58
NU305718	58
NU305720	132
NU305730	58
NU305744	58
NU305754	58
NU305903	59, 131
NU305903T	69, 131
NU305906	59, 131
NU305918	59
NU305918E	59
NU305918EP	59
NU305918P	59
NU305920	131
NU305920T	69
NU305930	59
NU305930E	59
NU305930EP	59
NU305944E	59
NU305954	59
NU305954E	59
NU305954EP	59
NU305961	59
NU306018	60
NU306030	60
NU306054	60
NU306103	59, 131
NU306103S	59, 131
NU306103T	69, 131
NU306603	58
NU306618	58
NU306630	58
NU306654	58
NU306703	58
NU306703A	58
NU306703AS	58
NU306703S	58
NU306706AS	58
NU306718	58
NU306718A	58
NU306718AS	58
NU306718AS	58
NU306718S	58
NU306720A	132
NU306720AS	132
NU306730A	58
NU306730AS	58
NU306754A	58
NU306754AS	58
NU306761AS	58
NU306818	60
NU306903	59, 131
NU306903S	59, 131
NU306903SE	59
NU306903T	69, 131
NU306906	59, 131
NU306918	59
NU306918S	59
NU306918SE	59
NU306918T	69
NU306930	59
NU306930S	59
NU306954	59
NU306954S	59
NU307103	59, 131
NU307103T	69, 131
NU307603	58
NU307618	58
NU307630	58
NU307903	59, 131
NU307903T	69, 131
NU307906	59, 131
NU307918	59
NU307918T	69
NU307930	59
NU307954	59
NU508218	58, 78
NU508230	58, 78
NU508244	58, 78
NU508254	58, 78
NU308418	61
NU308430	61
NU308454	61
NU308518	61
NU308818	61
NU308830	61
NU308918	61
NU308930	61
NU309818	61
NU309830	61
NU309918	61
NU309930	61
NU310118	50
NU310118SC	50
NU310118S-MUR	50
NU310120	127
NU310130	50
NU310144	50
NU310144SC	50
NU310154	50
NU310318	50
NU310318	50
NU310318F	50
NU310318S	50
NU310318SC	50
NU310318SD-ND	50
NU310320	127
NU310330	50
NU310330S	50
NU310344	50
NU310344SC	50
NU310354	50
NU310354S	50
NU310518	50
NU310518SC	50
NU310520	127
NU310530	50
NU310544	50
NU310554	50
NU310618	51
NU310618C	51
NU310618CN	51
NU310618F	51
NU310618L	51
NU310618N	51
NU310618NSC	51
NU310618SC	51
NU310620	127
NU310630	51
NU310630C	51
NU310630L	51
NU310630N	51
NU310644	51
NU310644CN	51
NU310644N	51
NU310644NSC	51
NU310654	51
NU310654C	51
NU310654L	51
NU310654N	51
NU310718SC	54
NU310730SC	54
NU310744SC	54
NU310754SC	54
NU310818SC	54
NU310830SC	54
NU310844SC	54
NU310854SC	54
NU310918SC	54
NU310944SC	54
NU312718SC	54
NU312744SC	54
NU313618	51
NU313630	51
NU313654	51
NU316118	52
NU316118S	52
NU316130	52
NU316144	52
NU316144S	52
NU316154	52
NU316218	52
NU316218S	52
NU316244S	52
NU316318	52
NU316330	52
NU316344	52
NU316354	52
NU320118	50
NU320118SC	50
NU320120	127
NU320130	50
NU320144	50
NU320144SC	50
NU320154	50
NU320318F	50
NU320318	50
NU320318P	50
NU320318S	50
NU320320	127
NU320320VMC	54, 129
NU320330	50
NU320330S	50
NU320330VMC	54
NU320344	50
NU320354	50
NU320354S	50
NU320354VMC	54
NU320518	50
NU320520	127
NU320530	50
NU320544	50
NU320554	50
NU320618	51
NU320618C	51
NU320618CN	51
NU320618F	51
NU320618FN	51
NU320618L	51
NU320618LN	51
NU320618N	51
NU320620	127
NU320620N	127
NU320630	51
NU320630C	51
NU320630CN	51
NU320630L	51
NU320630LN	51
NU320630N	51
NU320644	51
NU320644CN	51
NU320644N	51
NU320654	51
NU320654C	51
NU320654CN	51
NU320654L	51
NU320654LN	51
NU320654N	51
NU320718	54
NU320730	54
NU320744	54
NU320754	54
NU320818	54
NU320820	129

Reference number overview

Ref	Pg
NU320830	54
NU320844	54
NU320854	54
NU321118	50
NU321130	50
NU321144	50
NU321154	50
NU321318	50
NU321318F	50
NU321330	50
NU321344	50
NU321354	50
NU321418	54
NU321430	54
NU321454	54
NU322518	52
NU322620	54, 129
NU322630	54
NU322644	54
NU322654	54
NU323218S	52
NU323230S	52
NU323244S	52
NU323254S	52
NU323618	51
NU323630	51
NU323654	51
NU323718	54
NU323730	54
NU323754	54
NU324620	51, 127
NU324630	51
NU324654	51
NU326118	52
NU326118N	52
NU326144	52
NU326218	52
NU326218S	52
NU326230	52
NU326230S	52
NU326254	52
NU326254S	52
NU326318	52
NU326330	52
NU326354	52
NU328118	52
NU528218	50, 73
NU528230	50, 73
NU528244	50, 73
NU528254	50, 73
NU328318	55
NU328330	55
NU328344	55

Ref	Pg
NU328354	55
NU340618	63
NU340630	63
NU340654	63
NU340718	63
NU340730	63
NU340754	63
NU341018	63
NU341030	63
NU341044	63
NU341054	63
NU341118	63
NU341130	63
NU341144	63
NU341154	63
NU341218	63
NU341230	63
NU341244	63
NU341318	63
NU341330	63
NU341344	63
NU341418	63
NU341430	63
NU341444	63
NU341454	63
NU341518	63
NU341530	63
NU341544	63
NU341554	63
NU341618	63
NU341630	63
NU341644	63
NU341654	63
NU341718	63
NU341730	63
NU341754	63
NU341818	62
NU341830	62
NU341844	62
NU341854	62
NU341918	63
NU341918P	63
NU341930	63
NU341954	63
NU342018	63
NU342030	63
NU342054	63
NU342618	63
NU342630	63
NU342654	63
NU342818	62
NU342830	62
NU342844	62

Ref	Pg
NU342854	62
NU342918	65
NU342930	65
NU342954	65
NU343018	65
NU343030	65
NU343044	65
NU343054	65
NU343118	65
NU343130	65
NU343154	65
NU343218	65
NU343230	65
NU343254	65
NU343318	65
NU343330	65
NU343354	65
NU344718	63
NU344730	63
NU344754	63
NU344818	63
NU344830	63
NU344844	63
NU344854	63
NU344918	63
NU344930	63
NU344944	63
NU344954	63
NU345018	66
NU345020	133
NU345030	66
NU345044	66
NU345054	66
NU345118	66
NU345130	66
NU345144	66
NU345154	66
NU345218	66
NU345230	66
NU345254	66
NU345318	66
NU345330	66
NU345354	66
NU345418	66
NU345430	66
NU345444	66
NU345454	66
NU345518	66
NU345530	66
NU345554	66
NU345618	66
NU345630	66
NU345654	66

Ref	Pg
NU346118	66
NU346120	133
NU346130	66
NU346154	66
NU346218	66
NU346220	133
NU346230	66
NU346244	66
NU346254	66
NU346818	66
NU346830	66
NU346844	66
NU346854	66
NU347818	63
NU347918	63
NU348218	63
NU348318	63
NU348418	63
NU348518	63
NU348618	67
NU348630	67
NU348644	67
NU348654	67
NU348718	67
NU348730	67
NU348744	67
NU348754	67
NU349118	65
NU349130	65
NU349144	65
NU349154	65
NU349618	65
NU349630	65
NU349654	65
NU349718	65
NU349730	65
NU349744	65
NU349754	65
NU349918	65
NU349930	65
NU349944	65
NU349954	65
NU350118	56
NU350130	56
NU350144	56
NU350154	56
NU350318	56
NU350330	56
NU350344	56
NU350354	56
NU350818W	118
NU350820W	135
NU350830W	118

Ref	Pg
NU350854W	118
NU350918	116
NU350930	116
NU350944	116
NU350954	116
NU351418	56
NU351420	130
NU351430	56
NU351454	56
NU351518W	118
NU351520W	135
NU351530W	118
NU351554W	118
NU351618W	118
NU351620W	135
NU351630W	118
NU351654W	118
NU351718	115
NU351730	115
NU351754	115
NU351818	115
NU351830	115
NU351854	115
NU352518	57
NU352530	57
NU352554	57
NU352618	116
NU352630	116
NU352644	116
NU352654	116
NU352718	116
NU352730	116
NU352744	116
NU352754	116
NU353518	57
NU353530	57
NU353554	57
NU353718W	118
NU353720W	135
NU353730W	118
NU353754W	118
NU353818	115
NU353830	115
NU353854	115
NU354018	57
NU354030	57
NU354054	57
NU360118	67
NU360130	67
NU360154	67
NU360218	67
NU360230	67
NU360244	67

Reference number overview

Ref	Pg
NU360254	67
NU360318	68
NU360330	68
NU360344	68
NU360354	68
NU360518	68
NU361218	68
NU363118	68
NU363130	68
NU363154	68
NU370118	54
NU373118	54
NU373130	54
NU373154	54
NU378518	67, 68
NU378530	67, 68
NU378544	67
NU378554	67, 68
NU378618	67
NU378630	67
NU378644	67
NU378654	67
NU386218	68
NU386230	68
NU386244	68
NU386254	68
NU400218	110
NU400218	110
NU400218P	110
NU400220	137
NU400230	110
NU400254	110
NU400418	110
NU400420	137
NU400430	110
NU400454	110
NU400618	110
NU400620	137
NU400630	110
NU400654	110
NU400818	110
NU400830	110
NU400854	110
NU406918	60
NU406930	60
NU406954	60
NU411018	110
NU411030	110
NU411054	110
NU411418	110
NU411420	137
NU411430	110
NU411454	110
NU411618	110

Ref	Pg
NU411620	137
NU411630	110
NU411654	110
NU411818	110
NU411830	110
NU411854	110
NU501318	62, 79
NU501330	62, 79
NU501344	62, 79
NU501354	62, 79
NU501418	62, 79
NU501430	62, 79
NU501444	62, 79
NU501454	62, 79
NU501718	78, 79
NU501818	79
NU501830	79
NU501844	79
NU501854	79
NU501918	79
NU501930	79
NU501944	79
NU501954	79
NU503618	89
NU503618Z	89
NU503644	89
NU503644Z	89
NU503718	89
NU503718Z	89
NU503744	89
NU520118	73, 87
NU520118N	73, 87
NU520118NZ	87
NU520118Z	87
NU520130	73
NU520130N	73
NU520144	73, 87
NU520144N	73
NU520144Z	87
NU520154	73
NU520154N	73
NU520318	73, 87
NU520318N	73, 87
NU520318NZ	87
NU520318Z	87
NU520330	73
NU520330N	73
NU520344	73, 87
NU520344N	73
NU520344Z	87
NU520354	73
NU520354N	73
NU520518	73, 87
NU520518N	73

Ref	Pg
NU520518Z	87
NU520530	73
NU520530N	73
NU520544	73
NU520544N	73
NU520554	73
NU520554N	73
NU520618	73, 87, 95
NU520618N	73
NU520618Z	87
NU520630	73
NU520630N	73
NU520644	73, 87, 95
NU520644N	73
NU520644Z	87
NU520654	73
NU520654N	73
NU520718	75
NU520730	75
NU520744	75
NU520754	75
NU520818	75
NU520830	75
NU520844	75
NU520854	75
NU521118	73, 87
NU521118N	73, 87
NU521118NZ	87
NU521118Z	87
NU521130	73
NU521130N	73
NU521144	73, 87
NU521144N	73
NU521144Z	87
NU521154	73
NU521154N	73
NU521318	73
NU521318N	73, 87
NU521330	73
NU521330N	73
NU521344	73
NU521344N	73
NU521354	73
NU521354N	73
NU521518	73
NU521530	73
NU521544	73
NU521554	73
NU521718	73
NU521730	73
NU521744	73
NU521754	73
NU522618	75

Ref	Pg
NU522644	75
NU526218	74
NU526218S	74
NU526230	74
NU526230S	74
NU526244	74
NU526244S	74
NU526254	74
NU526254S	74
NU528318	75
NU528330	75
NU528344	75
NU528354	75
NU541118	80, 90
NU541118Z	90
NU541130	80
NU541144	80, 90
NU541144Z	90
NU541154	80
NU541518	80
NU541530	80
NU541544	80
NU541554	80
NU541818	79
NU541830	79
NU541844	79
NU541854	79
NU542018	80
NU542030	80
NU542044	80
NU542054	80
NU542418	80
NU542430	80
NU542444	80
NU542454	80
NU542718	80
NU542730	80
NU542744	80
NU542754	80
NU543018	80
NU543030	80
NU543044	80
NU543054	80
NU543118	80
NU543130	80
NU543144	80
NU543154	80
NU545418	81
NU545430	81
NU545444	81
NU545454	81
NU545518	81
NU545530	81
NU545544	81

Ref	Pg
NU545554	81
NU545618	81
NU545630	81
NU545644	81
NU545654	81
NU545718	66
NU545730	66
NU545754	66
NU546118	80
NU546130	80
NU546144	80
NU546154	80
NU546218	81, 90
NU546218Z	90
NU546230	81
NU546244	81, 90
NU546244Z	90
NU546254	81
NU546318	81
NU546330	81
NU546344	81
NU546354	81
NU546418	81
NU546430	81
NU546444	81
NU546454	81
NU547018	81
NU547030	81
NU547054	81
NU548618	82
NU548630	82
NU548644	82
NU548654	82
NU549218	80
NU549230	80
NU549244	80
NU549254	80
NU550118	76
NU550130	76
NU550144	76
NU550154	76
NU550318	76
NU550330	76
NU550344	76
NU550354	76
NU550918	116
NU551418	76
NU551430	76
NU551444	76
NU551454	76
NU551718	115
NU551730	115
NU551744	115
NU551754	115

Reference number overview

Ref	Pg
NU551818	115
NU551830	115
NU551844	115
NU551854	115
NU552518	77
NU552530	77
NU552544	77
NU552554	77
NU552618	116
NU552718	116
NU553018	122
NU553020	122, 136
NU553030	122
NU553054	122
NU553118	122
NU553120	122, 136
NU553130	122
NU553154	122
NU553518	77
NU553530	77
NU553544	77
NU553554	77
NU553818	115
NU553830	115
NU553844	115
NU553854	115
NU555718	117
NU555730	117
NU555744	117
NU555754	117
NU555918	119
NU555930	119
NU555954	119
NU557118	117
NU557118W	119
NU557120W	135
NU557130	117
NU557130W	119
NU557144	117
NU557154	117
NU557154W	119
NU577718	82
NU577730	82
NU577744	82
NU577754	82
NU578618	82
NU578630	82
NU578644	82
NU578654	82
NU586218	82
NU586230	82

Ref	Pg
NU586244	82
NU586254	82
NU586618	82
NU586630	82
NU586644	82
NU586654	82
NU593218	80
NU593230	80
NU593244	80
NU593254	80
NU600280	110
NU600282	110
NU600283	110
NU600284	110
NU600285	110
NU600286	110
NU600287	110
NU600289	110
NU600480	110
NU600482	110
NU600483	110
NU600484	110
NU600485	110
NU600486	110
NU600487	110
NU600489	110
NU600680	110
NU600682	110
NU600683	110
NU600684	110
NU600685	110
NU600686	110
NU600687	110
NU600689	110
NU600880	110
NU600882	110
NU600883	110
NU600884	110
NU600885	110
NU600886	110
NU600887	110
NU600889	110
NU610380	110
NU610382	110
NU610383	110
NU610384	110
NU610385	110
NU610386	110
NU610387	110
NU610389	110
NU800218	102
NU800244	102

Ref	Pg
NU800418	102
NU800444	102
NU800618	102
NU800644	102
NU810318	102
NU810418	102
NU821020	138, 144
NU821030	144
NU821054	144
NU821820	138, 144
NU821830	144
NU821854	144
NU822418	145
NU823418	145
NU824418	145
NU840218	102
NU840230	102
NU840254	102
NU840418	102
NU840430	102
NU840454	102
NU840618	102
NU840630	102
NU840654	102
NU903718	61, 78, 89
NU903718U	61, 78, 89
NU903730	61, 78, 89
NU903730U	61, 78, 89
NU903744	61, 78, 89
NU903744U	61, 78, 89
NU903754	61, 78, 89
NU903754U	61, 78, 89
NU910018	53, 74, 88, 95
NU910018N	53, 74, 88, 95
NU910018U	53, 74, 88, 95
NU910020	128
NU910020N	128
NU910030	53, 74, 88, 95
NU910030N	53, 74, 88, 95
NU910030U	53, 74, 88, 95
NU910044	53, 74, 88, 95

Ref	Pg
NU910044N	53, 74, 88, 95
NU910044U	53, 74, 88, 95
NU910054	53, 74, 88, 95
NU910054N	53, 74, 88, 95
NU910054U	53, 74, 88, 95
NU920018	53, 74, 88, 95
NU920018N	53, 74, 88, 95
NU920018U	53, 74, 88, 95
NU920020	128
NU920020N	128
NU920030	53, 74, 88, 95
NU920030N	53, 74, 88, 95
NU920030U	53, 74, 88, 95
NU920044	53, 74, 88, 95
NU920044N	53, 74, 88, 95
NU920044U	53, 74, 88, 95
NU920054	53, 74, 88, 95
NU920054N	53, 74, 88, 95
NU920054U	53, 74, 88, 95
NU940618	64
NU940620	133
NU940630	64
NU940654	64
NU940718	64
NU940720	133
NU940730	64
NU940754	64
NU941018	64
NU941020	133
NU941030	64
NU941044	64
NU941054	64
NU941118	64
NU941118T	69
NU941120	133
NU941130	64
NU941144	64
NU941154	64
NU942018	64
NU942020	133
NU942030	64

Reference number overview

Ref	Pg
NU942054	64
NU942218	64
NU942218	64
NU942230	64
NU942230	64
NU942254	64
NU942254	64
NU942418	64
NU942418	64
NU942430	64
NU942430	64
NU942454	64
NU942454	64
NU943818	64
NU943830	64
NU943854	64
NU943918	64
NU943930	64
NU943954	64
NU944018	66, 81
NU944030	66, 81
NU944044	66, 81
NU944054	66, 81
NU944118	66, 81
NU944120	133
NU944130	66, 81
NU944154	66, 81
NU946018	64
NU946020	133
NU946030	64
NU946044	64
NU946054	64
NU946118	64
NU946120	133
NU946130	64
NU946144	64
NU946154	64
NU946218	64
NU946220	133
NU946230	64
NU946254	64
NU946318	64
NU946320	133
NU946330	64
NU946354	64
NU946418	64
NU946430	64
NU946454	64
NU947818	64
NU947830	64
NU947854	64
NU947918	64

Ref	Pg
NU947930	64
NU947954	64
NU986418	68
NU986430	68
NU986444	68
NU986454	68
NU986518	68
NU986520	134
NU986530	68
NU986544	68
NU986554	68
NU986618	68
NU986620	134
NU986630	68
NU986644	68
NU986654	68
S	
S520299	53, 74, 88, 95, 128
U	
U0.582	101
U22.805	145

Notes



Green Premium™

Endorsing eco-friendly products in the industry

Green Premium™
Product

Green Premium is the only label that allows you to effectively develop and promote an environmental policy whilst preserving your business efficiency. This ecolabel guarantees compliance with up-to-date environmental regulations, but it does more than this.

Over 75% of Schneider Electric manufactured products have been awarded the Green Premium ecolabel

Discover what we mean by green …

Check your products!

Schneider Electric's Green Premium ecolabel is committed to offering transparency, by disclosing extensive and reliable information related to the environmental impact of its products:

RoHS

Schneider Electric products are subject to RoHS requirements at a worldwide level, even for the many products that are not required to comply with the terms of the regulation. Compliance certificates are available for products that fulfil the criteria of this European initiative, which aims to eliminate hazardous substances.

REACh

Schneider Electric applies the strict REACh regulation on its products at a worldwide level, and discloses extensive information concerning the presence of SVHC (Substances of Very High Concern) in all of its products.

PEP: Product Environmental Profile

Schneider Electric publishes complete set of environmental data, including carbon footprint and energy consumption data for each of the lifecycle phases on all of its products, in compliance with the ISO 14025 PEP ecopassport program. PEP is especially useful for monitoring, controlling, saving energy, and/or reducing carbon emissions.

EoLI: End of Life Instructions

Available at the click of a button, these instructions provide:

- Recyclability rates for Schneider Electric products.
- Guidance to mitigate personnel hazards during the dismantling of products and before recycling operations.
- Parts identification for recycling or for selective treatment, to mitigate environmental hazards/ incompatibility with standard recycling processes.

Life Is On | Schneider Electric

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.se.com

12-2021

© 2021 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.
Document reference:LSB03605EN

This document has been
printed on recycled paper

LED Zona®
ОСВЕТИТЕЛНИ РЕШЕНИЯ

Харесахте ли нещо от каталога?

Разгледайте и поръчайте продукти на Schneider Electric онлайн
на led-zona.bg – с актуални цени и наличности.

Продуктите на Schneider Electric

Сканирайте или кликнете

Разгледайте продуктите →

Каталози на Schneider Electric

Сканирайте или кликнете

Още каталози →

www.led-zona.bg

T: 0888 065 970 | E: sales@led-zona.bg

Сфера Лайт ООД · гр. София, ж.к. Банишора, ул. Опълченска, бл. 54 (до 7-ма поликлиника)