
ARCHITECTURAL LIGHTING

Zambelis
LIGHTS

Connect to our B2B platform through our website and access everything you need, anytime - 24/7

- B2B Online Order/Open Orders
- Product Availability & Arrival Dates
- Extensive Range of Products
- HD Photos
- Product Data Sheets
- Installation Manuals
- Flexibility & Customized Products
- Manufacturing Products
- Photometric Files
- CE Certificates
- COC Certificates
- 3D Models / 3D Viewer on Website

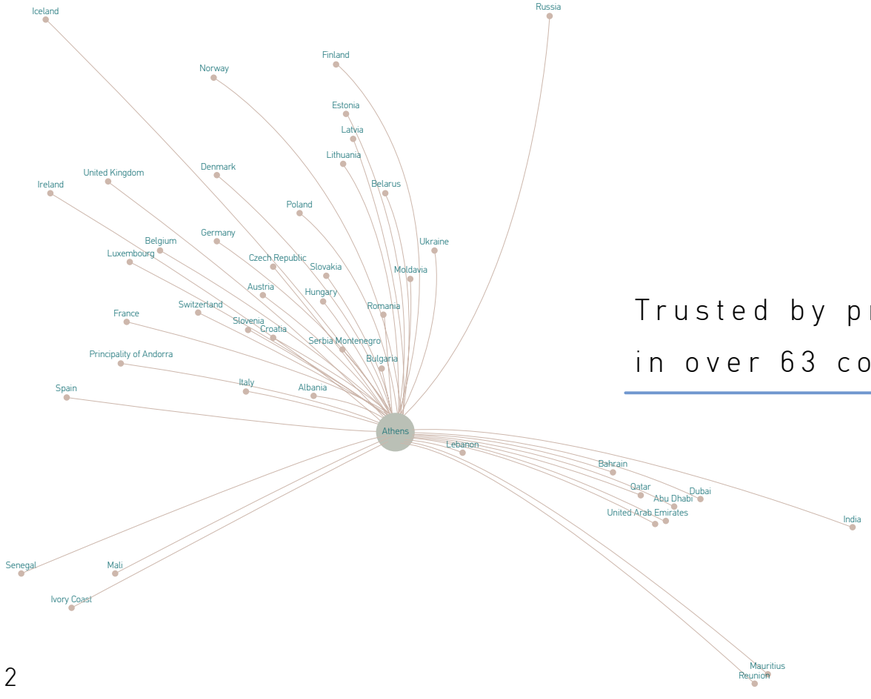

Trusted by professionals
in over 63 countries globally.

SUSTAINABILITY

Lighting the Future Responsibly.

We design lighting solutions that combine efficiency, durability and innovation - with minimal footprint and maximum purpose.
For us, green isn't just a color.
It's a mindset shaping everything we create.

Scan to learn how we go green.



TABLE OF CONTENTS

01. 48V MAGNETIC TRACK SYSTEM 5MM | p.014-039

02. 48V MAGNETIC TRACK SYSTEM 3MM | p.040-057

03. 24V MAGNETIC TRACK SYSTEM 6MM | p.058-079

04. 48V ULTRA SLIM MAGNETIC SYSTEM 15MM | p.080-097

05. 24V MINI SURFACE MAGNETIC SYSTEM 11MM | p.098-107

06. 48V LINEAR MAGNETIC SYSTEM | p.108-145

07. 48V ROUNDED RECTANGLE MAGNETIC SYSTEM | p.146-161

08. 48V CIRCLES-CURVED MAGNETIC SYSTEM | p.162-179

09. 48V SPACE FRAME MAGNETIC SYSTEM | p.180-191

10. 24V FLEXIBLE CURVED SYSTEM | p.192-201

11. 24V PLUG & PLAY SYSTEM | p.202-209

12. CEILING-PENDANT-TRIMLESS CIRCLES | p.210-227

13. LINEARS | p.228-247

14. 3-PHASE TRACKS & LIGHTS | p.248-267

15. DOWNLIGHT RECESSED & TRIMLESS LED SPOTS | p.268-333

16. DOWNLIGHT RECESSED & TRIMLESS SPOTS GU10 | p.334-351

17. GYPSUM | p.352-367

18. CEILING SPOTS | p.368-409

19. ALUMINIUM PROFILES & LED STRIPS | p.410-477

20. COINS-DRIVERS & SENSORS | p.478-489



2506 p.18



2503 p.22



25162 p.23



2522 p.26



2524 p.29



2525 p.30



2529 p.33



2527 p.34



2531 p.34



2530 p.36



2528 p.37



25130 p.44



25127 p.48



25118 p.48



25115 p.51



25117 p.51



25120 p.52



25121 p.52



25123 p.55



25125 p.56



25124 p.56



25126 p.56



25223 p.62



25231 p.63



25430 p.66



25433 p.66



25246 p.66



25255 p.69



25254 p.72



25251 p.72



25243 p.74



25240 p.74



25258 p.77



25249 p.77



25260 p.78



23123 p.84



23120 p.85



23124 p.88



23110 p.90



23112 p.90

23113 p.90

23114 p.92

23115 p.92

23117 p.93

23116 p.93

23126 p.96

22262 p.102

22251 p.105

22252 p.105

22253 p.105

22256 p.107

2084G-3 p.112

2082NCK-3 p.113

2083B-3 p.116

2082W-3 p.117

2084B-3 p.118

2085W-3 p.119

25354 p.122

25357 p.122

25352 p.124

25473 p.124

25476 p.125

2087 p.126

2091 p.129

20291 p.129

2094 p.130

2092-D p.130

20180 p.132

20178 p.132

20400-BD p.133

2095-D p.134

2081-D p.134

20291-W p.137

2091-3W p.137

2089-4W p.138

20414 p.139

22273B-3 p.148

22121 p.148

22275 p.148

22274B-3 p.150

22276 p.150

22099 p.152

22101 p.152

22100 p.152



22107 p.152



20413 p.159



20307-B p.161



22090 p.166



22091 p.168



22096 p.174



22120 p.174



22270 p.176



22271 p.176



22272 p.176

23152 p.186



23149 p.187



23150 p.187



23148 p.187



23154 p.187



23145 p.188



23153 p.188



23296 p.189



23142 p.189



23139 p.189



23178 p.196



23182 p.198



23183 p.198



23185 p.199

23186 p.200



23187 p.200



19152 p.204



19172 p.204



19166 p.204



19155 p.207



20140 p.207



19168 p.208

NEW



25198 p.212

NEW



25204 p.213

NEW



25199 p.214

NEW



25205 p.215

NEW



25201 p.216

NEW

25207 p.218

NEW



25210 p.220

NEW



25211 p.222

NEW

25214 p.223

NEW

81063B p.226

5158D p.232

53580 p.236

31580 p.240

3358D p.244

19401 p.250

19406 p.250

19403-R p.250

19430 p.251

19413 p.251

19414 p.251

NEW

S240 p.252

NEW

S244 p.254

NEW

S237 p.256

NEW

S235 p.257

S197 p.259

S203 p.259

S065- p.260

S114 p.263

S059 p.264

NEW

S221 p.267

S038 p.267

NEW

S338 p.271

NEW

S351 p.275

NEW

S346 p.276

NEW

S349 p.277

NEW

S337 p.279

NEW

25285 p.281

NEW

25290 p.281

NEW

25400 p.285

NEW

25403 p.285

NEW

25405 p.287

NEW

25406 p.287

NEW

25407 p.287

NEW

S342 p.289

NEW

RFLNS342 p.289

NEW

DFG342 p.291

NEW

DAW342 p.291

NEW

RRB342 p.291

NEW

TRML342 p.291

S204 p.297

S210 p.299

S213 p.299


S136 p.302


S140 p.303


S138 p.304


S142 p.305


NEW
25299 p.306


NEW
25301 p.306


S097 p.309


S183 p.310


S185 p.311


S187 p.311


S075 p.312


S170 p.314


S171 p.314


S110 p.316


180016 p.316


S078 p.318


S143 p.319


NEW
25361 p.320


NEW
25364 p.321


S176 p.322


S173 p.323


S178 p.323


NEW
S336 p.324


S195 p.326


S192 p.327


S193 p.328


S190 p.329


S086-B p.330


S085-B p.330


S084 p.331


E333 p.332


S125 p.338


S127 p.338


RFL125-BL p.338


RFL125-G p.338


S129 p.338


S126 p.339


S128 p.339


RFL126-BL p.339


RFL126-G p.339

S130 p.339

S162 p.340

NEW
S225 p.340

S165 p.342

S168 p.342

S046 p.343

NEW
S222 p.344

NEW
S228 p.346

NEW
S227 p.346

S149 p.347

Z10105TR-B p.347

S164 p.348

S150 p.348

S060 p.349

S061 p.349

S019 p.349

S012 p.350

S009 p.350

S008 p.351

S014 p.351

NEW
S231 p.354

NEW
S230 p.354

S029 p.354

S030 p.357

S025 p.357

S027 p.357

S047 p.358

S048 p.358

20272 p.361

NEW
25383 p.362

NEW
25382 p.362

NEW
25381 p.363

NEW
25380 p.364

NEW
25379 p.365

180026 p.366

180028 p.367

NEW
25308 p.371

S214 p.372

NEW
25215 p.374

NEW
25311 p.377

NEW
25313 p.379

NEW
25312 p.379

NEW
25305 p.380

S217 p.383



S218 p.383



25297 p.384



25298 p.384



Z12107K-B p.386



S179 p.389



S001 p.389



22133 p.390



S112 p.390



S133 p.392



S069 p.393



S040 p.394



S151 p.394



S155 p.396



23224 p.399

23225 p.399



S161 p.400



S055 p.402

S056 p.402



180017 p.404



180015 p.404



1928-B p.404



S117 p.405



S122 p.405



22028 p.406



S123 p.406



S107 p.407



S104 p.407



S157 p.408



20329 p.412



20328 p.414



20205 p.415




20203 p.415



20204 p.415



20326 p.416



20327 p.417



20195 p.418



20194 p.418



20206 p.418



20197 p.420



20190 p.421

20201 p.422

20198 p.423

*Some background visuals were created by using AI tools.

LS44 p.424

LS47 p.427

LS48 p.428

LS17 p.431

LS20 p.432

LS33 p.434

LS31 p.435

LS34 p.436

LS38 p.439

LS53 p.440

LS02 p.441

LS55 p.442

LS56 p.445

LS06 p.448

LS12 p.449

LS57 p.452

LS59 p.453

LS66 p.454

LS68 p.455

LS70 p.456

LS73 p.457

LS75 p.458

LS76 p.460

LS63 p.462

LS61 p.463

LS14 p.464

LS09 p.465

LS77 p.466

LS78 p.472

LS80 p.476

25338 p.480

25339 p.481

CN5092736 p.482

CN3593036 p.483

CN3594036 p.483

FLS42 p.484

FLS21 p.484

FLS42D p.485

FLS12D p.485

XLG-200 p.486

Xi24-200D p.487

6937186115232 p.488

01. 48V MAGNETIC TRACK SYSTEM 5MM



SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear | Curved

TRACK COLOR

Black Matt | White Matt

INSTALLATION

Surface | Pendant | Trimless

FIXTURE COLOR

Black Matt | White Matt

T/S: 2508 Feeder

T/S: 2508 Feeder

REFERENCE CODE | TRIMLESS & SURFACE INSTALLATION

T: TRIMLESS
S: SURFACE

T: 2521 Cross Connector
S: 2515 Cross Connector
T/S: 2x 2510 Flex Connector

T/S: 2509 Straight Connector
S: 25483 Straight Mechanic Connector

T: 2518 Inner Corner
S: 2512 Inner Corner
T/S: 2510 Flex Connector

T: 2517 Horizontal Corner
S: 2511 Horizontal Corner
T/S: 2510 Flex Connector


T: 2520 "T" Connector
S: 2514 "T" Connector
T/S: 2509-3D "T" Flex Connector

S: 2530
Feeder for Flexible LED Strip


S: 25162
Curved Track

*Dimensions Indicated In Millimeters

TRIMLESS TRACK 5MM

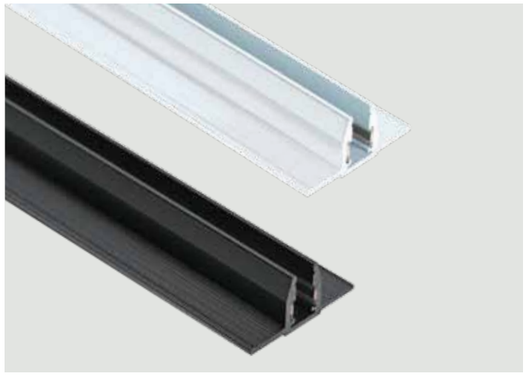


Track Code	Length	Color
2504	1m	Black Matt
2504-W	1m	White Matt
2505	2m	Black Matt
2505-W	2m	White Matt
2506	3m	Black Matt
2506-W	3m	White Matt






INNER CORNER 90°
(2518) VERTICAL




Corner Code	Installation	Color
2518	Vertical	Black Matt
2518-W	Vertical	White Matt
2517	Horizontal	Black Matt
2517-W	Horizontal	White Matt

Notice : For corner it is also required to order 2510, 2510-W



CORNER 90°
(2517) HORIZONTAL




ACCESSORIES FOR TRIMLESS TRACK 5MM




End Cap
Material Plastic

Color Black Matt / **Code 2507**
Color White Matt / **Code 2507-W**

OUTER CORNER - "T" CONNECTOR - CROSS CONNECTOR FOR TRIMLESS TRACK 5MM




OUTER CORNER 90°
(2519) VERTICAL






T CONNECTOR
(2520)





CROSS CONNECTOR
(2521)




Code	Type	Color
2519	Vertical	Black Matt
2520	T-Connector	Black Matt
2521	Cross Connector	Black Matt

*Dimensions Indicated In Millimeters


5mm wide





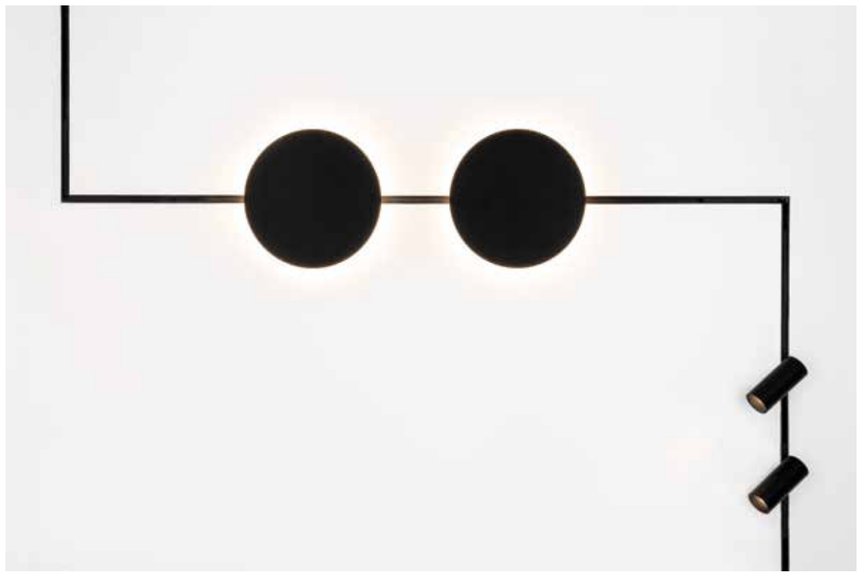


*Dimensions Indicated In Millimeters

SURFACE I PENDANT TRACK 5MM




Track Code	Length	Color
2501	1m	Black Matt
2501-W	1m	White Matt
2502	2m	Black Matt
2502-W	2m	White Matt
2503	3m	Black Matt
2503-W	3m	White Matt





INNER CORNER 90°
(2512) VERTICAL




Corner Code	Installation	Color
2512	Vertical	Black Matt
2512-W	Vertical	White Matt
2511	Horizontal	Black Matt
2511-W	Horizontal	White Matt

Notice : For corner it is also required to order 2510, 2510-W
Notice : Straight Mechanic Connector Included



CORNER 90°
(2511) HORIZONTAL




ACCESSORIES FOR SURFACE I PENDANT TRACK 5MM



End Cap
Material Plastic
Color Black Matt / **Code 2507**
Color White Matt / **Code 2507-W**



Straight Mechanic Connector
Material Metal
Color Black Matt / **Code 25483**




Suspension Kit (2pcs)
Material Metal
Color Black Matt-Black Wire 2000mm / **Code 2516**
Color White Matt-Wire 2000mm / **Code 2516-W**

*Dimensions Indicated In Millimeters

OUTER CORNER - "T" CONNECTOR - CROSS CONNECTOR FOR SURFACE I PENDANT TRACK 5MM




OUTER CORNER 90°
(2513) VERTICAL






T CONNECTOR
(2514)






CROSS CONNECTOR
(2515)




Code	Type	Color
2513	Vertical	Black Matt
2514	T-Connector	Black Matt
2515	Cross Connector	Black Matt


Notice : For corner it is also required to order 2510
Notice : For "T" connector it is also required to order 2509-3D
Notice : Straight Mechanic Connector Included



SURFACE I PENDANT CURVED TRACK 5MM








Dimensions	Ø: 600mm L: 521mm
Material	Aluminium
Color	Black Matt / **Code 25162**
Color	White Matt / **Code 25166**

REFERENCE CODE I PENDANT INSTALLATION
P: PENDANT








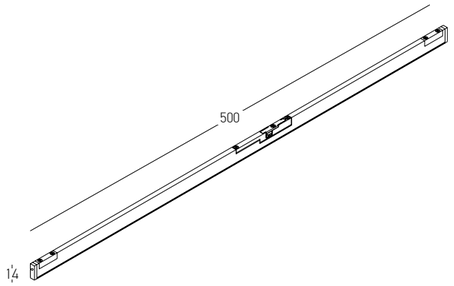

Power	8W
Input	48V
Color Temperature	3000K
Lumen	502Lm
Cri	90
Dimensions	L: 500mm W: 4mm H: 14mm
Beam Angle	100°
DALI Dimmable	
Material	Aluminium - PC Diffuser
Special Feature	Aluminium Adapter
Color	Black Matt / **Code 2523**
Color	White Matt / **Code 2523-W**





Power	4W
Input	48V
Color Temperature	3000K
Lumen	249Lm
Cri	90
Dimensions	L: 250mm W: 4mm H: 14mm
Beam Angle	100°
DALI Dimmable	
Material	Aluminium - PC Diffuser
Special Feature	Aluminium Adapter
Color	Black Matt / **Code 2522**







*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters





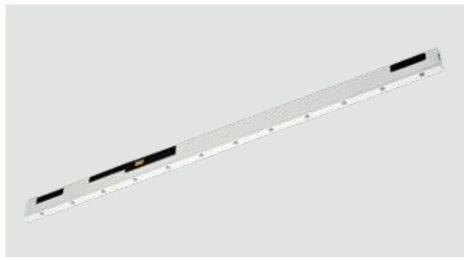

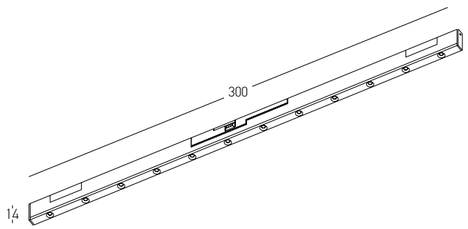

Power	7W
Input	48V
Color Temperature	3000K
Lumen	379Lm
Cri	90
Dimensions	L: 300mm W: 4mm H: 14mm
Beam Angle	80°
DALI Dimmable	◯
Material	Aluminium
Special Feature	Aluminium Adapter
Color	Black Matt / **Code 2524**
	White Matt / **Code 2524-W**















Power	7W
Input	48V
Color Temperature	3000K
Lumen	339Lm
Cri	90
Dimensions	Ø: 28mm H: 53mm
Beam Angle	36°
DALI Dimmable	◓
Material	Aluminium
Special Feature	Aluminium Adapter
Color	Black Matt / **Code 2525**
Color	White Matt / **Code 2525-W**





Power	10W
Input	48V
Color Temperature	3000K
Lumen	587Lm
Cri	90
Dimensions	Ø: 34mm H: 80mm
Beam Angle	36°
DALI Dimmable	◓
Material	Aluminium
Special Feature	Aluminium Adapter
Color	Black Matt / **Code 2526**



*Dimensions Indicated In Millimeters


*Dimensions Indicated In Millimeters














Power	7W
Input	48V
Color Temperature	3000K
Lumen	366Lm
Cri	90
Dimensions	Ø: 58mm H: 60mm
Beam Angle	36°
DALI Dimmable	◯
Material	Aluminium
Special Feature	Honeycomb Aluminium Adapter
Color	Black Matt / **Code 2529**
Color	White Matt / **Code 2529-W**

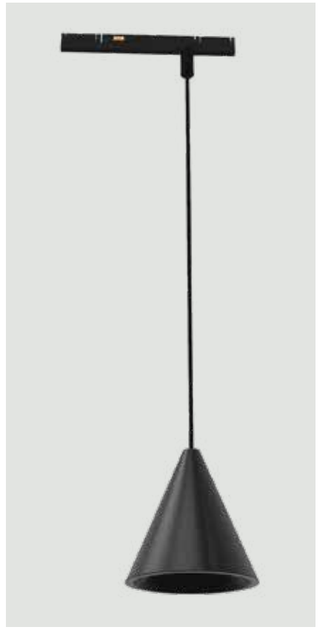

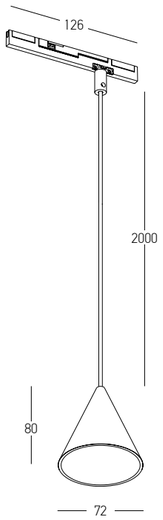

Power	6W
Input	48V
Color Temperature	3000K
Lumen	426Lm
Cri	90
Dimensions	Ø: 72mm H: 80mm
Beam Angle	36°
DALI Dimmable	◓
Material	Aluminium
Special Feature	2000mm Cable Available Aluminium Adapter
Color	Black Matt / **Code 2527**






Power	7W
Input	48V
Color Temperature	3000K
Lumen	330Lm
Cri	90
Dimensions	Ø: 80mm
DALI Dimmable	◓
Material	Aluminium - PMMA
Special Feature	Aluminium Adapter
Color	Black Matt / **Code 2531**



*Dimensions Indicated In Millimeters


*Dimensions Indicated In Millimeters



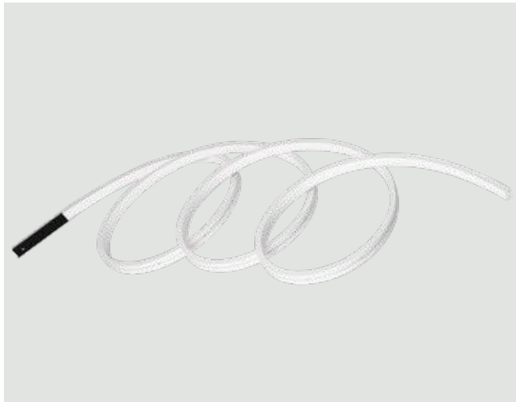

Power	10.8W
Input	48V
Color Temperature	3000K
Lumen	309Lm
Cri	90
Dimensions	L: 1000mm W: 4mm H: 10.8mm
Beam Angle	110°
DALI Dimmable	◯
Material	Silicone - Aluminium
Color	White-Black Matt Adapter / **Code 2530**


Notice : Adapter must be installed on a linear track.
Notice : Cut sections of flexible LED strip are not reusable.

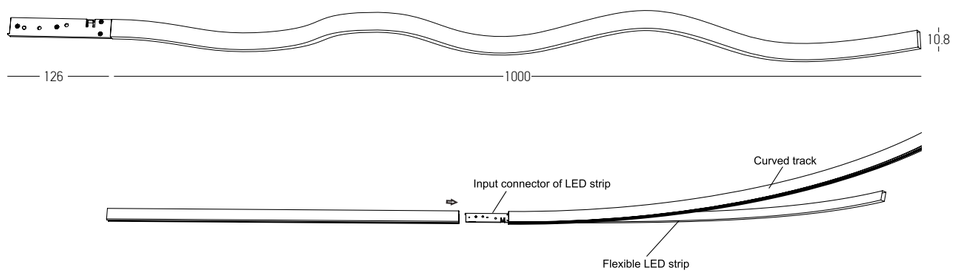





Power	8W
Input	48V
Color Temperature	3000K
Lumen	134Lm
Cri	90
Dimensions	Ø: 184mm H: 25mm
DALI Dimmable	◯
Material	Aluminium - Microprismatic Diffuser
Special Feature	Backlight Aluminium Adapter
Color	Black Matt / **Code 2528**





*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

ACCESSORIES FOR 48V MAGNETIC TRACK SYSTEM 5MM

FEEDER






Dimensions	L: 100mm W: 4mm H: 14mm
Material	Aluminium
Special Feature	200mm Available
Color	Black Matt / **Code 2508**
Color	White Matt / **Code 2508-W**

FEEDER FOR PENDANT INSTALLATION






Dimensions	L: 100mm W: 4mm H: 14mm
Material	Aluminium
Special Feature	2000mm Available
Color	Black Matt / **Code 2508-2M**

STRAIGHT CONNECTOR






Dimensions	L: 200mm W: 4mm H: 14mm
Material	Aluminium
Color	Black Matt / **Code 2509**
Color	White Matt / **Code 2509-W**

FLEX CONNECTOR






Dimensions	L: 225mm W: 4mm H: 14mm
Material	Aluminium
Color	Black Matt / **Code 2510**
Color	White Matt / **Code 2510-W**

"T" FLEX CONNECTOR






Dimensions	L: 240mm W: 4mm H: 14mm
Material	Aluminium
Color	Black Matt / **Code 2509-3D**

CEILING BASE FOR PENDANT INSTALLATION






Dimensions	Ø: 80mm H: 35mm
Material	Metal
Color	Sandy Black / **Code 23280**

REMOTE DRIVERS FOR 48V MAGNETIC TRACK SYSTEM 5MM


REMOTE DRIVER 60W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20295**


REMOTE DRIVER 100W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20296**


REMOTE DRIVER 150W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20297**

REMOTE DRIVER 200W

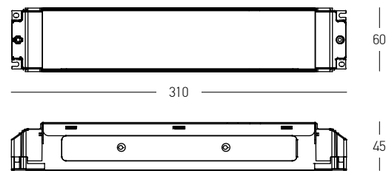

Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

DALI-PUSH BUTTON / **Code 23134**

*Dimensions Indicated In Millimeters

02. 48V MAGNETIC TRACK SYSTEM 3MM



SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear

BODY COLOR

Sandy Black | Sandy White

INSTALLATION

Trimless


FIXTURE COLOR

Sandy Black | Sandy White | Brass



T: 25131 Feeder
T: 25132 Straight Connector
T: 25134
Inner Corner
Flex Connector Included
T: 25135 Outer Corner
Flex Connector Included
T: 25133 Horizontal Corner
Flex Connector Included

*Dimensions Indicated In Millimeters

TRIMLESS TRACK 3MM

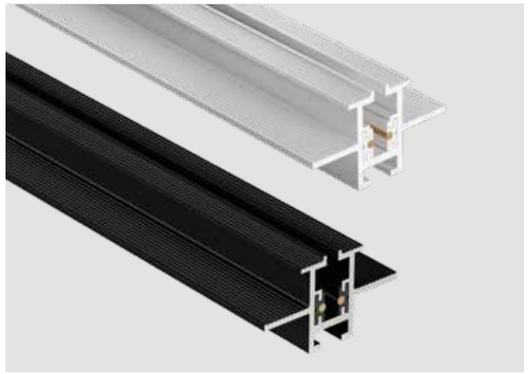


Track Code	Length	Color
25128	1m	Sandy Black
25128-W	1m	Sandy White
25129	2m	Sandy Black
25129-W	2m	Sandy White
25130	3m	Sandy Black
25130-W	3m	Sandy White






INNER CORNER 90°
(25134) VERTICAL






CORNER 90°
(25133) HORIZONTAL






OUTER CORNER 90°
(25135) VERTICAL



Corner Code	Installation	Color
25134	Vertical	Sandy Black
25134-W	Vertical	Sandy White
25133	Horizontal	Sandy Black
25133-W	Horizontal	Sandy White
25135	Vertical	Sandy Black

Notice : Flex Connector & Straight Mechanic Connector Included




FLEX CONNECTOR

ACCESSORIES FOR TRIMLESS TRACK 3MM

FEEDER






Dimensions L: 80mm W: 3mm H: 14mm
Material Plastic
Special Feature 300mm Available
Color Black / **Code 25131**

STRAIGHT CONNECTOR





Dimensions L: 160mm W: 3mm H: 14mm
Material Plastic
Color Black / **Code 25132**


END CAP



End Cap (2pcs)
Material Plastic
Color Black / **Code 25460**
Color White / **Code 25460-W**


REMOTE DRIVERS FOR TRIMLESS TRACK 3MM

REMOTE DRIVER 100W




Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years
ON-OFF / **Code 20296**

REMOTE DRIVER 100W




Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years
TRIAC / **Code 25479**

REMOTE DRIVER 100W



Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years
DALI-PUSH BUTTON / **Code 25480**


REMOTE DRIVER 150W




Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years
ON-OFF / **Code 20297**

*Dimensions Indicated In Millimeters




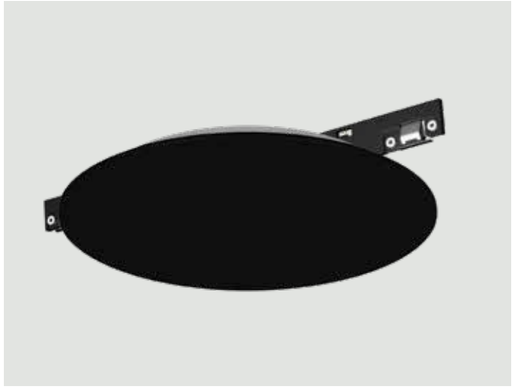


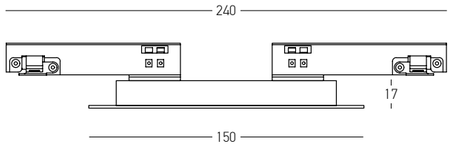


Power	7W
Input	48V
Color Temperature	3000K
Lumen	220Lm
Cri	90
Dimensions	Ø: 150mm H: 17mm
Dimmable Triac-DALI	◓
Material	Aluminium - PC Diffuser
Special Feature	Backlight
Color	Sandy Black / **Code 25127**



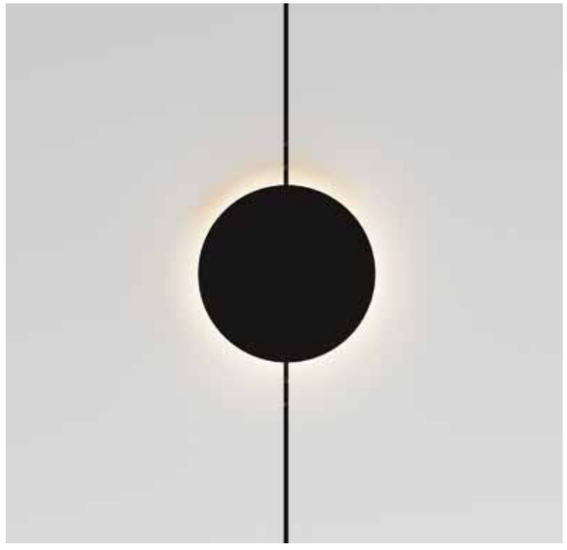

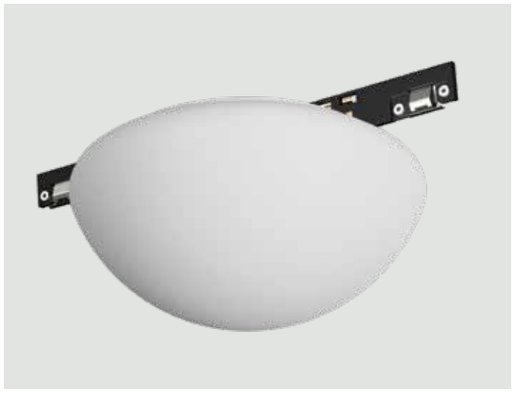

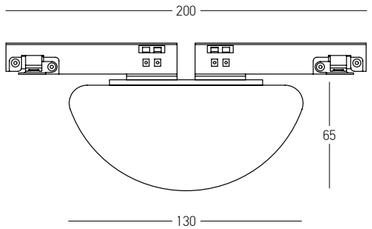

Power	8W
Input	48V
Color Temperature	3000K
Lumen	590Lm
Cri	80
Dimensions	Ø: 130mm H: 65mm
Beam Angle	60°
Non Dimmable	⊠
Material	PC Diffuser
Color	Opal / **Code 25118**



*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

























Power	7W
Input	48V
Color Temperature	3000K
Lumen	300Lm
Cri	90
Dimensions	Ø: 35mm H: 125mm
Beam Angle	60°
Dimmable Triac-DALI	◯
Material	Aluminium
Color	Sandy Black / **Code 25115**
Color	Sandy White / **Code 25116**
Color	Brass / **Code 25117**








Change Position








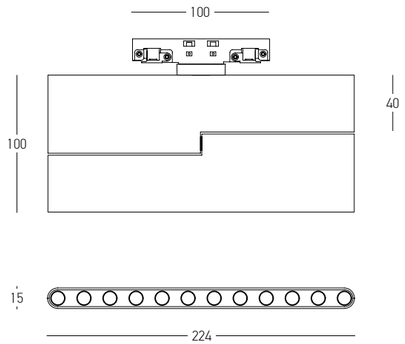

Power	12W
Input	48V
Color Temperature	3000K
Lumen	850Lm
Cri	90
Dimensions	L: 224mm W: 15mm H: 100mm
Beam Angle	36°
Dimmable Triac-DALI	◠
Material	Aluminium
Special Feature	180° Adjustable Grille 359° Rotatable
Color	Sandy Black / **Code 25119**
Color	Sandy White / **Code 25120**
Color	Brass / **Code 25121**






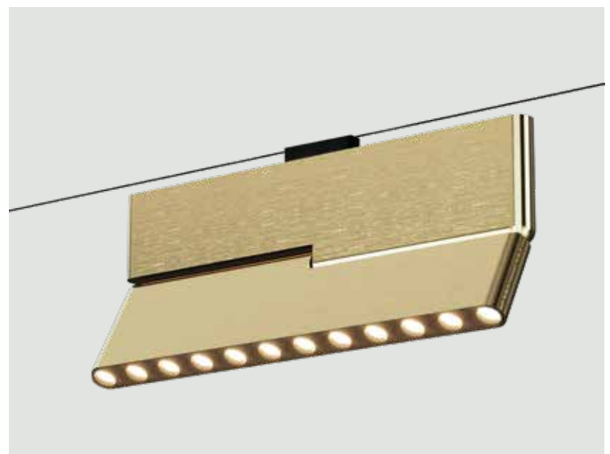



*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

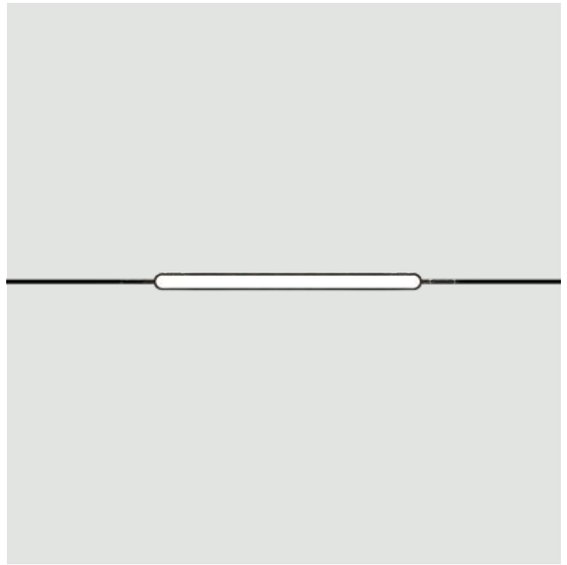




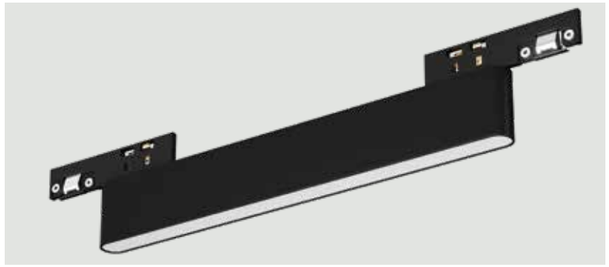


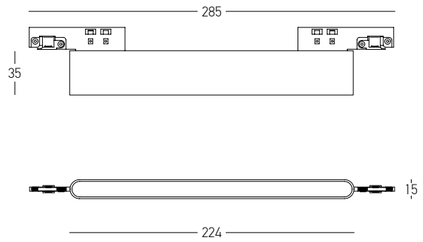


Power	10W
Input	48V
Color Temperature	3000K
Lumen	400Lm
Cri	90
Dimensions	L: 224mm W: 15mm H: 35mm
Beam Angle	120°
Dimmable Triac-DALI	◔
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 25123**

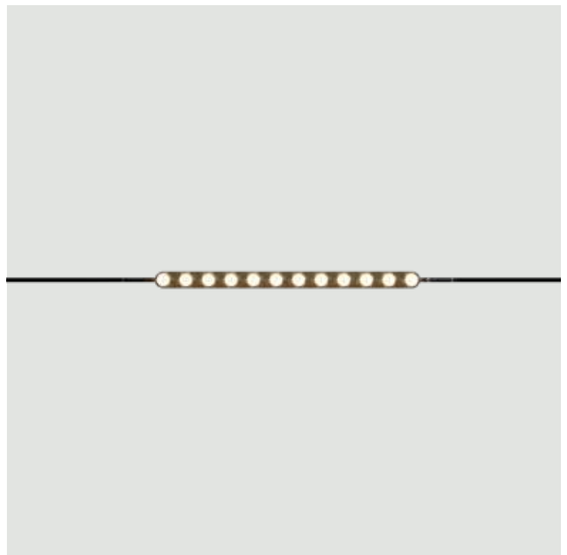





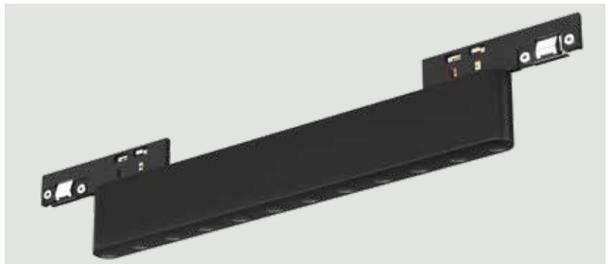

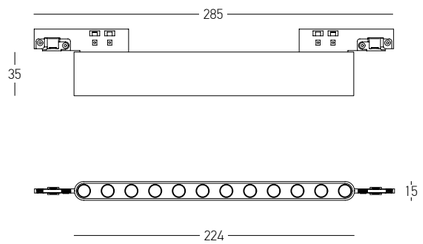



Power	10W
Input	48V
Color Temperature	3000K
Lumen	660Lm
Cri	90
Dimensions	L: 224mm W: 15mm H: 35mm
Beam Angle	36°
Dimmable Triac-DALI	◔
Material	Aluminium
Color	Sandy Black / **Code 25122**

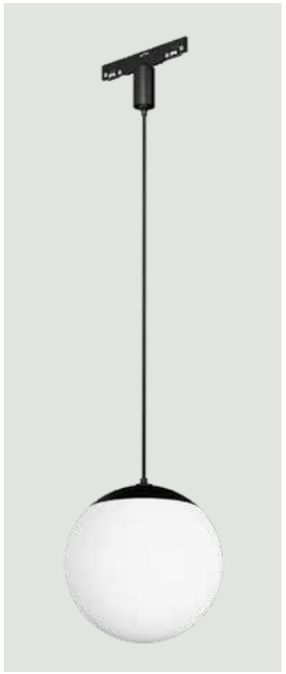

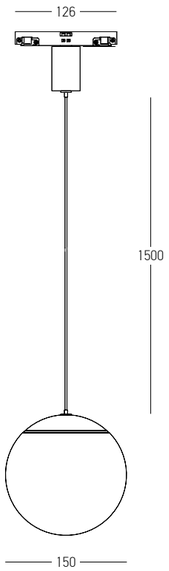


Power	10W
Input	48V
Color Temperature	3000K
Lumen	900Lm
Cri	90
Dimensions	Ø: 150mm
Beam Angle	120°
Dimmable Triac-DALI	◓
Material	Aluminium - PC Diffuser
Special Feature	1500mm Cable Available
Color	Sandy Black-Opal / **Code 25125**

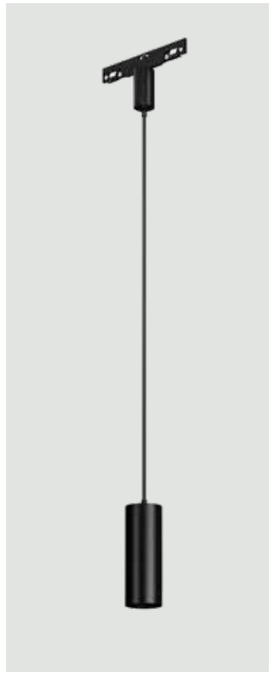

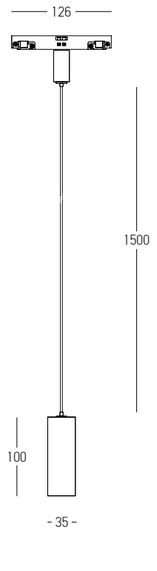



Power	7W
Input	48V
Color Temperature	3000K
Lumen	310Lm
Cri	90
Dimensions	Ø: 35mm H: 100mm
Beam Angle	30°
Dimmable Triac-DALI	◓
Material	Aluminium
Special Feature	1500mm Cable Available
Color	Sandy Black / **Code 25124**



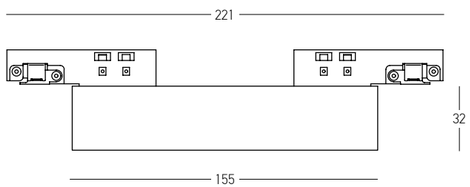

Power	11W
Input	48V
Color Temperature	3000K
Lumen	700Lm
Cri	90
Dimensions	Ø: 155mm H: 32mm
Beam Angle	60°
Dimmable Triac-DALI	◓
Material	Aluminium
Color	Sandy Black / **Code 25126**

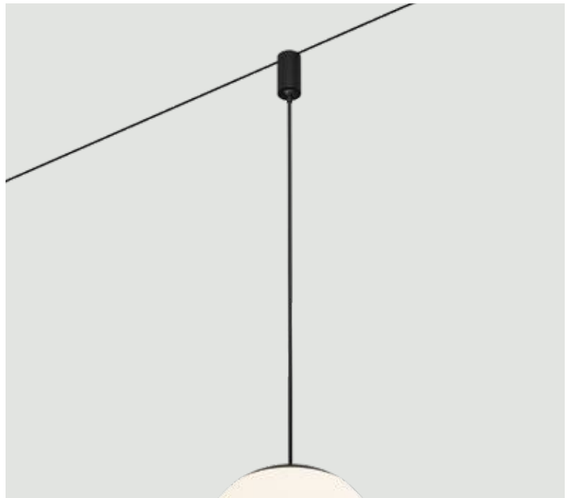

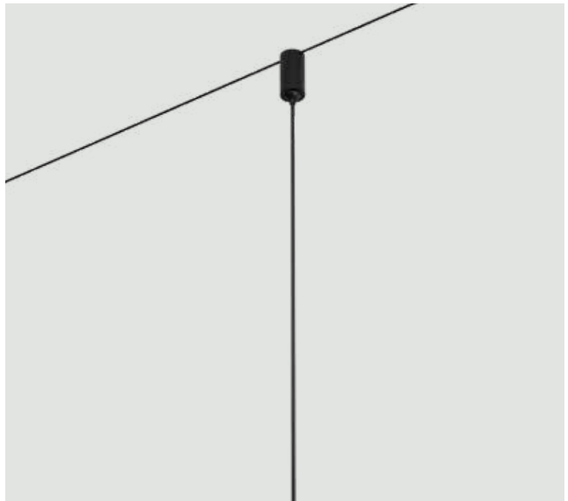





*Dimensions Indicated In Millimeters



03. 24V MAGNETIC TRACK SYSTEM 6MM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear | Curved

INSTALLATION

Trimless | Surface

BODY COLOR

Sandy Black | Antique Brass

FIXTURE COLOR

Sandy Black | Antique Brass

REFERENCE CODE | TRIMLESS & SURFACE INSTALLATION

T: TRIMLESS
S: SURFACE

T/S: 25264 Feeder

T/S: 25261 Straight Mechanic Connector
T/S: 25262 Straight Connector

T/S: 25261 Straight Mechanic Connector
T/S: 25262 Straight Connector

T/S: 25261 Straight Mechanic Connector

T/S: 25246 Feeder for Flexible LED Strip

T/S: 25261 Straight Mechanic Connector

T/S: 25261 Straight Mechanic Connector

T/S: 25261 Straight Mechanic Connector

T/S: 25264 Feeder

T/S: 25261 Straight Mechanic Connector

S: 25433
Curved Track

T/S: 25261 Straight Mechanic Connector
T/S: 25262 Straight Connector

T/S: 25261 Straight Mechanic Connector

T/S: 25246 Feeder for Flexible LED Strip

S: 25431
Curved Track

T/S: 25263 Flex Connector

T/S: 25261 Straight Mechanic Connector
T/S: 25262 Straight Connector


T/S: 25264
Feeder

*Dimensions Indicated In Millimeters

TRIMLESS TRACK 6MM




Track Code	Length	Color
25220	1m	Sandy Black
25221	1m	Antique Brass
25222	2m	Sandy Black
25223	2m	Antique Brass

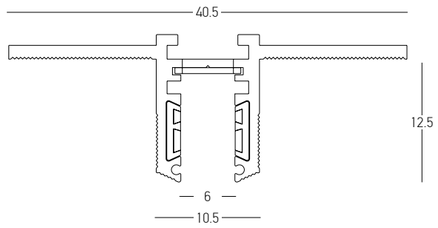

SURFACE TRACK 6MM



Track Code	Length	Color
25228	1m	Sandy Black
25229	1m	Antique Brass
25230	2m	Sandy Black
25231	2m	Antique Brass



CORNER 90° (25226)
VERTICAL

CORNER 90° (25227)
VERTICAL

Corner Code	Installation	Color
25226	Vertical	Sandy Black
25227	Vertical	Antique Brass
25224	Horizontal	Sandy Black
25225	Horizontal	Antique Brass


Notice : For corner it is also required to order 25263

CORNER 90° (25234)
VERTICAL

CORNER 90° (25235)
VERTICAL

Corner Code	Installation	Color
25234	Vertical	Sandy Black
25235	Vertical	Antique Brass
25232	Horizontal	Sandy Black
25233	Horizontal	Antique Brass


Notice : For corner it is also required to order 25263




CORNER 90° (25224)
HORIZONTAL



CORNER 90° (25225)
HORIZONTAL



CORNER 90° VERTICAL




CORNER 90° HORIZONTAL




CORNER 90° (25232)
HORIZONTAL



CORNER 90° (25233)
HORIZONTAL



CORNER 90° VERTICAL



CORNER 90° HORIZONTAL

ACCESSORIES FOR TRIMLESS TRACK 6MM



End Cap
Material Plastic

Color Black Matt / **Code 25458**
Color Antique Brass / **Code 25458-G**



Straight Mechanic Connector
Material Stainless Steel

Code 25261

ACCESSORIES FOR SURFACE TRACK 6MM



End Cap
Material Plastic

Color Black Matt / **Code 25458**
Color Antique Brass / **Code 25458-G**



Straight Mechanic Connector
Material Stainless Steel

Code 25261


*Dimensions Indicated In Millimeters






SURFACE CURVED TRACK


Dimensions	Ø: 600mm L: 680mm
Material	Aluminium
Color	Sandy Black / **Code 25430**
Color	Antique Brass / **Code 25431**




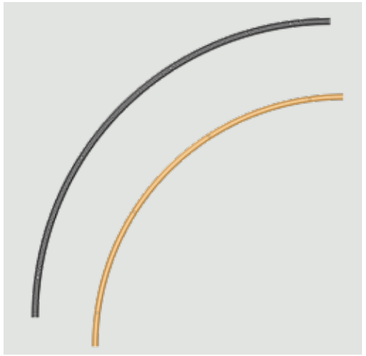

SURFACE CURVED TRACK

Dimensions	Ø: 900mm L: 992mm
Material	Aluminium
Color	Sandy Black / **Code 25432**
Color	Antique Brass / **Code 25433**




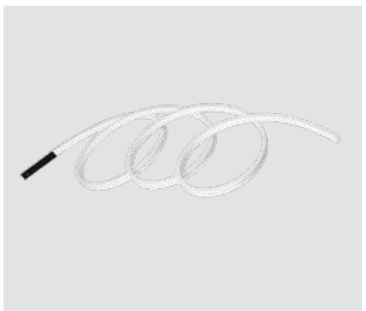

FLEXIBLE LED RUBBER STRIP

Power	16W
Input	24V
Color Temperature	3000K
Lumen	544Lm
Cri	90
Dimensions	L: 2000mm W: 5mm H: 10.8mm
Beam Angle	110°
Non Dimmable	⊠
Unit Cut	50mm
Material	Silicone
Color	White-Black Adapter / **Code 25246**

Notice : Adapter must be installed on a linear track.
Notice : Cut sections of flexible LED rubber are not reusable.

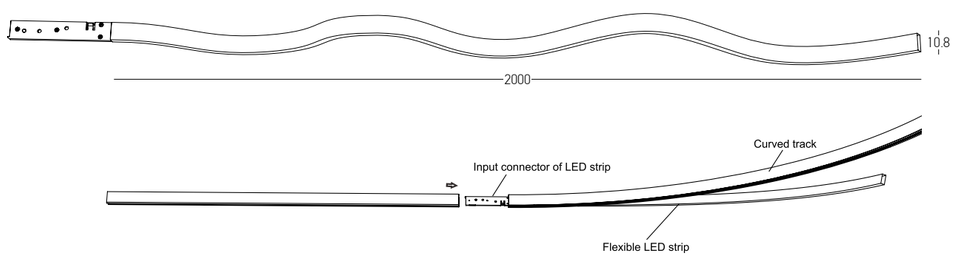



*Dimensions Indicated In Millimeters


*Dimensions Indicated In Millimeters










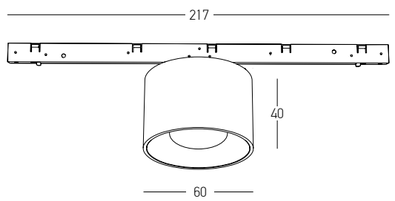

Power	5W
Input	24V
Color Temperature	3000K
Lumen	440Lm
Cri	90
Dimensions	Ø: 60mm H: 40mm
Beam Angle	36°
DALI Dimmable	◔
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 25255**
Color	Antique Brass / **Code 25256**




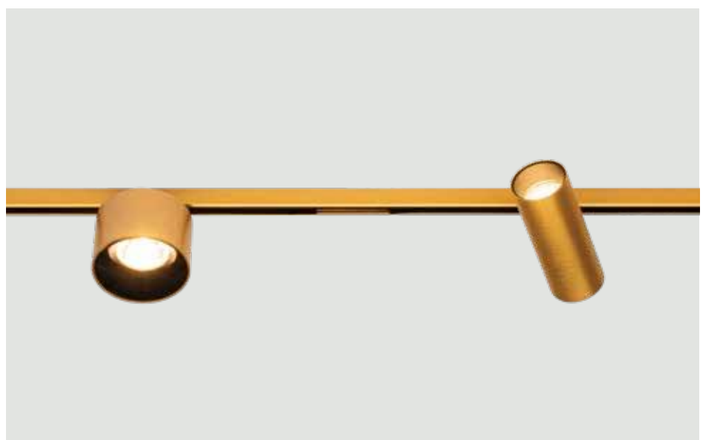







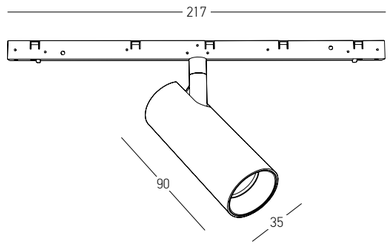


Power	7W
Input	24V
Color Temperature	3000K
Lumen	597Lm
Cri	90
Dimensions	Ø: 35mm H: 90mm
Beam Angle	36°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 25253**
Color	Antique Brass / **Code 25254**













Power	5W
Input	24V
Color Temperature	3000K
Lumen	303Lm
Cri	90
Dimensions	Ø: 23mm H: 48mm
Beam Angle	30°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 25251**
Color	Antique Brass / **Code 25252**




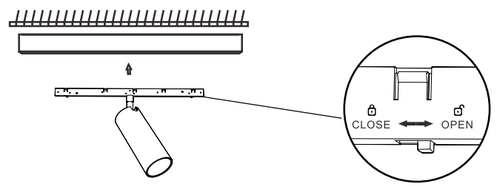

*Dimensions Indicated In Millimeters








Power	4W
Input	24V
Color Temperature	3000K
Lumen	218Lm
Cri	90
Beam Angle	60°
Dimensions	L: 235mm W: 5mm H: 10mm
Non Dimmable	⊠
Material	Aluminium
Color	Sandy Black / **Code 25242**
Color	Antique Brass / **Code 25243**

Notice : Magnetic Light Removal Tool Included






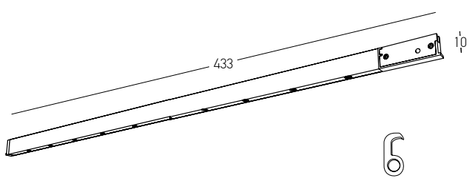

Power	8W
Input	24V
Color Temperature	3000K
Lumen	327Lm
Cri	90
Beam Angle	60°
Dimensions	L: 433mm W: 5mm H: 10mm
Non Dimmable	⊠
Material	Aluminium
Color	Sandy Black / **Code 25240**
Color	Antique Brass-Sandy Black / **Code 25241**

Notice : Magnetic Light Removal Tool Included

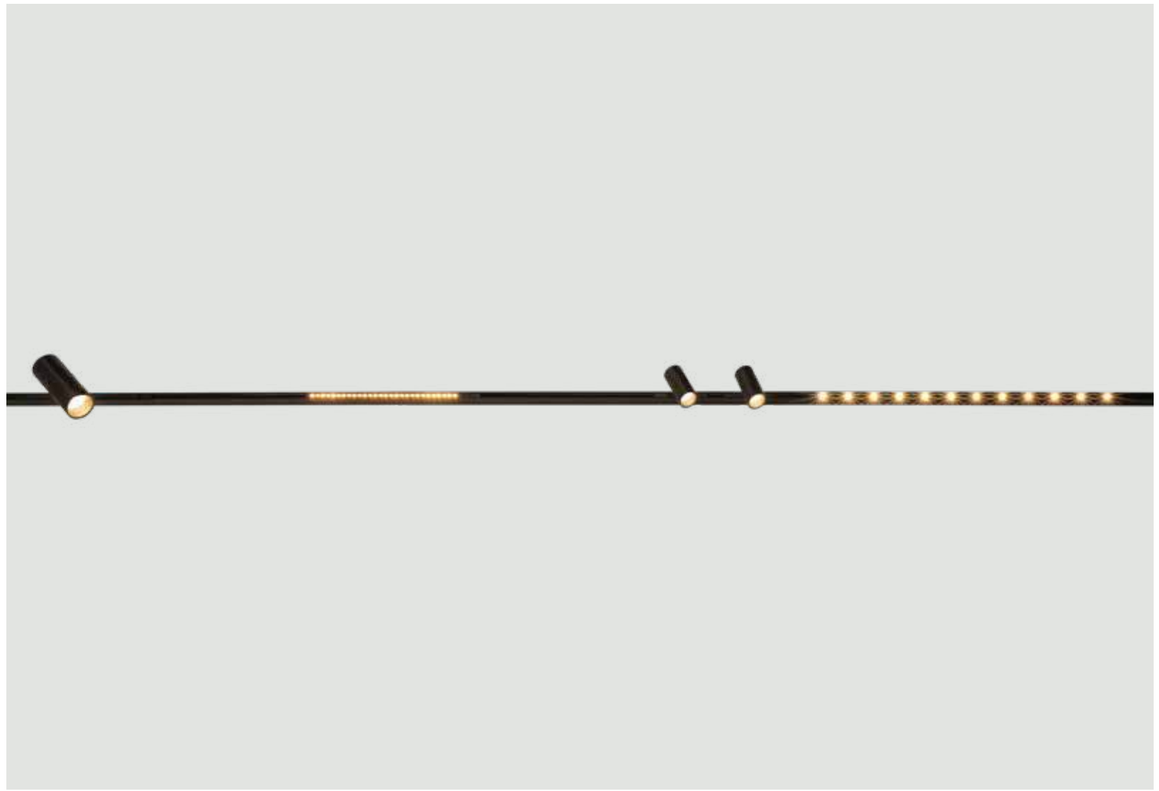







*Dimensions Indicated In Millimeters


*Dimensions Indicated In Millimeters





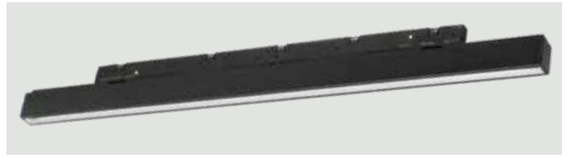

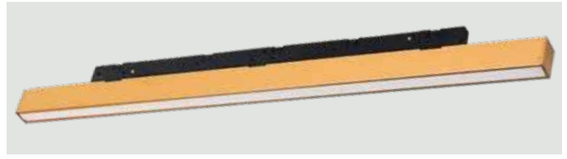


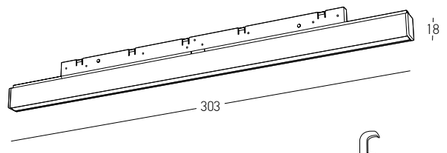

Removal Tool

Power	6W
Input	24V
Color Temperature	3000K
Lumen	522Lm
Cri	90
Dimensions	L: 303mm W: 10mm H: 18mm
Beam Angle	60°
DALI Dimmable	◯
Material	Aluminium - Microprismatic Diffuser
Color	Sandy Black / **Code 25249**
Color	Antique Brass / **Code 25250**


Notice : Magnetic Light Removal Tool Included

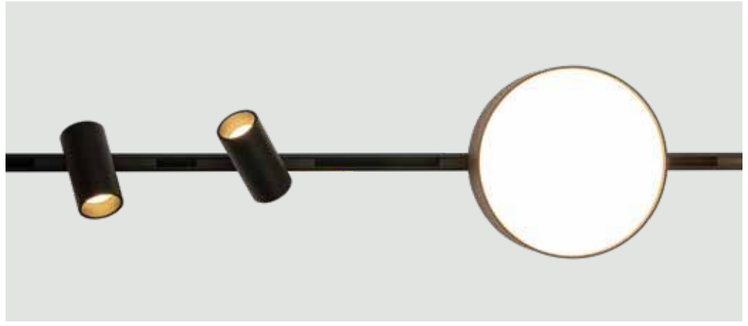







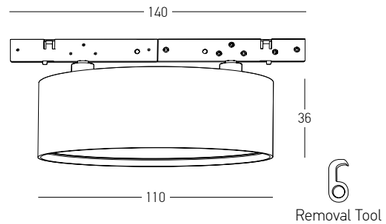


Removal Tool


Power	11W
Input	24V
Color Temperature	3000K
Lumen	786Lm
Cri	90
Dimensions	Ø: 110mm H: 36mm
Beam Angle	100°
Non Dimmable	⊗
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 25257**
Color	Antique Brass / **Code 25258**

Notice : Magnetic Light Removal Tool Included

*Dimensions Indicated In Millimeters

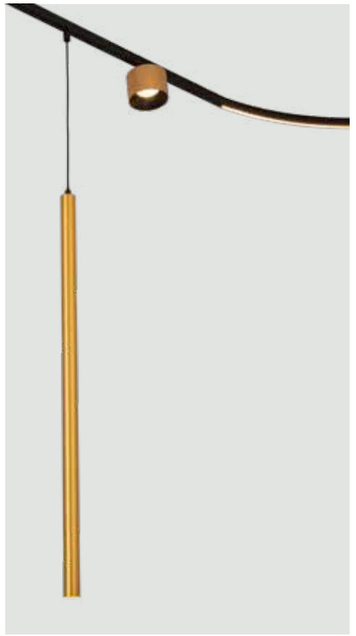






Power	5W
Input	24V
Color Temperature	3000K
Lumen	197Lm
Cri	90
Dimensions	Ø: 20mm H: 500mm
Beam Angle	30°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Special Feature	2000mm Cable Adjustable
Color	Sandy Black / **Code 25259**
Color	Antique Brass / **Code 25260**

ACCESSORIES FOR 24V MAGNETIC TRACK SYSTEM 6MM

FEEDER






Dimensions	L: 61mm W: 5mm H: 10mm
Special Feature	1000mm Cable Available
Color	Black / **Code 25264**

STRAIGHT CONNECTOR






Dimensions	L: 80mm W: 5mm H: 10mm
Color	Black / **Code 25262**

FLEX CONNECTOR






Dimensions	L: 260mm W: 5mm H: 10mm
Color	Black / **Code 25263**

REMOTE DRIVERS FOR 24V MAGNETIC TRACK 6MM


REMOTE DRIVER 60W



Input	220-240, 50-60Hz
Output	24V
Guarantee	5Years

ON-OFF / **Code 25461**
DALI KIT / **Code 25464**
PUSH BUTTON KIT / **Code 25467**
BLUETOOTH KIT / **Code 25470**


REMOTE DRIVER 120W



Input	220-240, 50-60Hz
Output	24V
Guarantee	5Years

ON-OFF / **Code 25462**
DALI KIT / **Code 25465**
PUSH BUTTON KIT / **Code 25468**
BLUETOOTH KIT / **Code 25471**

REMOTE DRIVER 180W



Input	220-240, 50-60Hz
Output	24V
Guarantee	5Years

ON-OFF / **Code 25463**
DALI KIT / **Code 25466**
PUSH BUTTON KIT / **Code 25469**
BLUETOOTH KIT / **Code 25472**



04. 48V ULTRA SLIM MAGNETIC SYSTEM 15MM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear

BODY COLOR

Sandy Black

INSTALLATION

Trimless | Surface | Pendant

FIXTURE COLOR

Sandy Black

REFERENCE CODE | TRIMLESS, SURFACE & PENDANT INSTALLATION

T: TRIMLESS
S: SURFACE
P: PENDANT

P: 23265
Suspension Kit

P: 23280
Ceiling Base

T/S: 23262
End Cap

P: 23126
Feeder

T/S: 23159 Indegrated Driver

T: 23133 Vertical Corner
S: 23132 Vertical Corner
T/S: 23128 Flex Connector

P: 23264
End Cap

T: 23130 Horizontal Corner
S: 23131 Horizontal Corner
T/S: 23129 Corner Connector


T: 23130 Horizontal Corner
S: 23131 Horizontal Corner
T/S: 23129 Corner Connector

*Dimensions Indicated In Millimeters

TRIMLESS ULTRA SLIM MAGNETIC TRACK 15MM




Track Code	Length	Color
23121	1m	Sandy Black
23122	2m	Sandy Black
23123	3m	Sandy Black

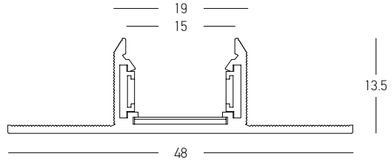




CORNER 90° (23133)
VERTICAL

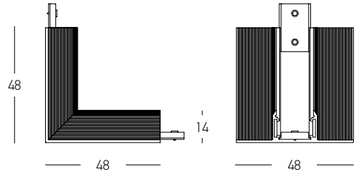


Corner Code	Installation	Color
23133	Vertical	Sandy Black
23130	Horizontal	Sandy Black

Notice : For Vertical corner it is also required to order 23128
Notice : For Horizontal corner it is also required to order 23129



CORNER 90° (23130)
HORIZONTAL

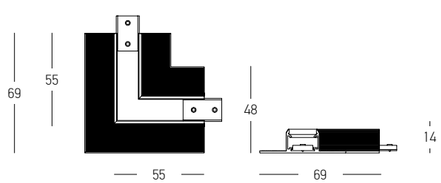

ACCESSORIES FOR TRIMLESS ULTRA SLIM MAGNETIC TRACK 15MM



End Cap
Material Plastic
Color Black / **Code 23262**




Straight Mechanic Connector
Material Aluminium
Color Black / **Code 23263**




PC Cover 3m
Material Plastic
Color Black / **Code 23125**

*Dimensions Indicated In Millimeters

SURFACE ULTRA SLIM MAGNETIC TRACK 15MM

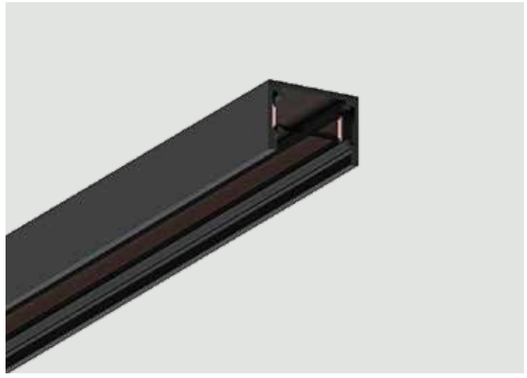


Track Code	Length	Color
23118	1m	Sandy Black
23119	2m	Sandy Black
23120	3m	Sandy Black





CORNER 90° (23132)
VERTICAL




Corner Code	Installation	Color
23132	Vertical	Sandy Black
23131	Horizontal	Sandy Black

Notice : For Vertical corner it is also required to order 23128
Notice : For Horizontal corner it is also required to order 23129



CORNER 90° (23131)
HORIZONTAL

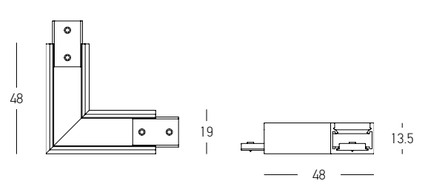

ACCESSORIES FOR SURFACE ULTRA SLIM MAGNETIC TRACK 15MM



End Cap
Material Plastic
Color Black / **Code 23262**



Straight Mechanic Connector
Material Aluminium
Color Black / **Code 23263**




PC Cover 3m
Material Plastic
Color Black / **Code 23125**



PENDANT ROUND SLIM MAGNETIC TRACK 15MM




Track Code	Length	Color
23124	2m	Black Matt





CORNER 90° (23300)
VERTICAL




Corner Code	Installation	Color
23300	Vertical	Black Matt
23350	Horizontal	Black Matt

Notice : For corner it is also required to order 23128



CORNER 90° (23350)
HORIZONTAL



ACCESSORIES FOR ROUND SLIM MAGNETIC TRACK 15MM



End Cap
Material Plastic
Color Black / **Code 23264**



Straight Mechanic Connector
Material Aluminium
Color Black / **Code 23263**




PC Cover 3m
Material Plastic
Color Black / **Code 23125**




Suspension Kit with Wire 1.5m
Material Metal
Color Chrome / **Code 23265**



*Dimensions Indicated In Millimeters

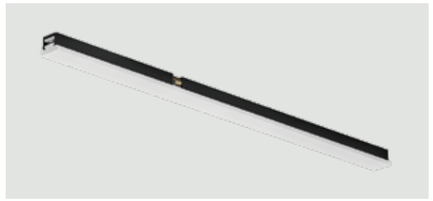


Power	6W
Input	48V
Color Temperature	3000K
Lumen	408Lm
Cri	90
Dimensions	L: 300mm W: 15mm H: 11mm
Beam Angle	110°
DALI Dimmable	◔
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 23110**






Power	12W
Input	48V
Color Temperature	3000K
Lumen	832Lm
Cri	90
Dimensions	L: 600mm W: 15mm H: 11mm
Beam Angle	110°
DALI Dimmable	◔
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 23111**






Power	6W
Input	48V
Color Temperature	3000K
Lumen	475Lm
Cri	90
Dimensions	L: 300mm W: 15mm H: 11mm
Beam Angle	36°
DALI Dimmable	◔
Material	Aluminium
Color	Sandy Black / **Code 23112**





Power	6W
Input	48V
Color Temperature	3000K
Lumen	415Lm
Cri	90
Dimensions	L: 300mm W: 15mm H: 11mm
Beam Angle	36°
DALI Dimmable	◔
Material	Aluminium
Color	Sandy Black / **Code 23113**



*Dimensions Indicated In Millimeters









*Dimensions Indicated In Millimeters



Power	5W
Input	48V
Color Temperature	3000K
Lumen	305Lm
Cri	90
Dimensions	Ø: 32mm H: 58mm
Beam Angle	24°
DALI Dimmable	◔
Material	Aluminium
Special Feature	Rotatable - Tilt Up Down
Color	Sandy Black / **Code 23114**




Power	8W
Input	48V
Color Temperature	3000K
Lumen	554Lm
Cri	90
Dimensions	L: 112mm W: 15mm H: 55-87mm
Beam Angle	24°
DALI Dimmable	◔
Material	Aluminium
Special Feature	Adjustable Grille
Color	Sandy Black / **Code 23115**





Power	3W
Input	48V
Color Temperature	3000K
Lumen	186Lm
Cri	90
Dimensions	Ø: 80mm
Beam Angle	340°
DALI Dimmable	◔
Material	Aluminium - Glass
Color	Sandy Black / **Code 23117**




Power	8W
Input	48V
Color Temperature	3000K
Lumen	553Lm
Cri	90
Dimensions	Ø: 90mm H: 95mm
Beam Angle	36°
DALI Dimmable	◔
Material	Aluminium
Special Feature	1200mm Cable Available
Color	Sandy Black / **Code 23116**



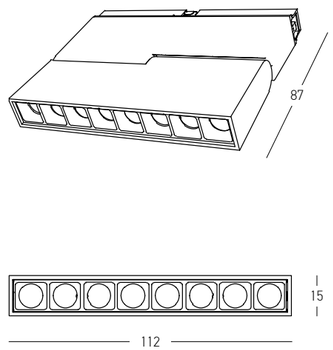



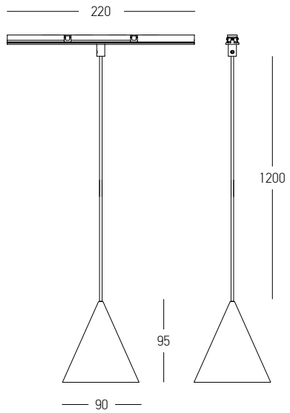

*Dimensions Indicated In Millimeters



*Dimensions Indicated In Millimeters

ACCESSORIES FOR 48V ULTRA SLIM MAGNETIC SYSTEM 15MM

FEEDER





Dimensions	L: 110mm W: 15mm H: 11mm
Material	Aluminium
Special Feature	1500mm Available
Color	Sandy Black / **Code 23126**

STRAIGHT CONNECTOR






Dimensions	L: 110mm W: 15mm H: 11mm
Material	Aluminium
Color	Sandy Black / **Code 23127**

FLEX CONNECTOR






Dimensions	L: 160mm W: 15mm H: 11mm
Material	Aluminium
Color	Sandy Black / **Code 23128**

CORNER CONNECTOR




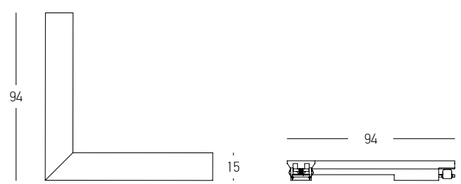

Dimensions	L: 94mm W: 94mm H: 11mm
Material	Aluminium
Color	Sandy Black / **Code 23129**

DRIVERS 48V FOR ULTRA SLIM MAGNETIC SYSTEM 15MM


REMOTE DRIVER 60W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20295**


REMOTE DRIVER 100W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20296**


REMOTE DRIVER 150W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20297**

INTEGRATED INTO TRACKS DRIVER 150W




Power	150W
Input	220-240, 50-60Hz
Output	48V
Special Feature	Integrated Into Track
Color	Black
Guarantee	5Years

ON-OFF / **Code 23159**



REMOTE DRIVER 200W

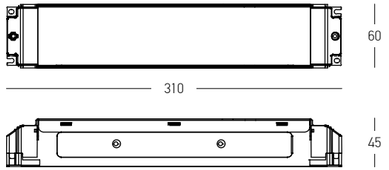


Power	200W
Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

DALI-PUSH BUTTON / **Code 23134**

CEILING BASE





Dimensions	Ø: 80mm H: 35mm
Material	Metal
Color	Sandy Black / **Code 23280**

*Dimensions Indicated In Millimeters



05. 24V MINI SURFACE MAGNETIC SYSTEM 11MM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear

BODY COLOR

Black Matt

INSTALLATION

Surface

FIXTURE COLOR

Black Matt




CRI>90, High Quality Light Output

Because ambient light produces colors differently,
the Color Rendering Index (CRI) is used as reference.
The CRI indicates the ratio by which the illuminated object
or the illuminated area deviates from the maximum
value of 100 (daylight).
MINI TRACK has an impressively high CRI of 90, which
means that it comes very close to natural light and is
suitable for Color-sensitive applications such as
display cases and special exhibition spaces.
The material quality, feel, and Color authenticity of
merchandise and artworks need to be rendered
as accurately as possible to accentuate object's value.
The especially small light surface of the LEDs and
high light density allow the luminaires to perfectly
reflect the three-dimensionality of amorphous surfaces.
Products with a CRI of 90 are perfect for high-end sales
floors and art settings.

R9>90, Closer to True Colors

R9 is the index to present the color of Red.
Red is a very important icon to many objects
like photography, textiles, bones and skins.
For human eyes, the red is a key reference to
distinguish the real true colors.
A higher R9 index can better present the true colors.
MINI TRACK, with R9 higher than 90, can better present
the world closer to true colors.

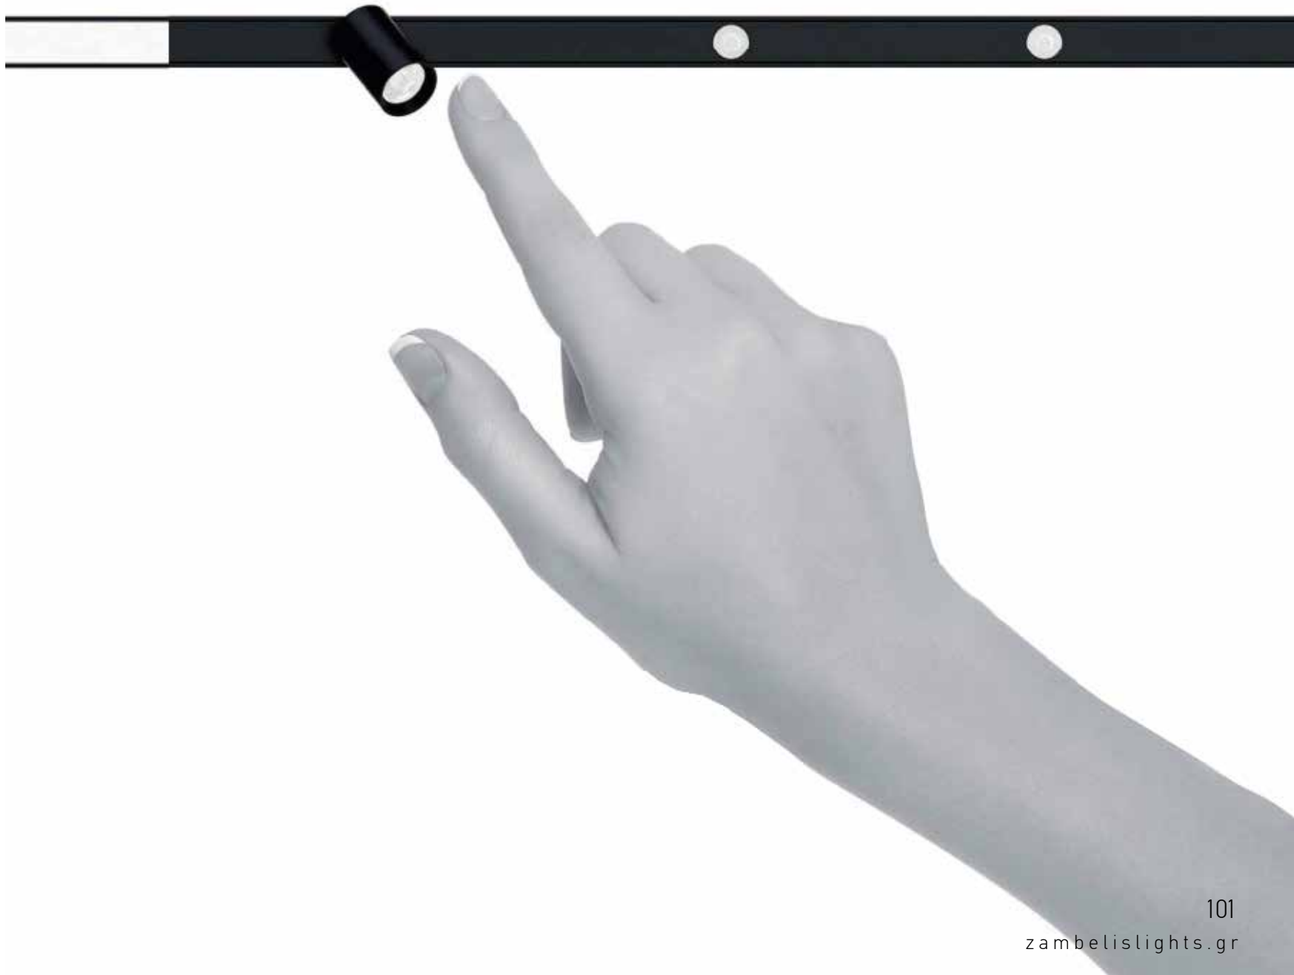


*Dimensions Indicated In Millimeters


SURFACE MINI TRACK 11MM



Track Code	Length	Color
22261	1.1m	Black Matt
22262	2.2m	Black Matt








Corner Code	Installation	Color
22258	Vertical	Black Matt
22257	Horizontal	Black Matt

SHOWCASE CORNER (22258)
VERTICAL-ROTATABLE





CORNER 90° (22257)
HORIZONTAL

ACCESSORIES FOR 24V MINI SURFACE MAGNETIC SYSTEM 11MM



END CAPS

Dimensions L: 5mm W: 12.5mm H: 10.5mm
Material Plastic
Color Black Matt / **Code 22260-E**



BLIND COVER

Dimensions L: 100mm W: 11mm H: 9mm
Material Aluminium
Color Black Matt / **Code 22259**



MAGNETIC SURFACE CLIP

Dimensions L: 25mm W: 12.5mm H: 12mm
Material Stainless Steel
Code 22264



SURFACE CLIP WITH SCREW

Dimensions L: 25mm W: 12.5mm H: 12mm
Material Stainless Steel
Code 22265

ACCESSORIES FOR 24V MINI SURFACE MAGNETIC SYSTEM 11MM

FEEDER



Dimensions L: 2500mm Cable
Material Aluminium - Plastic Cable
Color Black Matt / **Code 22260**

INNER CONNECTOR



Dimensions L: 46mm W: 11mm H: 9mm
Material Plastic
Color Black Matt / **Code 22260-I**

SHOWCASE HOLDER



Dimensions Ø: 22mm H: 40mm
Material Plastic
Cutting Hole Ø: 18mm
Surface Thikness 8-30mm
Color Black Matt / **Code 22263**

REMOTE DRIVERS FOR 24V MINI SURFACE MAGNETIC SYSTEM 11MM

REMOTE DRIVER 60W

Power	60W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3cm H: 1.8cm L: 35cm
DALI Dimming	Push Button - DALI2 1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code Xi24-60D**

REMOTE DRIVER 100W

Power	100W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3cm H: 1.8cm L: 35cm
DALI Dimming	Push Button - DALI2 1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code Xi24-100D**

REMOTE DRIVER 200W

Power	200W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4cm H: 2.2cm L: 40cm
DALI Dimming	Push Button - DALI2 1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code Xi24-200D**

*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters








One shop, One light...

There are many lighting types in retail lighting design, such as general lighting, accent lighting, and task lighting. Is it possible to use one light fixture to solve all the lighting requirements?


Yes, it is MINI SURFACE MAGNETIC SYSTEM.

The light designer could use it in various possibilities.

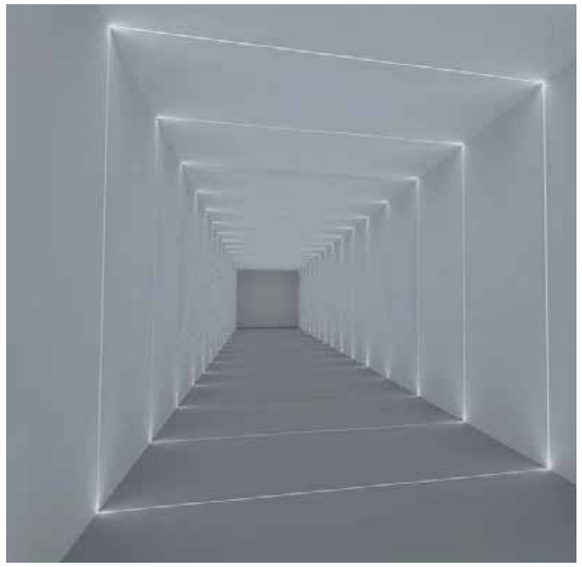




Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	80Lm
Cri	97
Dimensions	L: 50mm W: 11mm H: 36mm
Spot	Ø: 15mm H: 27mm
Beam Angle	20°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Special Feature	Movable Spot
Color	Black Matt / **Code 22251**






Power	2.6W
Input	24V
Color Temperature	3000K
Lumen	160Lm
Cri	97
Dimensions	L: 100mm W: 11mm H: 36mm
Spots	Ø: 15mm H: 27mm
Beam Angle	20°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Special Feature	Movable Spots
Color	Black Matt / **Code 22252**

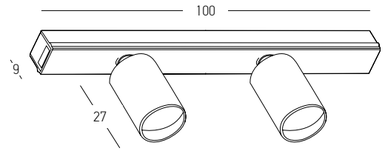




Power	2.5W
Input	24V
Color Temperature	3000K
Lumen	150Lm
Cri	97
Dimensions	L: 150mm W: 11mm H: 9mm
Beam Angle	30°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Black Matt / **Code 22253**



*Dimensions Indicated In Millimeters

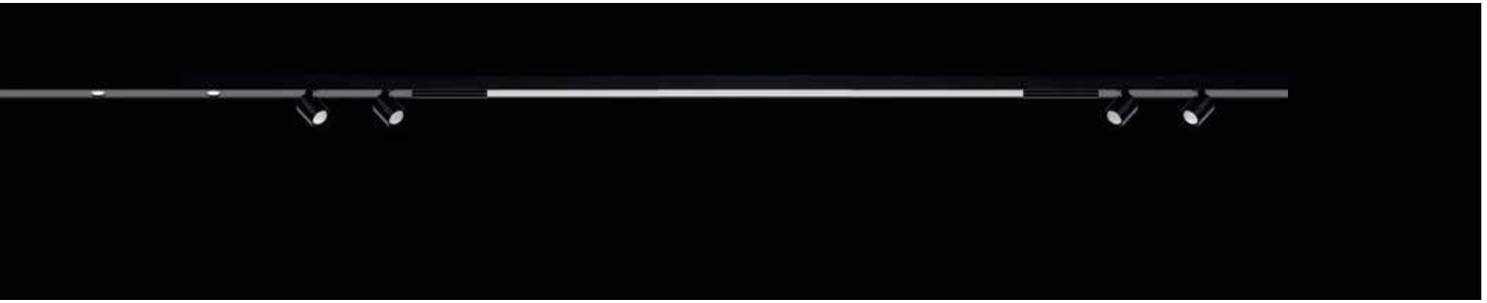

Mini Linear Light

Mini Fix Spots

Mini Adjustable Eyes





Free combination


Polarized free



Power	2.4W
Input	24V
Color Temperature	3000K
Lumen	210Lm
Cri	93
Dimensions	L: 150mm W: 11mm H: 9mm
Beam Angle	125°
DALI Dimmable	◔
Material	Aluminium - Acrylic
Color	Opal White / **Code 22254**



Power	4.8W
Input	24V
Color Temperature	3000K
Lumen	420Lm
Cri	93
Dimensions	L: 300mm W: 11mm H: 9mm
Beam Angle	125°
DALI Dimmable	◔
Material	Aluminium - Acrylic
Color	Opal White / **Code 22255**

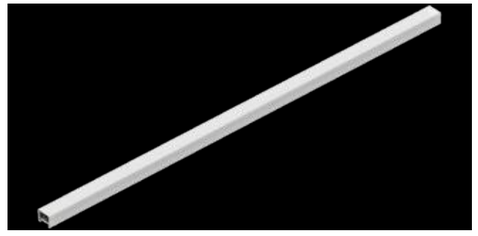

Power	9.6W
Input	24V
Color Temperature	3000K
Lumen	830Lm
Cri	93
Dimensions	L: 600mm W: 11mm H: 9mm
Beam Angle	125°
DALI Dimmable	◔
Material	Aluminium - Acrylic
Color	Opal White / **Code 22256**

06. 48V LINEAR MAGNETIC SYSTEM



SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear

BODY COLOR

Sandy Black | Sandy White | Golden Brass | Silver Black

INSTALLATION

Surface | Pendant | Trimless | Recessed

FIXTURE COLOR

Sandy Black | Sandy White | Golden Brass | Silver Black

REFERENCE CODE | TRIMLESS, SURFACE & PENDANT INSTALLATION

T: TRIMLESS
S: SURFACE

T/S: 22269 Integrated Driver

T: 2083B-CROSS Cross Connector
S: 2082B-CROSS Cross Connector
T/S: 20113 Cross Flex Connector

T/S: 20107 PC Cover


T: 2083B-T "T" Connector
S: 2082B-T "T" Connector
T/S: 20112 "T" Flex Connector

T: 2083B-C1 Vertical Corner
S: 2082B-C1 Vertical Corner
T/S: 20105 Flex Connector


T: 2083B-C2 Horizontal Corner
S: 2082B-C2 Horizontal Corner
T/S: 20104 Corner Connector


*Dimensions Indicated In Millimeters

RECESSED TRACK 23MM

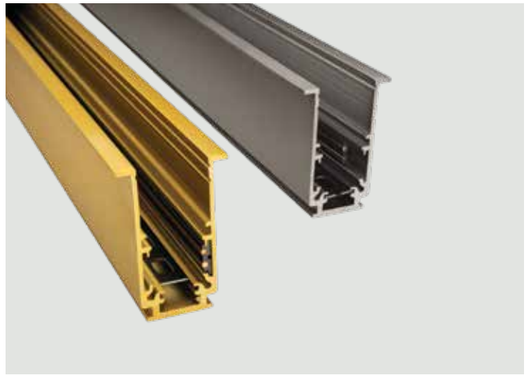

Track Code	Length	Color
2084G-1	1m	Golden Brass
2084NCK-1	1m	Silver Black
2084G-2	2m	Golden Brass
2084NCK-2	2m	Silver Black
2084G-3	3m	Golden Brass
2084NCK-3	3m	Silver Black







CORNER 90° (C1)
VERTICAL


Corner Code	Installation	Color
2084G-C1	Vertical	Golden Brass
2084NCK-C1	Vertical	Silver Black
2084G-C2	Horizontal	Golden Brass
2084NCK-C2	Horizontal	Silver Black

Notice : For corner type C1 it is also required to order 20105 and for type C2, 20104






CORNER 90° (C2)
HORIZONTAL



CORNER 90° (C1)




CORNER 90° (C2)

SURFACE I PENDANT TRACK 23MM





Track Code	Length	Color
2082G-1	1m	Golden Brass
2082NCK-1	1m	Silver Black
2082G-2	2m	Golden Brass
2082NCK-2	2m	Silver Black
2082G-3	3m	Golden Brass
2082NCK-3	3m	Silver Black





Suspension Kit (2pcs)
Adjustable Wire 2m
Aluminium
Code 20102-B





CORNER 90° (C1)
VERTICAL


Corner Code	Installation	Color
2082G-C1	Vertical	Golden Brass
2082NCK-C1	Vertical	Silver Black
2082G-C2	Horizontal	Golden Brass
2082NCK-C2	Horizontal	Silver Black

Notice : For corner type C1 it is also required to order 20105 and for type C2, 20104






CORNER 90° (C2)
HORIZONTAL



CORNER 90° (C1)



CORNER 90° (C2)

ACCESSORIES FOR RECESSED TRACK 23MM




End Cap
Material Metal
Color Golden Brass / **Code 20108-G**
Color Silver Black / **Code 20108-NCK**



Recessed Accessorie Kit (2pcs)
Material Stainless Steel
Code 20106

ACCESSORIES FOR SURFACE I PENDANT TRACK 23MM



End Cap
Material Plastic
Color Golden Brass / **Code 2098-G**
Color Silver Black / **Code 2098-NCK**



Surface Mounted Kit (2pcs)
Material Stainless Steel
Code 2082SP




Straight Mechanic Connector
Material Aluminium
Code 2097-B



PC Cover 3m
Material Plastic
Color Black Matt / **Code 20107**

*Dimensions Indicated In Millimeters

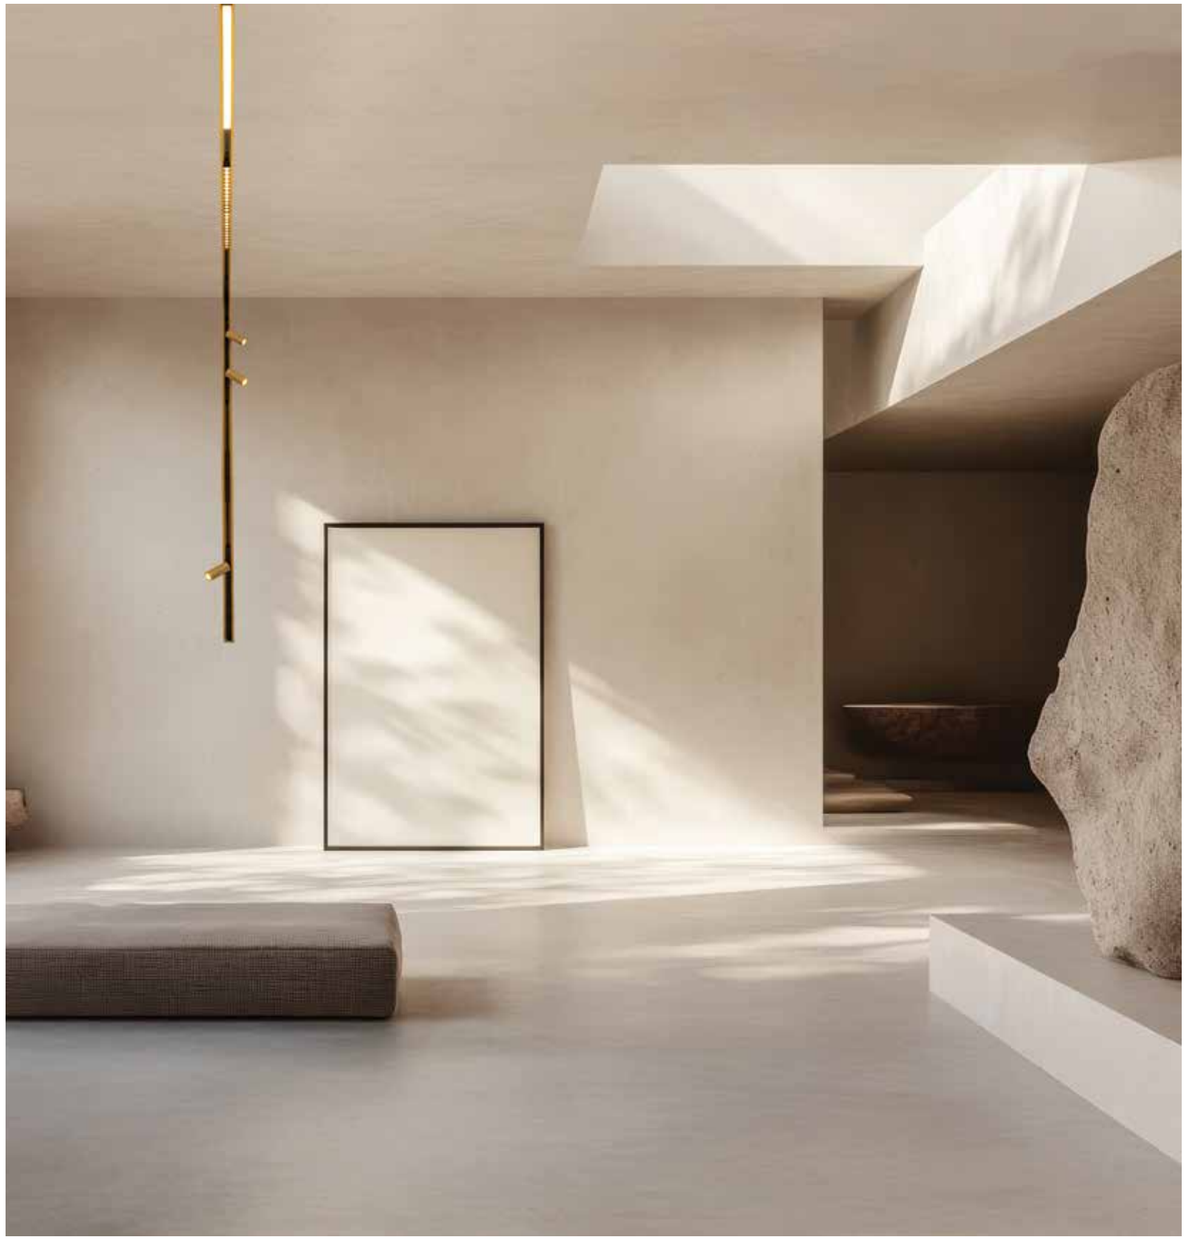




*Dimensions Indicated In Millimeters

TRIMLESS TRACK 23MM




Track Code	Length	Color
2083B-1	1m	Sandy Black
2083W-1	1m	Sandy White
2083B-2	2m	Sandy Black
2083W-2	2m	Sandy White
2083B-3	3m	Sandy Black
2083W-3	3m	Sandy White





CORNER 90° (C1)
VERTICAL




Corner Code	Installation	Color
2083B-C1	Vertical	Sandy Black
2083W-C1	Vertical	Sandy White
2083B-C2	Horizontal	Sandy Black
2083W-C2	Horizontal	Sandy White

Notice : For corner type C1 it is also required to order 20105 and for type C2, 20104



CORNER 90° (C2)
HORIZONTAL





"T" CONNECTOR
Dimensions: 200x123mm
Code 2083B-T




CROSS CONNECTOR
Dimensions: 200x200mm
Code 2083B-CROSS

Notice : For "T" connector it is also required to order 20112
Notice : For cross connector it is also required to order 20113

SURFACE I PENDANT TRACK 23MM




Track Code	Length	Color
2082B-1	1m	Sandy Black
2082W-1	1m	Sandy White
2082B-2	2m	Sandy Black
2082W-2	2m	Sandy White
2082B-3	3m	Sandy Black
2082W-3	3m	Sandy White






Suspension Kit (2pcs)
Adjustable Wire 2m
Aluminium
Code 20102-B



CORNER 90° (C1)
VERTICAL




Corner Code	Installation	Color
2082B-C1	Vertical	Sandy Black
2082W-C1	Vertical	Sandy White
2082B-C2	Horizontal	Sandy Black
2082W-C2	Horizontal	Sandy White

Notice : For corner type C1 it is also required to order 20105 and for type C2, 20104



CORNER 90° (C2)
HORIZONTAL





"T" CONNECTOR
Dimensions: 200x123mm
Code 2082B-T




CROSS CONNECTOR
Dimensions: 200x200mm
Code 2082B-CROSS

Notice : For "T" connector it is also required to order 20112
Notice : For cross connector it is also required to order 20113

ACCESSORIES FOR TRIMLESS TRACK 23MM



End Cap
Material Plastic
Color Black / **Code 2099-B**
Color White / **Code 2099-W**



PC Cover 3m
Material Plastic
Color Black Matt / **Code 20107**
Color White Matt / **Code 20107-W**

ACCESSORIES FOR SURFACE I PENDANT TRACK 23MM




End Cap
Material Plastic
Color Black / **Code 2098-B**
Color White / **Code 2098-W**



Surface Mounted Kit (2pcs)
Material Stainless Steel
Code 2082SP



Straight Mechanic Connector
Material Aluminium
Code 2097-B



PC Cover 3m
Material Plastic
Color Black Matt / **Code 20107**
Color White Matt / **Code 20107-W**


*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

RECESSED TRACK 23MM




Track Code	Length	Color
2084B-1	1m	Sandy Black
2084W-1	1m	Sandy White
2084B-2	2m	Sandy Black
2084W-2	2m	Sandy White
2084B-3	3m	Sandy Black
2084W-3	3m	Sandy White





CORNER 90° (C1)
VERTICAL




Corner Code	Installation	Color
2084B-C1	Vertical	Sandy Black
2084W-C1	Vertical	Sandy White
2084B-C2	Horizontal	Sandy Black
2084W-C2	Horizontal	Sandy White

Notice : For corner type C1 it is also required to order 20105 and for type C2, 20104




CORNER 90° (C2)
HORIZONTAL



SURFACE I PENDANT SHORT TRACK 23MM



Track Code	Length	Color
2085B-1	1m	Sandy Black
2085W-1	1m	Sandy White
2085B-2	2m	Sandy Black
2085W-2	2m	Sandy White
2085B-3	3m	Sandy Black
2085W-3	3m	Sandy White






Suspension Kit (2pcs)
Adjustable Wire 2m
Aluminium
Code 20102



CORNER 90° (C1)
VERTICAL




Corner Code	Installation	Color
2085B-C1	Vertical	Sandy Black
2085W-C1	Vertical	Sandy White
2085B-C2	Horizontal	Sandy Black
2085W-C2	Horizontal	Sandy White

Notice : For corner type C1 it is also required to order 20105 and for type C2, 20104



CORNER 90° (C2)
HORIZONTAL



ACCESSORIES FOR RECESSED TRACK 23MM



End Cap
Material Metal
Color Black / **Code 20108-1B**
Color White / **Code 20108-1W**



End Cap
Material Metal
Color Black / **Code 20108-B**
Color White / **Code 20108-W**



Recessed Accessorie Kit (2pcs)
Material Stainless Steel
Code 20106

ACCESSORIES FOR SURFACE I PENDANT SHORT TRACK 23MM




End Cap
Material Plastic
Color Black / **Code 20101-B**
Color White / **Code 20101-W**




Straight Mechanic Connector
Material Aluminium
Code 2097

*Dimensions Indicated In Millimeters



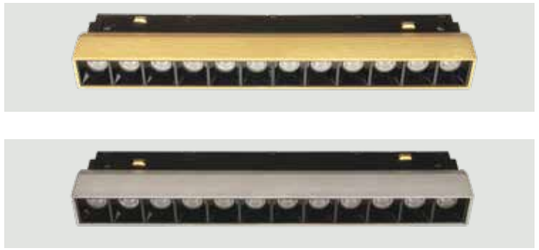


OSRAM



Power	8W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	605Lm I 693Lm I 713Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 45mm
Beam Angle	30°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Golden Brass / **Code 25354**
Color	Silver Black / **Code 25355**




OSRAM



Power	13W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	673Lm I 779Lm I 812Lm
Cri	90
Dimensions	L: 328mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◯
Material	Aluminium - PC Diffuser
Color	Golden Brass / **Code 25356**
Color	Silver Black / **Code 25357**



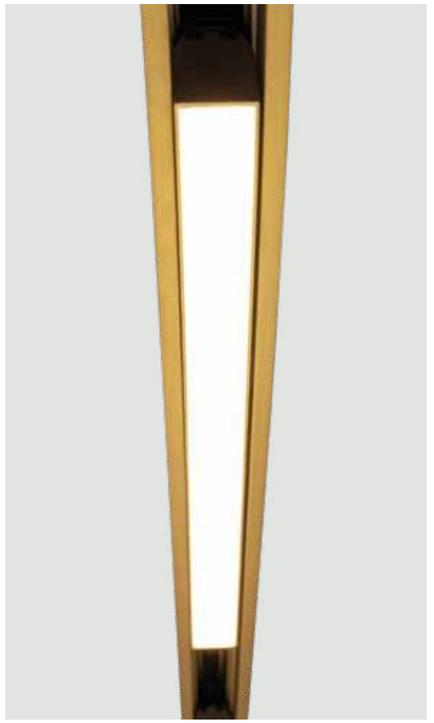






*Dimensions Indicated In Millimeters





CREE




Power	6W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	360Lm I 410Lm I 435Lm
Cri	90
Dimensions	Ø: 35mm H: 85mm
Beam Angle	24°
DALI Dimmable	◠
Material	Aluminium
Color	Golden Brass / **Code 25352**
Color	Silver Black / **Code 25353**





CREE




Power	6W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	360Lm I 410Lm I 435Lm
Cri	90
Dimensions	Ø: 35mm H: 85mm
Beam Angle	24°
DALI Dimmable	◠
Material	Aluminium
Color	Golden Brass / **Code 25475**
Color	Silver Black / **Code 25476**





CREE



Power	6W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	360Lm I 410Lm I 435Lm
Cri	90
Dimensions	Ø: 35mm H: 115mm
Beam Angle	24°
DALI Dimmable	◠
Material	Aluminium
Color	Golden Brass / **Code 25473**
Color	Sandy Black / **Code 25474**







*Dimensions Indicated In Millimeters



OSRAM




Power	13W
Input	48V
Color Temperature	3000K
Lumen	779Lm
Cri	90
Dimensions	L: 328mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◯
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 2087**

Power	13W
Input	48V
Color Temperature	3000K
Lumen	779Lm
Cri	90
Dimensions	L: 328mm W: 23mm H: 45mm
Beam Angle	120°
Non Dimmable	⊗
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 2086**



OSRAM




Power	20W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	1324Lm I 1383Lm I 1411Lm
Cri	90
Dimensions	L: 652mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◯
Material	Aluminium - PC Diffuser
Color	2700K Sandy Black / **Code 2089-27B**
Color	3000K Sandy Black / **Code 2089**
Color	4000K Sandy Black / **Code 2089-4B**

Power	20W
Input	48V
Color Temperature	3000K
Lumen	1383Lm
Cri	90
Dimensions	L: 652mm W: 23mm H: 45mm
Beam Angle	120°
Non Dimmable	⊗
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 2088**



*Dimensions Indicated In Millimeters



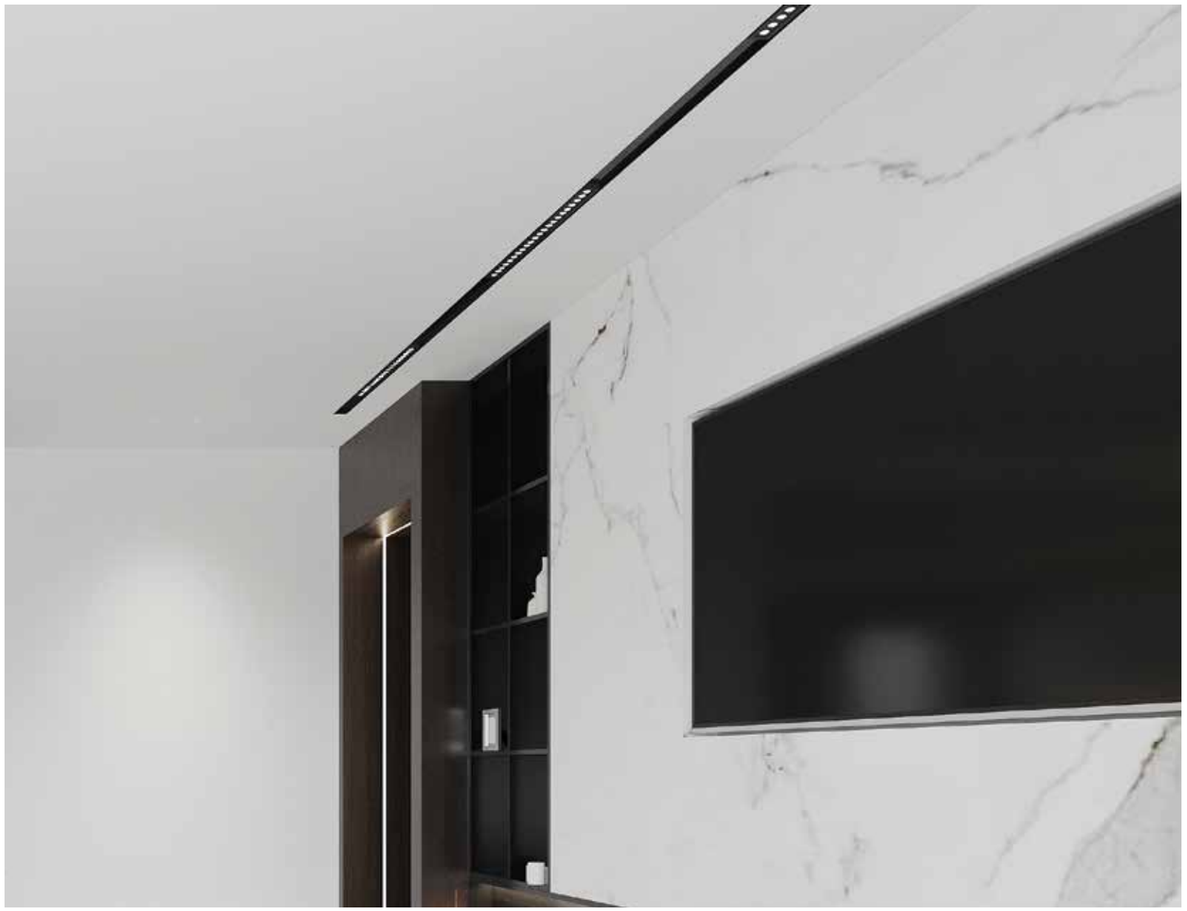








OSRAM




Power	8W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	675Lm I 693Lm I 713Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 45mm
Beam Angle	30°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	2700K Sandy Black / **Code 2091-27B**
Color	3000K Sandy Black / **Code 2091**
Color	4000K Sandy Black / **Code 2091-4B**

Power	8W
Input	48V
Color Temperature	3000K
Lumen	693Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 45mm
Beam Angle	30°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 2090**



OSRAM

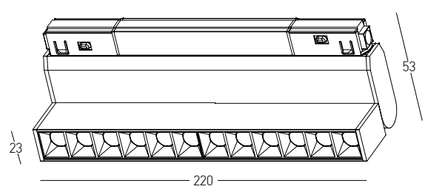


Power	12W
Input	48V
Color Temperature	3000K
Lumen	1021Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 53mm
Beam Angle	30°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 20291**

Power	12W
Input	48V
Color Temperature	3000K
Lumen	1021Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 53mm
Beam Angle	30°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 20290**



CREE




Power	5W
Input	48V
Color Temperature	3000K
Lumen	414Lm
Cri	90
Dimensions	Ø: 26mm H: 125mm
Beam Angle	24°
DALI Dimmable	◯
Material	Aluminium
Color	Sandy Black / **Code 2094**

Power	5W
Input	48V
Color Temperature	3000K
Lumen	414Lm
Cri	90
Dimensions	Ø: 26mm H: 125mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Color	Sandy Black / **Code 2093**



OSRAM



Power	10W
Input	48V
Color Temperature	3000K
Lumen	945Lm
Cri	90
Dimensions	L: 150mm W: 23mm H: 95mm
Beam Angle	Asymmetric 50°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 2092-D**

Power	10W
Input	48V
Color Temperature	3000K
Lumen	945Lm
Cri	90
Dimensions	L: 150mm W: 23mm H: 95mm
Beam Angle	Asymmetric 50°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 2092**

*Dimensions Indicated In Millimeters








*Dimensions Indicated In Millimeters





OSRAM




Power	5W
Input	48V
Color Temperature	3000K
Lumen	363Lm
Cri	80
Dimensions	Ø: 27mm H: 145mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Color	Sandy Black / **Code 20179**
Color	Gold / **Code 20180**

OSRAM

Power	12W
Input	48V
Color Temperature	3000K
Lumen	763Lm
Cri	80
Dimensions	Ø: 120mm H: 110mm
Beam Angle	38°
Non Dimmable	⊗
Material	Aluminium
Color	Sandy Black / **Code 20177**
Color	Sandy White / **Code 20178**



CREE



Power	7W
Input	48V
Color Temperature	2700K I 3000K
Lumen	565Lm I 580Lm
Cri	90
Dimensions	Ø: 37mm H: 87mm
Beam Angle	32°
DALI Dimmable	◯
Material	Aluminium
Color	3000K Sandy Black / **Code 20400-BD**
Color	2700K Sandy Black / **Code 20407-BD**

CREE

Power	7W
Input	48V
Color Temperature	3000K I 4000K
Lumen	580Lm I 605Lm
Cri	90
Dimensions	Ø: 37mm H: 87mm
Beam Angle	32°
Non Dimmable	⊗
Material	Aluminium
Color	3000K Sandy Black / **Code 20402-B**
Color	4000K Sandy Black / **Code 20406**

Power	15W
Input	48V
Color Temperature	3000K I 4000K
Lumen	1284Lm I 1312Lm
Cri	90
Dimensions	Ø: 65mm H: 130mm
Beam Angle	24°
DALI Dimmable	◯
Material	Aluminium
Color	3000K Sandy Black / **Code 20413**
Color	4000K Sandy Black / **Code 20415**


Power	15W
Input	48V
Color Temperature	3000K I 4000K
Lumen	1284Lm I 1312Lm
Cri	90
Dimensions	Ø: 65mm H: 130mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Color	3000K Sandy Black / **Code 20410**
Color	4000K Sandy Black / **Code 20411**

*Dimensions Indicated In Millimeters




CREE

Power	15W
Input	48V
Color Temperature	3000K
Lumen	1225Lm
Cri	90
Dimensions	Ø: 45mm H: 200mm
Beam Angle	24°
DALI Dimmable	◯
Material	Aluminium
Color	Sandy Black / **Code 2095-D**




Power	15W
Input	48V
Color Temperature	3000K
Lumen	1225Lm
Cri	90
Dimensions	Ø: 45mm H: 200mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Color	Sandy Black / **Code 2095**



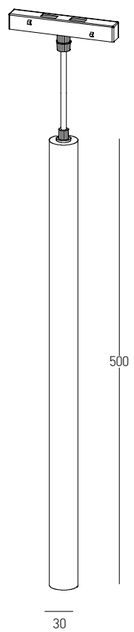

Power	7W
Input	48V
Color Temperature	3000K
Lumen	431Lm
Cri	90
Dimensions	Ø: 30mm H: 500mm
Beam Angle	24°
DALI Dimmable	◯
Material	Aluminium
Special Feature	1000mm Cable Adjustable
Color	Sandy Black / **Code 2081-D**
Color	Sandy White / **Code 2081-WD**


Power	7W
Input	48V
Color Temperature	3000K
Lumen	431Lm
Cri	90
Dimensions	Ø: 30mm H: 500mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Special Feature	1000mm Cable Adjustable
Color	Sandy Black / **Code 2081**
Color	Sandy White / **Code 2081-W**

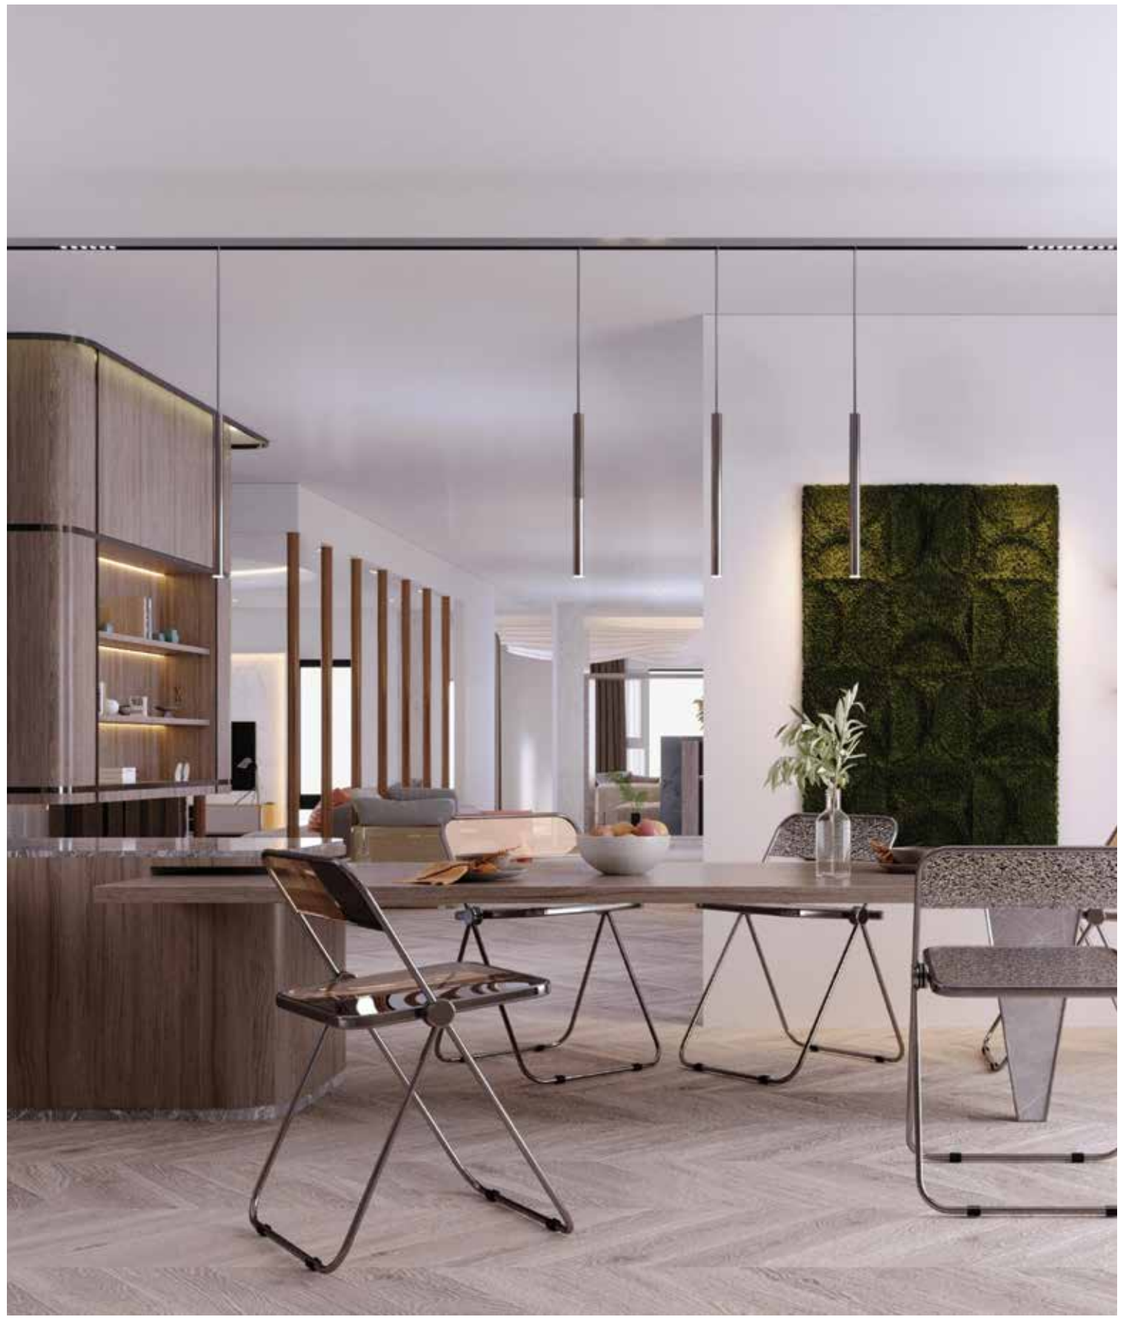


CREE

*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

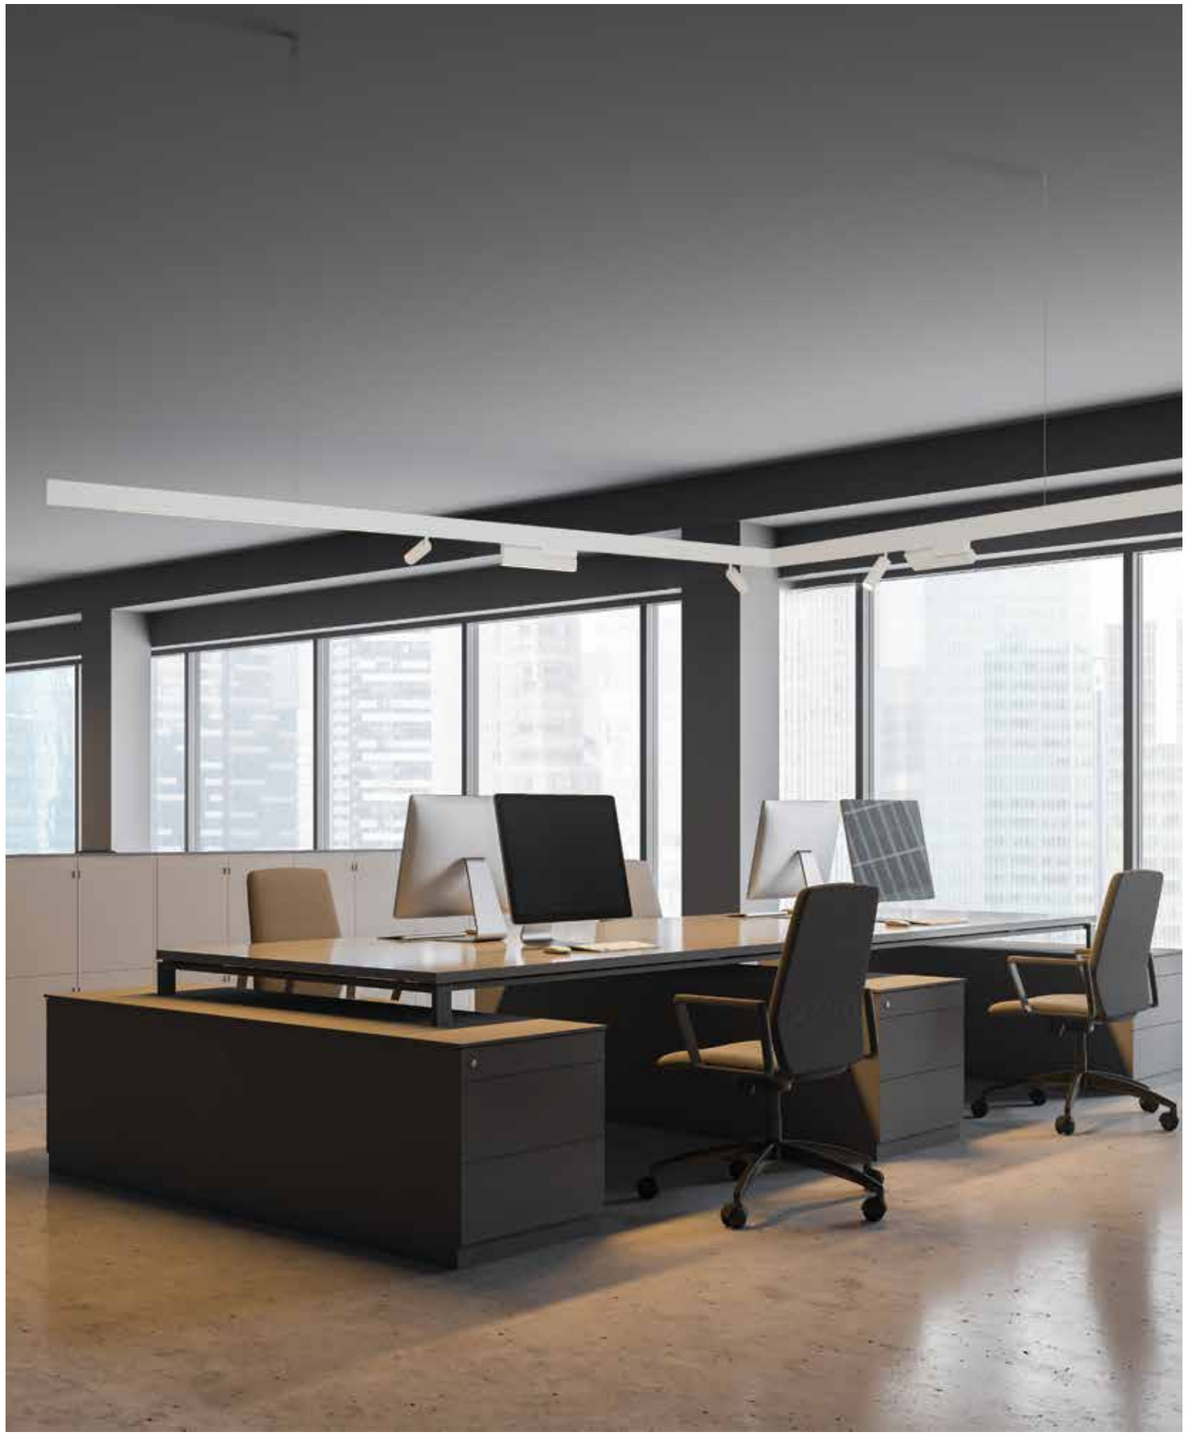




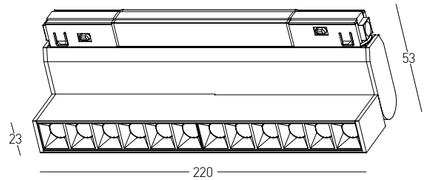

OSRAM


Power	12W
Input	48V
Color Temperature	3000K
Lumen	1021Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 53mm
Beam Angle	30°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy White / **Code 20291-W**






OSRAM

Power	8W
Input	48V
Color Temperature	3000K
Lumen	693Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 45mm
Beam Angle	30°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy White / **Code 2091-3W**

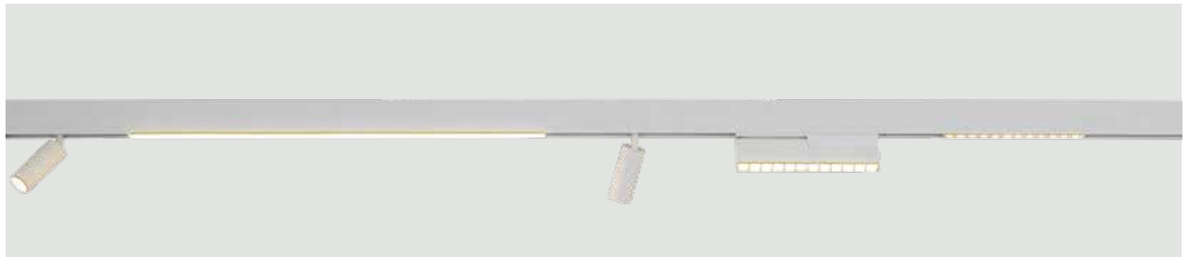




OSRAM



Power	20W
Input	48V
Color Temperature	3000K I 4000K
Lumen	1383Lm I 1411Lm
Cri	90
Dimensions	L: 652mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◔
Material	Aluminium - PC Diffuser
Color	3000K Sandy White / **Code 2089-3W**
Color	4000K Sandy White / **Code 2089-4W**



CREE




Power	7W
Input	48V
Color Temperature	3000K I 4000K
Lumen	580Lm I 605Lm
Cri	90
Dimensions	Ø: 37mm H: 87mm
Beam Angle	32°
DALI Dimmable	◔
Material	Aluminium
Color	3000K Sandy White / **Code 20401-WD**
Color	4000K Sandy White / **Code 20404**

CREE

Power	7W
Input	48V
Color Temperature	3000K I 4000K
Lumen	580Lm I 605Lm
Cri	90
Dimensions	Ø: 37mm H: 87mm
Beam Angle	32°
Non Dimmable	⊗
Material	Aluminium
Color	3000K Sandy White / **Code 20403-W**
Color	4000K Sandy White / **Code 20405**




CREE




Power	15W
Input	48V
Color Temperature	3000K I 4000K
Lumen	1284Lm I 1312Lm
Cri	90
Dimensions	Ø: 65mm H: 130mm
Beam Angle	24°
DALI Dimmable	◔
Material	Aluminium
Color	3000K Sandy White / **Code 20412**
Color	4000K Sandy White / **Code 20414**


ACCESSORIES FOR 48V LINEAR MAGNETIC TRACKS




Feeder for 48V Magnetic Tracks
300mm Cable Available
Code 2096 / Color Black
Code 2096-W / Color White




Feeder for 48V Magnetic Tracks
2000mm Cable Available
Code 2096-2M / Color Black
Code 2096-W2M / Color White

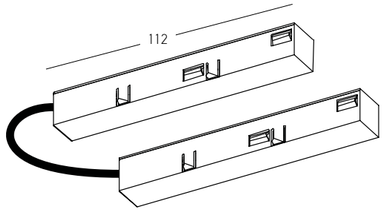


Flex Connector with Cable for 48V Magnetic Tracks
Code 20105 / Color Black
Code 20105-W / Color White




Corner Connector for 48V Magnetic Tracks
Code 20104 / Color Black
Code 20104-W / Color White

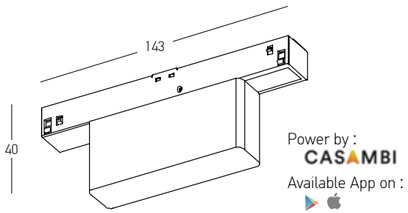


Wireless Control for 48V Magnetic Tracks
Bluetooth DALI
Code 20293



Inner Connector for 48V Magnetic Tracks
Code 20103 / Color Black
Code 20103-W / Color White



"T" Flex Connector with Cable for 48V Magnetic Tracks
Code 20112 / Color Black




Cross Flex Connector with Cable for 48V Magnetic Tracks
Code 20113 / Color Black

*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters


REMOTE DRIVER 60W



Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years

ON-OFF / **Code 20295**
DALI KIT / **Code 20322**
PUSH BUTTON KIT / **Code 20300**
BLUETOOTH KIT / **Code 20303**


REMOTE DRIVER 100W



Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years

ON-OFF / **Code 20296**
DALI KIT / **Code 20298**
PUSH BUTTON KIT / **Code 20301**
BLUETOOTH KIT / **Code 20304**


REMOTE DRIVER 150W



Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years

ON-OFF / **Code 20297**
DALI KIT / **Code 20299**
PUSH BUTTON KIT / **Code 20302**
BLUETOOTH KIT / **Code 20305**

REMOTE DRIVER 240W




Input 220-240, 50-60Hz
Output 48V
Guarantee 5Years

ON-OFF / **Code 20323**
DALI KIT / **Code 20324**
PUSH BUTTON KIT / **Code 25481**
BLUETOOTH KIT / **Code 25482**

INTEGRATED DRIVERS FOR 48V LINEAR MAGNETIC TRACKS




MAGNETIC TRACK 2085



DALI Driver for Surface Magnetic Track
Push-Button Dimming is not Supported
Power 100W
Input 220-240, 50-60Hz
Output 48V
Special Feature Fully Integrated Into Track 2085 I 2082
Guarantee 5Years

Color Black / **Code 22269**
Color White / **Code 22269-W**




Ceiling Box for Cable Connection for 2082
Dimensions L: 80mm W: 26mm H: 52mm
Materiat Metal

Color Sandy Black / **Code 22290**
Color Sandy White / **Code 22291**




MAGNETIC TRACK 2082

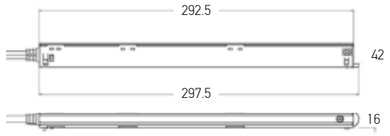

DALI Driver for Surface Magnetic Track
Push-Button Dimming is not Supported
Power 250W
Input 220-240, 50-60Hz
Output 48V
Special Feature Fully Integrated Into Track 2082
Guarantee 5Years

Color Black / **Code 22294**
Color White / **Code 22294-W**




Ceiling Box for Cable Connection for 2085
Dimensions L: 80mm W: 26mm H: 29mm
Material Metal

Color Sandy Black / **Code 22292**
Color Sandy White / **Code 22293**

*Dimensions Indicated In Millimeters

DRIVER BOX FOR CEILING APPLICATION

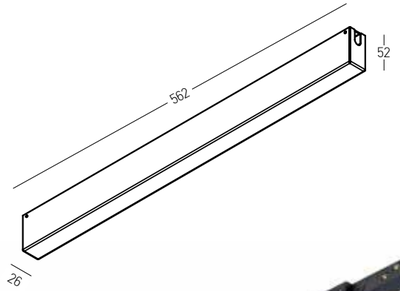

Surface Mount Base with Driver for Surface Magnetic Track

Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	Included 48V Feeder
Color	Sandy Black
Guarantee	5Years


ON-OFF / **Code 20306-B**
DALI KIT / **Code 20308-B**
PUSH BUTTON KIT / **Code 20310-B**
BLUETOOTH KIT / **Code 20312-B**



Surface Mount Base with Driver for Surface Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	Included 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 20307-B**
DALI KIT / **Code 20309-B**
PUSH BUTTON KIT / **Code 20311-B**
BLUETOOTH KIT / **Code 20313-B**

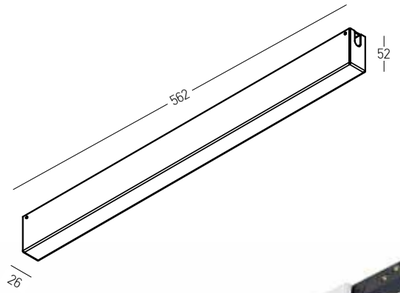

Surface Mount Base with Driver for Surface Magnetic Track

Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	Included 48V Feeder
Color	Sandy White
Guarantee	5Years

ON-OFF / **Code 20306-W**
DALI KIT / **Code 20308-W**
PUSH BUTTON KIT / **Code 20310-W**
BLUETOOTH KIT / **Code 20312-W**




Surface Mount Base with Driver for Surface Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	Included 48V Feeder
Color	Sandy White
Guarantee	5Years

ON-OFF / **Code 20307-W**
DALI KIT / **Code 20309-W**
PUSH BUTTON KIT / **Code 20311-W**
BLUETOOTH KIT / **Code 20313-W**

DRIVER BOX FOR PENDANT APPLICATION

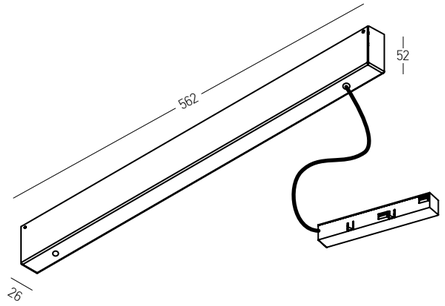

Pendant Base with Driver for Pendant Magnetic Track


Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 20314-B**
DALI KIT / **Code 20316-B**
PUSH BUTTON KIT / **Code 20318-B**
BLUETOOTH KIT / **Code 20320-B**

Pendant Base with Driver for Pendant Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 20315-B**
DALI KIT / **Code 20317-B**
PUSH BUTTON KIT / **Code 20319-B**
BLUETOOTH KIT / **Code 20321-B**

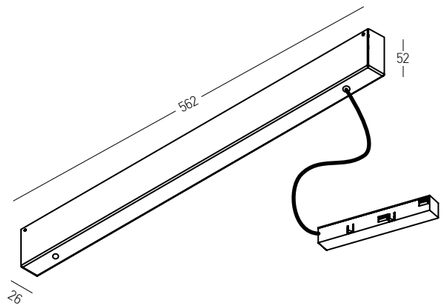

Pendant Base with Driver for Pendant Magnetic Track

Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy White
Guarantee	5Years

ON-OFF / **Code 20314-W**
DALI KIT / **Code 20316-W**
PUSH BUTTON KIT / **Code 20318-W**
BLUETOOTH KIT / **Code 20320-W**

Pendant Base with Driver for Pendant Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy White
Guarantee	5Years

ON-OFF / **Code 20315-W**
DALI KIT / **Code 20317-W**
PUSH BUTTON KIT / **Code 20319-W**
BLUETOOTH KIT / **Code 20321-W**

*Dimensions Indicated In Millimeters




CASAMBI READY wireless control for DALI luminaires


Zambelis 48V tracks are fully compatible with the CASAMBI control system, enabling seamless bidirectional communication between control devices and luminaires. This allows users to create lighting scenes, manage the system via smart devices, and personalize their lighting experience with ease.


Through CASAMBI and its wireless control options, users have total control over their installation, enjoying the same advanced features typically found in low-voltage systems.
With the 48V track system, flexibility, innovation, and cutting-edge control in architectural lighting remain uncompromised.

Power by :
CASAMBI
Available App on :

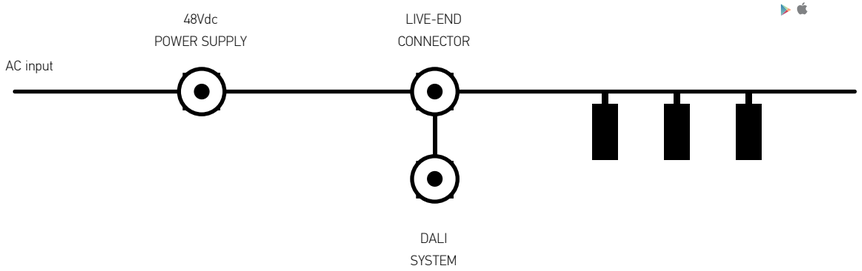

DESIGN YOUR OWN LIGHTING...

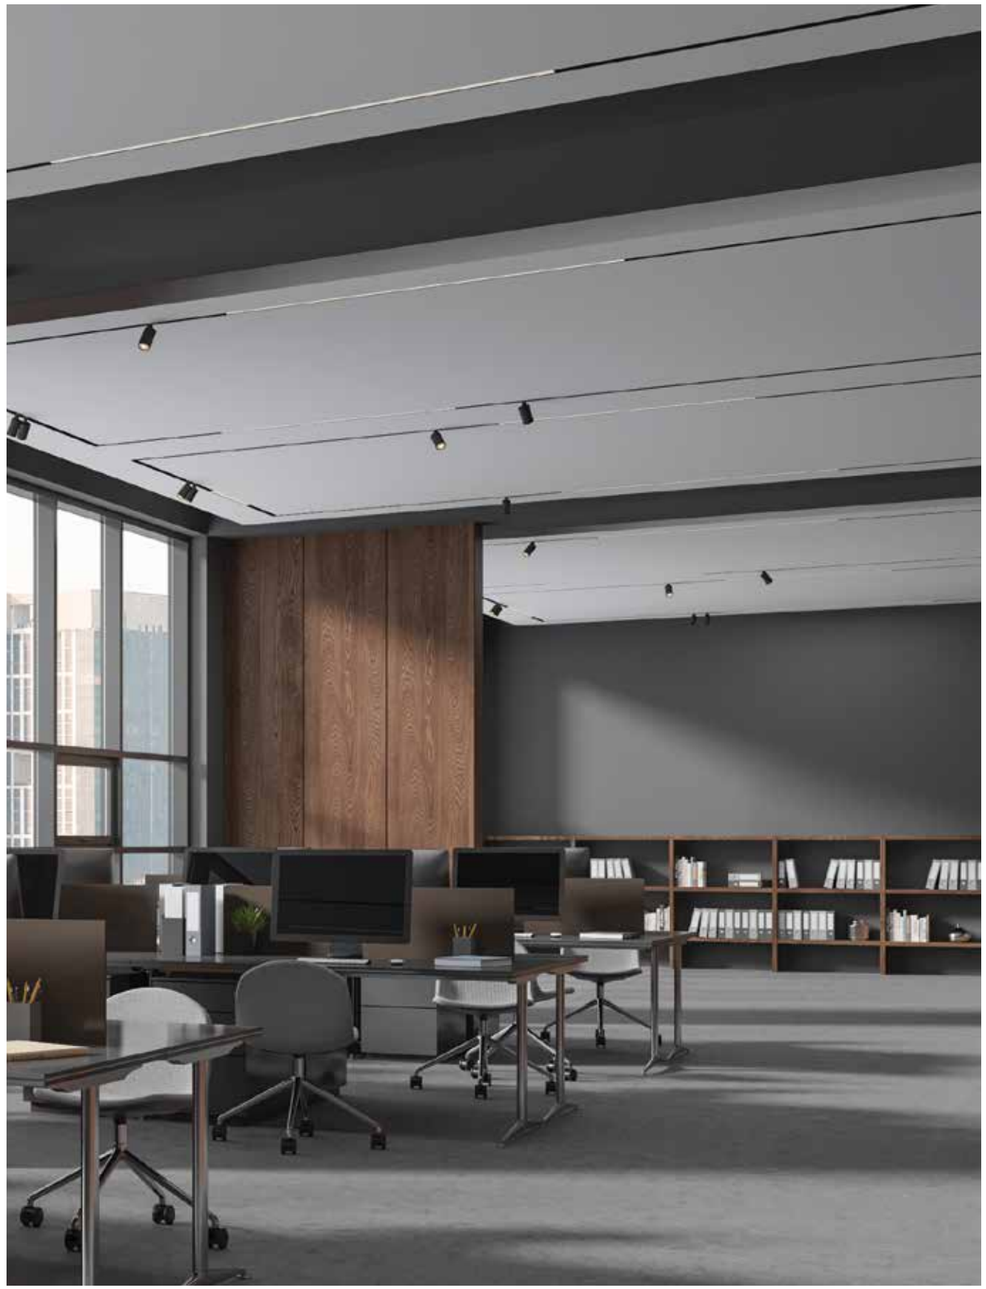

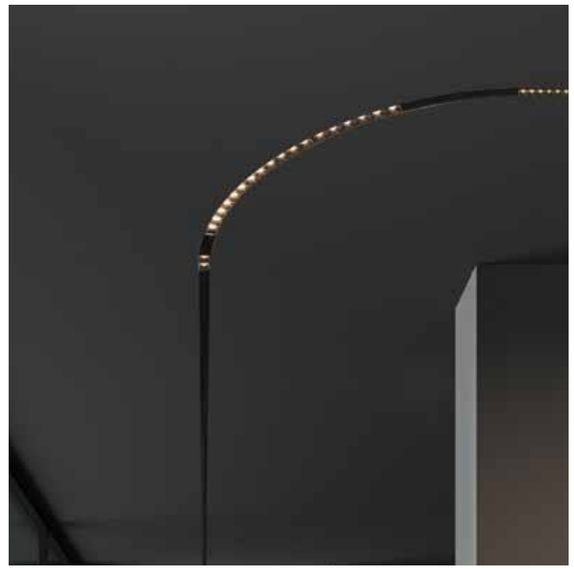

07. 48V ROUNDED RECTANGLE MAGNETIC SYSTEM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear | Curved

BODY COLOR

Sandy Black

INSTALLATION

Surface | Pendant | Trimless


FIXTURE COLOR

Sandy Black

SURFACE I PENDANT TRACK



Track Code	Length	Color
22273B-1	1m	Sandy Black
22273B-2	2m	Sandy Black
22273B-3	3m	Sandy Black





Curved Mechanic Connector
Metal
Code 22097-C




Suspension Kit (2pcs)
Adjustable Wire 2m
Metal
Code 22121



SURFACE I PENDANT CURVE TRACK 90°


Dimensions Ø: 900mm
L: 706mm
Material Aluminium
Color Sandy Black / **Code 22277**





SURFACE I PENDANT CURVE TRACK 90°

Dimensions Ø: 600mm
L: 471mm
Material Aluminium
Color Sandy Black / **Code 22275**






*Dimensions Indicated In Millimeters

TRIMLESS TRACK



Track Code	Length	Color
22274B-1	1m	Sandy Black
22274B-2	2m	Sandy Black
22274B-3	3m	Sandy Black






Curved Mechanic
Connector
Metal
Code 22097-C



TRIMLESS CURVE TRACK 90°


Dimensions Ø: 900mm
L: 906mm
Material Aluminium
Color Sandy Black / **Code 22278**






TRIMLESS CURVE TRACK 90°

Dimensions Ø: 600mm
L: 670mm
Material Aluminium
Color Sandy Black / **Code 22276**



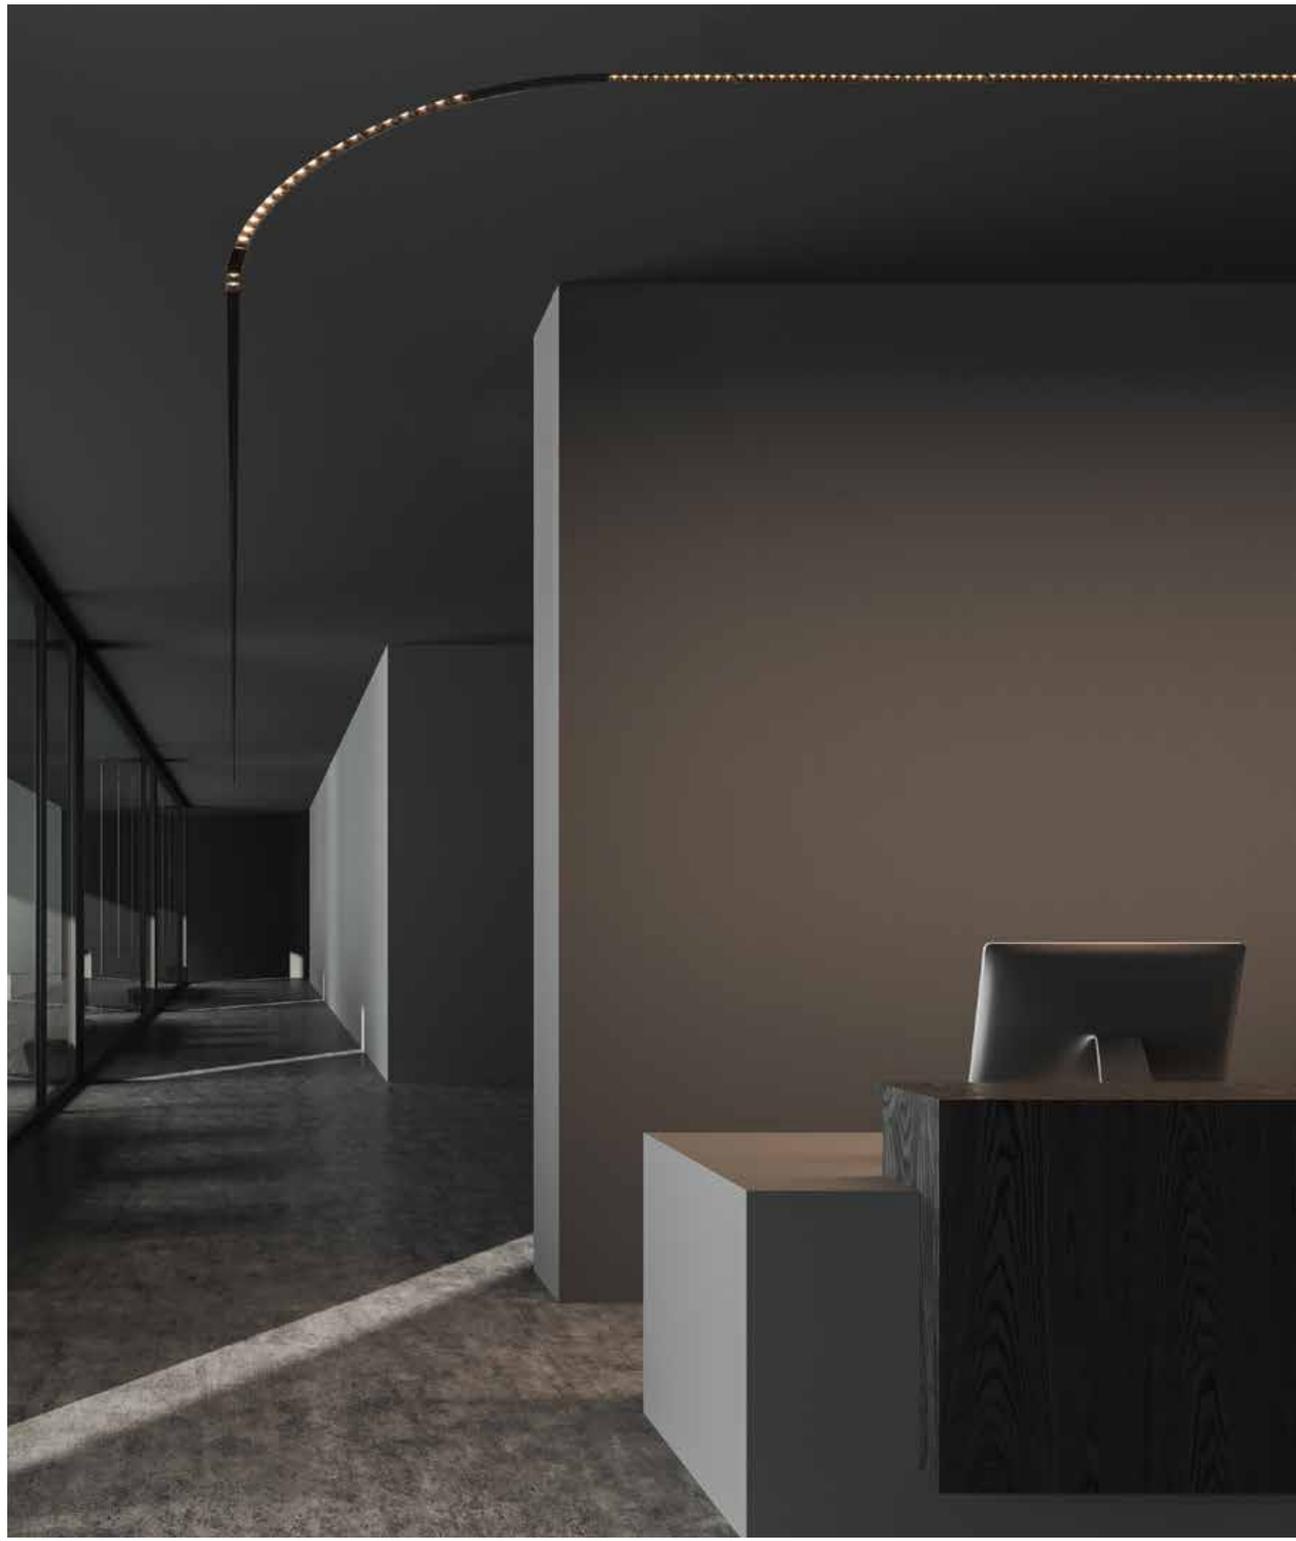


*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters


LIGHTS FOR D:900MM CURVED TRACKS






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 900mm L: 195mm W: 23mm H: 45mm
Beam Angle	36°
DALI Dimmable	◓
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22099**






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 900mm L: 195mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◓
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22100**






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 900mm Ø: 45mm L: 110mm
Beam Angle	36°
DALI Dimmable	◓
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22101**






Power	2W
Input	48V
Color Temperature	3000K
Lumen	170Lm
Cri	80
Dimensions	L: 30mm W: 23mm H: 45mm
Beam Angle	25°
Non Dimmable	⊠
Material	Acrylic
Color	Sandy Black / **Code 22107**

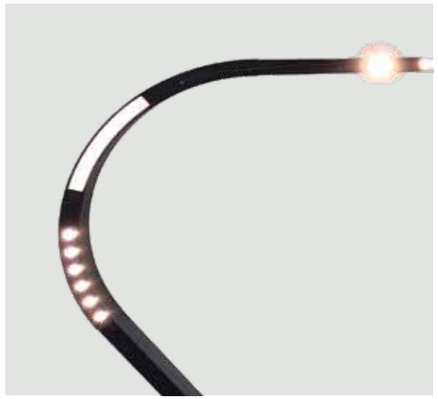




LIGHTS FOR D:600MM CURVED TRACKS






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 600mm L: 195mm W: 23mm H: 45mm
Beam Angle	36°
DALI Dimmable	◓
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22092**






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 600mm L: 195mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◓
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22093**





Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 600mm Ø: 45mm L: 110mm
Beam Angle	36°
DALI Dimmable	◓
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22094**





Power	2W
Input	48V
Color Temperature	3000K
Lumen	170Lm
Cri	80
Dimensions	L: 30mm W: 23mm H: 45mm
Beam Angle	25°
Non Dimmable	⊠
Material	Acrylic
Color	Sandy Black / **Code 22107**






*Dimensions Indicated In Millimeters



OSRAM




Power	13W
Input	48V
Color Temperature	3000K
Lumen	779Lm
Cri	90
Dimensions	L: 328mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◔
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 2087**

Power	13W
Input	48V
Color Temperature	3000K
Lumen	779Lm
Cri	90
Dimensions	L: 328mm W: 23mm H: 45mm
Beam Angle	120°
Non Dimmable	⊗
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 2086**



OSRAM



Power	20W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	1324Lm I 1383Lm I 1411Lm
Cri	90
Dimensions	L: 652mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◔
Material	Aluminium - PC Diffuser
Color	2700K Sandy Black / **Code 2089-27B**
Color	3000K Sandy Black / **Code 2089**
Color	4000K Sandy Black / **Code 2089-4B**

Power	20W
Input	48V
Color Temperature	3000K
Lumen	1383Lm
Cri	90
Dimensions	L: 652mm W: 23mm H: 45mm
Beam Angle	120°
Non Dimmable	⊗
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code 2088**



*Dimensions Indicated In Millimeters


*Dimensions Indicated In Millimeters







OSRAM



Power	8W
Input	48V
Color Temperature	2700K I 3000K I 4000K
Lumen	675Lm I 693Lm I 713Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 45mm
Beam Angle	30°
DALI Dimmable	◔
Material	Aluminium - Acrylic
Color	2700K Sandy Black / **Code 2091-27B**
Color	3000K Sandy Black / **Code 2091**
Color	4000K Sandy Black / **Code 2091-4B**


Power	8W
Input	48V
Color Temperature	3000K
Lumen	693Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 45mm
Beam Angle	30°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 2090**







OSRAM

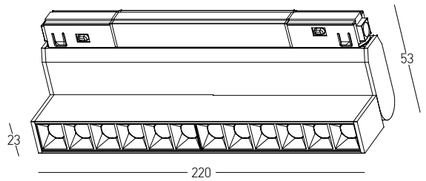

Power	12W
Input	48V
Color Temperature	3000K
Lumen	1021Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 53mm
Beam Angle	30°
DALI Dimmable	◔
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 20291**


Power	12W
Input	48V
Color Temperature	3000K
Lumen	1021Lm
Cri	90
Dimensions	L: 220mm W: 23mm H: 53mm
Beam Angle	30°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 20290**

*Dimensions Indicated In Millimeters



CREE

Power	5W
Input	48V
Color Temperature	3000K
Lumen	414Lm
Cri	90
Dimensions	Ø: 26mm H: 125mm
Beam Angle	24°
DALI Dimmable	◯
Material	Aluminium
Color	Sandy Black / **Code 2094**




Power	5W
Input	48V
Color Temperature	3000K
Lumen	414Lm
Cri	90
Dimensions	Ø: 26mm H: 125mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Color	Sandy Black / **Code 2093**



CREE

Power	15W
Input	48V
Color Temperature	3000K
Lumen	1225Lm
Cri	90
Dimensions	Ø: 45mm H: 200mm
Beam Angle	24°
DALI Dimmable	◯
Material	Aluminium
Color	Sandy Black / **Code 2095-D**




Power	15W
Input	48V
Color Temperature	3000K
Lumen	1225Lm
Cri	90
Dimensions	Ø: 45mm H: 200mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Color	Sandy Black / **Code 2095**

*Dimensions Indicated In Millimeters



CREE

Power	7W
Input	48V
Color Temperature	2700K I 3000K
Lumen	565Lm I 580Lm
Cri	90
Dimensions	Ø: 37mm H: 87mm
Beam Angle	32°
DALI Dimmable	◯
Material	Aluminium
Color	3000K Sandy Black / **Code 20400-BD**
Color	2700K Sandy Black / **Code 20407-BD**




Power	7W
Input	48V
Color Temperature	3000K I 4000K
Lumen	580Lm I 605Lm
Cri	90
Dimensions	Ø: 37mm H: 87mm
Beam Angle	32°
Non Dimmable	⊗
Material	Aluminium
Color	3000K Sandy Black / **Code 20402-B**
Color	4000K Sandy Black / **Code 20406**




CREE

Power	15W
Input	48V
Color Temperature	3000K I 4000K
Lumen	1284Lm I 1312Lm
Cri	90
Dimensions	Ø: 65mm H: 130mm
Beam Angle	24°
DALI Dimmable	◯
Material	Aluminium
Color	3000K Sandy Black / **Code 20413**
Color	4000K Sandy Black / **Code 20415**




Power	15W
Input	48V
Color Temperature	3000K I 4000K
Lumen	1284Lm I 1312Lm
Cri	90
Dimensions	Ø: 65mm H: 130mm
Beam Angle	24°
Non Dimmable	⊗
Material	Aluminium
Color	3000K Sandy Black / **Code 20410**
Color	4000K Sandy Black / **Code 20411**


ACCESSORIES FOR 48V ROUNDED RECTANGLE MAGNETIC SYSTEM




Feeder for 48V Magnetic Tracks
300mm Cable Available
Code 2096 / Color Black




Feeder for 48V Magnetic Tracks
2000mm Cable Available
Code 2096-2M / Color Black

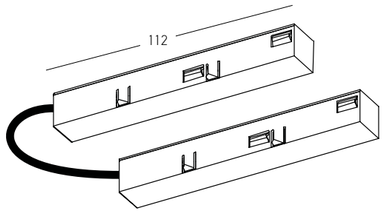


Flex Connector with Cable for 48V Magnetic Tracks
Code 20105 / Color Black



Inner Connector for 48V Magnetic Tracks
Code 20103 / Color Black

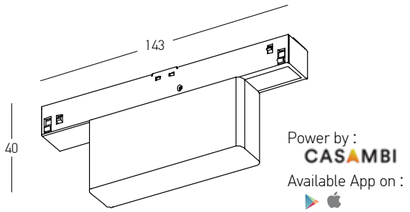


Wireless Control for 48V Magnetic Tracks
Bluetooth DALI
Code 20293



End Cap
Material Metal
Code 22097-E / Color Black

REMOTE DRIVERS FOR 48V ROUNDED RECTANGLE MAGNETIC SYSTEM


REMOTE DRIVER 60W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20295**
DALI KIT / **Code 20322**
PUSH BUTTON KIT / **Code 20300**
BLUETOOTH KIT / **Code 20303**


REMOTE DRIVER 100W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20296**
DALI KIT / **Code 20298**
PUSH BUTTON KIT / **Code 20301**
BLUETOOTH KIT / **Code 20304**

REMOTE DRIVER 150W




Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20297**
DALI KIT / **Code 20299**
PUSH BUTTON KIT / **Code 20302**
BLUETOOTH KIT / **Code 20305**

*Dimensions Indicated In Millimeters

DRIVER BOX FOR 48V ROUNDED RECTANGLE MAGNETIC SYSTEM (ceiling application)

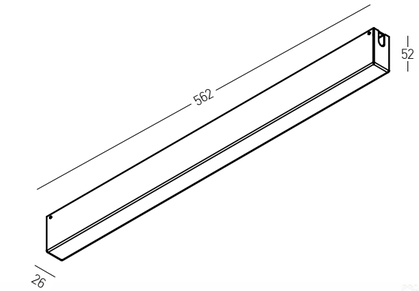

Surface Mount Base with Driver for Surface Magnetic Track

Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	Included 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 20306-B**
DALI KIT / **Code 20308-B**
PUSH BUTTON KIT / **Code 20310-B**
BLUETOOTH KIT / **Code 20312-B**




Surface Mount Base with Driver for Surface Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	Included 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 20307-B**
DALI KIT / **Code 20309-B**
PUSH BUTTON KIT / **Code 20311-B**
BLUETOOTH KIT / **Code 20313-B**

DRIVER BOX FOR 48V ROUNDED RECTANGLE MAGNETIC SYSTEM (pendant application)

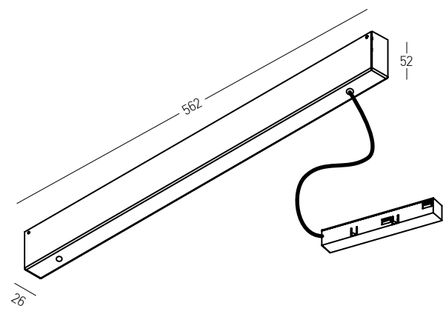

Pendant Base with Driver for Pendant Magnetic Track

Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 20314-B**
DALI KIT / **Code 20316-B**
PUSH BUTTON KIT / **Code 20318-B**
BLUETOOTH KIT / **Code 20320-B**

Pendant Base with Driver for Pendant Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 20315-B**
DALI KIT / **Code 20317-B**
PUSH BUTTON KIT / **Code 20319-B**
BLUETOOTH KIT / **Code 20321-B**



08. 48V CIRCLES-CURVED MAGNETIC SYSTEM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Curved | Circles




BODY COLOR

Sandy Black

INSTALLATION

Surface | Pendant | Trimless



FIXTURE COLOR


Sandy Black



SURFACE I PENDANT TRACK



Track Code	Length	Color
22273B-1	1m	Sandy Black
22273B-2	2m	Sandy Black
22273B-3	3m	Sandy Black






Curved Mechanic
Connector
Metal
Code 22097-C




Suspension Kit (2pcs)
Adjustable Wire 2m
Metal
Code 22121




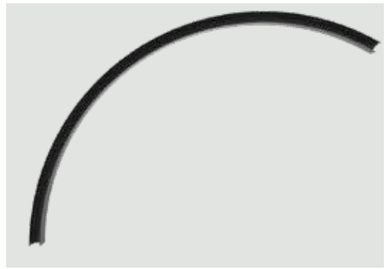

SURFACE I PENDANT CURVE TRACK 120°


Dimensions	**Ø**: 1200mm L: 1252.5mm
Material	Aluminium
Color	Sandy Black
	Code 22102



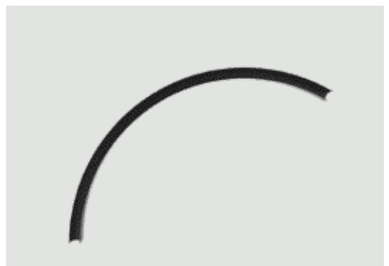

SURFACE I PENDANT CURVE TRACK 120°


Dimensions	**Ø**: 900mm L: 942.5mm
Material	Aluminium
Color	Sandy Black
	Code 22097





SURFACE I PENDANT CURVE TRACK 120°

Dimensions	**Ø**: 600mm L: 628mm
Material	Aluminium
Color	Sandy Black
	Code 22090






*Dimensions Indicated In Millimeters

TRIMLESS TRACK




Track Code	Length	Color
22274B-1	1m	Sandy Black
22274B-2	2m	Sandy Black
22274B-3	3m	Sandy Black






Curved Mechanic
Connector
Metal


Code 22097-C

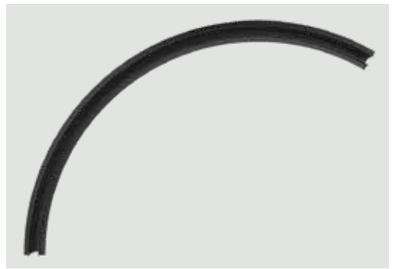

TRIMLESS CURVE TRACK 120°


Dimensions	**Ø**: 1200mm L: 1252.5mm
Material	Aluminium
Color	Sandy Black
	Code 22103



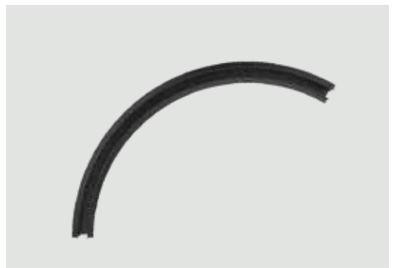

TRIMLESS CURVE TRACK 120°


Dimensions	**Ø**: 900mm L: 942.5mm
Material	Aluminium
Color	Sandy Black
	Code 22098





TRIMLESS CURVE TRACK 120°

Dimensions	**Ø**: 600mm L: 628mm
Material	Aluminium
Color	Sandy Black
	Code 22091






*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters




LIGHTS FOR D:1200MM CURVED TRACKS






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 1200mm L: 195mm W: 23mm H: 45mm
Beam Angle	36°
DALI Dimmable	◠
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22104**






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 1200mm L: 195mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◠
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22105**





Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 1200mm Ø: 45mm L: 110mm
Beam Angle	36°
DALI Dimmable	◠
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22106**






Power	2W
Input	48V
Color Temperature	3000K
Lumen	170Lm
Cri	80
Dimensions	L: 30mm W: 23mm H: 45mm
Beam Angle	25°
Non Dimmable	⊗
Material	Acrylic
Color	Sandy Black / **Code 22107**

*Dimensions Indicated In Millimeters


LIGHTS FOR D:900MM CURVED TRACKS






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 900mm L: 195mm W: 23mm H: 45mm
Beam Angle	36°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22099**






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 900mm L: 195mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22100**






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 900mm Ø: 45mm L: 110mm
Beam Angle	36°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22101**






Power	2W
Input	48V
Color Temperature	3000K
Lumen	170Lm
Cri	80
Dimensions	L: 30mm W: 23mm H: 45mm
Beam Angle	25°
Non Dimmable	⊗
Material	Acrylic
Color	Sandy Black / **Code 22107**

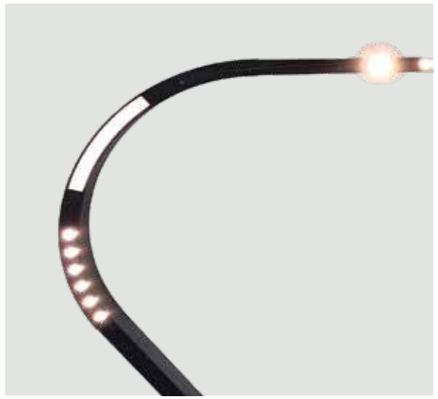




LIGHTS FOR D:600MM CURVED TRACKS






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 600mm L: 195mm W: 23mm H: 45mm
Beam Angle	36°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22092**






Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 600mm L: 195mm W: 23mm H: 45mm
Beam Angle	120°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22093**





Power	8W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	80
Dimensions	Curved: 600mm Ø: 45mm L: 110mm
Beam Angle	36°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 22094**





Power	2W
Input	48V
Color Temperature	3000K
Lumen	170Lm
Cri	80
Dimensions	L: 30mm W: 23mm H: 45mm
Beam Angle	25°
Non Dimmable	⊗
Material	Acrylic
Color	Sandy Black / **Code 22107**





*Dimensions Indicated In Millimeters

ACCESSORIES FOR 48V CIRCLES-CURVED MAGNETIC SYSTEM

FEEDER FOR SURFACE-TRIMLESS APPLICATION



Material	Plastic
Special Feature	300mm Available Cable
Color	Black Matt / **Code 22095**

FEEDER FOR PENDANT INSTALLATION




Material	Plastic
Special Feature	2000mm Available Cable
Color	Black Matt / **Code 22120**

FLEX CONNECTOR



Material	Plastic
Special Feature	2200mm Available Cable
Color	Black Matt / **Code 22096**


END CAPS



Material	Metal
Color	Black Matt / **Code 22097-E**

REMOTE DRIVERS FOR 48V CIRCLES-CURVED MAGNETIC SYSTEM


REMOTE DRIVER 60W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20295**
DALI KIT / **Code 20322**
PUSH BUTTON KIT / **Code 20300**
BLUETOOTH KIT / **Code 20303**


REMOTE DRIVER 100W



Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20296**
DALI KIT / **Code 20298**
PUSH BUTTON KIT / **Code 20301**
BLUETOOTH KIT / **Code 20304**


REMOTE DRIVER 150W




Input	220-240, 50-60Hz
Output	48V
Guarantee	5Years

ON-OFF / **Code 20297**
DALI KIT / **Code 20299**
PUSH BUTTON KIT / **Code 20302**
BLUETOOTH KIT / **Code 20305**

*Dimensions Indicated In Millimeters

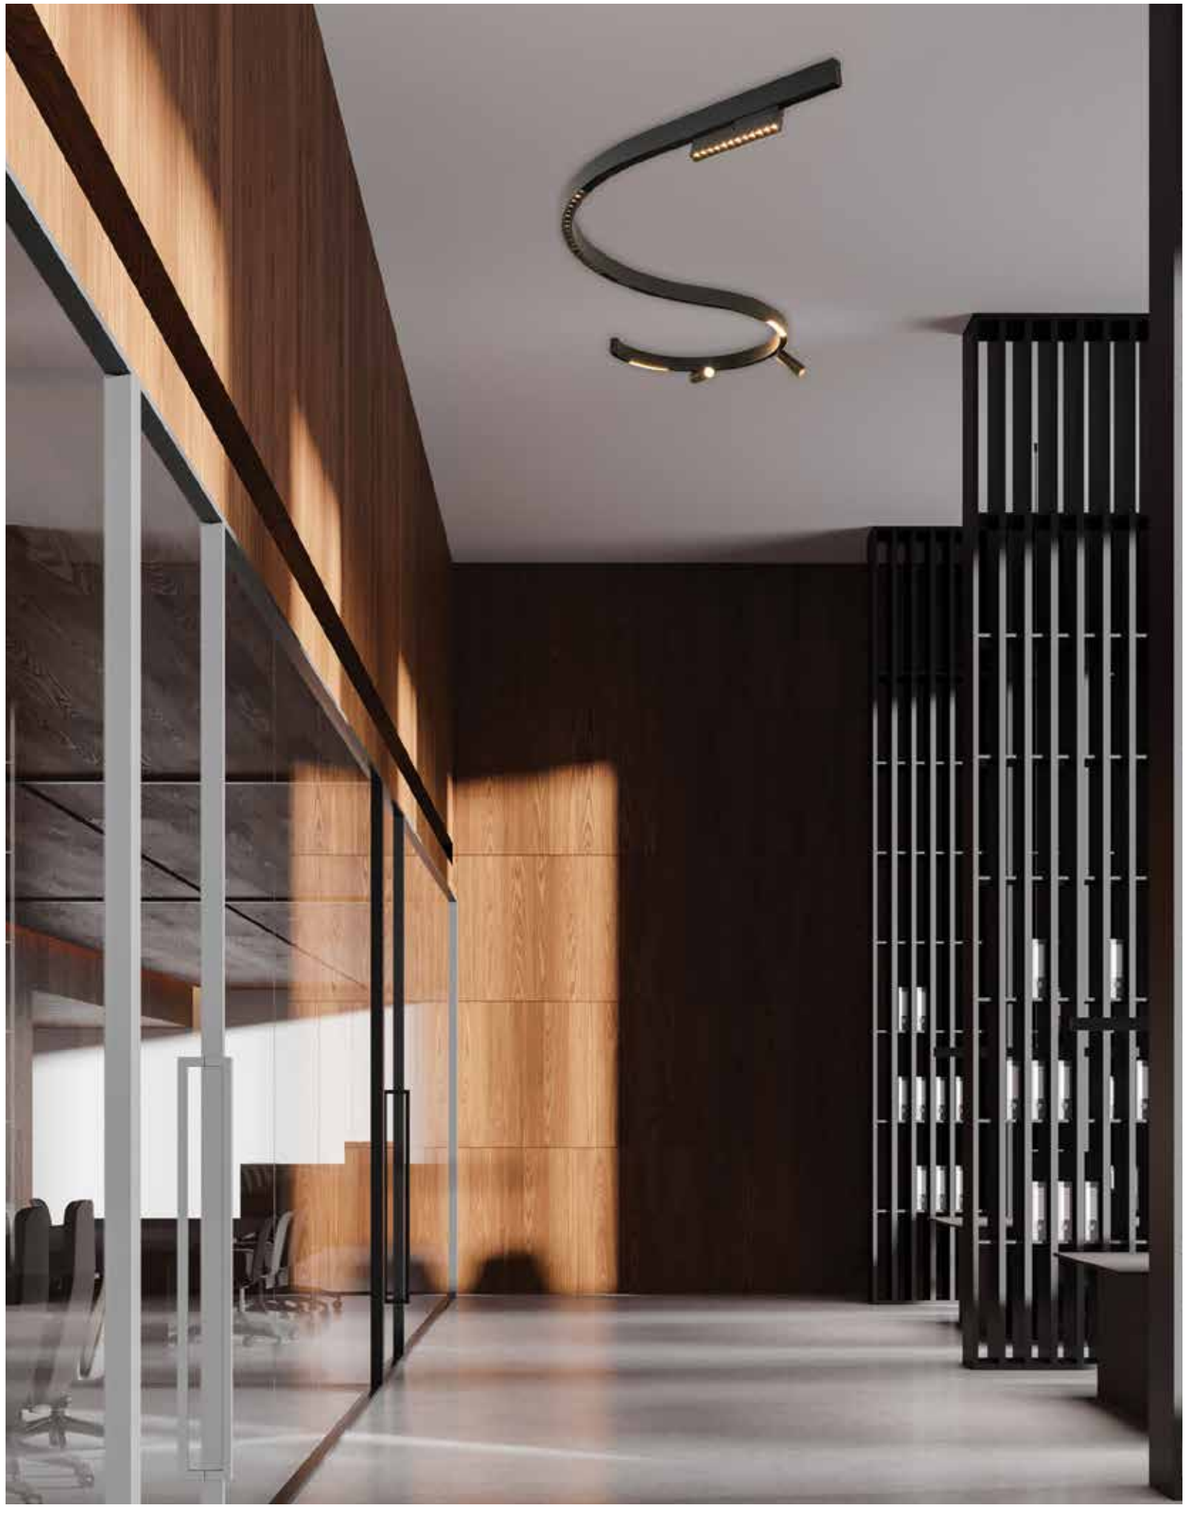






MAGNETIC SURFACE I PENDANT CIRCLE

Dimensions Ø: 600mm W: 28mm H: 56mm
Material Aluminium
Color Sandy Black / **Code 22270**






MAGNETIC SURFACE I PENDANT CIRCLE

Dimensions Ø: 900mm W: 28mm H: 56mm
Material Aluminium
Color Sandy Black / **Code 22271**





MAGNETIC SURFACE I PENDANT CIRCLE

Dimensions Ø: 1200mm W: 28mm H: 56mm
Material Aluminium
Color Sandy Black / **Code 22272**




Suspension Kit (3pcs) for Magnetic Circles
Adjustable Wire 2000mm
Material Metal
Code 22283



*Dimensions Indicated In Millimeters

CEILING DRIVER BOX FOR PENDANT CURVED TRACKS - CIRCLES

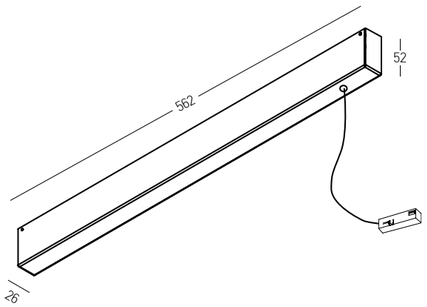

Pendant Base with Driver for Pendant Magnetic Track


Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 22284**
BLUETOOTH KIT / **Code 22282**

Pendant Base with Driver for Pendant Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

ON-OFF / **Code 22286**
BLUETOOTH KIT / **Code 22280**

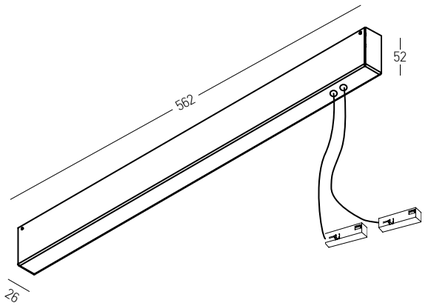

Pendant Base with Driver for Pendant Magnetic Track

Power	100W
Input	220-240, 50-60Hz
Output	48V
Special Feature	200cm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

DALI KIT / **Code 22285**
PUSH BUTTON KIT / **Code 22281**

Pendant Base with Driver for Pendant Magnetic Track

Power	200W
Input	220-240, 50-60Hz
Output	48V
Special Feature	2000mm Cable Available - 48V Feeder
Color	Sandy Black
Guarantee	5Years

DALI KIT / **Code 22287**
PUSH BUTTON KIT / **Code 22279**










*Dimensions Indicated In Millimeters

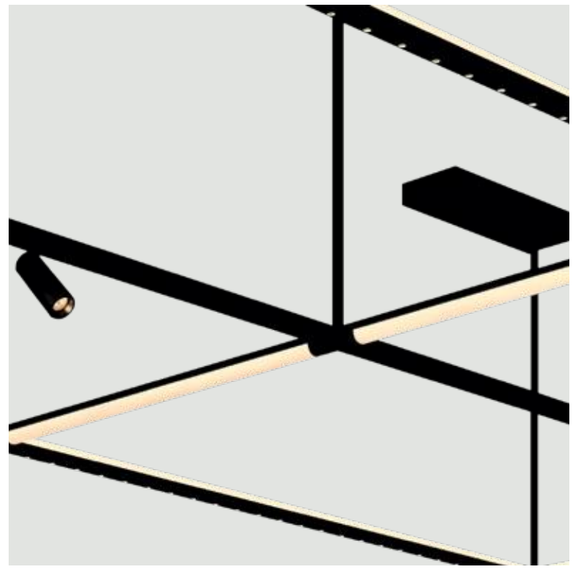

09. 48V SPACE FRAME MAGNETIC SYSTEM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

TRACK FORM

Linear

BODY COLOR


Sandy Black

INSTALLATION

Pendant

FIXTURE COLOR

Sandy Black

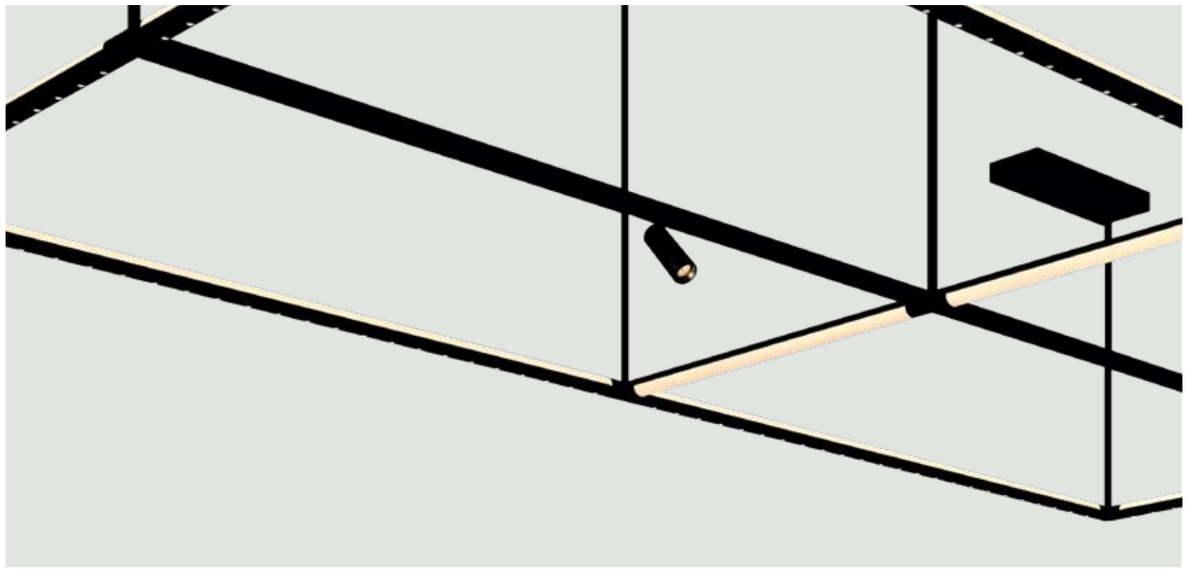



DOWNLIGHT TUBE



SPOT TUBE WITH UP-LIGHT


SPOT TUBE




MAGNETIC TRACK



DO IT YOURSELF

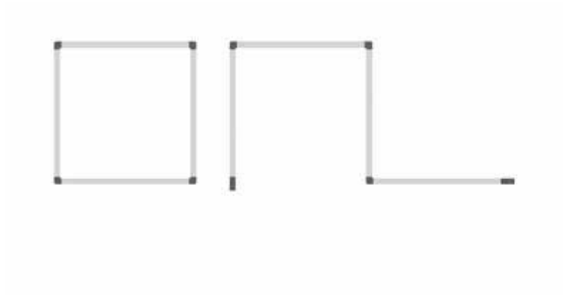

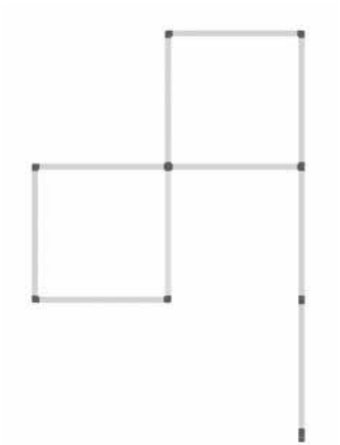





*Dimensions Indicated In Millimeters

Power Supply Connection


The feeder tube must always be used in combination with the 48V power supply.
At the combined tail end, both the end cap and inner connector are required to ensure proper installation. Each circuit group should not exceed a total load / maximum power capacity of 150W, while insulator block circuits must be applied for correct circuit grouping and safe operation.

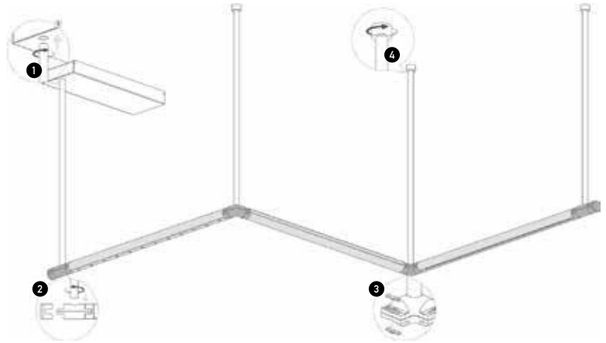

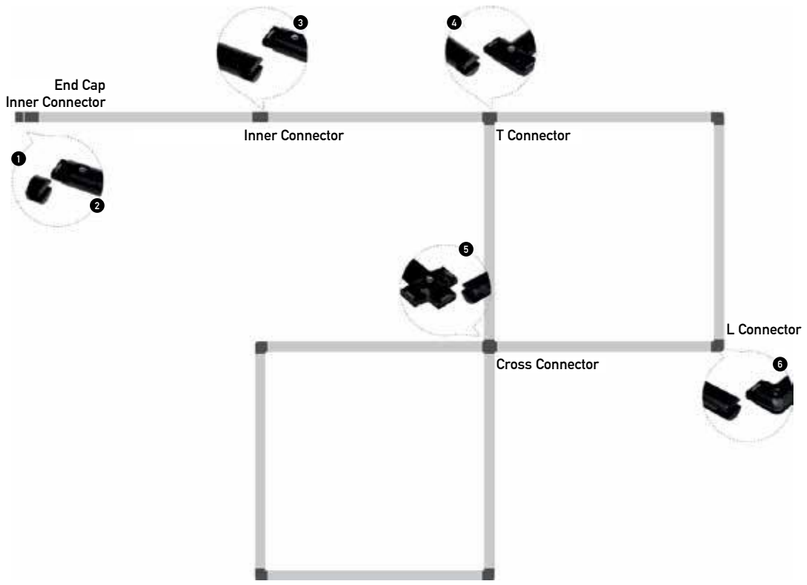

End Cap






Dimensions Ø: 30mm L: 23mm
Material Plastic
Color Black Matt / **Code 23151**

Inner Connector






Dimensions Ø: 30mm L: 70mm
Material Plastic
Color Black Matt / **Code 23156**

L Connector






Dimensions Ø: 30mm L: 50mm W: 50mm
Material Plastic
Color Black Matt / **Code 23149**

T Connector





Dimensions Ø: 30mm L: 70mm W: 50mm
Material Plastic
Color Black Matt / **Code 23150**

Power Supply 48V




Power 150W
Input 220-240V
Output 48V
Dimensions L: 355mm W: 124mm H: 39.5mm
Material Metal
Special Feature Driver Included

Color Black Matt
On-Off / **Code 23154**
DALI / **Code 23157**

Cross Connector





Dimensions Ø: 30mm L: 70mm W: 70mm
Material Plastic
Color Black Matt / **Code 23148**

Feeder Tube

Dimensions Ø: 25mm H:562mm
Material Metal
Color Black Matt / **Code 23155**




Pendant Tube

Dimensions Ø: 25mm H: 593mm
Material Metal
Color Black Matt / **Code 23152**




*Dimensions Indicated In Millimeters

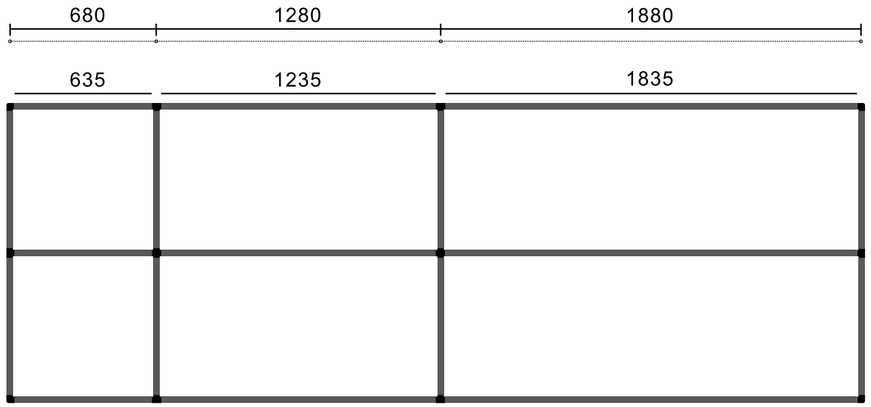



Track Code	Size
23147	635mm
23145	1235mm
23146	1835mm

Magnetic Tracks for 23153 Magnetic Spot

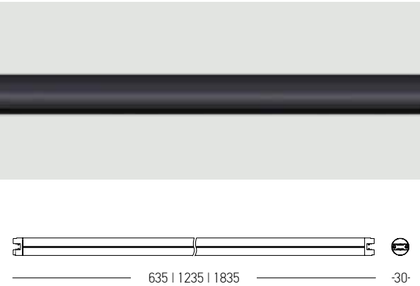


Input	48V
Dimensions	Ø: 30mm L: 635mm I 1235mm I 1835mm
Material	Aluminium
Color	Black Matt

Power	9W
Input	48V
Color Temperature	3000K
Lumen	780Lm
Cri	90
Dimensions	Ø: 43mm L: 75mm
Beam Angle	28°
DALI Dimmable	◯
Material	Aluminium
Color	Sandy Black / **Code 23153**


Magnetic Spot for Tracks 23147, 23145 & 23146




Code	Size	Watt
23295	635mm	12W
23296	1235mm	25W
23297	1835mm	37W



Power	12W I 25W I 37W
Input	48V
Color Temperature	3000K
Lumen	966Lm I 1812Lm I 2708Lm
Cri	90
Dimensions	Ø: 30mm L: 635mm I 1235mm I 1835mm
Beam Angle	115°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Black Matt

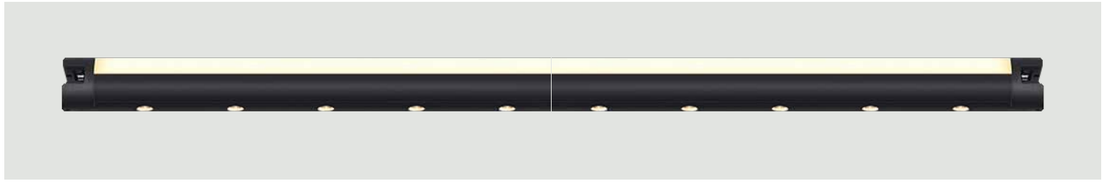


Code	Size	Watt
23144	635mm	24W
23142	1235mm	48W
23143	1835mm	71W



Power	24W I 48W I 71W
Input	48V
Color Temperature	3000K
Lumen	1966Lm I 2812Lm I 3708Lm
Cri	90
Dimensions	Ø: 30mm L: 635mm I 1235mm I 1835mm
Beam Angle	20°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Special Feature	Up-Down Light
Color	Black Matt



Code	Size	Watt
23141	635mm	11W
23139	1235mm	23W
23140	1835mm	34W




Power	11W I 23W I 34W
Input	48V
Color Temperature	3000K
Lumen	985Lm I 1831Lm I 2726Lm
Cri	90
Dimensions	Ø: 30mm L: 635mm I 1235mm I 1835mm
Beam Angle	20°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Black Matt


*Dimensions Indicated In Millimeters


WARNING

Each group of circuits should not exceed 150W.


Circuit grouping, need to block the circuit.

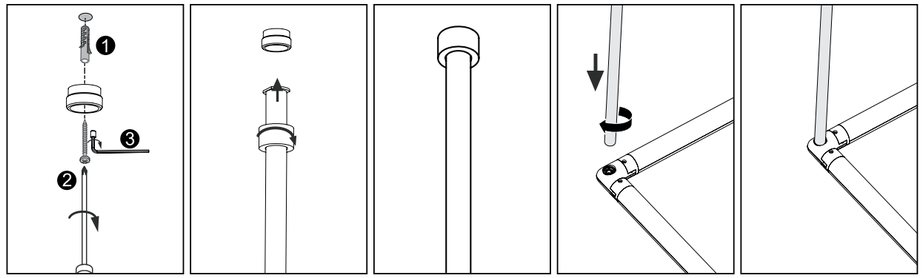


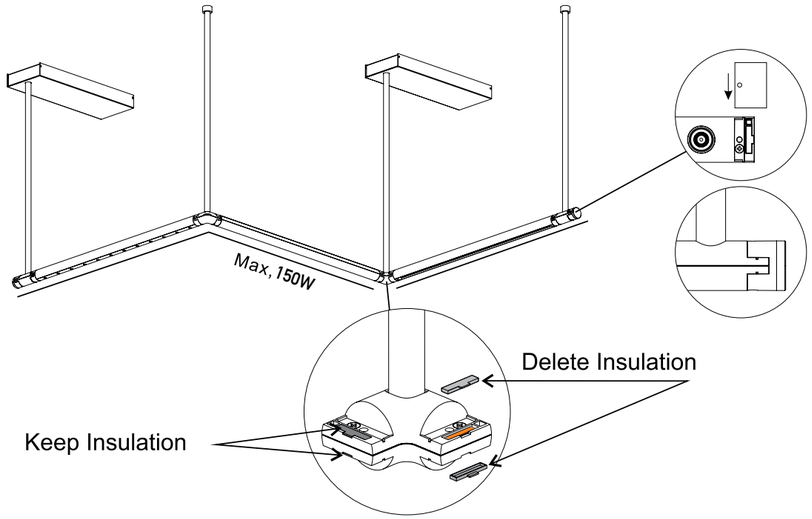


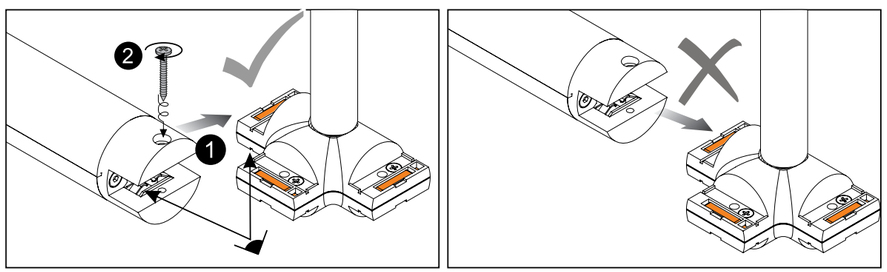



Installation Guide

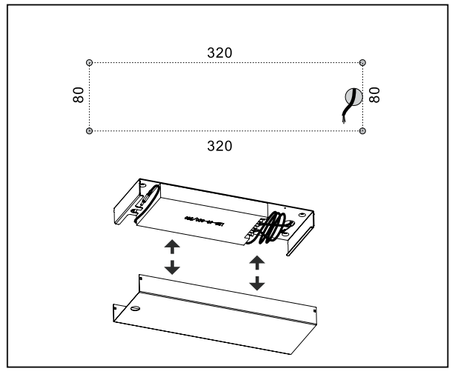


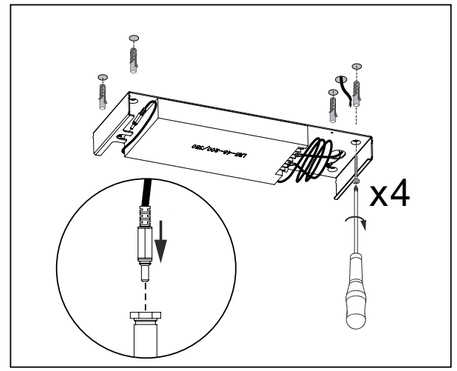

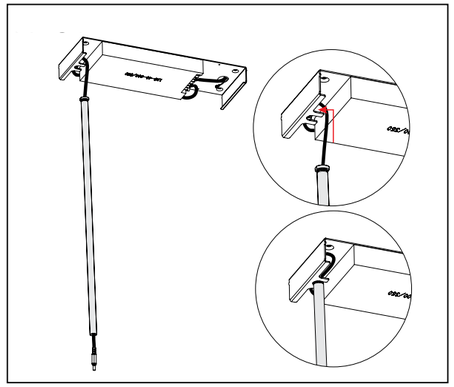

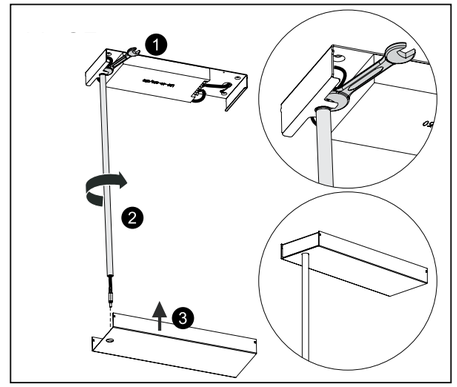

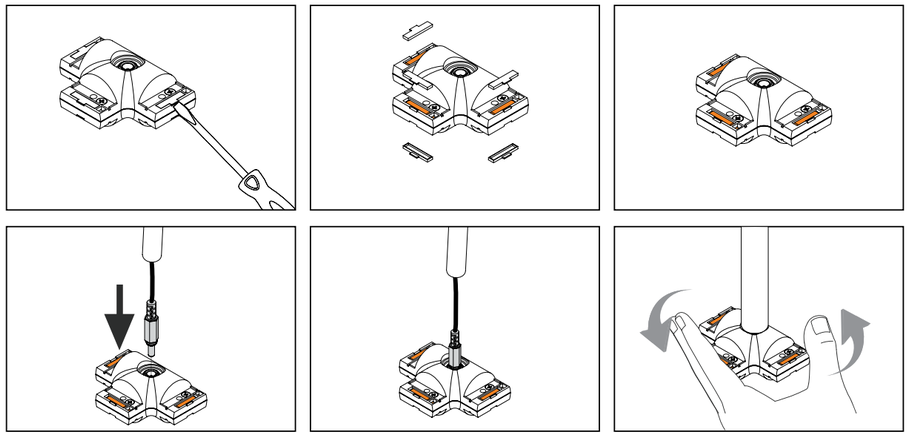

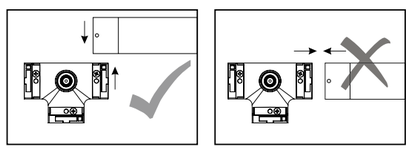



10. 24V FLEXIBLE CURVED SYSTEM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

BODY COLOR

Sandy Black

INSTALLATION

Linear | Curved

Surface

FIXTURE COLOR

Sandy Black | Gold Matt



FLEXIBLE TRACK









Track Code	Size	Color
23178	2m	Sandy Black
23177	3m	Sandy Black





CEILING BASE





Dimensions Ø: 3.5cm H: 9cm
Material Aluminium
Color Sandy Black / **Code 23179**

TRACK CONNECTOR





Dimensions L: 5cm W: 2cm H: 3.3cm
Material Aluminium
Color Sandy Black / **Code 23180**





Power	10W
Input	24V
Color Temperature	3000K
Lumen	832Lm
Cri	90
Dimensions	L: 30cm W: 3.4cm H: 5cm
Beam Angle	120°
DALI Dimmable	◯
Material	Aluminium - PC Diffuser
Special Feature	This light can also used as connector between 2 tracks
Color	Sandy Black / **Code 23182**





Power	10W
Input	24V
Color Temperature	3000K
Lumen	795Lm
Cri	90
Dimensions	L: 13.5cm W: 3.4cm H: 5cm
Beam Angle	40°
DALI Dimmable	◯
Material	Aluminium - Acrylic
Color	Sandy Black / **Code 23183**






Power	5W
Input	24V
Color Temperature	3000K
Lumen	378Lm
Cri	80
Dimensions	Ø: 3.8cm H: 10cm
Beam Angle	36°
DALI Dimmable	◯
Material	Aluminium
Color	Sandy Black / **Code 23184**
Color	Gold Matt / **Code 23185**

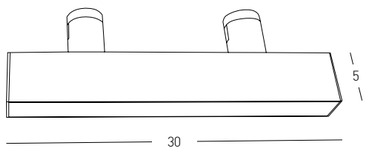


















Power	6W
Input	24V
Color Temperature	3000K
Lumen	470Lm
Cri	90
Dimensions	Ø: 3cm H: 30cm
Beam Angle	40°
DALI Dimmable	◯
Material	Aluminium
Special Feature	120cm Cable Adjustable
Color	Sandy Black / **Code 23186**






Power	5W
Input	24V
Color Temperature	3000K
Lumen	281Lm
Cri	80
Dimensions	Ø: 6cm
DALI Dimmable	◯
Material	Aluminium
Color	Sandy Black / **Code 23187**
Color	Gold Matt / **Code 23188**

FEEDER FOR REMOTE DRIVER APPLICATION






Input	24V
Dimensions	Ø: 3.5cm H: 4.7cm
Material	Metal
Special Feature	100cm Cable Available Included Ceiling Base D: 8cm for Wire Connection
Color	Sandy Black / **Code 23189**

BOX WITH DALI DRIVER 150W





Power	150W
Input	220-240, 50-60Hz
Output	24V
Dimensions	L: 40cm W: 3.5cm H: 5cm
DALI Dimmable	◯
Material	Metal
Special Feature	100cm Cable Available Included Ceiling Base D: 8cm for Wire Connection
Color	Sandy Black / **Code 23181**

REMOTE DRIVERS FOR 24V FLEXIBLE CURVED SYSTEM

REMOTE DRIVER 30W

Power	30W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 2.7cm L: 14.5cm
Non Dimmable	⊗ On-Off ELEMENT 30/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605503**

REMOTE DRIVER 60W


Power	60W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 3.1cm L: 20.1cm
Non Dimmable	⊗ On-Off ELEMENT 60/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605527**

REMOTE DRIVER 120W

Power	120W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 3.1cm L: 26cm
Non Dimmable	⊗ On-Off ELEMENT 120/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605541**

REMOTE DRIVER 180W

Power	180W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4cm H: 3.1cm L: 30cm
Non Dimmable	⊗ On-Off ELEMENT 180/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605565**

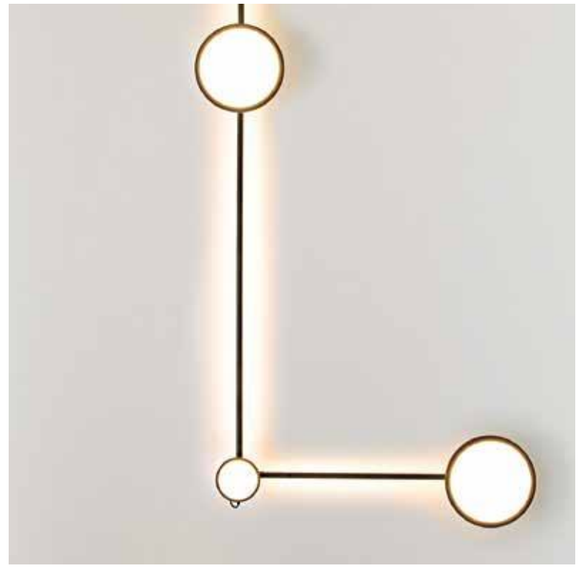

11. 24V PLUG & PLAY SYSTEM

SYSTEM REFERENCE

5 YEARS* GUARANTEE

FORM

Linear

FIXTURE COLOR


Sandy Black | Sandy White

INSTALLATION

Surface | Pendant









Power	3W
Input	24V
Color Temperature	3000K
Lumen	285Lm
Cri	80
Dimensions	Ø: 10cm H: 7.6cm
Dimmable Triac	◯
Material	Aluminium - PC Diffuser
Special Feature	Plug & Play With Jack System
Color	Sandy Black / **Code 19152**
Color	Sandy White / **Code 19151**





Power	20W
Input	24V
Color Temperature	3000K
Lumen	1600Lm
Cri	80
Dimensions	Ø: 22.3cm H: 3.8cm
Non Dimmable	⊗
Material	Aluminium - Diffuser
Special Feature	Plug & Play With Jack System
Color	Sandy Black / **Code 19172**





Power	7W
Input	24V
Color Temperature	3000K
Lumen	560Lm
Cri	80
Dimensions	Ø: 11cm H: 3.8cm
Non Dimmable	⊗
Material	Aluminium - Diffuser
Special Feature	Plug & Play With Jack System
Color	Sandy Black / **Code 19170**



Power		4W	10W	18W	24W	30W
Input	24V					
Color Temperature	3000K					
Lumen		280Lm	700Lm	1260Lm	1680Lm	2100Lm
Cri	80					
Dimensions	Ø: 1.5cm	27cm	57cm	97cm	127cm	157cm
Dimmable Triac	◯					
Material	Aluminium - Diffuser					
Special Feature	Plug & Play With Jack System					
Color	Sandy Black / **Code**	**19158**	**19160**	**19162**	**19164**	**19166**












CEILING I WALL BASE 150W






Power	150W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	Ø: 15.5cm H: 7.6cm
Non Dimmable	⊠
Material	Aluminium
Driver	Included
Special Feature	Plug & Play With Jack System
Color	Sandy Black / **Code 20140**

CEILING I WALL BASE 100W






Power	100W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	Ø: 15.5cm H: 7.6cm
Non Dimmable	⊠
Material	Aluminium
Driver	Included
Special Feature	Plug & Play With Jack System
Color	Sandy Black / **Code 19154**
Color	Sandy White / **Code 19153**

CEILING I WALL BASE 100W






Power	100W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	Ø: 15.5cm H: 7.6cm
Dimmable Triac	◠
Material	Aluminium
Driver	Included
Special Feature	Plug & Play With Jack System Remote Control Included
Color	Sandy Black / **Code 19156**
Color	Sandy White / **Code 19155**







Power	5W
Input	24V
Color Temperature	3000K
Lumen	475Lm
Cri	80
Dimensions	Ø: 6cm H: 10cm
Dimmable Triac	◯
Material	Aluminium - PC Diffuser
Special Feature	Plug & Play With Jack System 180cm Cable Adjustable
Color	Sandy Black / **Code 19168**
Color	Sandy White / **Code 19167**






12. CEILING-PENDANT-TRIMLESS CIRCLES

REFERENCE

5 YEARS* GUARANTEE

INSTALLATION

Surface | Pendant | Trimless



COLOR


Sandy Black | Sandy White

Dimming On-Off, Dali & Push-Button
CCT 2700K - 4000K





Power	42W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3200K I 4000K
Lumen	2511Lm I 2777Lm I 2933Lm
Cri	90
Dimensions	Ø: 45cm H: 6cm
Base	Ø: 24.5cm H: 3.5cm
Beam Angle	100°
DALI Dimmable	◓
Material	Metal - Aluminium - Microprismatic Diffuser
Color	Sandy White / **Code 25197**
Color	Sandy Black / **Code 25198**

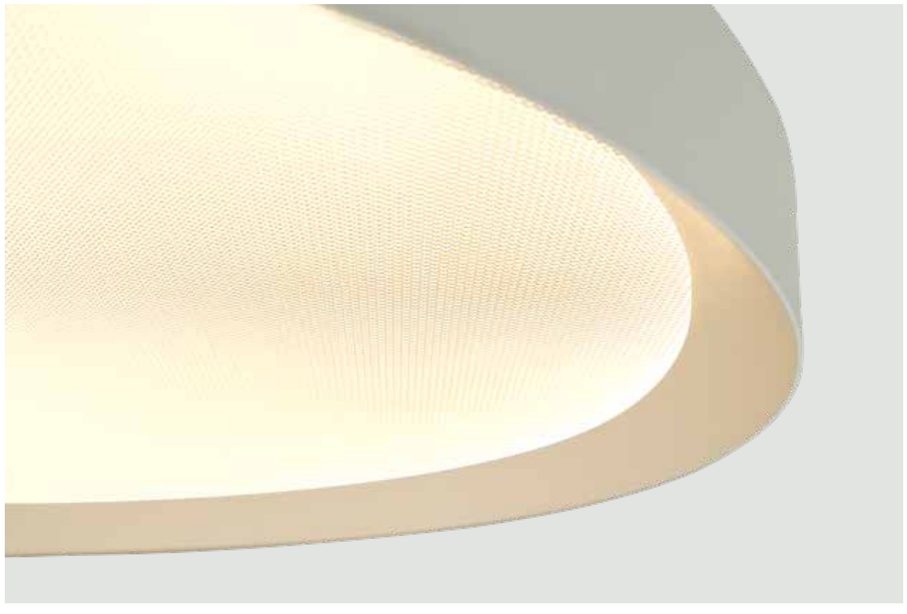






Trimless Frame for 25197, 25198

Dimensions	Ø: 45.7cm H: 6.5cm
Cutting Hole	Ø: 46.2cm
Material	Aluminium
Depth Required	⎍: 7cm
Color	Sandy White / **Code 25203**
Color	Sandy Black / **Code 25204**








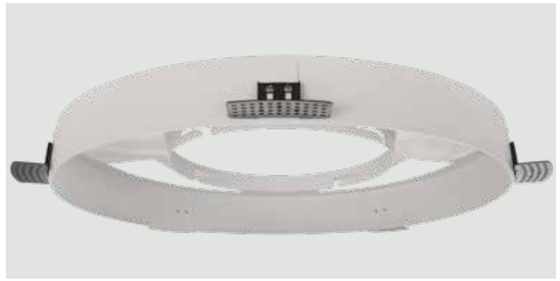








Power	56W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3200K I 4000K
Lumen	4316Lm I 4512Lm I 4706Lm
Cri	90
Dimensions	Ø: 65cm H: 6cm
Base	Ø: 34.5cm H: 3.5cm
Beam Angle	100°
DALI Dimmable	◓
Material	Metal - Aluminium - Microprismatic Diffuser
Color	Sandy White / **Code 25199**
Color	Sandy Black / **Code 25200**

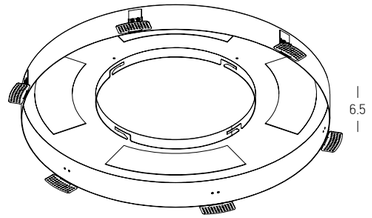

Trimless Frame for 25199, 25200


Dimensions	Ø: 65.7cm H: 6.5cm
Cutting Hole	Ø: 66.2cm
Material	Aluminium
Depth Required	⎍: 7cm
Color	Sandy White / **Code 25205**
Color	Sandy Black / **Code 25206**













Power	84W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3200K I 4000K
Lumen	6152Lm I 6486Lm I 6781Lm
Cri	90
Dimensions	Ø: 85cm H: 6cm
Base	Ø: 54.5cm H: 3.5cm
Beam Angle	100°
DALI Dimmable	◓
Material	Metal - Aluminium - Microprismatic Diffuser
Color	Sandy Black / **Code 25201**
Color	Sandy White / **Code 25202**

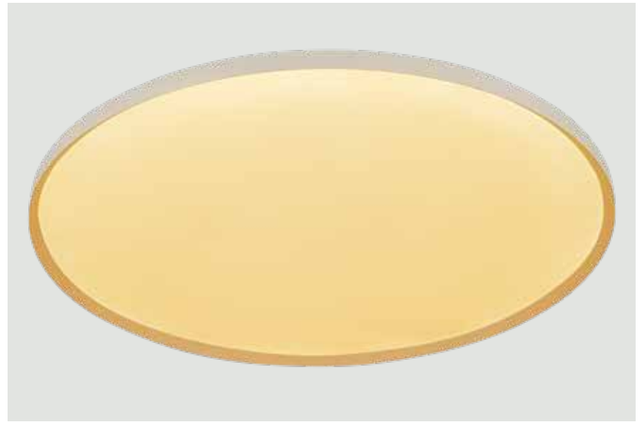

2700K



3200K

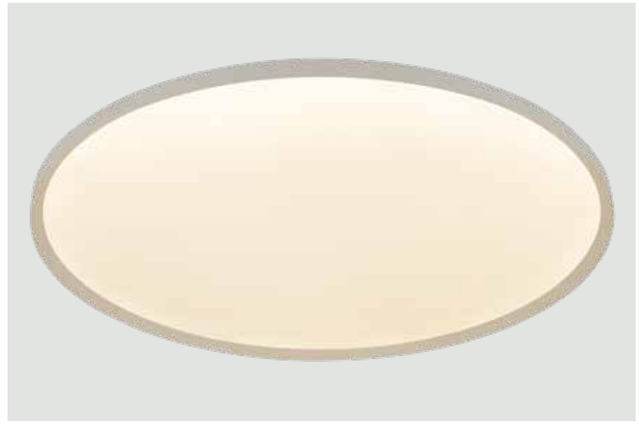


4000K

ACCESSORIES FOR PENDANT INSTALLATION FOR 25197-25202





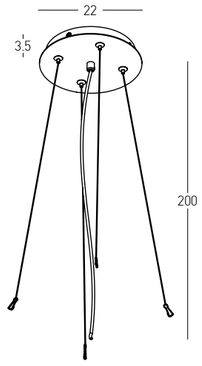

Suspension Kit for 25197, 25198, 25199, 25200, 25201, 25202


Dimensions	Ø: 22cm H: 3.5cm
Material	Stainless Steel - Aluminium
Special Feature	200cm Cable Adjustable Adjustable Wires
Color	Sandy White / **Code 25207**
Color	Sandy Black / **Code 25208**









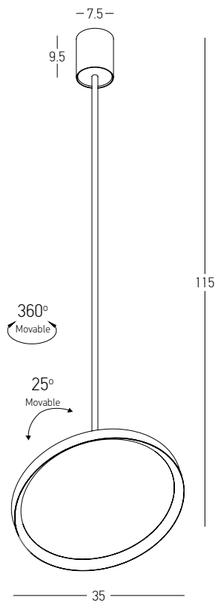





Power	36W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3200K I 4000K
Lumen	2198Lm I 2357Lm I 2495Lm
Cri	90
Dimensions	Ø: 35cm H: 115cm
Base	Ø: 7.5cm H: 9.5cm
Lighting Panel	Ø: 35cm H: 2.8cm
Beam Angle	100°
DALI Dimmable	◔
Material	Aluminium - Microprismatic Diffuser
Special Feature	Movable & Rotatable LED Panel
Color	Sandy White / **Code 25209**
Color	Sandy Black / **Code 25210**








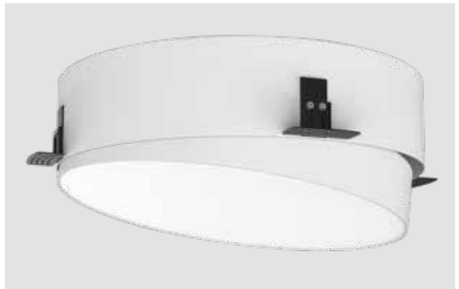


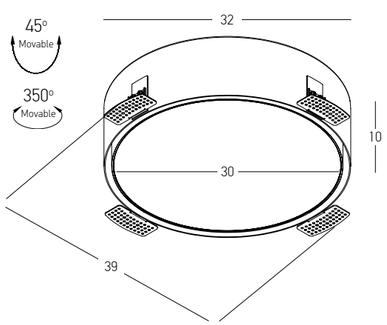

Power	36W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3200K I 4000K
Lumen	2672Lm I 2811Lm I 2958Lm
Cri	90
Dimensions	Ø: 32cm H: 10cm
Beam Angle	100°
Cutting Hole	Ø: 32.5cm
DALI Dimmable	◔
Material	Metal - Aluminium - Acrylic
Depth Required	⎍: 10.5cm
Special Feature	Rotatable - Tilt Up Down
Color	Sandy White / **Code 25211**
Color	Sandy Black / **Code 25212**



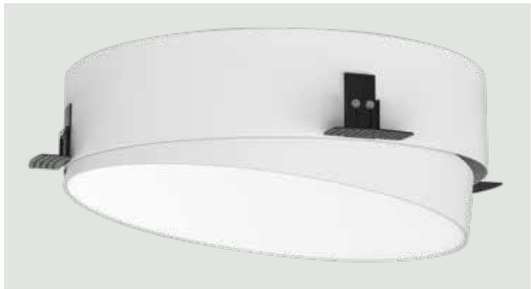

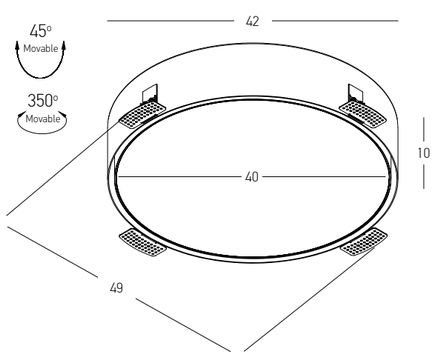


Power	42W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3200K I 4000K
Lumen	2900Lm I 3032Lm I 3166Lm
Cri	90
Dimensions	Ø: 42cm H: 10cm
Beam Angle	100°
Cutting Hole	Ø: 42.5cm
DALI Dimmable	◔
Material	Metal - Aluminium - Acrylic
Depth Required	⎍: 10.5cm
Special Feature	Rotatable - Tilt Up Down
Color	Sandy White / **Code 25213**
Color	Sandy Black / **Code 25214**



CUSTOM MADE PRODUCTS...

LED Circle Luminaire, This luminaire features a curved extruded aluminium body with a fine sandy powder-coated finish, designed for ceiling or pendant mounting. It delivers direct light through a polycarbonate diffuser, ensuring a nearly uniform and comfortable light distribution. Equipped with the latest generation of high-performance LED boards. Operates with an ON/OFF or DALI driver.


CUSTOM DIAMETER FROM 50cm
UPON REQUEST

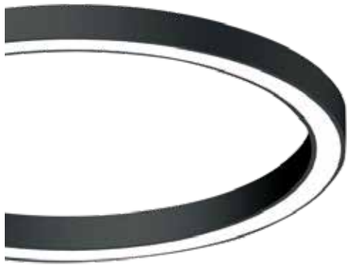

CEILING



PENDANT

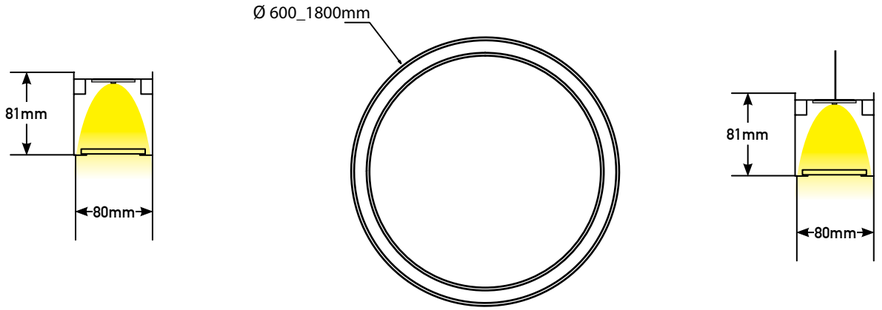

Ceiling Your Code : **81** ____ ____ ____ ____

Diameter | Driver | Kelvin | Body Color

Pendant Your Code : **82** ____ ____ ____ ____

Diameter | Driver | Kelvin | Body Color

Select technical features to configure your code.


Diameter*	Driver	Kelvin	Body Color
06 = 60cm	O = ON-OFF	3 = 3000K	W = SANDY WHITE
09 = 90cm	D = DALI	4 = 4000K	B = SANDY BLACK
12 = 120cm			
18 = 180cm			

*Select from available dimensions only, is not an open edit length profile.

High Output

Diameter (cm)	Watt	3000K (Lumen)	4000K (Lumen)
60	45	7267	7650
90	75	10858	11430
120	100	14449	15210
180	150	21660	22800



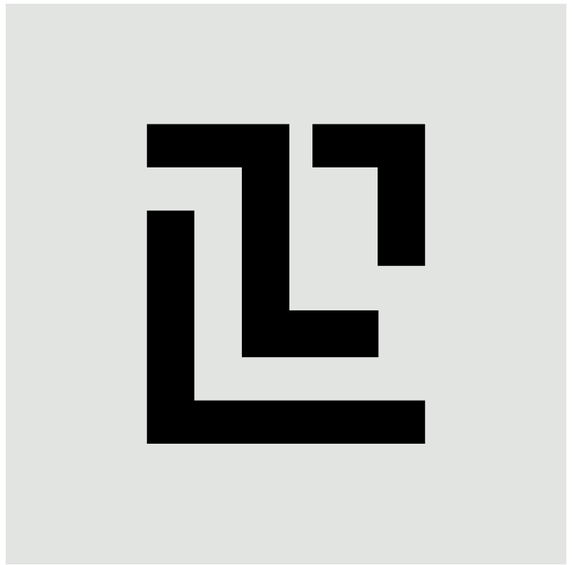

13. LINEARS

REFERENCE

5 YEARS* GUARANTEE

TRACK FORMS

Linear

BODY COLOR

Sandy Black | Sandy White | Sandy Grey


INSTALLATION

Surface | Pendant | Trimless | Recessed

Different Dimming On-Off, Dali & Bluetooth
Different CCT 2200K - 6500K
Different Colors
Different Levels of Lumen Output
Different Dimension Upon Request




48mm LED profile luminaire, made of an extruded aluminium, power-coated with fine sandy finish. Designed for ceiling/pendant/ trimless/recessed, providing direct light emission through a diffuser made of satined polycarbonate for an almost homegeneous emission of light. Luminaire equipped with the latest generation of well known LED boards with small color tolerance.





34mm LED profile luminaire, made of an extruded aluminium, power-coated with fine sandy finish. Designed for ceiling/pendant/ trimless/recessed mounting, providing direct light emission through PMMA diffuser. Luminaire equipped with the latest generation of well known LED boards with small color tolerance.



In the following Electrical Table, you may find Watt and Lumen Output,
High Efficiency (HE) 200Lm/W - 3357Lm/m, High Output (HO) 188Lm/W - 5640Lm/m according to the length of our LED profile


Set HE		Lumen		Set HO		Lumen	
Length (cm)	**Watt**	**3000K**	**4000K**	**Length (cm)**	**Watt**	**3000K**	**4000K**
58	10	1577	1660	58	18	2565	2700
86	15	2366	2490	86	27	3848	4050
114	20	3154	3320	114	36	5130	5400
142	25	3943	4150	142	45	6413	6750
170	30	4731	4980	170	54	7695	8100
198	35	5520	5810	198	63	8978	9450
226	40	6308	6640	226	72	10260	10800
254	45	7097	7470	254	81	11543	12150
282	50	7885	8300	282	90	12825	13500
310	55	8674	9130	310	99	14108	14850
338	60	9462	9960	338	108	15390	16200


CUSTOM MADE PRODUCTS...





CEILING

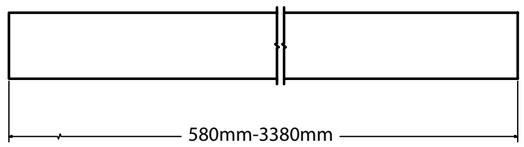




Your Code : **51** _____ _____ _____ _____ _____

Length	Driver	Kelvin	Set	Body Color


Select technical features to configure your code.

Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				G = SANDY GREY
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				
254 = 254cm				
282 = 282cm				
310 = 310cm				
338 = 338cm				


*Select from available dimensions only, is not an open edit length profile.

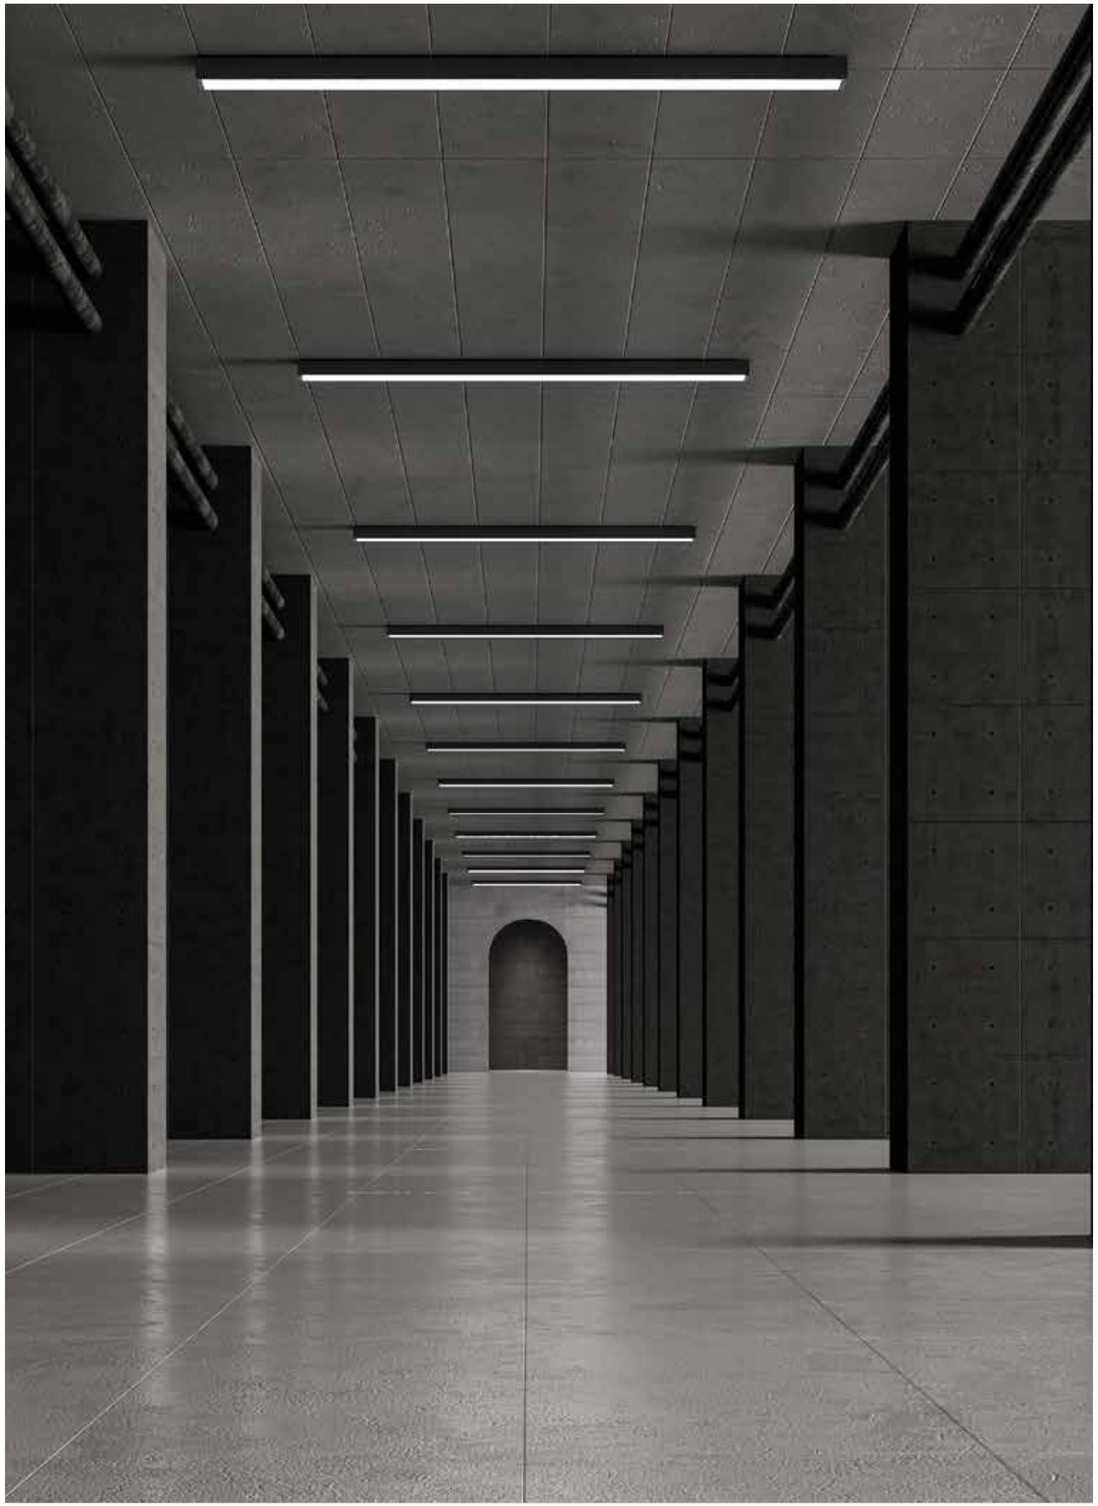




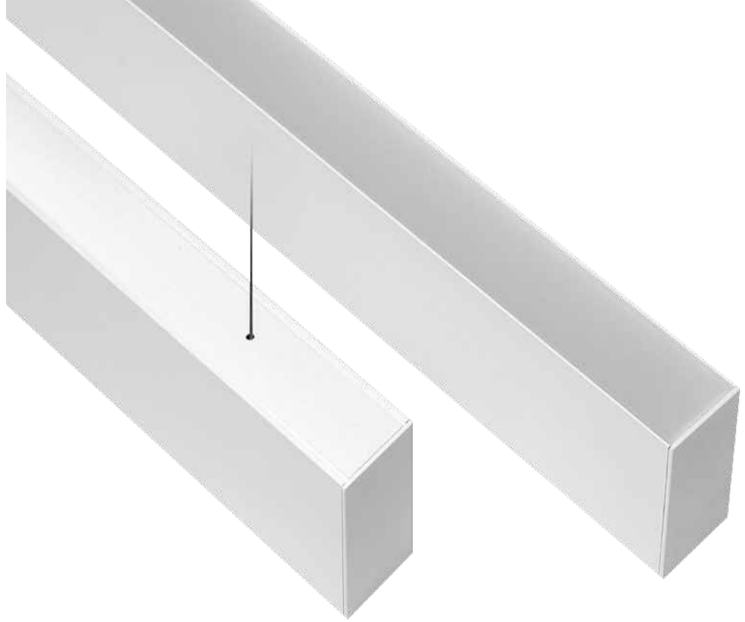

PENDANT

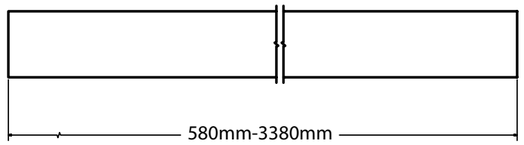

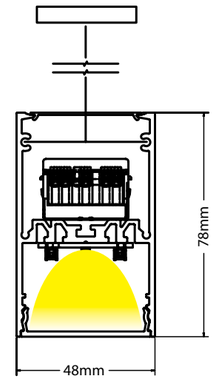

Your Code : **52** _____ _____ _____ _____ _____

Length **Driver** **Kelvin** **Set** **Body Color**


Select technical features to configure your code.


Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				G = SANDY GREY
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				
254 = 254cm				
282 = 282cm				
310 = 310cm				
338 = 338cm				

*Select from available dimensions only, is not an open edit length profile.



TRIMLESS

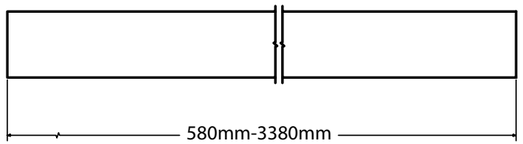

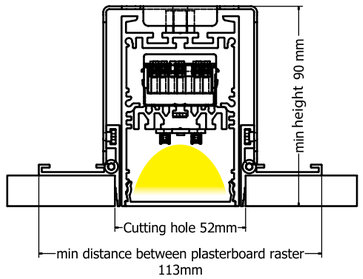

Your Code : **53** _____ _____ _____ _____ _____

Length	Driver	Kelvin	Set	Body Color


Select technical features to configure your code.

Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				
254 = 254cm				
282 = 282cm				
310 = 310cm				
338 = 338cm				


*Select from available dimensions only, is not an open edit length profile.






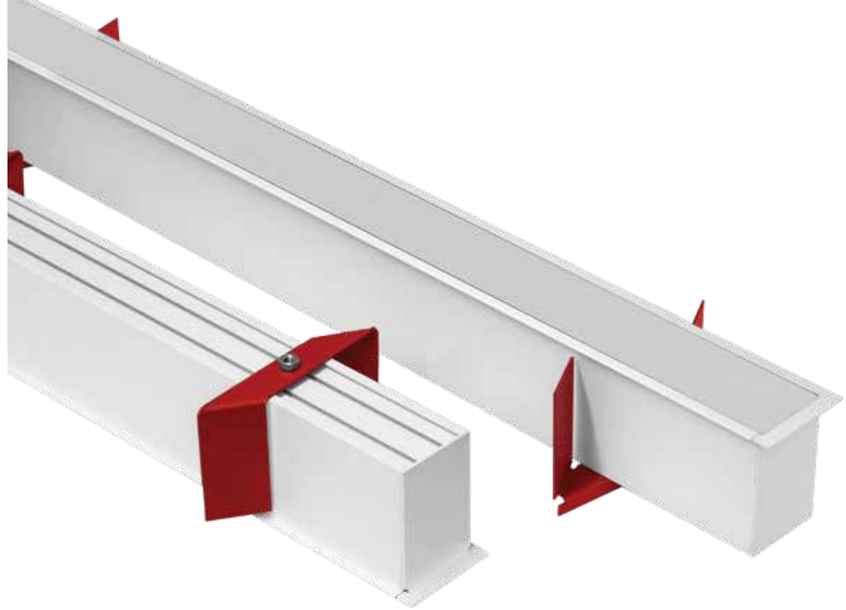

RECESSED

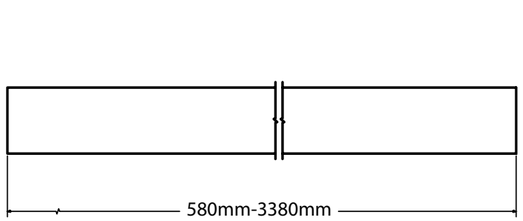

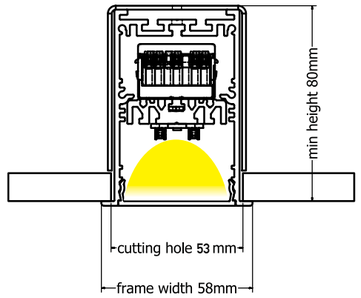

Your Code : **54** _____ _____ _____ _____ _____

Length	Driver	Kelvin	Set	Body Color


Select technical features to configure your code.


Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				
254 = 254cm				
282 = 282cm				
310 = 310cm				
338 = 338cm				

*Select from available dimensions only, is not an open edit length profile.



CEILING

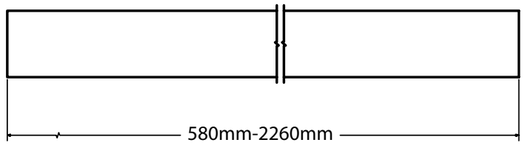




Your Code : **31** _____ _____ _____ _____ _____

Length	Driver	Kelvin	Set	Body Color

Select technical features to configure your code.

Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				


*Select from available dimensions only, is not an open edit length profile.

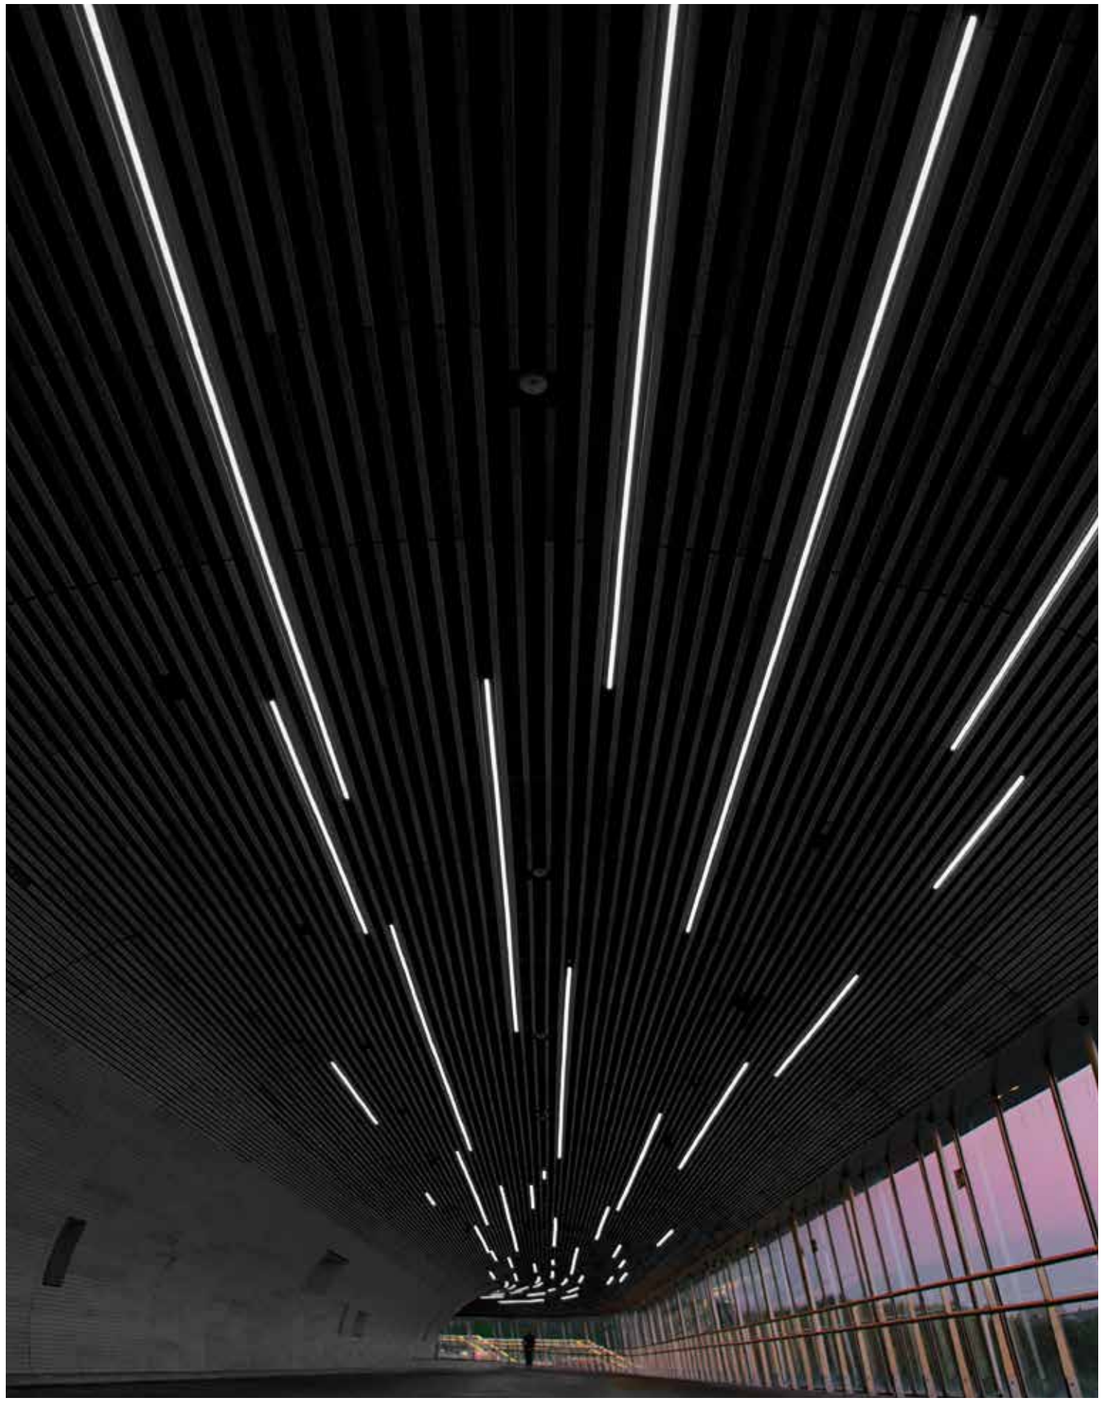






PENDANT

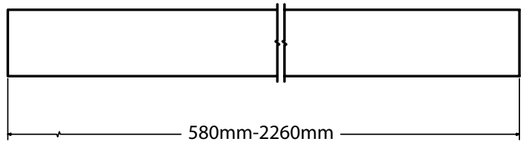

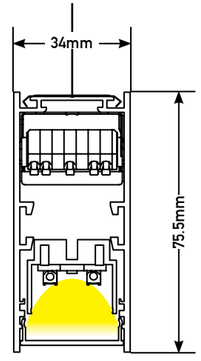

Your Code : **32** _____ _____ _____ _____ _____

Length	Driver	Kelvin	Set	Body Color


Select technical features to configure your code.


Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				

*Select from available dimensions only, is not an open edit length profile.



TRIMLESS

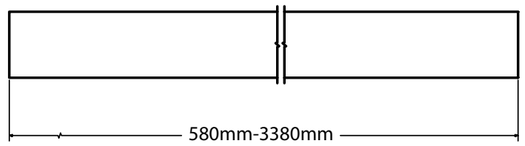

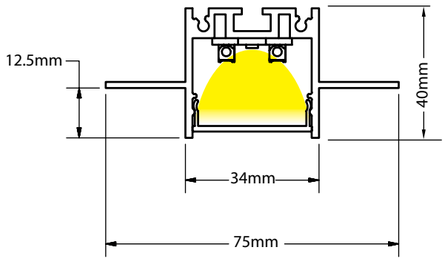


Your Code : **33** _____ _____ _____ _____ _____

Length	Driver	Kelvin	Set	Body Color

Select technical features to configure your code.

Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				
254 = 254cm				
282 = 282cm				
310 = 310cm				
338 = 338cm				


*Select from available dimensions only, is not an open edit length profile.

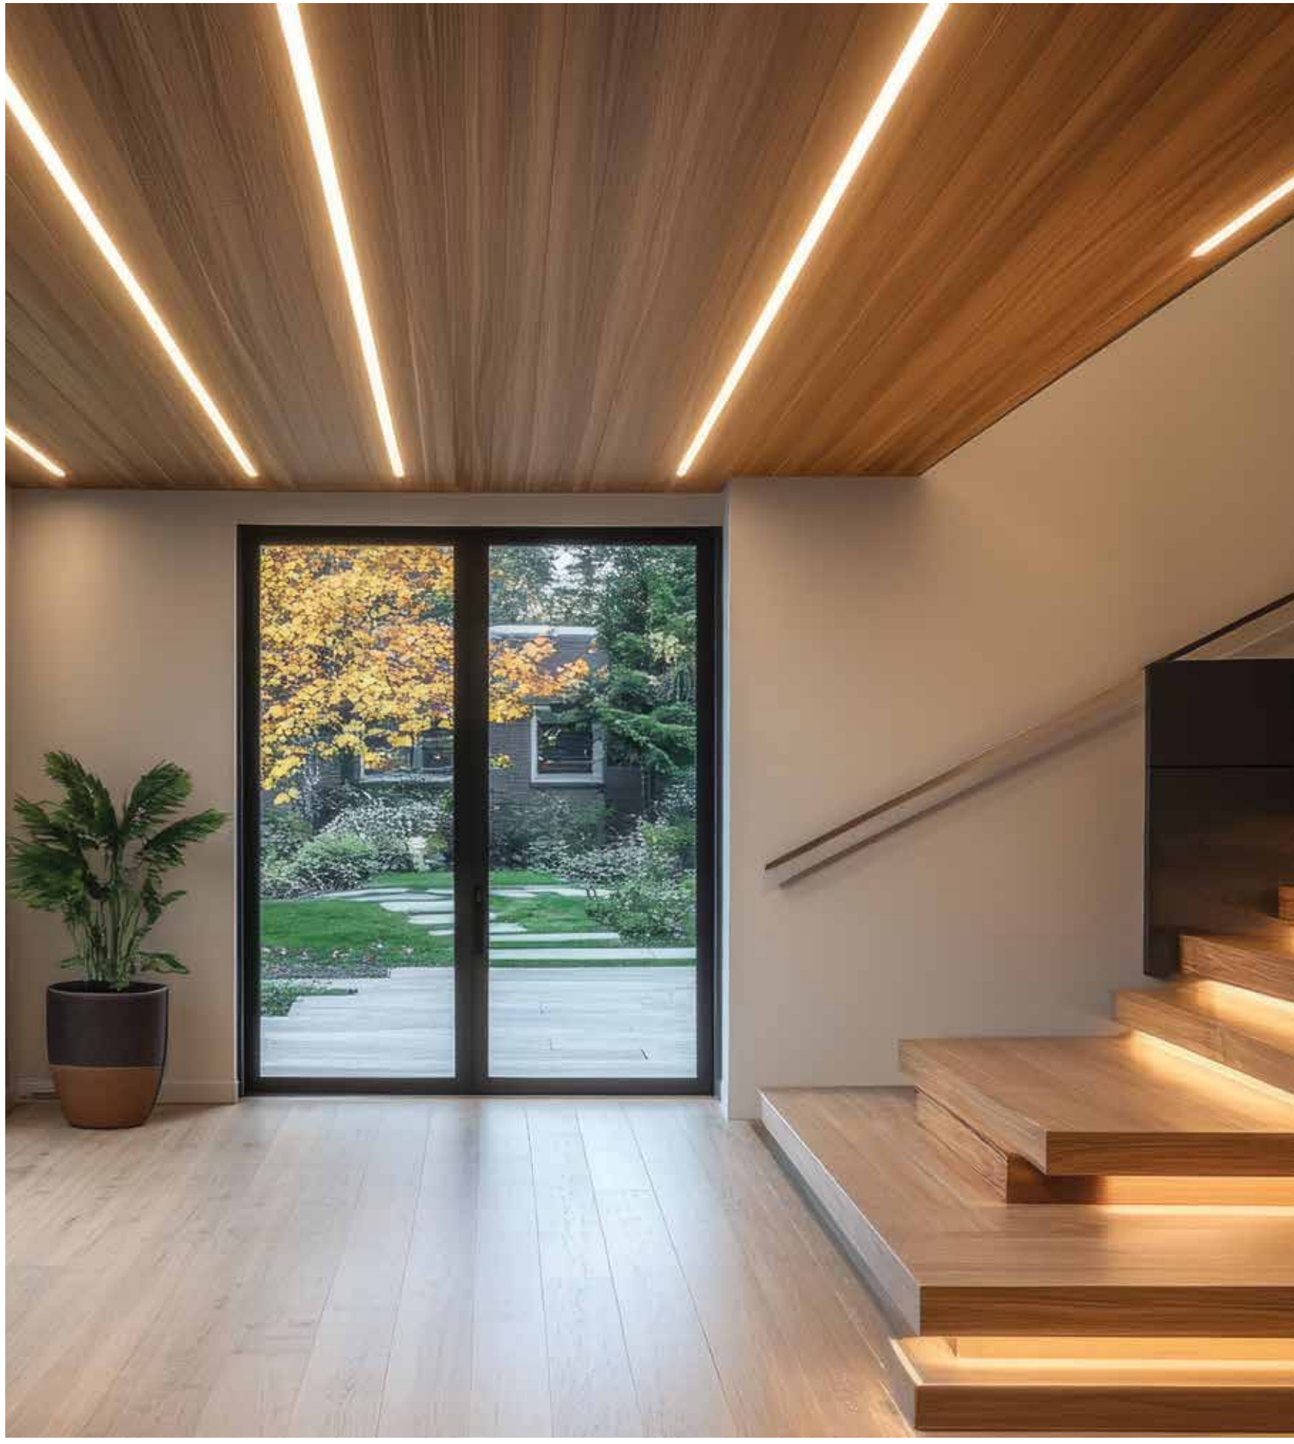






RECESSED

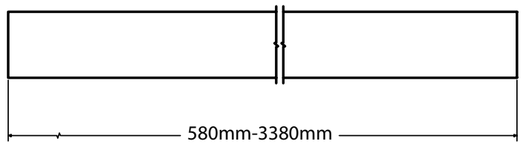



Your Code : **34** _____ _____ _____ _____ _____

Length	**Driver**	**Kelvin**	**Set**	**Body Color**

Select technical features to configure your code.

Length*	Driver	Kelvin	Set	Body Color
058 = 58cm	O = ON-OFF	3 = 3000K	E = HE	W = SANDY WHITE
086 = 86cm	D = DALI	4 = 4000K	O = HO	B = SANDY BLACK
114 = 114cm				
142 = 142cm				
170 = 170cm				
198 = 198cm				
226 = 226cm				
254 = 254cm				
282 = 282cm				
310 = 310cm				
338 = 338cm				

*Select from available dimensions only, is not an open edit length profile.



14. 3-PHASE TRACKS & LIGHTS

REFERENCE

5 YEARS* GUARANTEE

TRACK FORMS

Linear

BODY COLOR

Sandy Black | Sandy White

INSTALLATION

Surface | Pendant




Dimensions L: 300cm W: 3.2cm H: 3.5cm
Description Square Track Surface 100-240V
Color Black / **Code 19400**
Color White / **Code 19401**




Dimensions L: 200cm W: 3.2cm H: 3.5cm
Description Square Track Surface 100-240V
Color Black / **Code 19400-2M**
Color White / **Code 19401-2M**




Dimensions L: 100cm W: 3.2cm H: 3.5cm
Description Square Track Surface 100-240V
Color Black / **Code 19400-1M**
Color White / **Code 19401-1M**




Dimensions L: 400cm W: 3.2cm H: 3.5cm
Description Square Track Surface 100-240V
Color Black / **Code 19400-4M**
Color White / **Code 19401-4M**




Dimensions L: 17cm H: 3.4cm
Description Live Connector for 3 Circuit Lighting Track 100-240V
Color Black / **Code 19406**
Color White / **Code 19407**




Dimensions L: 10cm H: 3.4cm
Description Feeder for 3 Circuit Lighting Track 100-240V
Special Feature Right Feeder / Left Feeder
Color Black-Right / **Code 19402-R**
Color Black-Left / **Code 19402-L**
Color White-Right / **Code 19403-R**
Color White-Left / **Code 19403-L**




Dimensions L: 17cm W: 10cm H: 3.4cm
Description T Connector for 3 Circuit Lighting Track 100-240V
Color Black / **Code 19408**
Color White / **Code 19409**




Dimensions L: 10cm W: 10cm H: 3.4cm
Description Corner for 3 Circuit Lighting Track 100-240V
Special Feature Right Corner / Left Corner
Color Black-Right / **Code 19404-R**
Color Black-Left / **Code 19404-L**
Color White-Right / **Code 19405-R**
Color White-Left / **Code 19405-L**





Dimensions Ø: 11.2cm H: 3.2cm
Description Surface Mount Base for Track Spots 100-240V
Color Black / **Code 19412**
Color White / **Code 19413**




Dimensions L: 7cm H: 2.6cm
Description Inner Connector for 3 Circuit Lighting Track 100-240V
Color Black / **Code 19415**
Color White / **Code 19416**





Dimensions L: 3.2cm H: 3.2cm
Description End Cap for 3 Circuit Lighting Track 100-240V
Color Black / **Code 19410**
Color White / **Code 19411**





Dimensions L: 17cm H: 3.4cm
Description Flex Connector for 3 Circuit Lighting Track 100-240V
Color Black / **Code 19430**
Color White / **Code 19431**





Dimensions 200cm
Description Adjustable Wire for 3 Circuit Lighting Track 100-240V
Material Metal
Color Metallic / **Code 19414**

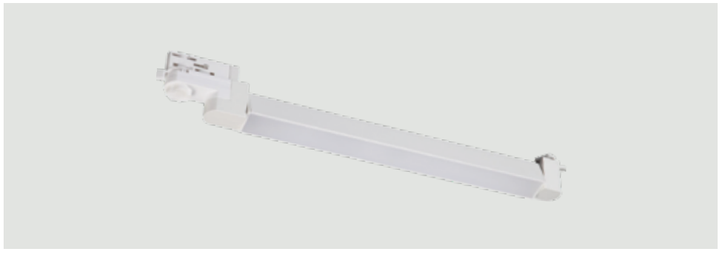





Power	20W
Input	220-240V, 50/60Hz
Color Temperature	3000K I 4000K
Lumen	1587Lm I 1673Lm
Cri	90
Dimensions	L: 53.5cm W: 3.3cm H: 7cm
Beam Angle	100°
Material	Aluminium - PC Diffuser
Special Feature	3 Phase Track Light Movable
Color	3000K Sandy White / **Code S240**
Color	4000K Sandy White / **Code S239**

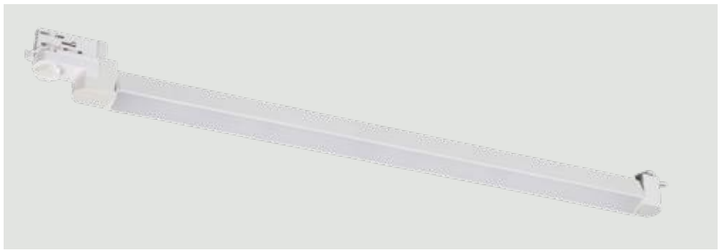





Power	40W
Input	220-240V, 50/60Hz
Color Temperature	3000K I 4000K
Lumen	2934Lm I 3097Lm
Cri	90
Dimensions	L: 93.5cm W: 3.3cm H: 7cm
Beam Angle	100°
Material	Aluminium - PC Diffuser
Special Feature	3 Phase Track Light Movable
Color	3000K Sandy White / **Code S242**
Color	4000K Sandy White / **Code S241**

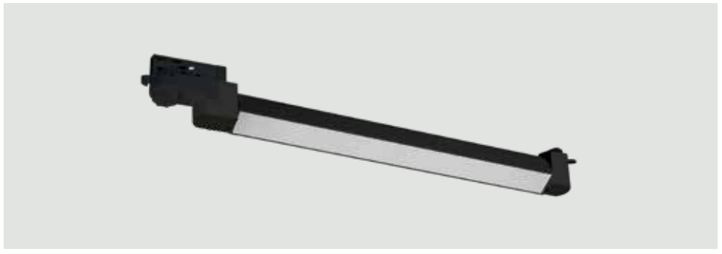




Power	20W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	1414Lm I 1493Lm I 1622Lm
Cri	90
Dimensions	L: 53.5cm W: 3.3cm H: 7cm
Beam Angle	100°
Material	Aluminium - PC Diffuser
Special Feature	3 Phase Track Light Movable
Color	Sandy Black / **Code S238**

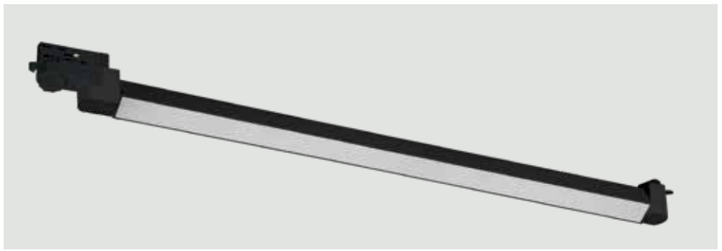




Power	40W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	2735Lm I 2884Lm I 3012Lm
Cri	90
Dimensions	L: 93.5cm W: 3.3cm H: 7cm
Beam Angle	100°
Material	Aluminium - PC Diffuser
Special Feature	3 Phase Track Light Movable
Color	Sandy Black / **Code S243**



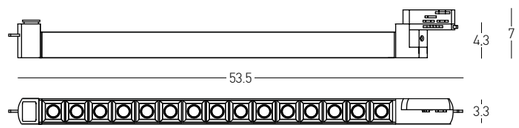


Power	15W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	1114Lm I 1203Lm I 1278Lm
Cri	90
Dimensions	L: 53.5cm W: 3.3cm H: 7cm
Beam Angle	36°
Material	Aluminium - PC Diffuser
Special Feature	3 Phase Track Light Movable
Color	Sandy Black / **Code S244**



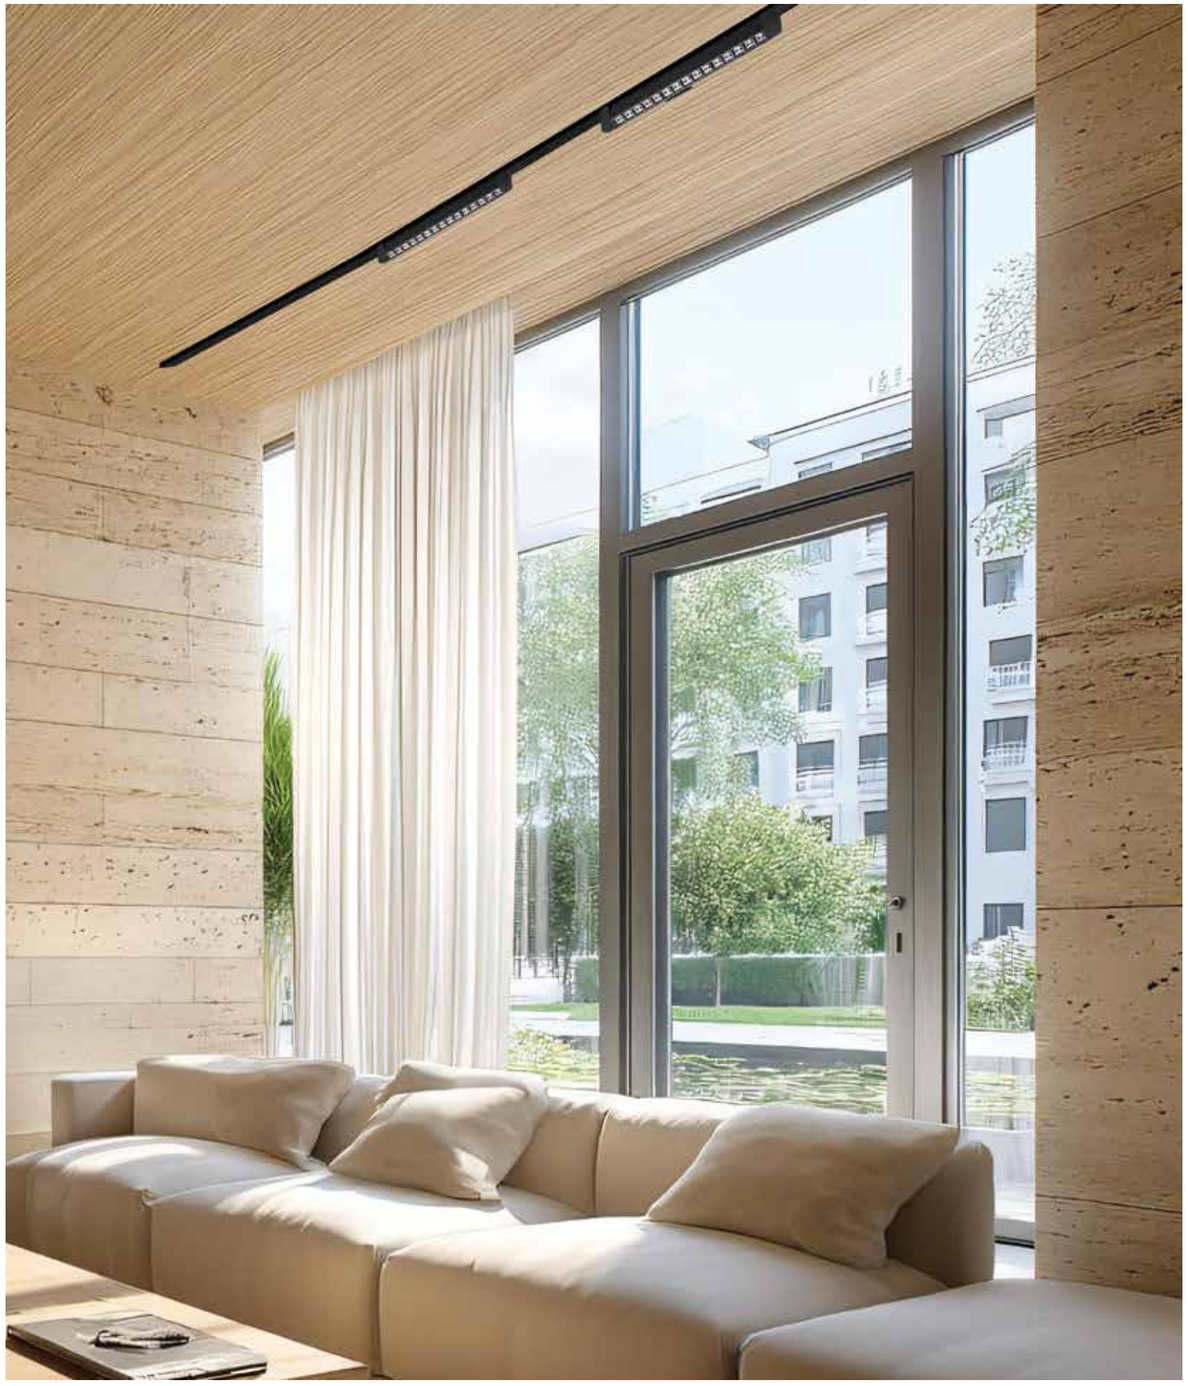








Power	10W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	910Lm I 937Lm I 956Lm
Cri	90
Dimensions	Ø: 6cm H: 6.6cm
Beam Angle	36°
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Sandy Black / **Code S236**
Color	Sandy White / **Code S237**








Power	40W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	4013Lm I 4129Lm I 4219Lm
Cri	90
Dimensions	Ø: 10cm H: 11.5cm
Beam Angle	36°
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Sandy White / **Code S234**
Color	Sandy Black / **Code S235**








Power	20W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	2037Lm I 2112Lm I 2178Lm
Cri	90
Dimensions	Ø: 7.5cm H: 10.5cm
Beam Angle	36°
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Sandy White / **Code S232**
Color	Sandy Black / **Code S233**




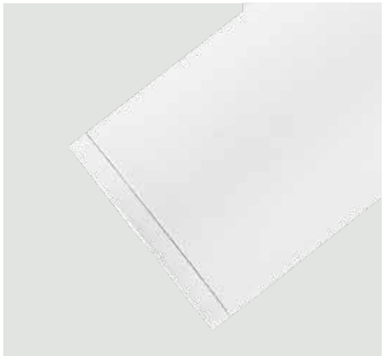










Power	25W
Input	220-240V, 50/60Hz
Color Temperature	3000K I 4000K
Lumen	2460Lm I 2510Lm
Cri	90
Dimensions	Ø: 9cm H: 9.2cm
Beam Angle	36°
Material	Aluminium
Special Feature	3 Phase Track Light
Color	3000K Sandy White / **Code S198**
Color	3000K Sandy Black / **Code S200**
Color	4000K Sandy White / **Code S197**
Color	4000K Sandy Black / **Code S199**

Lens for 25W Spots

Dimensions	Ø: 9cm
Beam Angle	24°
Code LNS197	








Power	42W
Input	220-240V, 50/60Hz
Color Temperature	3000K I 4000K
Lumen	4130Lm I 4210Lm
Cri	90
Dimensions	Ø: 11cm H: 10.6cm
Beam Angle	36°
Material	Aluminium
Special Feature	3 Phase Track Light
Color	3000K Sandy White / **Code S202**
Color	4000K Sandy White / **Code S201**
Color	4000K Sandy Black / **Code S203**

Lens for 42W Spots

Dimensions	Ø: 11cm
Beam Angle	24°
Code LNS202	








Power	20W
Input	220-240V, 50/60Hz
Color Temperature	3000K I 4000K
Lumen	2115Lm
Cri	90
Dimensions	Ø: 7cm H: 13.5cm
Beam Angle	15° / 24° / 38°
Material	Aluminium
Special Feature	3 Phase Track Light

Code S065-





Power	38W
Input	220-240V, 50/60Hz
Color Temperature	3000K I 4000K
Lumen	3900Lm
Cri	90
Dimensions	Ø: 9cm H: 16.5cm
Beam Angle	15° / 24° / 38°
Material	Aluminium
Special Feature	3 Phase Track Light

Code S066-

Select technical features to configure your code.


Kelvin	Body Color	Beam Angle
3 = 3000K 4 = 4000K	W = SANDY WHITE B = SANDY BLACK	15 = 15° 24 = 24° 36 = 36°


Your Code : S065- _____ _____ _____

Kelvin | Body Color | Beam Angle

Your Code : S066- _____ _____ _____

Kelvin | Body Color | Beam Angle

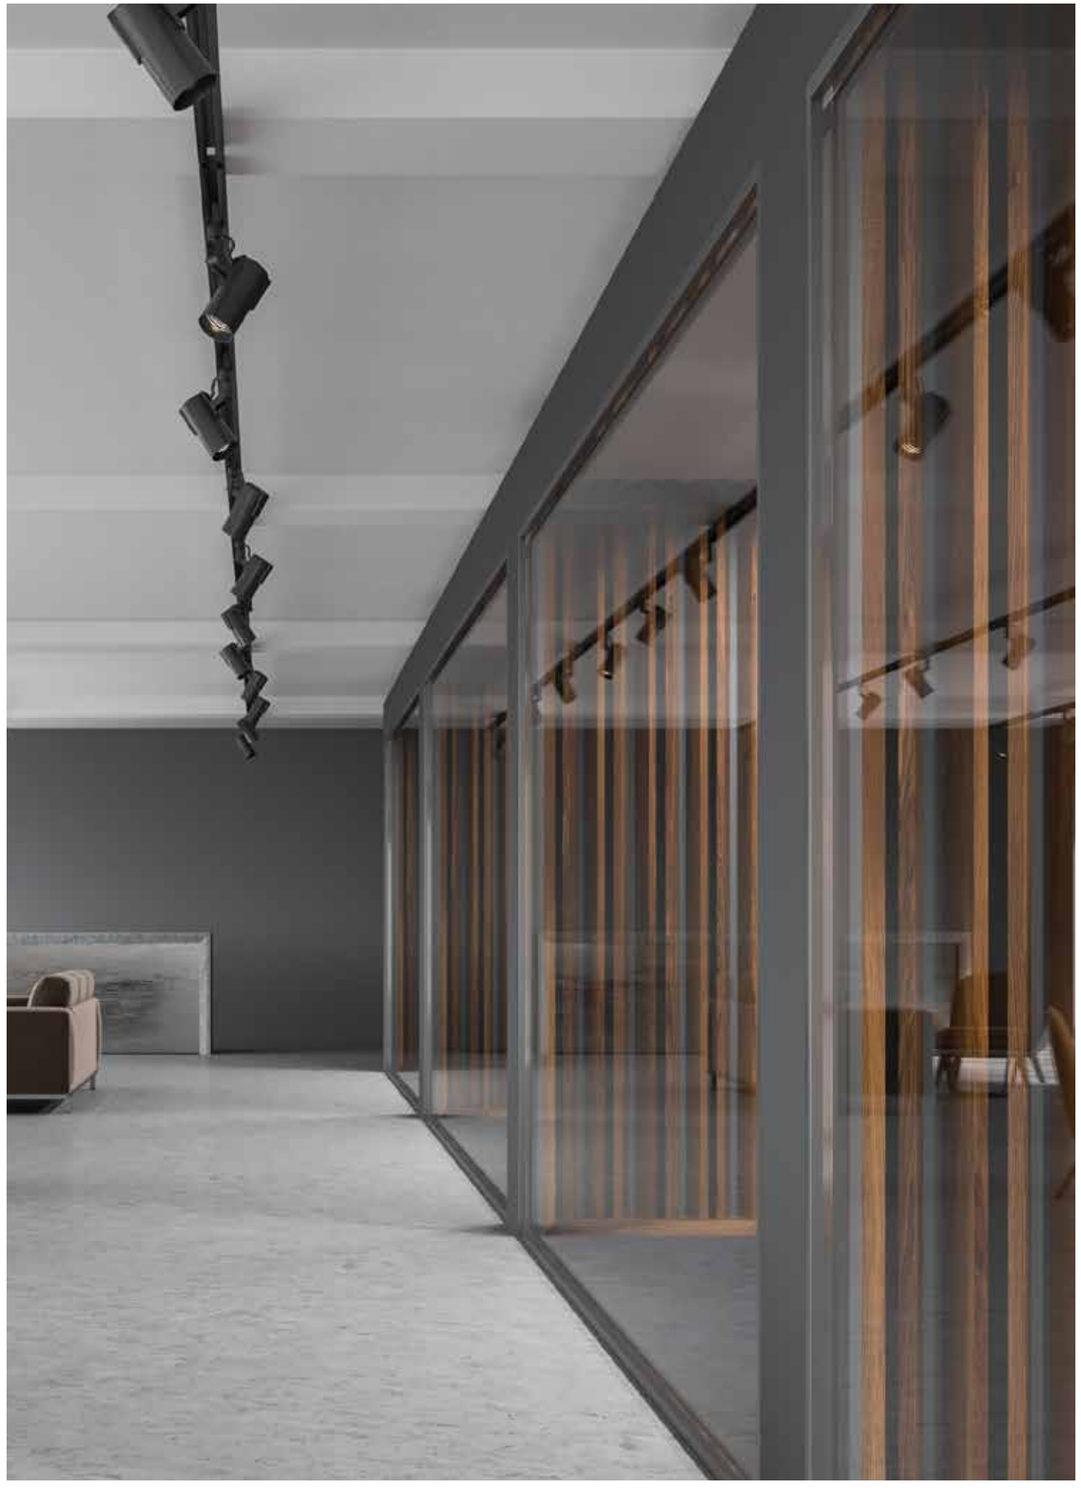

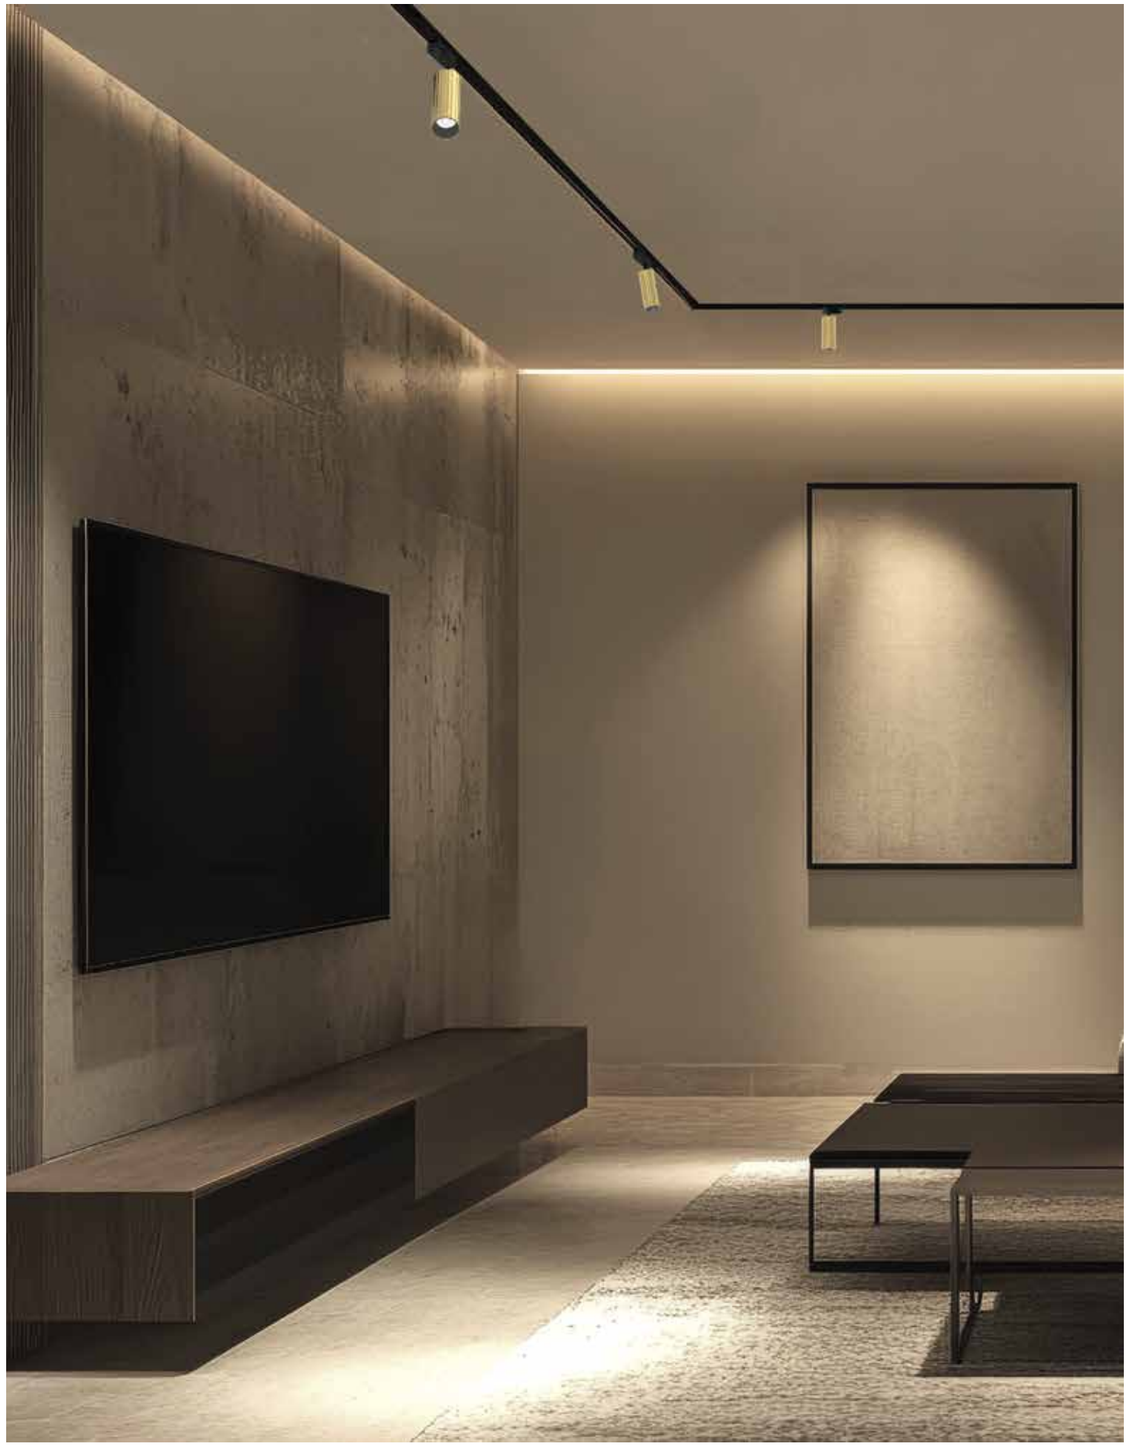

















Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	580Lm
Cri	90
Dimensions	Ø: 4.5cm H: 12cm
Beam Angle	36°
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Brushed Brass / **Code S114**
Color	White Matt / **Code S115**
Color	Black Matt / **Code S116**








Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 13cm
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Black Matt / **Code S059**
Color	White Matt / **Code S058**





OSRAM




Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1000Lm
Cri	90
Dimensions	Ø: 6cm H: 13cm
Beam Angle	15° / 24° / 40°
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Black Matt / **Code S059-15**
Color	Black Matt / **Code S059-24**
Color	Black Matt / **Code S059-40**
Color	White Matt / **Code S058-15**
Color	White Matt / **Code S058-24**
Color	White Matt / **Code S058-40**












Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 5.5cm H: 16cm
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Sandy Black / **Code S220**
Color	Sandy White / **Code S221**








Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 12cm
Material	Aluminium
Special Feature	3 Phase Track Light
Color	Sandy Black / **Code S038**
Color	Sandy White / **Code S037**



Ring for S037 & S038

Material	Aluminium
Color	Gold / **Code Ring G**

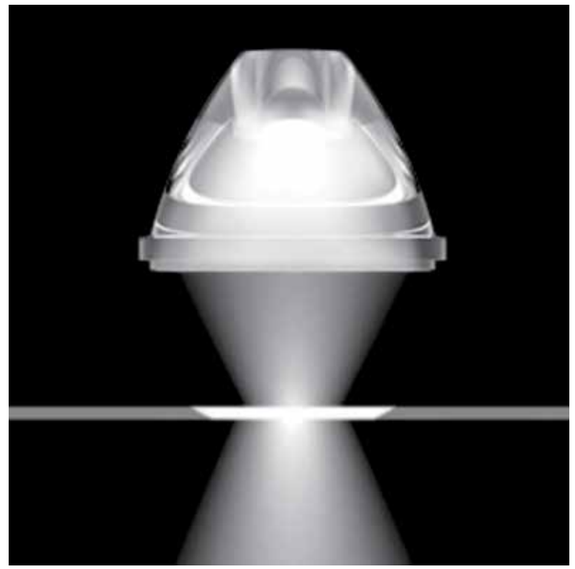


15. DOWNLIGHT RECESSED & TRIMLESS LED SPOTS

REFERENCE


5 YEARS* GUARANTEE


INSTALLATION

Trimless | Recessed




Dimming On-Off, Dali
CCT 2700K - 4000K
IP Rating 20-54
Non Adjustable-Adjustable

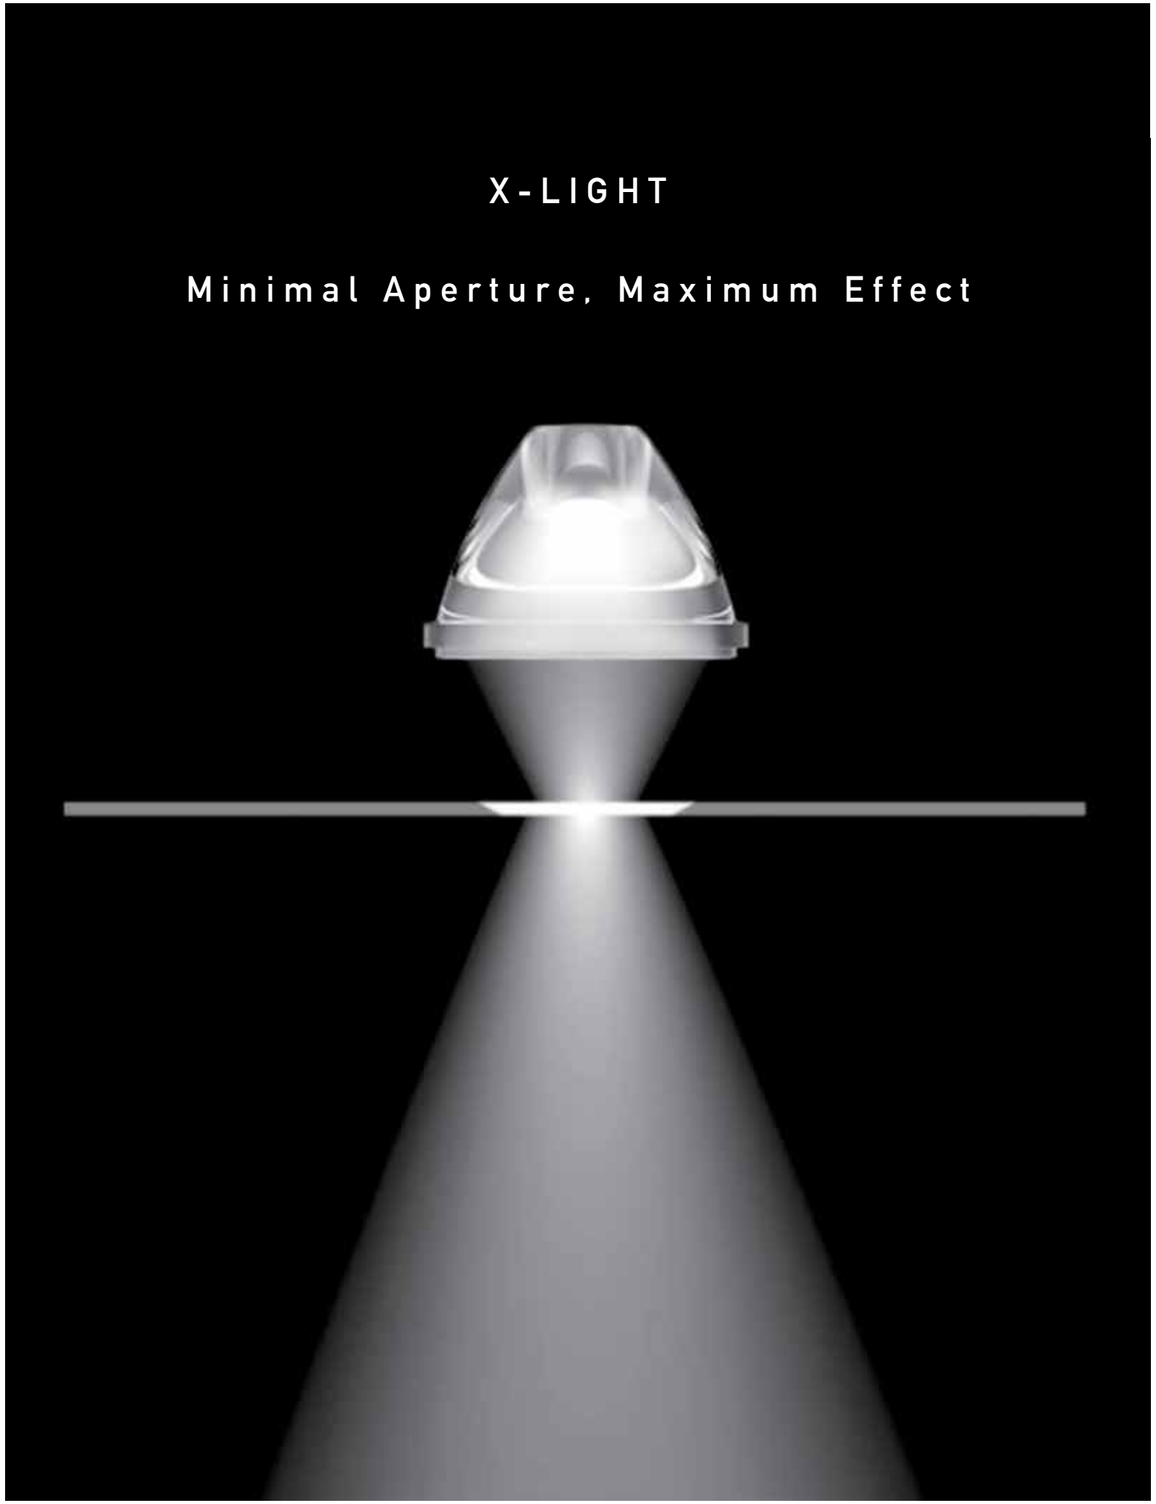

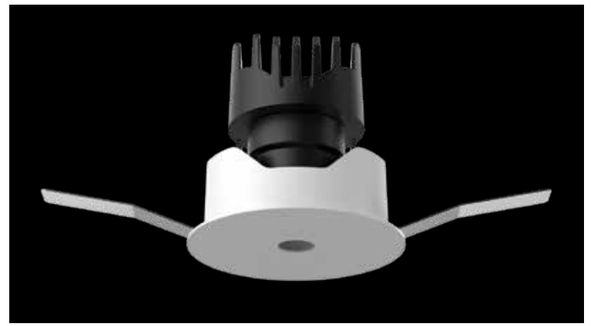



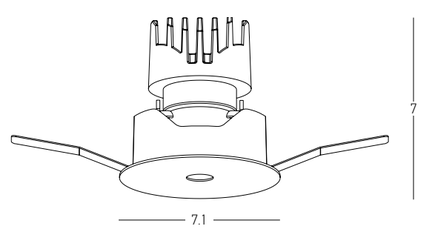

Power	7W
Input	36V / 150mA
Color Temperature	2700K I 3000K
Lumen	370Lm I 413Lm
Cri	92
IP	20
UGR	<6
Dimensions	Ø: 7.1cm H: 7cm
Beam Angle	36°
Cutting Hole	Ø: 6.5cm
Material	Aluminium
Depth Required	⊓: 7.5cm
Suggested On-Off Driver	FLS21 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (pass from the hole)
Special Feature	Adjustable
Color	2700K Sandy White / **Code S338**
Color	3000K Sandy White / **Code S339**





CODE	mA	Watt	V
FLS21	150-500	21	10-42



CODE	mA	Watt	V
FLS12D	120-350	12	9-42



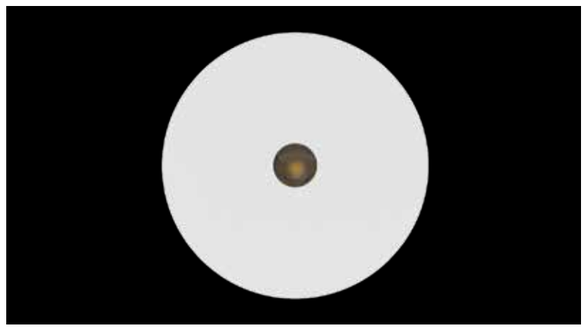

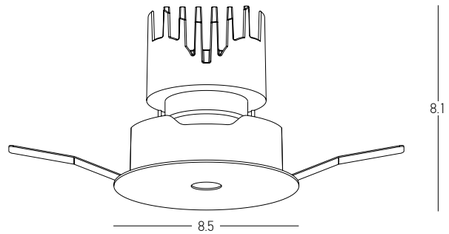


Power	14W
Input	36V / 300mA
Color Temperature	2700K I 3000K
Lumen	590Lm I 681Lm
Cri	93
IP	20
UGR	<8
Dimensions	Ø: 8.5cm H: 8.1cm
Beam Angle	36°
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍ : 8.5cm
Suggested On-Off Driver	FLS21 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (pass from the hole)
Special Feature	Adjustable
Color	2700K Sandy White / **Code S340**
Color	3000K Sandy White / **Code S341**




CODE	mA	Watt	V
FLS21	150-500	21	10-42




CODE	mA	Watt	V
FLS12D	120-350	12	9-42

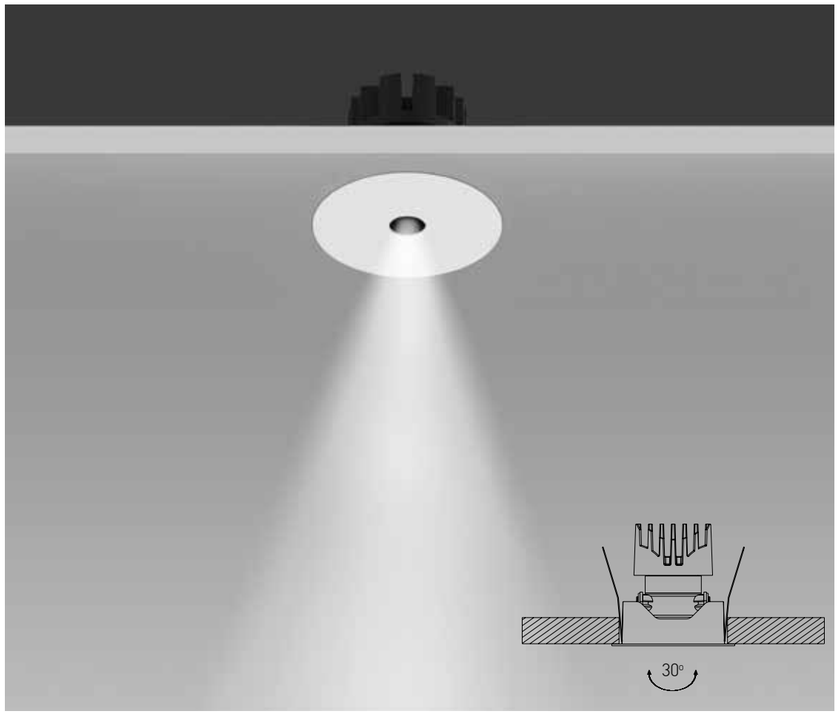

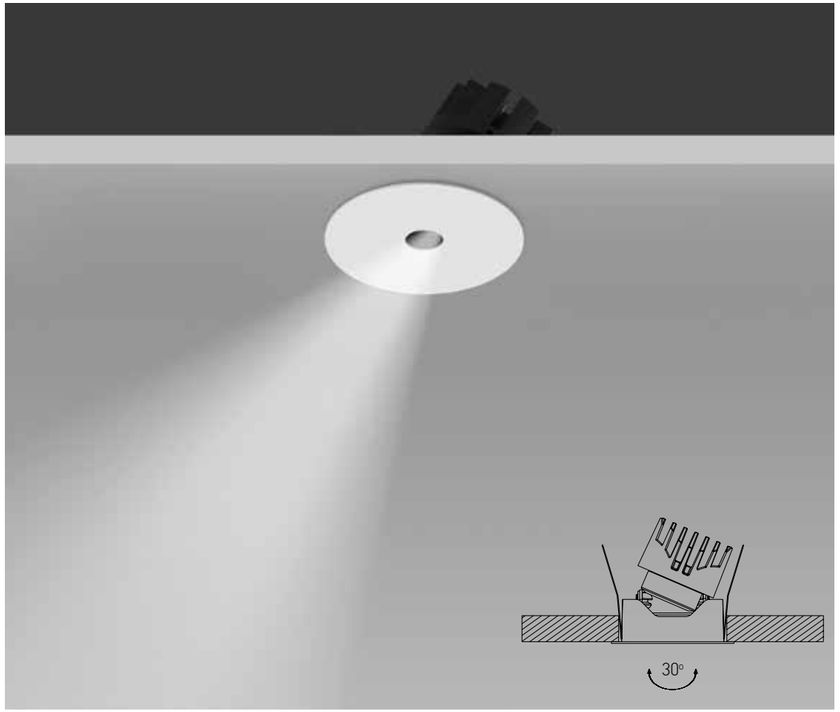







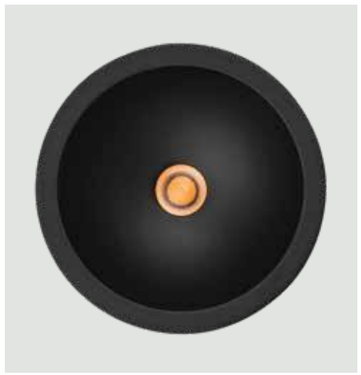



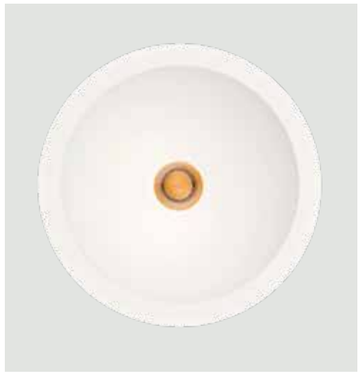

IP54

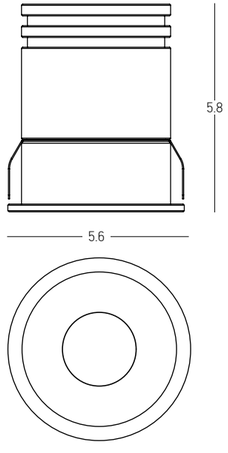


Power	9W
Input	36V / 200mA
Color Temperature	3000K
Lumen	773Lm
Cri	90
IP	54
UGR	<16
Dimensions	Ø: 5.6cm H: 5.8cm
Beam Angle	60°
Cutting Hole	Ø: 5cm
Material	Aluminium
Depth Required	⎍: 6.3cm
Suggested On-Off Driver	FLS21 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (pass from the hole)
Color	White Matt / **Code S350**
Color	Black Matt / **Code S351**








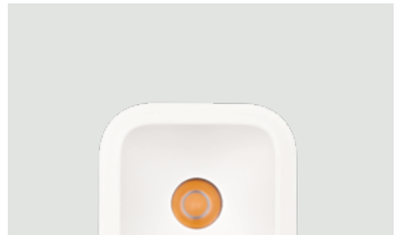

IP54

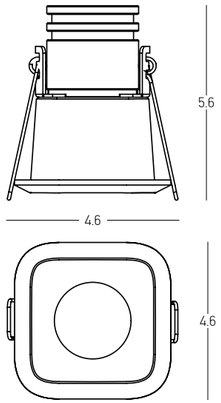

Power	5W
Input	36V / 120mA
Color Temperature	3000K
Lumen	515Lm
Cri	90
IP	54
UGR	<16
Dimensions	L: 4.6cm W: 4.6cm H: 5.6cm
Beam Angle	36°
Cutting Hole	L: 3.7cm W: 3.7cm
Material	Aluminium
Depth Required	⎍: 6cm
Suggested On-Off Driver	D-OT FIT8 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	Sandy White / **Code S346**
Color	Sandy Black / **Code S347**

CODE	mA	Watt	V
D-OT FIT8	80-180	8	30-42

CODE	mA	Watt	V
FLS12D	120-350	12	9-42











IP54

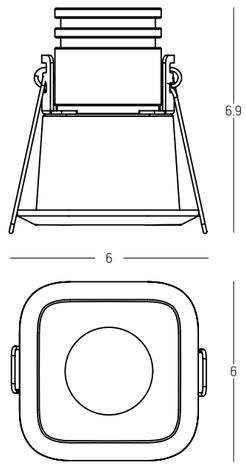


Power	7W
Input	36V / 150mA
Color Temperature	3000K
Lumen	528Lm
Cri	90
IP	54
UGR	<16
Dimensions	L: 6cm W: 6cm H: 6.9cm
Beam Angle	36°
Cutting Hole	L: 4.8cm W: 4.8cm
Material	Aluminium
Depth Required	⎍: 7.4cm
Suggested On-Off Driver	FLS21 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (pass from the hole)
Color	Sandy White / **Code S348**
Color	Sandy Black / **Code S349**


CODE	mA	Watt	V
FLS21	150-500	21	10-42



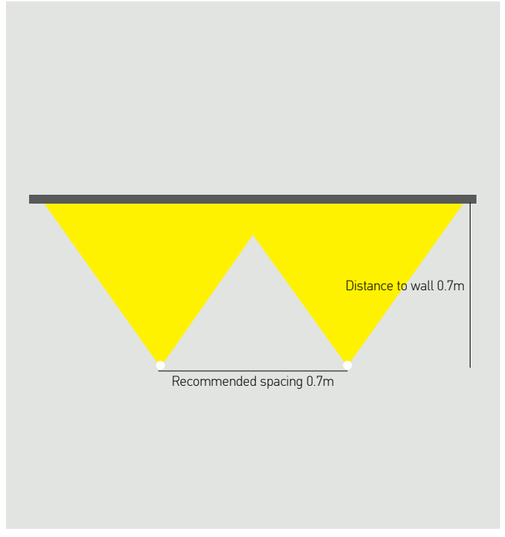



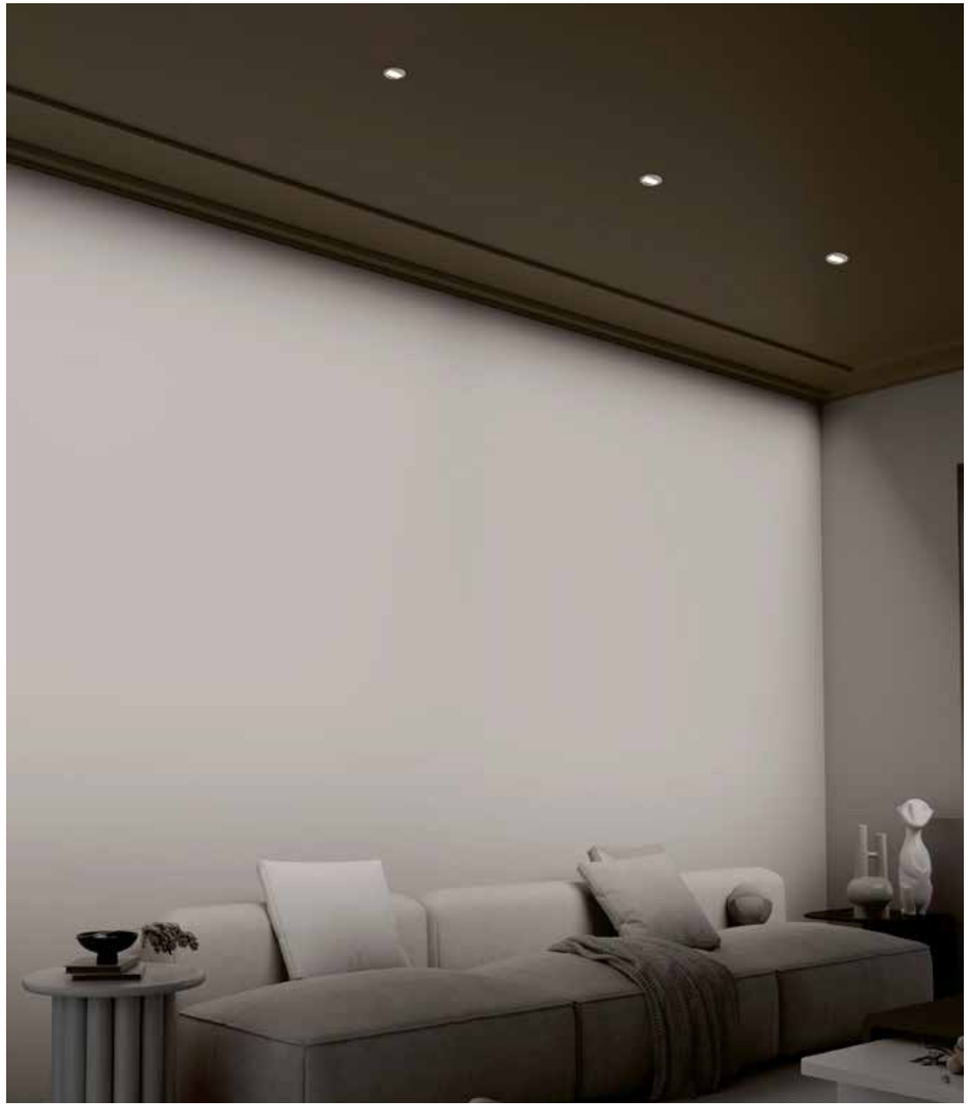




Power	10W
Input	36V / 250mA
Color Temperature	3000K
Lumen	655Lm
Cri	90
IP	20
UGR	<12
Dimensions	Ø: 6.3cm H: 6cm
Beam Angle	10x60°
Cutting Hole	Ø: 5.7cm
Material	Aluminium
Depth Required	: 6.5cm
Suggested On-Off Driver	FLS21 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (pass from the hole)
Color	Sandy White / **Code S337**


Modularization Recessed - Trimless Downlight Spot 7W

Select your application and colors to create the ultimate style by combining the different models available...



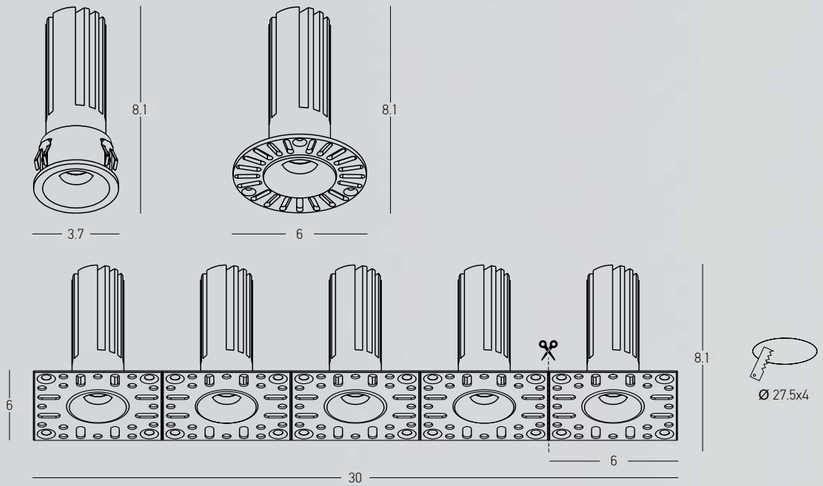





Power	7W
Input	12V / 500mA
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	20
UGR	<16
Dimensions	Ø: 2.6cm H: 8.1cm
Beam Angle	36°
Material	Aluminium
Depth Required	⎍: 8.5cm
Suggested On-Off Driver	25287 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-4 Fixtures (remote application)
Color	Sandy Black / **Code 25285**
Color	Sandy White / **Code 25286**
Color	Silver Matt / **Code 25288**
Color	Copper Matt / **Code 25289**
Color	Brass Matt/ **Code 25290**



CODE	mA	Watt	V
25287	500	7	5-12



CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52

Modularization Recessed - Trimless Downlight Spot 7W

Select your application and colors to create the ultimate style by combining the different models available...








RECESSED COVER FOR LED SPOT **7W**








Code	Color	Dimensions	Cutting Hole - Depth
25291	Sandy Black	Ø: 3.7cm H: 1.7cm	Ø: 3.4cm - 8.1cm
25292	Sandy White	Ø: 3.7cm H: 1.7cm	Ø: 3.4cm - 8.1cm

TRIMLESS COVER FOR LED SPOT **7W**






Code	Color	Dimensions	Cutting Hole - Depth
25293	Sandy White	Ø: 6cm H: 1.4cm	Ø: 3.1cm - 8.1cm

EASY-CUT TRIMLESS PLASTIC COVER FOR 1-5 LED SPOTS **7W**



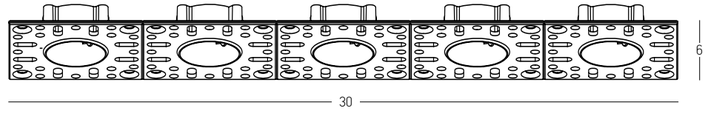


Code	Color	Dimensions	Cutting Hole - Depth
25294	White	L: 30cm W: 6cm H: 1.4cm	27.5x4cm - 8.1cm


Modularization Recessed - Trimless Downlight Spot 12W

Select your application and colors to create the ultimate style by combining the different models available...



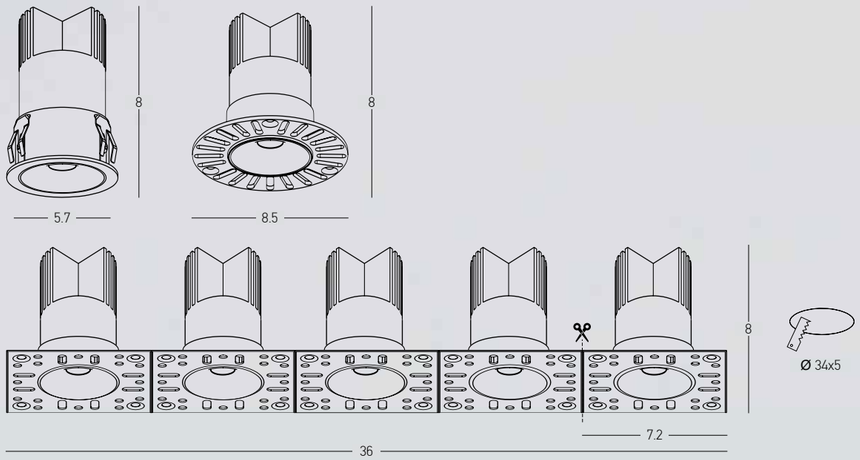





Power	12W
Input	36V / 300mA
Color Temperature	3000K
Lumen	683Lm
Cri	90
IP	20
UGR	<16
Dimensions	Ø: 4.4cm H: 8cm
Beam Angle	36°
Material	Aluminium
Depth Required	∫∏L : 8.4cm
Suggested On-Off Driver	FLS21 for 1 Fixture (remote application)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	Sandy Black / **Code 25399**
Color	Sandy White / **Code 25400**
Color	Silver Matt / **Code 25401**
Color	Brass Matt / **Code 25402**
Color	Copper Matt / **Code 25403**




CODE	mA	Watt	V
FLS21	150-500	21	10-42



CODE	mA	Watt	V
FLS12D	120-350	12	9-42

Modularization Recessed - Trimless Downlight Spot 12W


Select your application and colors to create the ultimate style by combining the different models available...

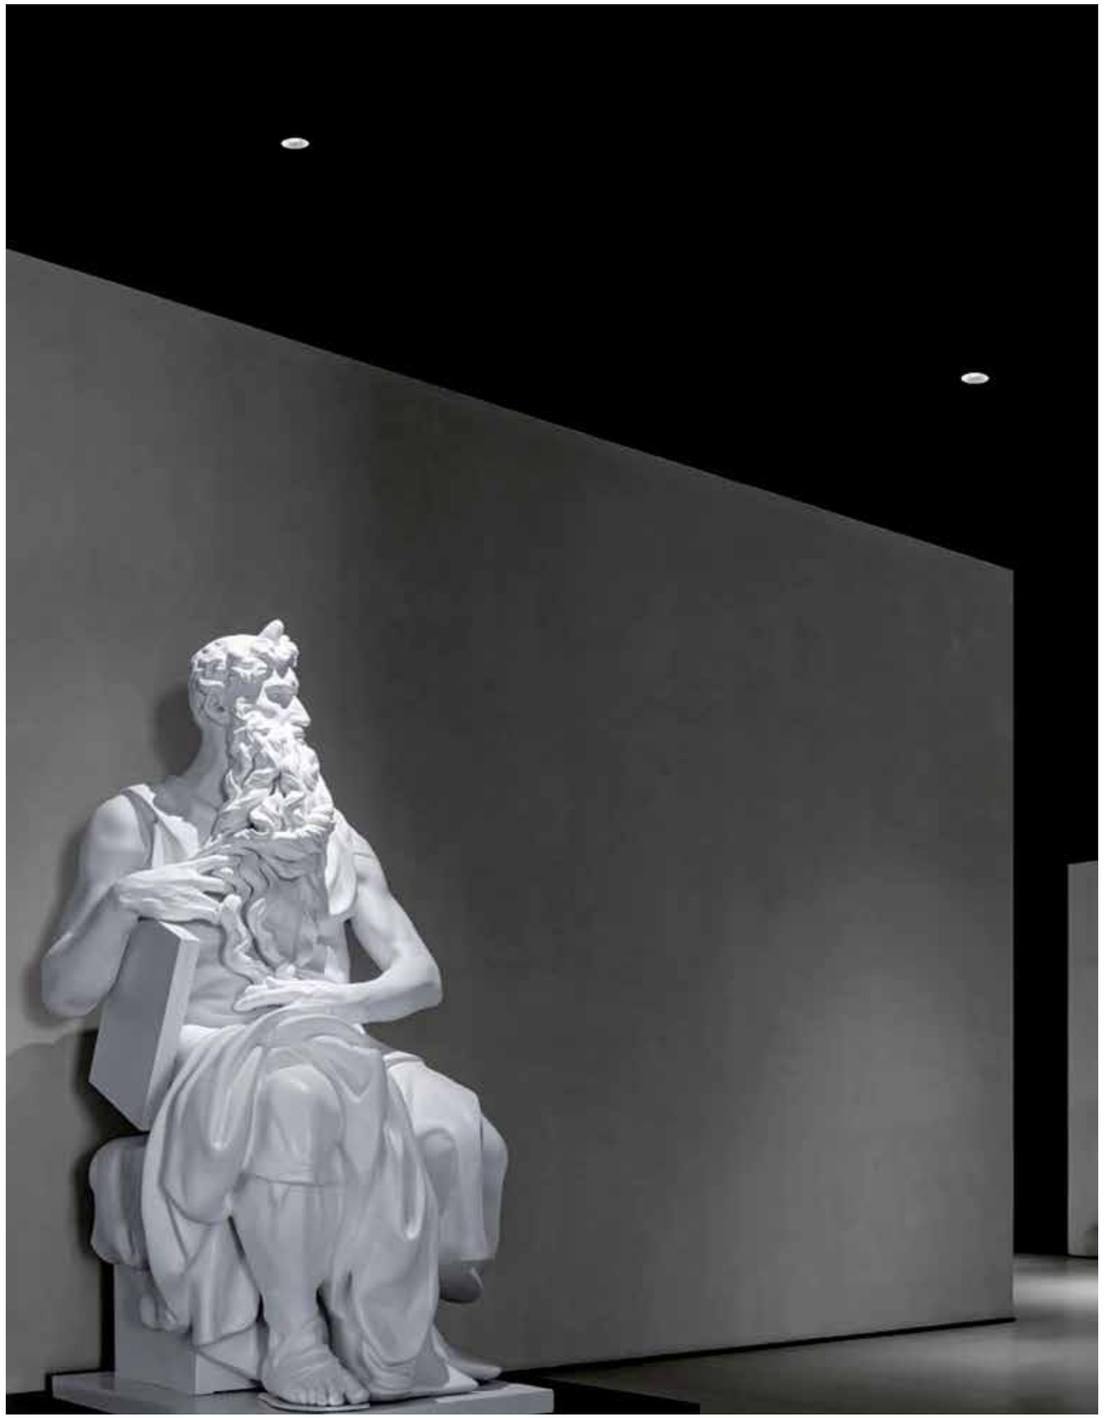

RECESSED COVER FOR LED SPOT **12W**








Code	Color	Dimensions	Cutting Hole - Depth
25404	Sandy Black	Ø: 5.7cm H: 2.1cm	Ø: 5.3cm - 8cm
25405	Sandy White	Ø: 5.7cm H: 2.1cm	Ø: 5.3cm - 8cm

TRIMLESS COVER FOR LED SPOT **12W**






Code	Color	Dimensions	Cutting Hole - Depth
25406	Sandy White	Ø: 8.5cm H: 1.4cm	Ø: 6cm - 8cm

EASY-CUT TRIMLESS PLASTIC COVER FOR 1-5 LED SPOTS **12W**



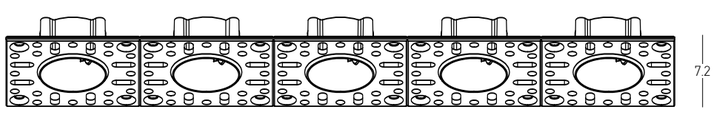

Code	Color	Dimensions	Cutting Hole - Depth
25407	White	L: 36cm W: 7.2cm H: 1.4cm	34x5cm - 8.cm

IP 44 Downlight Spot

Fixed I Adjustable I Recessed I Trimless




IP44 LED MODULE **11W**



Power	11W
Input	36V / 250mA
Color Temperature	2700K I 3000K
Lumen	695Lm I 730Lm
Cri	93
IP	44
UGR	<14
Dimensions	Ø: 4.5cm H: 5.2cm
Beam Angle	36°
Material	Aluminium
Suggested On-Off Driver	FLS21 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (pass from the hole)
Color	2700K Sandy Black / **Code S342**
Color	3000K Sandy Black / **Code S343**

IP44







Lens for LED Module 11W
Beam Angle 15° / **Code OPTC-S342-15D**
Beam Angle 24° / **Code OPTC-S342-24D**


RECESSED RING FOR LED MODULE **11W**











Code	Color	Dimensions	Cutting Hole - Depth
RFLBS342	Sandy Black	Ø: 6.1cm H: 3.5cm	Ø: 5.5cm - 7.8cm
RFLWS342	Sandy White	Ø: 6.1cm H: 3.5cm	Ø: 5.5cm - 7.8cm
RFLNS342	Silver Matt	Ø: 6.1cm H: 3.5cm	Ø: 5.5cm - 7.8cm
RFLGS342	Brass Matt	Ø: 6.1cm H: 3.5cm	Ø: 5.5cm - 7.8cm

Modularization Recessed - Trimless IP 44 Downlight Spot 11W

Select your application and colors to create the ultimate style by combining the different models available...







Copper Matt



Brass Matt


Silver Matt



Sandy Black


Sandy White

Recessed Dimensions

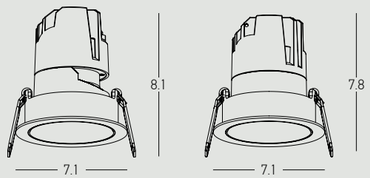

Trimless Dimensions

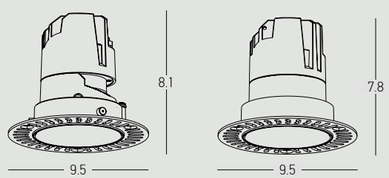

Adjustable **Non Adjustable** **Adjustable** **Non Adjustable**

LED Module



Adjustable - Non Adjustable Ring



Recessed - Trimless Accessory



NON ADJUSTABLE RING FOR LED MODULE **11W**









Code	Color	Dimensions
DFB342	Sandy Black	Ø: 5.1cm H: 3.5cm
DFW342	Sandy White	Ø: 5.1cm H: 3.5cm
DFN342	Silver Matt	Ø: 5.1cm H: 3.5cm
DFBR342	Copper Matt	Ø: 5.1cm H: 3.5cm
DFG342	Brass Matt	Ø: 5.1cm H: 3.5cm

ADJUSTABLE RING FOR LED MODULE **11W**





Code	Color	Dimensions
DAB342	Sandy Black	Ø: 5.1cm H: 3.8cm
DAW342	Sandy White	Ø: 5.1cm H: 3.8cm

RECESSED COVER FOR LED MODULE **11W**

Code	Color	Dimensions	Cutting Hole	Adjustable Depth	Non Adjustable Depth
RRB342	Sandy Black	Ø: 7.1cm H: 3cm	Ø: 6.5cm	8.1cm	7.8cm
RRW342	Sandy White	Ø: 7.1cm H: 3cm	Ø: 6.5cm	8.1cm	7.8cm

TRIMLESS COVER FOR LED MODULE **11W**

Code	Color	Dimensions	Cutting Hole	Adjustable Depth	Non Adjustable Depth
TRML342	Sandy White	Ø: 9.5cm H: 2cm	Ø: 6.2cm	8.1cm	7.8cm

IP 44 Downlight Spot

Fixed I Adjustable I Recessed I Trimless




IP44 LED MODULE **15W**



Power	15W
Input	36V / 350mA
Color Temperature	2700K I 3000K
Lumen	1010Lm I 1043Lm
Cri	92
IP	44
UGR	<15
Dimensions	Ø: 5.4cm H: 5.3cm
Beam Angle	36°
Material	Aluminium
Suggested On-Off Driver	FLS21 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1 Fixture (pass from the hole)
Color	2700K Sandy Black / **Code S344**
Color	3000K Sandy Black / **Code S345**

IP44







Lens for LED Module 15W
Beam Angle 15° / **Code OPTC-S344-15D**
Beam Angle 24° / **Code OPTC-S344-24D**


RECESSED RING FOR LED MODULE **15W**











Code	Color	Dimensions	Cutting Hole - Depth
RFLBS344	Sandy Black	Ø: 7.1cm H: 4.4cm	Ø: 6.5cm - 8.3cm
RFLWS344	Sandy White	Ø: 7.1cm H: 4.4cm	Ø: 6.5cm - 8.3cm
RFLNS344	Silver Matt	Ø: 7.1cm H: 4.4cm	Ø: 6.5cm - 8.3cm
RFLGS344	Brass Matt	Ø: 7.1cm H: 4.4cm	Ø: 6.5cm - 8.3cm



CODE	mA	Watt	V
FLS21	150-500	21	10-42



CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52

Modularization Recessed - Trimless IP 44 Downlight Spot 15W

Select your application and colors to create the ultimate style by combining the different models available...





Copper Matt



Brass Matt



Silver Matt




Sandy Black




Sandy White

Recessed Dimensions

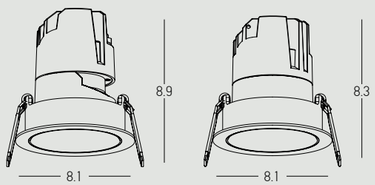

Adjustable **Non Adjustable**

Trimless Dimensions

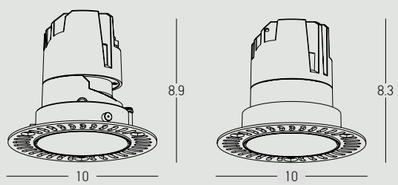

Adjustable **Non Adjustable**









NON ADJUSTABLE RING FOR LED MODULE **15W**







Code	Color	Dimensions
DFB344	Sandy Black	Ø: 5.9cm H: 4cm
DFW344	Sandy White	Ø: 5.9cm H: 4cm
DFG344	Brass Matt	Ø: 5.9cm H: 4cm

ADJUSTABLE RING FOR LED MODULE **15W**







Code	Color	Dimensions
DAB344	Sandy Black	Ø: 5.9cm H: 4.5cm
DAW344	Sandy White	Ø: 5.9cm H: 4.5cm

RECESSED COVER FOR LED MODULE **15W**








Code	Color	Dimensions	Cutting Hole	Adjustable Depth	Non Adjustable Depth
RRB344	Sandy Black	Ø: 8.1cm H: 3.5cm	Ø: 7.5cm	8.9cm	8.3cm
RRW344	Sandy White	Ø: 8.1cm H: 3.5cm	Ø: 7.5cm	8.9cm	8.3cm

TRIMLESS COVER FOR LED MODULE **15W**






Code	Color	Dimensions	Cutting Hole	Adjustable Depth	Non Adjustable Depth
TRML344	Sandy White	Ø: 10cm H: 2.4cm	Ø: 7.2cm	8.9cm	8.3cm



MINI LED SPOT **5W**





Power	5W
Input	3V / 1150mA
Color Temperature	3000K
Lumen	380Lm
Cri	90
IP	20
UGR	<16
Dimensions	Ø: 3.4cm H: 8.7cm
Cutting Hole	Ø: 3cm
Beam Angle	24°
Material	Aluminium
Depth Required	⎍⎍: 9.5cm
Suggested On-Off Driver	D-EG-5 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-13 Fixtures (remote application)
Special Feature	Series Connection
Color	White Matt / **Code S204**
Color	Black Matt / **Code S205**



TRIMLESS ACCESORY
FOR S204 & S205
Code TRMLS205

Notice : For trimless installation it is also required to order trimless ring.

RECESSED RING FOR MINI LED SPOT **5W**





Code	Color	Dimensions	Cutting Hole
RFLG204	Gold Matt Ring	Ø: 3.4cm H: 3.4cm	Ø: 3cm
RFLNB204	Nickel Black Ring	Ø: 3.4cm H: 3.4cm	Ø: 3cm

TRIMLESS RING FOR MINI LED SPOT **5W**







Code	Color	Dimensions	Cutting Hole
S206	White Matt Ring	Ø: 3.2cm H: 3.6cm	Ø: 3.5cm
S207	Nickel Black Ring	Ø: 3.2cm H: 3.6cm	Ø: 3.5cm
S208	Gold Matt Ring	Ø: 3.2cm H: 3.6cm	Ø: 3.5cm



CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52




CODE	mA	Watt	V
D-EG-5	1150	5	2.5-3.2



MINI LED SPOT **9W**





Power	9W
Input	36V / 200mA
Color Temperature	3000K
Lumen	630Lm
Cri	90
IP	20
UGR	<16
Dimensions	Ø: 4.4cm H: 10.1cm
Cutting Hole	Ø: 4cm
Beam Angle	24°
Material	Aluminium
Depth Required	: 10.3cm
Suggested On-Off Driver	D-KE-9 for 1 Fixture (remote application)
Suggested DALI Driver	D-EG-9 for 1 Fixture (remote application)
Color	White Matt / **Code S209**
Color	Black Matt / **Code S210**



TRIMLESS ACCESORY
FOR S209 & S210
Code TRMLS209

Notice : For trimless installation it is also required to order trimless ring.

RECESSED RING FOR MINI LED SPOT **9W**





Code	Color	Dimensions	Cutting Hole
RFLG209	Gold Matt Ring	Ø: 4.4cm H: 4.4cm	Ø: 4cm
RFLNB209	Nickel Black Ring	Ø: 4.4cm H: 4.4cm	Ø: 4cm

TRIMLESS RING FOR MINI LED SPOT **9W**








Code	Color	Dimensions	Cutting Hole
S211	White Matt Ring	Ø: 4.2cm H: 4.8cm	Ø: 5cm
S212	Nickel Black Ring	Ø: 4.2cm H: 4.8cm	Ø: 5cm
S213	Gold Matt Ring	Ø: 4.2cm H: 4.8cm	Ø: 5cm



CODE	mA	Watt	V
D-KE-9	200	9	30-42



CODE	mA	Watt	V
D-EG-9	200	9	30-40



Easy Installation , Easy Dismount

Recessed Spot Installation




Trimless Spot Installation



Two Steps Dismount



Power	6.5W
Input	36V / 150mA
Color Temperature	2700K
Lumen	331Lm
Cri	93
IP	20
UGR	<12
Dimensions	Ø: 4.5cm L: 7.6cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 3.6cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	White Matt / **Code S135**

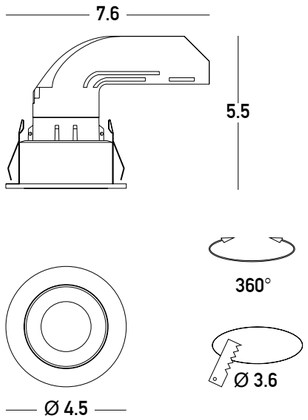


Power	6.5W
Input	36V / 150mA
Color Temperature	3000K
Lumen	361Lm
Cri	93
IP	20
UGR	<12
Dimensions	Ø: 4.5cm L: 7.6cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 3.6cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	White Matt / **Code S136**






Power	6.5W
Input	36V / 150mA
Color Temperature	2700K
Lumen	331Lm
Cri	93
IP	20
UGR	<12
Dimensions	Ø: 5.2cm L: 8cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 4.3cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Special Feature	Adjustable
Color	White Matt / **Code S139**



Power	6.5W
Input	36V / 150mA
Color Temperature	3000K
Lumen	361Lm
Cri	93
IP	20
UGR	<12
Dimensions	Ø: 5.2cm L: 8cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 4.3cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Special Feature	Adjustable
Color	White Matt / **Code S140**

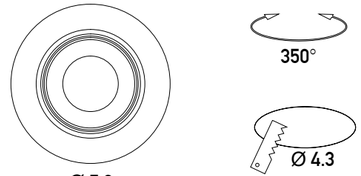






CODE	mA	Watt	V
LS-6-150	150	6	27-40

CODE	mA	Watt	V
FLS12D	120-350	12	9-42

Power	6.5W
Input	36V / 150mA
Color Temperature	2700K
Lumen	331Lm
Cri	93
IP	20
UGR	<12
Dimensions	Ø: 3.1cm L: 8.4cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 3.5cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	White Matt / **Code S137**

Power	6.5W
Input	36V / 150mA
Color Temperature	3000K
Lumen	361Lm
Cri	93
IP	20
UGR	<12
Dimensions	Ø: 3.1cm L: 8.4cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 3.5cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	White Matt / **Code S138**

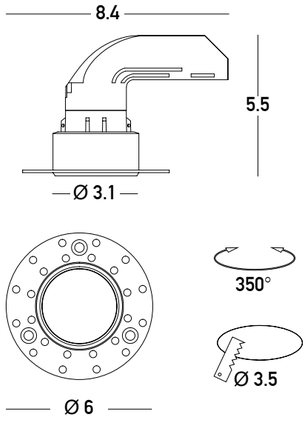






CODE	mA	Watt	V
LS-6-150	150	6	27-40

Power	6.5W
Input	36V / 150mA
Color Temperature	2700K
Lumen	260Lm
Cri	93
IP	20
UGR	<10
Dimensions	Ø: 1.5cm L: 8.4cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 3.5cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	White Matt / **Code S141**

Power	6.5W
Input	36V / 50mA
Color Temperature	3000K
Lumen	282Lm
Cri	93
IP	20
UGR	<10
Dimensions	Ø: 1.5cm L: 8.4cm H: 5.5cm
Beam Angle	30°
Cutting Hole	Ø: 3.5cm
Depth Required	⎍: 6cm
Material	Aluminium
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	White Matt / **Code S142**

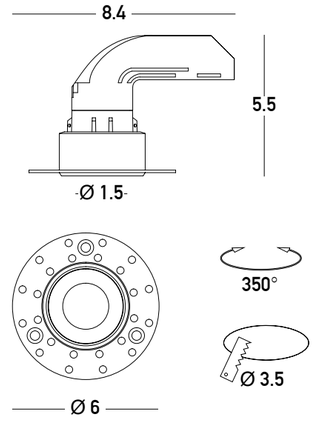







CODE	mA	Watt	V
FLS12D	120-350	12	9-42

Power	8W
Input	36V / 200mA
Color Temperature	3000K
Lumen	587Lm
Cri	90
IP	20
UGR	<18
Dimensions	Ø: 4.3cm L: 10cm H: 6.3cm
Beam Angle	36°
Cutting Hole	Ø: 4.5cm
Material	Aluminium
Depth Required	⎍: 6.5cm
Suggested On-Off Driver	25300 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	Sandy White / **Code 25299**

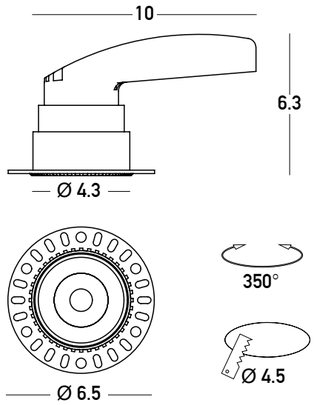


Power	8W
Input	36V / 200mA
Color Temperature	3000K
Lumen	587Lm
Cri	90
IP	20
UGR	<18
Dimensions	Ø: 5.3cm L: 10cm H: 6.3cm
Beam Angle	36°
Cutting Hole	Ø: 4.5cm
Material	Aluminium
Depth Required	⎍: 6.5cm
Suggested On-Off Driver	25300 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	Sandy White / **Code 25301**

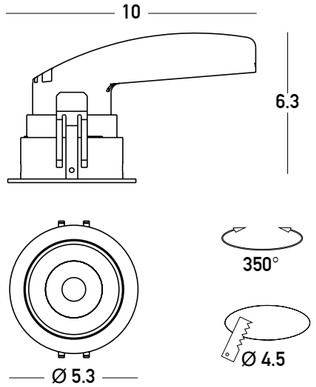









CODE	mA	Watt	V
25300	200	8	30-40




CODE	mA	Watt	V
FLS12D	120-350	12	9-42

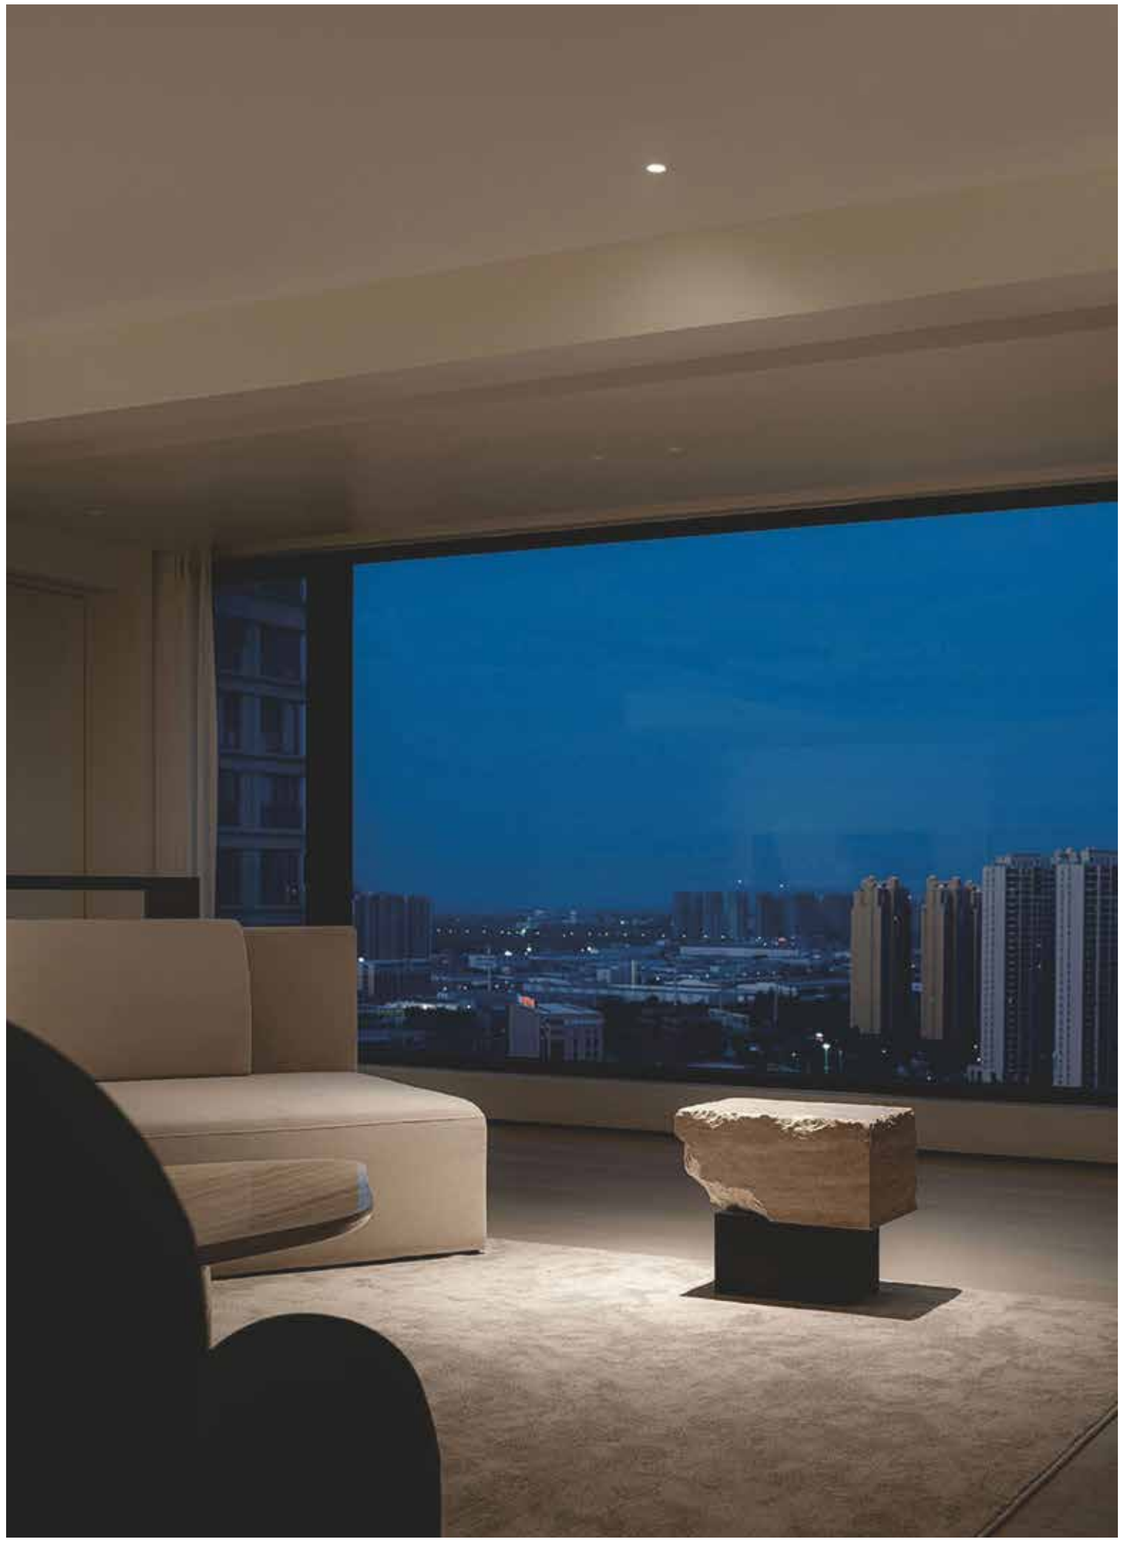








Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	430Lm
Cri	90
IP	20
UGR	<12
Dimensions	Ø: 6.1cm W: 10.9cm H: 7.4cm
Cutting Hole	Ø: 6.2cm
Beam Angle	22°
Material	Aluminium
Depth Required	⎍⎍⎿: 8cm
Driver On-Off	Included (135mA) (pass from the hole)
Suggested DALI Driver	FLS42D for 1 Fixture (pass from the hole)
Color	Sandy White / **Code S095**




CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52





Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	675Lm
Cri	90
IP	20
UGR	<12
Dimensions	Ø: 8.2cm W: 13.5cm H: 10.2cm
Cutting Hole	Ø: 8.3cm
Beam Angle	42°
Material	Aluminium
Depth Required	⎍⎍⎿: 10.5cm
Driver On-Off	Included (200mA) (pass from the hole)
Suggested DALI Driver	FLS42D for 1 Fixture (pass from the hole)
Color	Sandy White / **Code S096**






Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1125Lm
Cri	90
IP	20
UGR	<12
Dimensions	Ø: 8.2cm W: 13.5cm H: 11.8cm
Cutting Hole	Ø: 8.3cm
Beam Angle	42°
Material	Aluminium
Depth Required	⎍⎍⎿: 12cm
Driver On-Off	Included (350mA) (pass from the hole)
Suggested DALI Driver	FLS42D for 1 Fixture (pass from the hole)
Color	Sandy White / **Code S097**






Power	3W
Input	3V / 700mA
Color Temperature	2700K I 3000K
Lumen	176 I 195Lm
Cri	90
IP	20
UGR	<15
Dimensions	Ø: 3.3cm H: 5.5cm
Beam Angle	35°
Cutting Hole	Ø: 3cm
Depth Required	⎍⎍ : 5.5cm
Material	Aluminium
Suggested On-Off Driver	LS-3-700 for 1 Fixture (pass from the hole)
Suggested DALI Driver	4062172151252 for 1 Fixture (remote application)
Color	3000K White Matt / **Code S181**
Color	2700K White Matt / **Code S182**





Power	7.5W
Input	36V / 180mA
Color Temperature	2700K I 3000K
Lumen	466 I 517Lm
Cri	90
IP	20
UGR	<15
Dimensions	Ø: 4.1cm H: 10cm
Beam Angle	38°
Cutting Hole	Ø: 3.6cm
Depth Required	⎍⎍ : 10.5cm
Material	Aluminium
Suggested On-Off Driver	D-OT FIT8 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	3000K White Matt / **Code S183**
Color	2700K White Matt / **Code S184**

RINGS FOR S181 & S182





Material	Aluminium
Color	Gold / **Code RFL G 181**
Color	Black Matt / **Code RFL B 181**

RINGS FOR S183 & S184





Material	Aluminium
Color	Gold / **Code RFL G 185**
Color	Black Matt / **Code RFL B 185**

LENS FOR S183 & S184



Dimensions	Ø: 2.6cm
Beam Angle	20°
Code LNS 20 183	




CODE	mA	Watt	V
LS-3-700	700	3	max 10




CODE	mA	Watt	V
4062172151252	150-700	10	2.5-45






Power	7.5W
Input	36V / 180mA
Color Temperature	2700K I 3000K
Lumen	466 I 517Lm
Cri	90
IP	20
UGR	<15
Dimensions	Ø: 5cm H: 10cm
Beam Angle	38°
Cutting Hole	Ø: 4.6cm
Depth Required	⎍⎍ : 10.5cm
Material	Aluminium
Suggested On-Off Driver	D-OT FIT8 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Special Feature	Adjustable
Color	3000K White Matt / **Code S187**
Color	2700K White Matt / **Code S188**





Power	7.5W
Input	36V / 180mA
Color Temperature	2700K I 3000K
Lumen	466 I 517Lm
Cri	90
IP	20
UGR	<15
Dimensions	Ø: 4.1cm H: 10cm
Beam Angle	35°
Cutting Hole	Ø: 4.4cm
Depth Required	⎍⎍ : 10.5cm
Material	Aluminium
Suggested On-Off Driver	D-OT FIT8 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	3000K White Matt / **Code S185**
Color	2700K White Matt / **Code S186**

RINGS FOR S185 & S186





Material	Aluminium
Color	Gold / **Code RFL G 185**
Color	Black Matt / **Code RFL B 185**

LENS FOR S185 & S186



Dimensions	Ø: 2.6cm
Beam Angle	20°
Code LNS 20 183	



CODE	mA	Watt	V
D-OT FIT8	80-180	8	30-42



CODE	mA	Watt	V
FLS12D	120-350	12	9-42






S073




S074



S075



Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	377Lm
Cri	90
IP	20
UGR	<10
Dimensions	Ø: 5.5cm H: 9.1cm
Cutting Hole	Ø: 5.2cm
Beam Angle	24°
Material	Aluminium
Depth Required	∫⊓ : 9.5cm
Driver On-Off	Included (160mA)
Suggested DALI Driver	4062172151252 for 1 Fixture (pass from the hole)
Color	White Matt / **Code S073**
Color	Black Matt / **Code S074**




Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	731Lm
Cri	90
IP	20
UGR	<10
Dimensions	Ø: 7.5cm H: 9.8cm
Cutting Hole	Ø: 7.2cm
Beam Angle	31°
Material	Aluminium
Depth Required	∫⊓ : 10.5cm
Driver On-Off	Included (250mA)
Suggested DALI Driver	4062172151252 for 1 Fixture (pass from the hole)
Color	White Matt / **Code S075**
Color	Black Matt / **Code S076**



CODE	mA	Watt	V
4062172151252	150-700	10	2.5-45






Power	2W
Input	3V / 700mA
Color Temperature	3000K
Lumen	120Lm
Cri	90
IP	44
UGR	<12
Dimensions	Ø: 3cm H: 2cm
Beam Angle	40°
Cutting Hole	Ø: 1.2cm
Material	Aluminium
Depth Required	⎍: 2.5cm
Suggested On-Off Driver	LS-3-700 for 1 Fixture (remote application)
Color	Sandy White / **Code S169**
Color	Sandy Black / **Code S170**

IP44



CODE	mA	Watt	V
LS-3-700	700	3	max 10

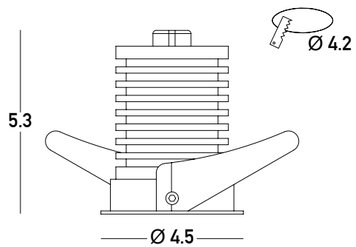

Power	6W
Input	36V / 150mA
Color Temperature	3000K
Lumen	420Lm
Cri	90
IP	44
UGR	<18
Dimensions	Ø: 4.5cm H: 5.3cm
Beam Angle	38°
Cutting Hole	Ø: 4.2cm
Material	Aluminium
Depth Required	⎍: 5.5cm
Suggested On-Off Driver	LS-6-150 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	Sandy White / **Code S171**


IP44

Reflector for S171


Dimensions	Ø: 2.3cm
Beam Angle	18°

Code S172






CODE	mA	Watt	V
LS-6-150	150	6	27-40




CODE	mA	Watt	V
FLS12D	120-350	12	9-42

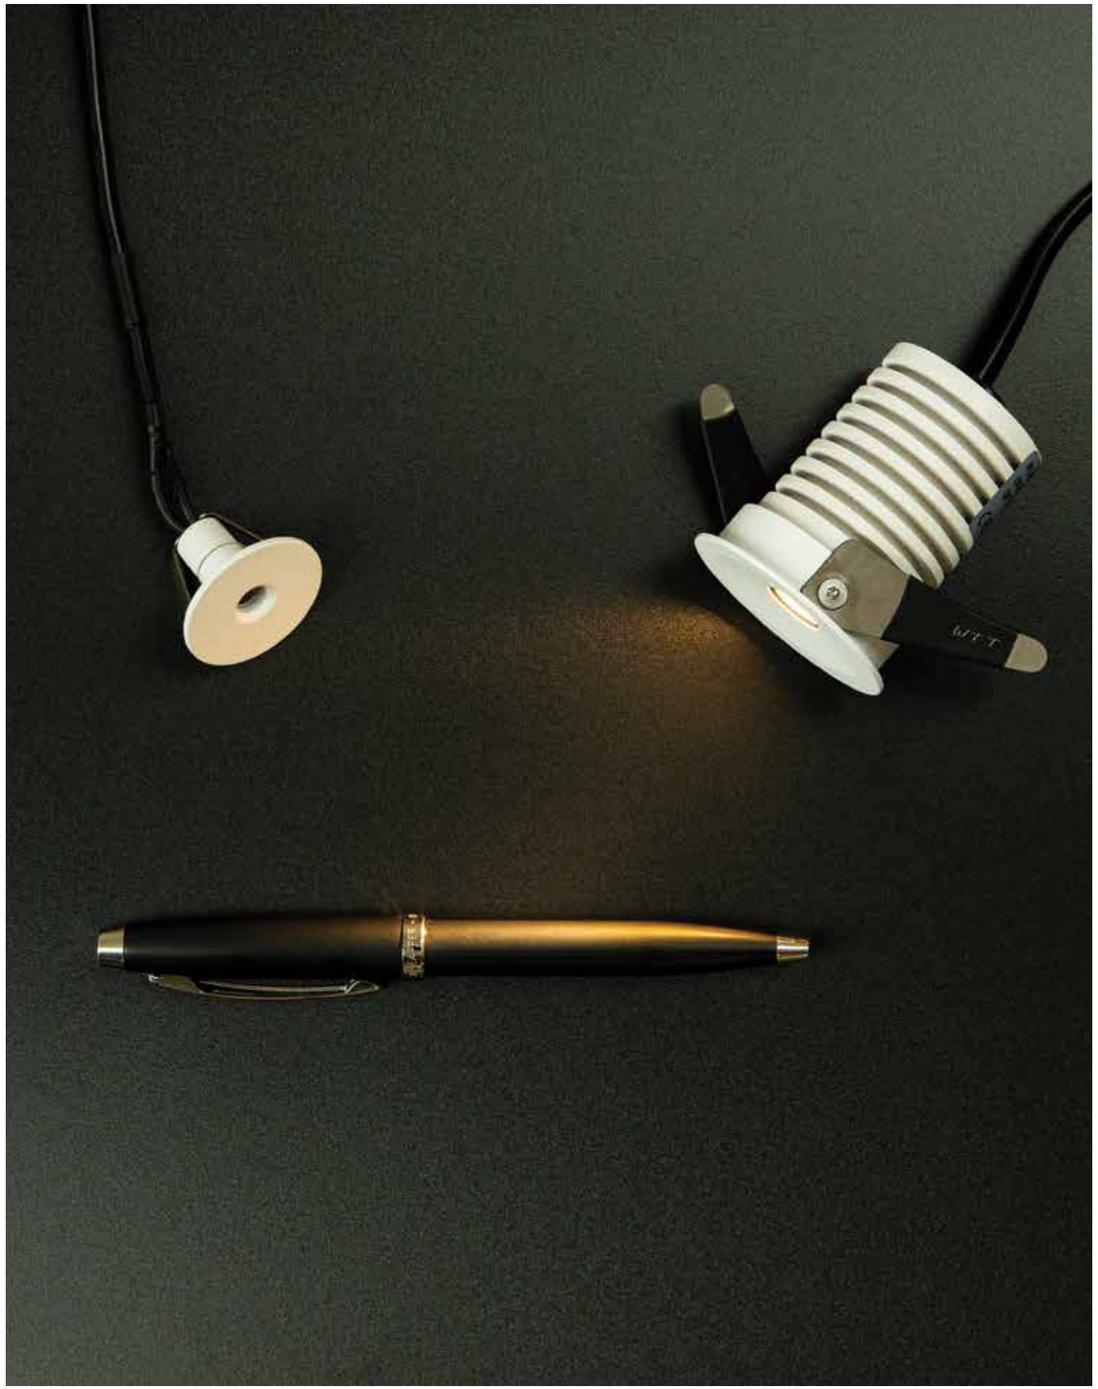






IP54



Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	440Lm
Cri	90
IP	54
UGR	<17
Dimensions	Ø: 8cm H: 4cm
Cutting Hole	Ø: 7.3cm
Beam Angle	20°
Non Dimmable	⊗
Material	Aluminium - Glass
Depth Required	⎍: 4.5cm
Driver	Included
Color	Black Matt / **Code S110**
Color	White Matt / **Code S111**



IP65




Power	2W
Input	3V / 500mA
Color Temperature	3000K
Lumen	138Lm
Cri	80
IP	65
UGR	<12
Dimensions	Ø: 3.7cm H: 4.1cm
Beam Angle	24°
Cutting Hole	Ø: 3.2cm
Material	Aluminium
Depth Required	⎍: 5cm
Suggested On-Off Driver	D-iT FIT7 for 1 Fixture (remote application)
Suggested DALI Driver	FLS42D for 1-13 Fixtures (remote application)
Color	Sandy White / **Code 180016**



CODE	mA	Watt	V
D-iT FIT7	350-700	7	2.5-11




CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52

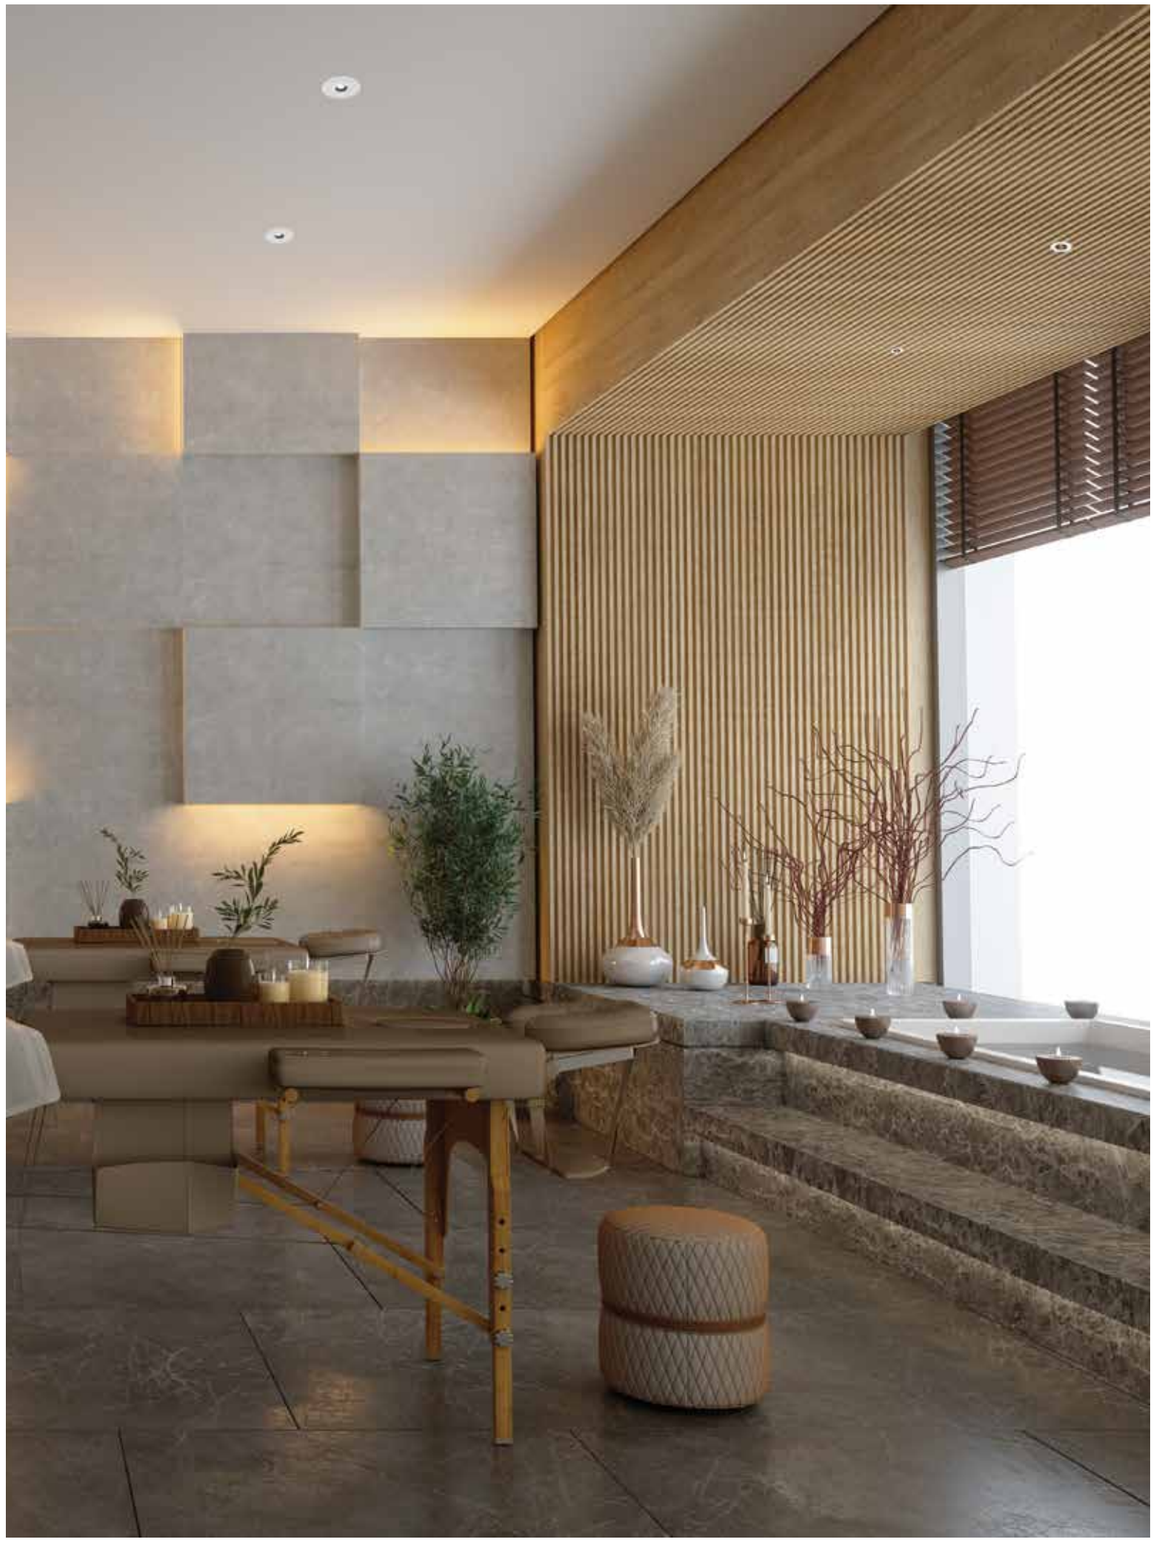









Power	13W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	910Lm
Cri	90
IP	20
UGR	<16
Dimensions	Ø: 8.3cm H: 8.5cm
Cutting Hole	Ø: 7.6cm
Beam Angle	28°
Material	Aluminium
Depth Required	: 9cm
Driver On-Off	Included (300mA)
Suggested DALI Driver	FLS42D for 1 Fixture (pass from the hole)
Color	Black Matt / **Code S078**
Color	White Matt / **Code S077**



CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52









Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	645Lm
Cri	90
IP	20
UGR	<19
Dimensions	L: 8.2cm W: 8.2cm H: 9.6cm
Beam Angle	36°
Cutting Hole	L: 7.5cm W: 7.5cm
Material	Aluminium
Depth Required	: 10cm
Special Feature	Adjustable Included LED Driver
Color	Sandy Black / **Code S146**

Power	9W
Input	220-240V, 50/60Hz
Color Temperature	2700K
Lumen	596Lm
Cri	90
IP	20
UGR	<19
Dimensions	L: 8.2cm W: 8.2cm H: 9.6cm
Beam Angle	36°
Cutting Hole	L: 7.5cm W: 7.5cm
Material	Aluminium
Depth Required	: 10cm
Special Feature	Adjustable Included LED Driver
Color	Sandy White / **Code S145**



Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	645Lm
Cri	90
IP	20
UGR	<19
Dimensions	Ø: 8.2cm H: 9.6cm
Beam Angle	36°
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	: 10cm
Special Feature	Adjustable Included LED Driver
Color	Sandy White / **Code S144**






Power	9W
Input	220-240V, 50/60Hz
Color Temperature	2700K
Lumen	596Lm
Cri	90
IP	20
UGR	<19
Dimensions	Ø: 8.2cm H: 9.6cm
Beam Angle	36°
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	: 10cm
Special Feature	Adjustable Included LED Driver
Color	Sandy White / **Code S143**







Power	9W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	572Lm I 613Lm I 642Lm
Cri	90
IP	20
UGR	<12
Dimensions	Ø: 9cm H: 8.9cm
Beam Angle	24°
Cutting Hole	Ø: 8.5cm
Non Dimmable	⊠
Material	Aluminium
Depth Required	⎍⎍ : 6.5cm
Driver On-Off	Included (220mA) (pass from the hole)
Special Feature	Movable
	Stick Ø: 4cm
Color	Sandy Black-Gold Ring / **Code 25361**
Color	Sandy White-Gold Ring / **Code 25362**





Rings for 25361, 25362, 25363, 25364


Material	Aluminium
Color	Sandy Black / **Code 25477**
Color	Sandy White / **Code 25478**










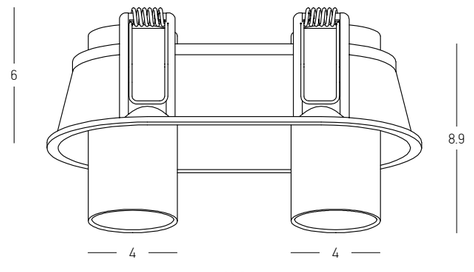

Power	2x 9W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3000K I 4000K
Lumen	1008Lm I 1134Lm I 1185Lm
Cri	90
IP	20
UGR	<12
Dimensions	L: 16.8cm W: 9cm H: 8.9cm
Beam Angle	24°
Cutting Hole	8.3cm x 16cm
Non Dimmable	⊠
Material	Aluminium
Depth Required	⎍⎍ : 6.5cm
Driver On-Off	Included (220mA) (pass from the hole)
Special Feature	Movable
	Stick Ø: 4cm
Color	Sandy Black-Black Ring / **Code 25363**
Color	Sandy White-Black Ring / **Code 25364**



CUTOUT







IP44









Power	2x 10W
Input	36V / 250mA
Color Temperature	3000K
Lumen	1440Lm
Cri	90
IP	44
UGR	<12
Dimensions	L: 17.1cm W: 9.1cm H: 9.1cm
Cutting Hole	8.5cm x 16.5cm
Beam Angle	38°
Material	Aluminium
Depth Required	⎍⎍⎣ : 10cm
Suggested On-Off Driver	FLS42 (500mA), (pass from the hole), Parallel Connection
Suggested DALI Driver	FLS42D (500mA), (pass from the hole), Parallel Connection
Special Feature	Movable Stick Ø: 4.5cm
Color	Sandy White / **Code S175**
Color	Sandy Black / **Code S176**



CODE	mA	Watt	V
FLS42	300-1050	42	9-52



CODE	mA	Watt	V
FLS21	150-500	21	10-42




CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52



CODE	mA	Watt	V
FLS12D	120-350	12	9-42








IP44

Power	10W
Input	36V / 250mA
Color Temperature	3000K
Lumen	720Lm
Cri	90
IP	44
UGR	<12
Dimensions	Ø: 9.1cm H: 9.1cm
Cutting Hole	Ø: 8.5cm
Beam Angle	38°
Material	Aluminium
Depth Required	⎍⎍⎣ : 10cm
Suggested On-Off Driver	FLS21 (pass from the hole)
Suggested DALI Driver	FLS12D (pass from the hole)
Special Feature	Movable Stick Ø: 4.5cm
Color	Sandy White / **Code S173**
Color	Sandy Black / **Code S174**











IP44

Power	10W
Input	36V / 250mA
Color Temperature	3000K
Lumen	720Lm
Cri	90
IP	44
UGR	<12
Dimensions	Ø: 8.2cm H: 9.1cm
Cutting Hole	Ø: 8.3cm
Beam Angle	38°
Material	Aluminium
Depth Required	⎍⎍⎣ : 10cm
Suggested On-Off Driver	FLS21 (pass from the hole)
Suggested DALI Driver	FLS12D (pass from the hole)
Special Feature	Movable Stick Ø: 4.5cm
Color	Sandy White / **Code S177**
Color	Sandy Black / **Code S178**

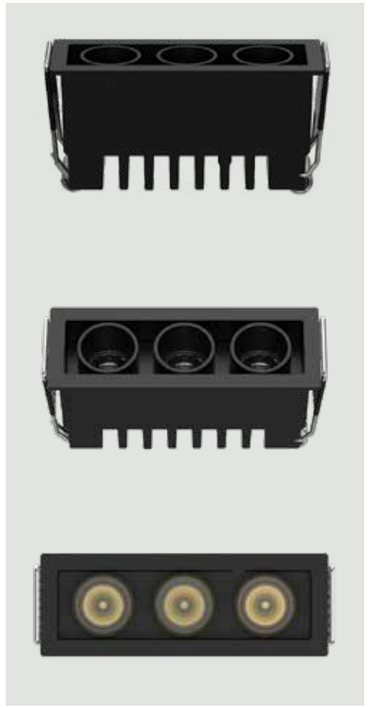

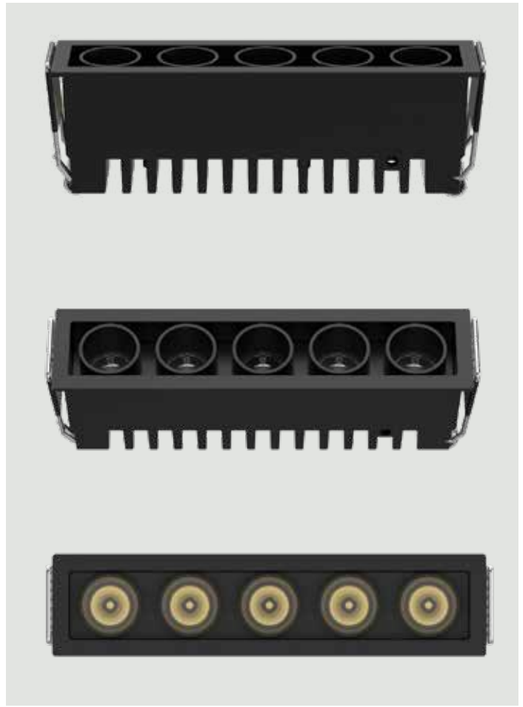

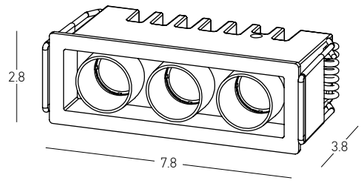

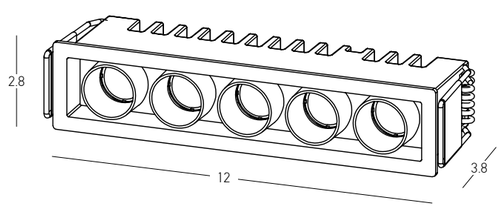

Power	7W
Input	9V / 700mA
Color Temperature	3000K
Lumen	440Lm
Cri	93
IP	20
UGR	<16
Dimensions	L: 7.8cm W: 2.8cm H: 3.8cm
Beam Angle	36°
Cutting Hole	7.4cm x 2.4cm
Material	Aluminium
Depth Required	⎍: 4.3cm
Suggested On-Off Driver	KGP7 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-4 Fixtures (remote application)
Special Feature	Series Connection
Color	Sandy Black / **Code S335**

Power	12W
Input	15V / 700mA
Color Temperature	3000K
Lumen	787Lm
Cri	93
IP	20
UGR	<16
Dimensions	L: 12cm W: 2.8cm H: 3.8cm
Beam Angle	36°
Cutting Hole	11.6cm x 2.4cm
Material	Aluminium
Depth Required	⎍: 4.3cm
Suggested On-Off Driver	FLS42 for 1 Fixture (remote application)
Suggested DALI Driver	FLS42D for 1-3 Fixtures (remote application)
Special Feature	Series Connection
Color	Sandy Black / **Code S336**




CODE	mA	Watt	V
KGP7	100-700	7	2.5-20



CODE	mA	Watt	V
FLS42	300-1050	42	9-52





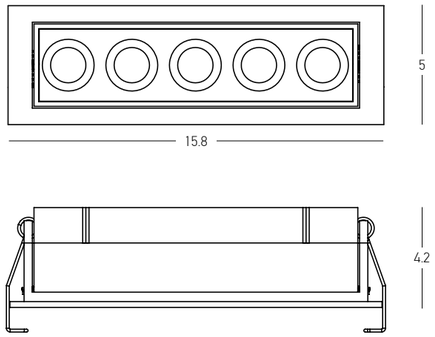





Power	12W
Input	15V / 700mA
Color Temperature	3000K
Lumen	800Lm
Cri	90
IP	20
UGR	<17
Dimensions	L: 15.8cm W: 5cm H: 4.2cm
Cutting Hole	L: 15cm W: 4.5cm
Beam Angle	36°
Material	Aluminium
Depth Required	⎍⎍ : 5cm
Suggested On-Off Driver	KEDH012 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-2 Fixtures (pass from the hole)
Special Feature	Adjustable
	Series Connection
Color	Sandy White / **Code S195**
Color	Sandy Black / **Code S196**



CODE	mA	Watt	V
KEDH012	700	12	9-18



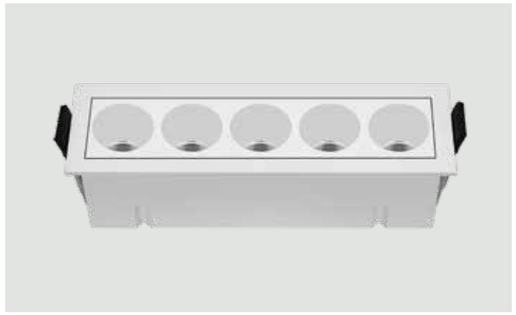

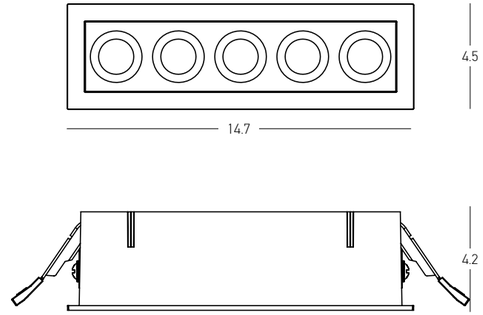



Power	12W
Input	15V / 700mA
Color Temperature	3000K
Lumen	800Lm
Cri	90
IP	20
UGR	<17
Dimensions	L: 14.7cm W: 4.5cm H: 4.2cm
Cutting Hole	L: 14.2cm W: 3.7cm
Beam Angle	36°
Material	Aluminium
Depth Required	⎍⎍ : 5cm
Suggested On-Off Driver	KEDH012 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-2 Fixtures (pass from the hole)
Special Feature	Series Connection
Color	Sandy White / **Code S191**
Color	Sandy Black / **Code S192**




CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52








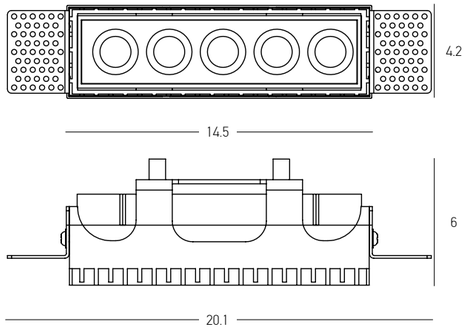




Power	12W
Input	15V / 700mA
Color Temperature	3000K
Lumen	800Lm
Cri	90
IP	65
UGR	<17
Dimensions	L: 14.5cm W: 4.2cm H: 6cm
Cutting Hole	L: 14.7cm W: 4.3cm
Beam Angle	36°
Material	Aluminium
Depth Required	⎍⎍ : 6.5cm
Suggested On-Off Driver	KEDH012 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-2 Fixtures (remote application)
Special Feature	Series Connection
Color	Sandy White / **Code S193**
Color	Sandy Black / **Code S194**

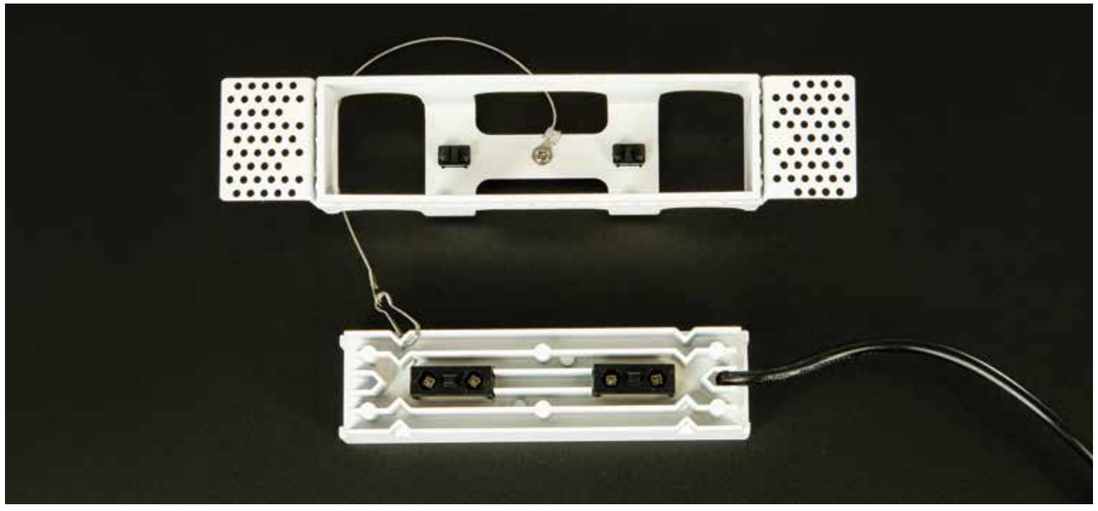



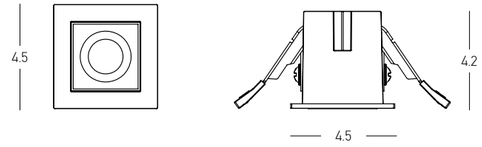



Power	3W
Input	3V / 700mA
Color Temperature	3000K
Lumen	180Lm
Cri	90
IP	65
UGR	<17
Dimensions	L: 4.5cm W: 4.5cm H: 4.2cm
Cutting Hole	L: 4.2cm W: 3.7cm
Beam Angle	36°
Material	Aluminium
Depth Required	⎍⎍ : 6cm
Suggested On-Off Driver	LS-3-700 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-12 Fixtures (remote application)
Special Feature	Series Connection
Color	Sandy Black / **Code S190**
Color	Sandy White / **Code S189**



CODE	mA	Watt	V
KEDH012	700	12	9-18




CODE	mA	Watt	V
LS-3-700	700	3	max 10




CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52





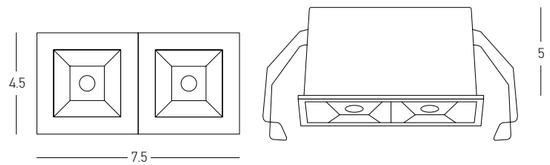


Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	350Lm
Cri	90
IP	20
UGR	<18
Dimensions	L: 7.5cm W: 4.5cm H: 5cm
Cutting Hole	6.5 x 3.5cm
Beam Angle	30°
Non Dimmable	⊠
Material	Aluminium
Depth Required	⎍⎍ : 5.5cm
Driver	Included (600mA)
Suggested DALI Driver	FLS42D for 1 Fixture (remote application)
Color	Sandy White - Black / **Code S085**
Color	Sandy Black / **Code S085-B**

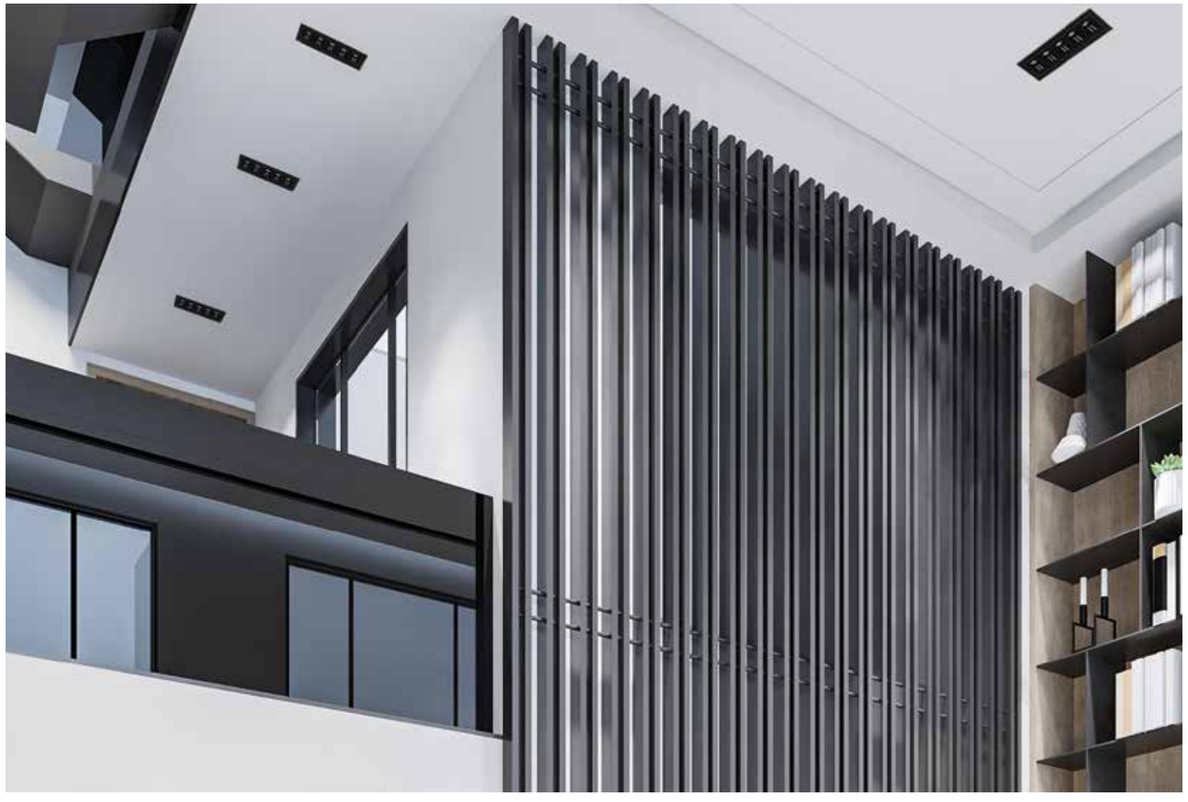






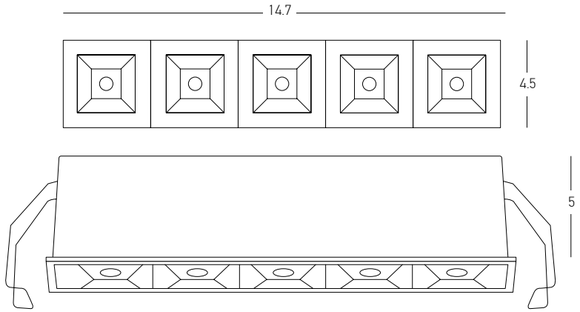


Power	11W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	770Lm
Cri	90
IP	20
UGR	<18
Dimensions	L: 14.7cm W: 4.5cm H: 5cm
Cutting Hole	13.5 x 3.5cm
Beam Angle	30°
Non Dimmable	⊠
Material	Aluminium
Depth Required	⎍⎍ : 5.5cm
Driver	Included (600mA)
Suggested DALI Driver	FLS42D for 1 Fixture (pass from the hole)
Color	Sandy White - Black / **Code S086**
Color	Sandy Black / **Code S086-B**




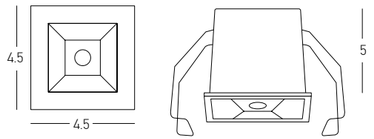


Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	169Lm
Cri	90
IP	20
UGR	<18
Dimensions	L: 4.5cm W: 4.5cm H: 5cm
Cutting Hole	3.5 x 3.5cm
Beam Angle	30°
Non Dimmable	⊠
Material	Aluminium
Depth Required	⎍⎍ : 5.5cm
Driver	Included (700mA)
Suggested DALI Driver	FLS42D for 1 Fixture (remote application)
Color	Sandy White - Black / **Code S084**



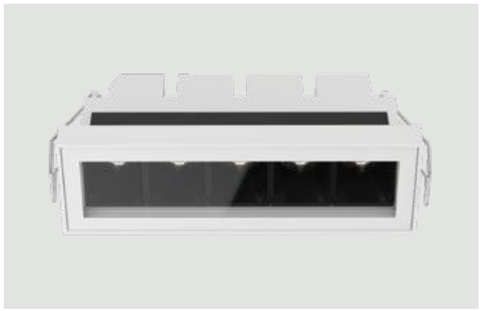

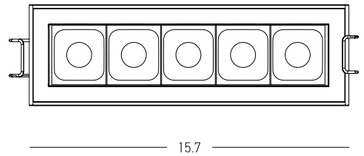




Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	757Lm
Cri	90
IP	65
UGR	<17
Dimensions	L: 15.7cm W: 5cm H: 6.8cm
Cutting Hole	14.2 x 3.5cm
Beam Angle	40°
Non Dimmable	⊠
Material	Stainless Steel - Aluminium - Tempered Glass
Depth Required	Π: 6cm
Driver	Included (700mA)
Suggested DALI Driver	FLS42D for 1 Fixture (pass from the hole)
Color	Sandy Black / **Code E332**
Color	Sandy White / **Code E333**

IP65



Recessed Box for Concrete Application (for E332-E333)



Dimensions	L: 26cm W: 4.3cm H: 10cm
Material	Galvanized Steel
Hole	14.5cm x 4cm
Color	Natural / **Code E333-4-BOX**



CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52








16. DOWNLIGHT RECESSED & TRIMLESS SPOTS GU10

SPOT REFERENCE

INSTALLATION

Trimless I Recessed




Dimming On-Off, Dali
IP Rating 20-65
Non Adjustable-Adjustable



ADJUSTABLE MODELS

RECESSED APPLICATION






Bulb	1x GU10 LED
Power	10W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 8.5cm H: 5.8cm
Cutting Hole	Ø: 7.4cm
Material	Aluminium - Plastic
Depth Required	∏ : 10.5cm
Special Feature	GU10 Lampholder Not Included
Color	Sandy White-Black Chrome / **Code S125**

TRIMLESS APPLICATION





Bulb	1x GU10 LED
Power	10W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 7.3cm H: 5.2cm
Cutting Hole	Ø: 7.4cm
Material	Aluminium - Plastic
Depth Required	∏ : 10.5cm
Special Feature	GU10 Lampholder Not Included
Color	Sandy White-Black Chrome / **Code S127**

ACCESSORIES FOR ADJUSTABLE SPOTS



Black Matt
Code RFL125-BL



Gold Matt
Code RFL125-G



White Matt
Code RFL125-WH



Pinhole Oval
Code S129



Honeycomb
Code HNCMB

SUGGESTED LAMP-DRIVERS OSRAM



COIN 50 G3
go to page 482



Phase Cut Driver
Code D-OTE-18



DALI Driver
Code 4062172227735




On-Off Driver
Code 6977770430235

NON ADJUSTABLE MODELS

RECESSED APPLICATION






Bulb	1x GU10 LED
Power	10W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 8.5cm H: 5.8cm
Cutting Hole	Ø: 7.4cm
Material	Aluminium - Plastic
Depth Required	∏ : 10.5cm
Special Feature	GU10 Lampholder Not Included
Color	Sandy White-Black Chrome / **Code S126**

TRIMLESS APPLICATION





Bulb	1x GU10 LED
Power	10W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 7.3cm H: 5.2cm
Cutting Hole	Ø: 7.4cm
Material	Aluminium - Plastic
Depth Required	∏ : 10.5cm
Special Feature	GU10 Lampholder Not Included
Color	Sandy White-Black Chrome / **Code S128**

ACCESSORIES FOR NON ADJUSTABLE SPOTS



Black Matt
Code RFL126-BL




Gold Matt
Code RFL126-G



White Matt
Code RFL126-WH



Pinhole
Code S130



Honeycomb
Code HNCMB

SUGGESTED LAMP-DRIVERS OSRAM



COIN 50 G3
go to page 482



Phase Cut Driver
Code D-OTE-18




DALI Driver
Code 4062172227735



On-Off Driver
Code 6977770430235








Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 12.6cm W: 9.4cm H: 5.5cm
Cutting Hole	Ø: 8cm
Material	Metal - Glass
Depth Required	⎍⎍ : 10cm
Special Feature	GU10 Lampholder Included
Color	Sandy Black / **Code S162**
Color	Sandy White / **Code S162-W**

IP65








Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
IP	44
Dimensions	Ø: 6.5cm H: 3cm
Cutting Hole	Ø: 6.6cm
Material	Aluminium
Depth Required	⎍⎍ : 8.5cm
Special Feature	GU10 Lampholder Included
Color	Sandy Black / **Code S224**
Color	Sandy White / **Code S225**

IP44







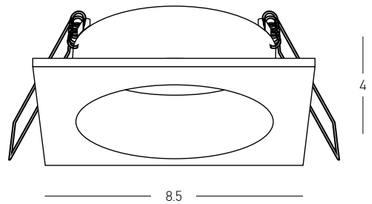


Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 8.5cm W: 8.5cm H: 4cm
Cutting Hole	Ø: 6.8cm
Material	Aluminium
Depth Required	⎍: 8.3cm
Special Feature	GU10 Lampholder Included
Color	Sandy White / **Code S165**
Color	Sandy Black / **Code S166**

IP65







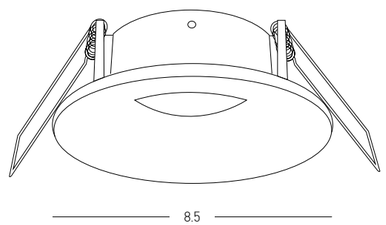


Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 8.5cm H: 4cm
Cutting Hole	Ø: 6.8cm
Material	Aluminium
Depth Required	⎍: 8.3cm
Special Feature	GU10 Lampholder Included
Color	Sandy White / **Code S167**
Color	Sandy Black / **Code S168**

IP65





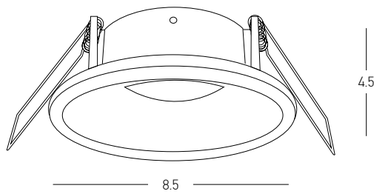


Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 8.5cm H: 4.5cm
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍: 10.5cm
Special Feature	GU10 Lampholder Included
Color	Black Matt / **Code S046**
Color	White Matt / **Code S045**

IP65





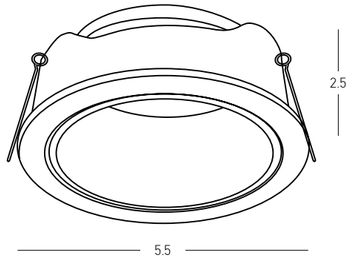

Bulb	1x MR11-GU10
Power	35W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 5.5cm H: 2.5cm
Cutting Hole	Ø: 5.1cm
Material	Aluminium
Depth Required	⎍: 6cm
Special Feature	GU10 Lampholder Included
Color	Sandy Black / **Code S222**
Color	Sandy White / **Code S223**





SUGGESTED LAMP-DRIVERS OSRAM



COIN 35 G3

go to page 483



DALI Driver


Code 4062172151252



On-Off Driver

Code D-OT FIT8

Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 4.5cm
Cutting Hole	Ø: 6.8cm
Material	Aluminium
Depth Required	⎍⎍ : 7.5cm
Special Feature	GU10 Lampholder Included
Color	Sandy Black / **Code S228**
Color	Sandy White / **Code S229**



Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 9.3cm H: 4.6cm
Cutting Hole	Ø: 8.3cm
Material	Aluminium
Depth Required	⎍⎍ : 10cm
Special Feature	GU10 Lampholder Included Movable
Color	Sandy White / **Code S148**

Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 9.3cm H: 4.6cm
Cutting Hole	Ø: 8.3cm
Material	Aluminium
Depth Required	⎍⎍ : 10cm
Special Feature	GU10 Lampholder Included Movable
Color	Sandy Black / **Code S149**









Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 7.7cm H: 3cm
Cutting Hole	Ø: 8.5cm
Material	Aluminium
Depth Required	⎍⎍ : 9cm
Special Feature	GU10 Lampholder Included Movable
Color	Sandy White / **Code S227**

Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 7.7cm H: 3cm
Cutting Hole	Ø: 8.5cm
Material	Aluminium
Depth Required	⎍⎍ : 9cm
Special Feature	GU10 Lampholder Included Movable
Color	Sandy Black / **Code S226**

Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 4cm
Cutting Hole	Ø: 6cm
Material	Aluminium
Depth Required	⎍⎍ : 12cm
Special Feature	GU10 Lampholder Included
Color	Black / **Code Z10105 TR-B**

Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 4cm
Cutting Hole	Ø: 6cm
Material	Aluminium
Depth Required	⎍⎍ : 12cm
Special Feature	GU10 Lampholder Included
Color	White / **Code Z10105 TR-W**









Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 7.4cm H: 5cm
Cutting Hole	Ø: 6.8cm
Material	Aluminium
Depth Required	⎍⎍ : 11cm
Special Feature	GU10 Lampholder Included Adjustable 30°
Color	Sandy White / **Code S164**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 9cm H: 4cm
Cutting Hole	Ø: 8cm
Material	Aluminium
Depth Required	⎍⎍ : 10cm
Special Feature	GU10 Lampholder Included Movable
Color	White - Black / **Code S060**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	L: 8.4cm W: 8.4cm H: 4cm
Cutting Hole	Ø: 7.6cm
Material	Aluminium
Depth Required	⎍⎍ : 10cm
Special Feature	GU10 Lampholder Included Movable
Color	White - Black / **Code S061**



Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 8.5cm H: 6.5cm
Cutting Hole	Ø: 7.7cm
Material	Aluminium
Depth Required	⎍⎍ : 10cm
Special Feature	GU10 Lampholder Included Adjustable 360°
Color	Sandy White / **Code S150**



Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 7.4cm H: 3.1cm
Cutting Hole	Ø: 7cm
Material	Aluminium
Depth Required	⎍⎍ : 8.5cm
Special Feature	GU10 Lampholder Included
Color	Sandy White / **Code S163**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 10cm H: 4cm
Cutting Hole	Ø: 9.2cm
Material	Aluminium
Depth Required	⎍⎍ : 9.5cm
Special Feature	GU10 Lampholder Included Movable
Color	White / **Code S019**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 10cm H: 4cm
Cutting Hole	Ø: 9.2cm
Material	Aluminium
Depth Required	⎍⎍ : 9.5cm
Special Feature	GU10 Lampholder Included Movable
Color	White - Black / **Code S020**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 8.6cm H: 4cm
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 9cm
Special Feature	GU10 Lampholder Included Movable
Color	White / **Code S012**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 8.6cm H: 4cm
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 9cm
Special Feature	GU10 Lampholder Included Movable
Color	Black / **Code S011**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 8.3cm H: 5.5cm
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 10.5cm
Special Feature	GU10 Lampholder Included
Color	White / **Code S008**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 8.3cm H: 5.5cm
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 10.5cm
Special Feature	GU10 Lampholder Included
Color	Black / **Code S007**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	L: 8.8cm W: 8.8cm H: 7.8cm
Cutting Hole	L: 7.5cm W: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 13.5cm
Special Feature	GU10 Lampholder Included
Color	White / **Code S010**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	L: 8.8cm W: 8.8cm H: 7.8cm
Cutting Hole	L: 7.5cm W: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 13.5cm
Special Feature	GU10 Lampholder Included
Color	Black / **Code S009**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	L: 8.5cm W: 8.5cm H: 2cm
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 7.5cm
Special Feature	GU10 Lampholder Included Movable
Color	White / **Code S013**



Bulb	1x GU10
Power	50W MAX
Input	220-240V, 50/60Hz
Dimensions	L: 8.5cm W: 8.5cm H: 2cm
Cutting Hole	Ø: 7.5cm
Material	Aluminium
Depth Required	⎍⎍ : 7.5cm
Special Feature	GU10 Lampholder Included Movable
Color	Black / **Code S014**




17. GYPSUM





REFERENCE

INSTALLATION

Trimless | Wall




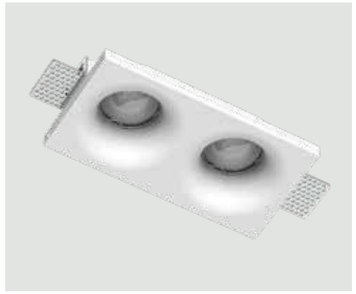




Bulb	2x GU10
Power	2x 35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 19.5cm W: 10cm H: 4cm
Cutting Hole	L: 19.7cm W: 10.2cm
Material	Gypsum
Depth Required	⎍: 10.5cm
Special Feature	GU10 Lampholder Included Installation Flanges Built-in on the spotlight body
Color	Pure White / **Code S231**





Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	Ø: 10cm H: 4cm
Cutting Hole	Ø: 10.2cm
Material	Gypsum
Depth Required	⎍: 10.5cm
Special Feature	GU10 Lampholder Included Installation Flanges Built-in on the spotlight body
Color	Pure White / **Code S230**






Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 12cm W: 12cm H: 6cm
Cutting Hole	L: 12.2cm W: 12.2cm
Material	Gypsum
Depth Required	⎍: 11.5cm
Special Feature	GU10 Lampholder Included Installation Flanges Built-in on the spotlight body
Color	Pure White / **Code S029**











Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 12cm W: 12cm H: 7cm
Cutting Hole	L: 12.2cm W: 12.2cm
Material	Gypsum
Depth Required	⎍⎍: 14cm
Special Feature	GU10 Lampholder Included Installation Flanges Built-in on the spotlight body
Color	Pure White / **Code S030**






Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 12cm W: 12cm H: 6cm
Cutting Hole	L: 12.2cm W: 12.2cm
Material	Gypsum
Depth Required	⎍⎍: 11.5cm
Special Feature	GU10 Lampholder Included Installation Flanges Built-in on the spotlight body
Color	Pure White / **Code S025**






Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	Ø: 10cm H: 3cm
Cutting Hole	Ø: 10.3cm
Material	Gypsum
Depth Required	⎍⎍: 9cm
Special Feature	GU10 Lampholder Included Installation Flanges Built-in on the spotlight body
Color	Pure White / **Code S027**






Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 8cm W: 8cm H: 5.3cm
Cutting Hole	L: 8.2cm W: 8.2cm
Material	Gypsum
Depth Required	⎍⎍ : 12cm
Special Feature	GU10 Lampholder Included Square Hole
Color	Pure White / **Code S047**






Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 8cm W: 8cm H: 5.3cm
Cutting Hole	L: 8.2cm W: 8.2cm
Material	Gypsum
Depth Required	⎍⎍ : 12cm
Special Feature	GU10 Lampholder Included Round Hole
Color	Pure White / **Code S048**

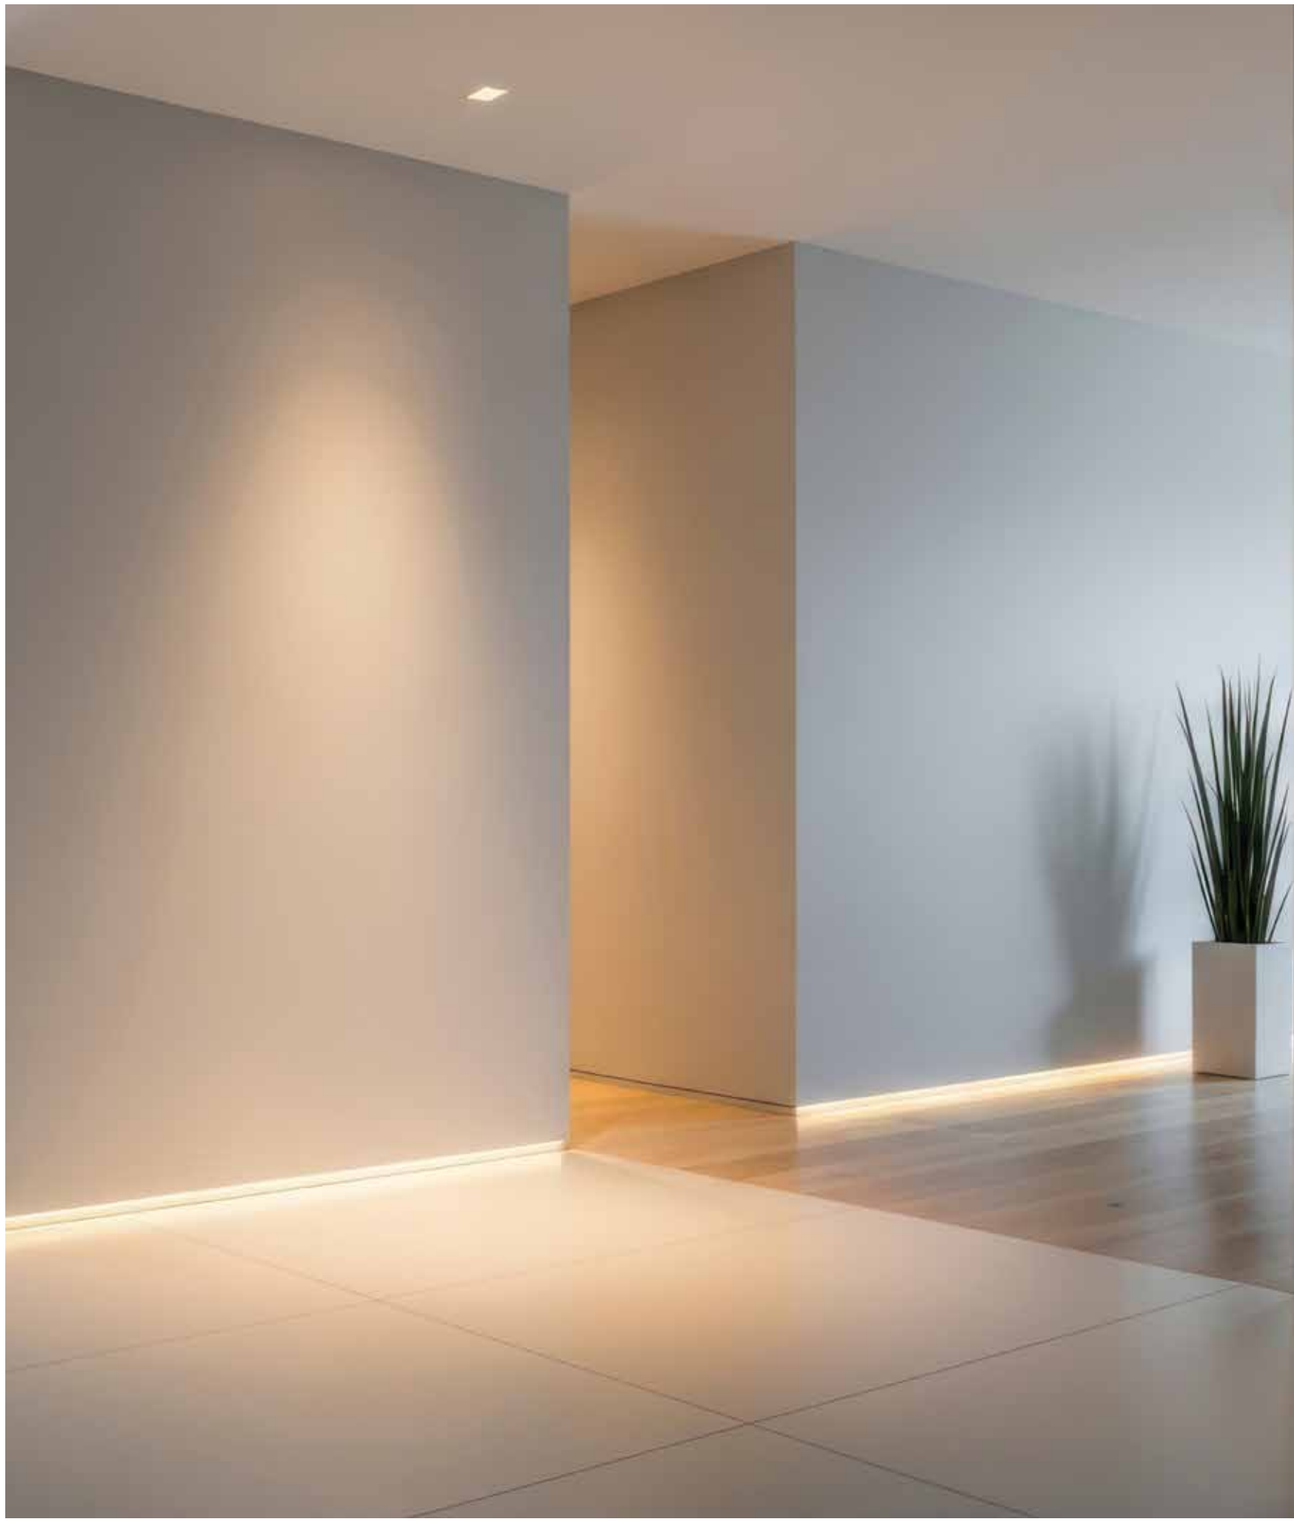








Power	9.2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	460Lm
Cri	80
IP	20
Dimensions	Ø: 25cm L: 5.5cm
Material	Gypsum
Color	Pure White / **Code 20272**






Power	7.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	375Lm
Cri	80
IP	20
Dimensions	Ø: 15cm L: 4.1cm
Material	Gypsum
Color	Pure White / **Code 20271**











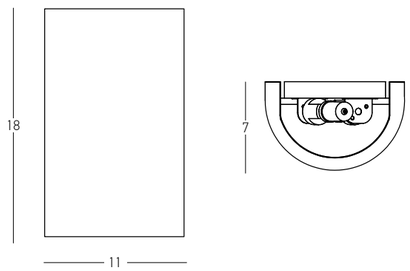

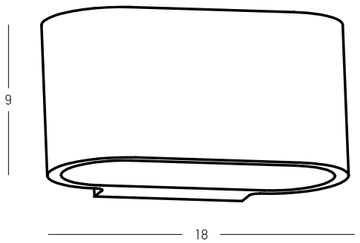




Bulb	2x G9
Power	25W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 7cm W: 11cm H: 18cm
Material	Gypsum
Special Feature	Up-Down Lighting
Color	Pure White / **Code 25383**


Bulb	1x G9
Power	25W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 10cm W: 18cm H: 9cm
Material	Gypsum
Special Feature	Up-Down Lighting
Color	Pure White / **Code 25382**

Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K, 4000K
Lumen	536Lm, 597Lm
Cri	80
IP	20
Dimensions	L: 8cm W: 18cm H: 8.5cm
Non Dimmable	⊗
Material	Gypsum
Color	Pure White / **Code 25381**





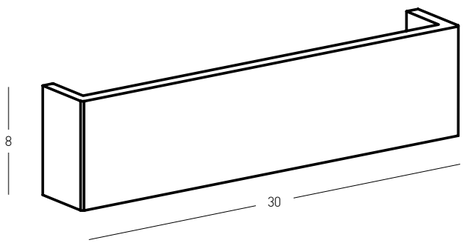






Power	8.25W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	625Lm
Cri	80
IP	20
Dimensions	L: 4.5cm W: 30cm H: 8cm
Non Dimmable	⊠
Material	Gypsum
Special Feature	Up-Down Lighting
Color	Pure White / **Code 25380**






Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	510Lm
Cri	80
IP	20
Dimensions	L: 6cm W: 10cm H: 16cm
Non Dimmable	⊠
Material	Gypsum
Special Feature	Up-Down Lighting
Color	Pure White / **Code 25379**






Bulb	1x G9
Power	25W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 14.5cm W: 32cm H: 5.5cm
Material	Gypsum
Special Feature	Up-Down Lighting
Color	Pure White / **Code 180026**




Bulb	1x G9
Power	25W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 8.5cm W: 20cm H: 12cm
Material	Gypsum
Special Feature	Up-Down Lighting
Color	Pure White / **Code 180025**







Bulb	1x G9
Power	25W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 10cm W: 20cm H: 6cm
Material	Gypsum
Special Feature	Up Lighting
Color	Pure White / **Code 180027**



Bulb	1x G9
Power	25W MAX
Input	220-240V, 50/60Hz
IP	20
Dimensions	L: 13cm W: 15cm H: 13cm
Material	Gypsum
Special Feature	Up-Down Lighting
Color	Pure White / **Code 180028**



18. CEILING SPOTS



SPOT REFERENCE

INSTALLATION

Ceiling


Dimming On-Off, Dali, Triac
CCT 2700K-4000K
IP Rating 20-54















Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	543Lm
Cri	80
IP	20
UGR	<18
Dimensions	Ø: 10cm H: 12.5cm
Base	Ø: 7.7cm H: 4.5cm
Non Dimmable	⊠
Material	Aluminium - Glass - Acrylic
Color	Sandy Black / **Code 25306**
Color	Sandy White / **Code 25307**
Color	Gold Matt / **Code 25308**









Power	10W
Input	36V / 250mA
Color Temperature	3000K
Lumen	720Lm
Cri	90
IP	20
UGR	<19
Dimensions	Ø: 8cm H: 9.6cm
Beam Angle	100°
Material	Aluminium- Acrylic
Suggested On-Off Driver	D-KE-10 (fits in the light)
Suggested DALI Driver	D-EG-10 (remote application)
Color	Sandy White / **Code S214**
Color	Sandy Black / **Code S215**

CODE	mA	Watt	V
D-KE-10	250	10	27-40



CODE	mA	Watt	V
D-EG-10	250	12	9-42










IP44



Power	12W
Input	220-240V, 50/60Hz
Color Temperature	2700K I 3200K I 4000K
Lumen	830Lm I 865Lm I 905Lm
Cri	90
IP	44
UGR	<19
Dimensions	Ø: 12cm H: 6.4cm
Beam Angle	100°
DALI Dimmable	
Material	Aluminium - Microprismatic Diffuser
Special Feature	Anti-Glare Design
Color	Gold / **Code 25215**
Color	Sandy Black / **Code 25216**


2700K


3200K


4000K















Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	430Lm
Cri	80
IP	20
UGR	<22
Dimensions	Ø: 10cm H: 5cm
Beam Angle	120°
Non Dimmable	⊠
Material	Aluminium - PC Diffuser
Driver On-Off	Included (200mA)
Color	Sandy Black / **Code 25309**
Color	Sandy White / **Code 25310**
Color	Gold Matt / **Code 25311**





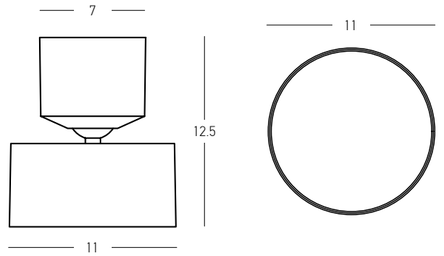


Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	798Lm
Cri	80
IP	20
UGR	<24
Dimensions	Ø: 11cm H: 12.5cm
Base	Ø: 7cm H: 5cm
Beam Angle	120°
Non Dimmable	⊠
Material	Aluminium - Acrylic
Special Feature	30° I 359° Movable
Color	Sandy Black / **Code 25312**
Color	Sandy White / **Code 25313**
Color	Gold Matt / **Code 25314**









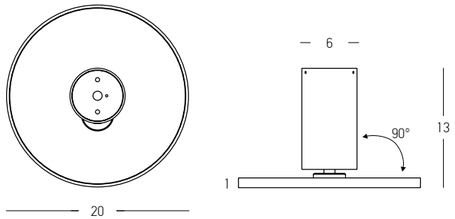




Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	950Lm
Cri	80
IP	20
UGR	<26
Dimensions	**Ø**: 20cm H: 13cm
Base	**Ø**: 6cm H: 11cm
Beam Angle	120°
Non Dimmable	⊗
Material	Aluminium - PC Diffuser
Special Feature	Movable
Color	Sandy Black / **Code 25304**
Color	Gold Matt / **Code 25305**












Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	380Lm
Cri	90
IP	20
UGR	<17
Dimensions	Ø: 3.1cm H: 20cm
Beam Angle	24°
Material	Aluminium- Acrylic
Driver On-Off	Included (200mA)
Suggested DALI Driver	EG-5-D (remote application)
Special Feature	Rotatable-Tilt Up Down
Color	Sandy White / **Code S216**
Color	Sandy Black / **Code S217**




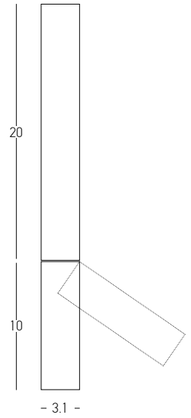

Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	380Lm
Cri	90
IP	20
UGR	<17
Dimensions	Ø: 3.1cm H: 30cm
Beam Angle	24°
Material	Aluminium- Acrylic
Driver On-Off	Included (200mA)
Suggested DALI Driver	EG-5-D (remote application)
Special Feature	Rotatable-Tilt Up Down
Color	Sandy White / **Code S218**
Color	Sandy Black / **Code S219**




CODE	mA	Watt	V
EG-5-D	120	5	9-42

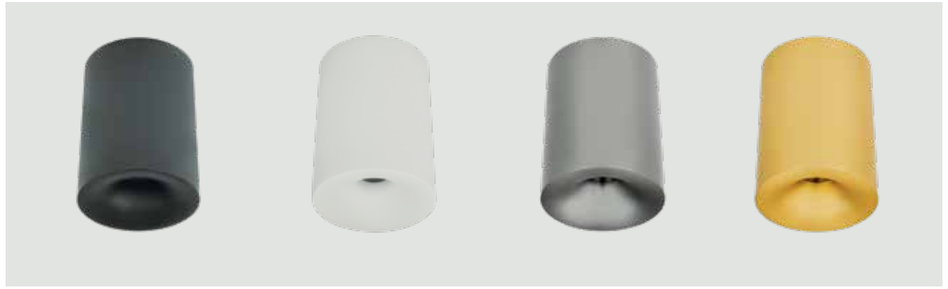

Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	600Lm
Cri	90
IP	54
UGR	<15
Dimensions	Ø: 6cm H: 10.5cm
Beam Angle	36°
Non Dimmable	⊗
Material	Aluminium
Color	Sandy Black / **Code 25295**
Color	Sandy White / **Code 25296**
Color	Silver Matt / **Code 25297**
Color	Brass Matt / **Code 25298**

IP54

















Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	500Lm
Cri	80
IP	20
UGR	<18
Dimensions	Ø: 6cm H: 6.5cm
Beam Angle	35°
Dimmable Triac	◠
Material	Aluminium
Color	White Matt / **Code Z12107K-W**
Color	Black Matt / **Code Z12107K-B**
***Ring not included**	Black / **Code Z050106-B**
***Ring not included**	Brass / **Code Z050106-BR**


*****Must be ordered seperately



Brass Ring for Z12107K-W, Z12107K-B
Material Plastic
Code Z050106-BR



Black Ring for Z12107K-W, Z12107K-B
Material Plastic
Code Z050106-B

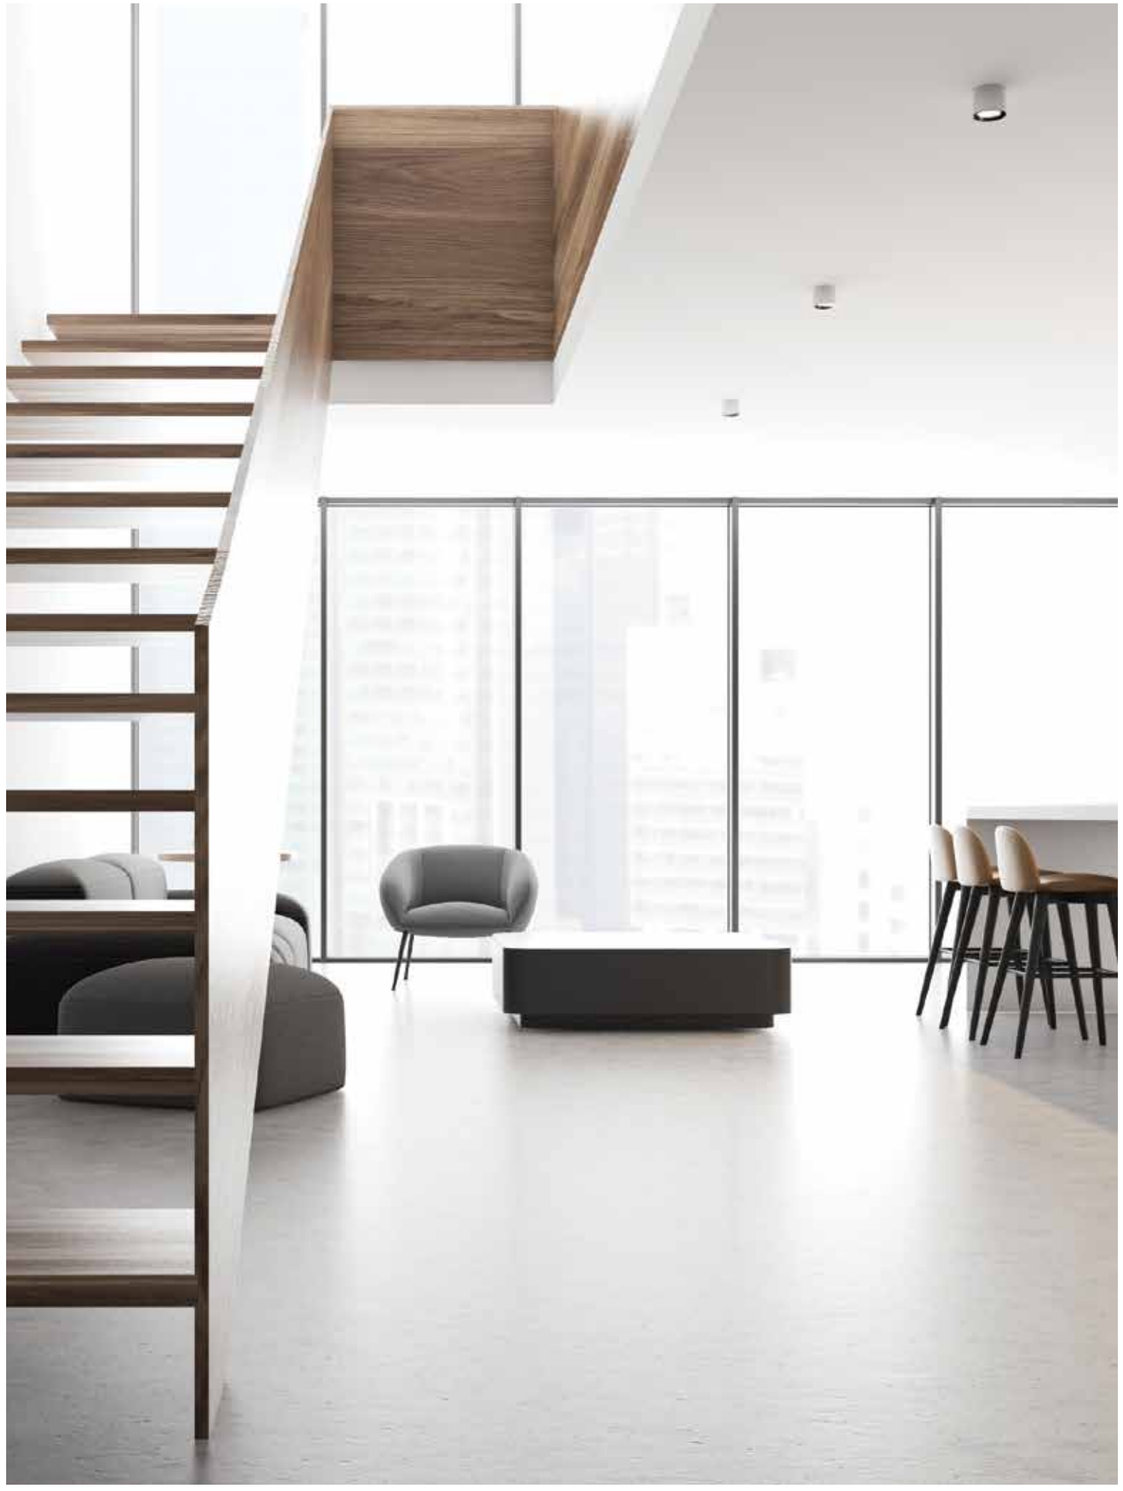









IP44



Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	90
IP	44
UGR	<15
Dimensions	Ø: 8.5cm H: 13cm
Beam Angle	38°
Non Dimmable	⊠
Material	Aluminium
Special Feature	Movable Spot Spot Ø: 4.5cm
Color	Sandy White / **Code S179**
Color	Sandy Black / **Code S180**








Bulb	1x GU10
Power	40W MAX
Dimensions	Ø: 6.3cm H: 11.4cm
Material	Aluminium
Special Feature	GU10 Lampholder Included
Color	Black Matt / **Code S001**
Color	White Matt / **Code S002**






IP54




Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	560Lm
Cri	90
IP	54
UGR	<18
Dimensions	Ø: 6.3cm H: 7.5cm
Beam Angle	20°
Non Dimmable	⊗
Material	Aluminium - Glass
Special Feature	Included LED Driver
Color	Sandy Black / **Code S112**
Color	Sandy White / **Code S113**








Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	454Lm
Cri	80
IP	20
UGR	<26
Dimensions	Ø: 11cm H: 7cm
Beam Angle	100°
Non Dimmable	⊗
Material	Aluminium - Acrylic
Color	Sandy White / **Code 22133**
Color	Sandy Black / **Code 22134**

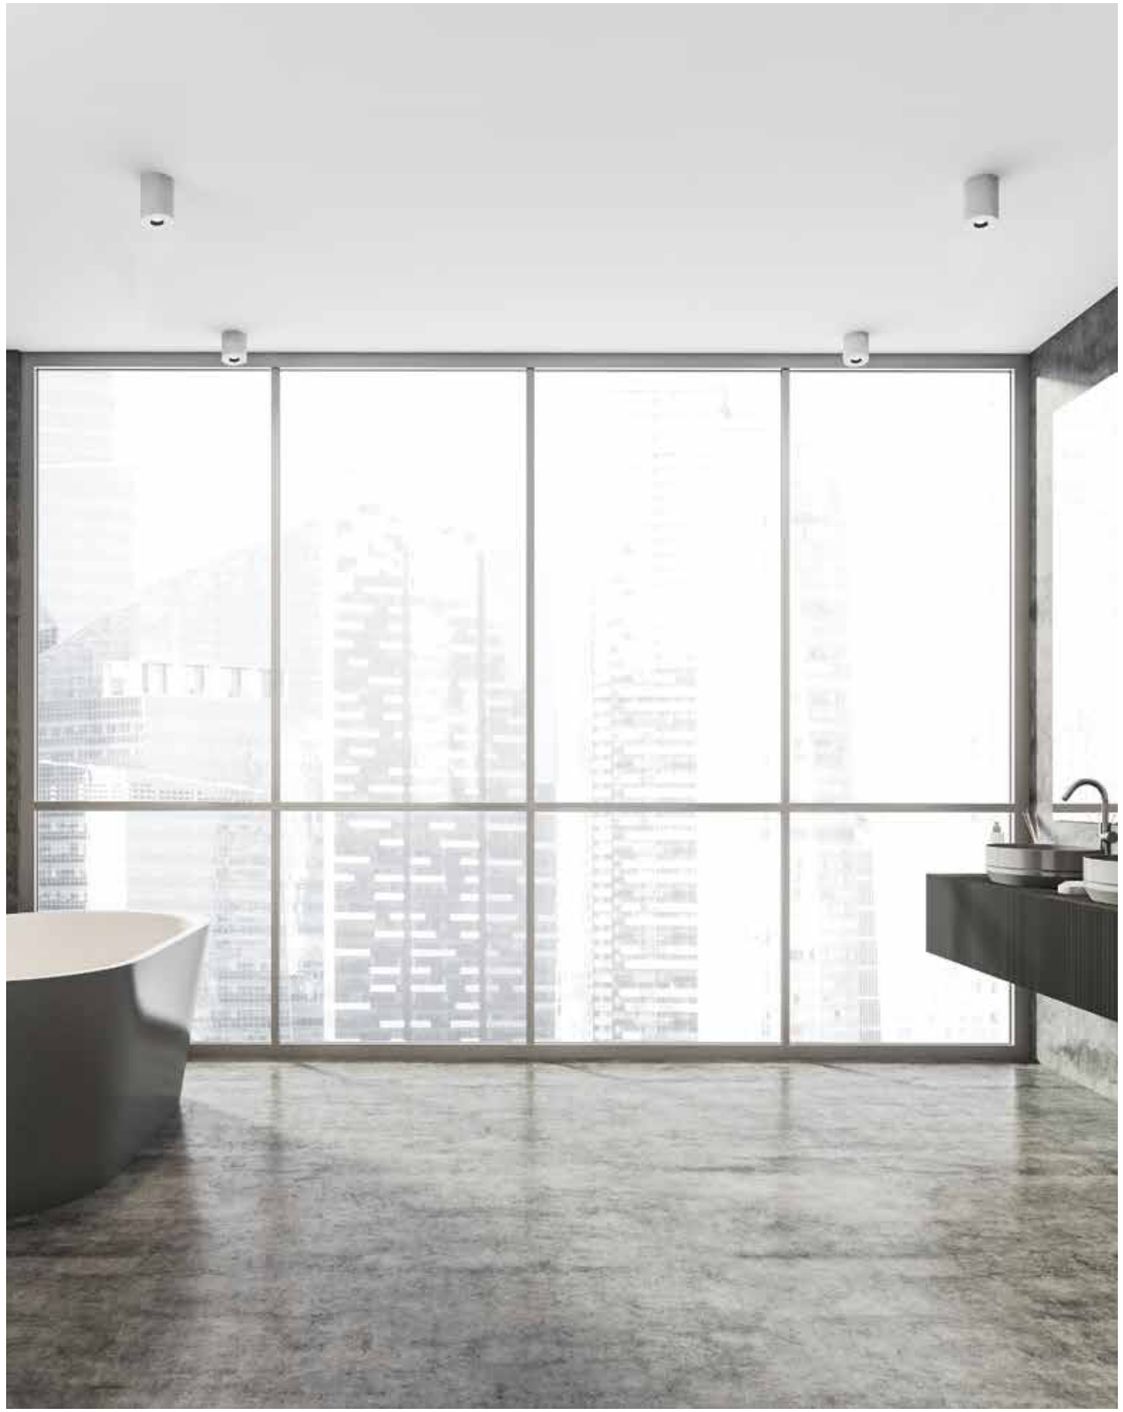







Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	561Lm
Cri	80
IP	54
UGR	<16
Dimensions	Ø: 8cm H: 5.5cm
Beam Angle	120°
Non Dimmable	⊠
Material	Aluminium
Color	Sandy Black / **Code S131**
Color	Sandy White / **Code S132**





Power	12W
Input	220-240V, 50/60Hz
Color Temperature	4000K
Lumen	593Lm
Cri	80
IP	54
UGR	<16
Dimensions	Ø: 8cm H: 5.5cm
Beam Angle	120°
Non Dimmable	⊠
Material	Aluminium
Color	Sandy Black / **Code S131-4K**
Color	Sandy White / **Code S132-4K**






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	454Lm
Cri	80
IP	54
UGR	<16
Dimensions	Ø: 6.5cm H: 4.5cm
Beam Angle	120°
Non Dimmable	⊠
Material	Aluminium
Color	Sandy Black / **Code S133**
Color	Sandy White / **Code S134**








Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	733Lm
Cri	80
IP	20
UGR	<18
Dimensions	L: 7.5cm W: 7.5cm H: 9.5cm
Beam Angle	32°
Non Dimmable	⊠
Material	Aluminium - Glass
Special Feature	Included LED Driver
Color	White - Black Reflector / **Code S068**
Color	Black - Black Reflector / **Code S069**








Bulb	1x GU10
Power	40W MAX
Dimensions	L: 9cm W: 9cm H: 11.5cm
Material	Aluminium
Special Feature	GU10 Lampholder Included
Color	White Matt / **Code S039**
Color	Black Matt / **Code S040**








Bulb	1x GU10
Power	40W MAX
Dimensions	L: 9cm W: 9cm H: 11.5cm
Material	Aluminium
Special Feature	GU10 Lampholder Included
Color	Sandy White / **Code S151**
Color	Sandy Black / **Code S152**





Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 8.5cm
Material	Aluminium
Special Feature	GU10 Lampholder Included
Color	Sandy White / **Code S153**
Color	Sandy Black / **Code S154**
Color	Brushed Gold-Black Ring / **Code S155**










Brushed Gold Ring for S153, S154, S155
Material Aluminium
Code RFL G 154











Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 5.4cm H: 25cm
Material	Aluminium
Color	Sandy White / **Code 23220**
Color	Sandy Black / **Code 23221**
Color	Brushed Brass / **Code 23222**





Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 5.4cm H: 40cm
Material	Aluminium
Color	Sandy White / **Code 23223**
Color	Sandy Black / **Code 23224**






Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 5.4cm H: 80cm
Material	Aluminium
Color	Sandy White / **Code 23225**
Color	Sandy Black / **Code 23226**









Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 12.1cm
Material	Aluminium
Special Feature	GU10 Lampholder Included
Color	Sandy White / **Code S159**
Color	Sandy Black / **Code S160**
Color	Sandy White - Gold Matt / **Code S161**








OSRAM

Bulb	1x GU10
Power	35W MAX
Dimensions	Ø: 6cm H: 20cm
Cylinder	Ø: 6cm H: 13cm
Base	Ø: 6cm H: 3cm
Material	Aluminium
Color	Black Matt / **Code S055**
Color	White Matt / **Code S054**




Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1000Lm
Cri	90
Dimensions	Ø: 6cm H: 20cm
Cylinder	Ø: 6cm H: 13cm
Base	Ø: 6cm H: 3cm
Beam Angle	15° / 24° / 40°
Non Dimmable	☒
Material	Aluminium
Driver On-Off	Included (250mA)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Color	Black Matt / **Code S055-15**
Color	Black Matt / **Code S055-24**
Color	Black Matt / **Code S055-40**
Color	White Matt / **Code S054-15**
Color	White Matt / **Code S054-24**
Color	White Matt / **Code S054-40**





OSRAM

Bulb	1x GU10
Power	35W MAX
Dimensions	Ø: 6cm H: 17cm
Cylinder	Ø: 6cm H: 13cm
Base	Ø: 6cm
Cutting Hole	Ø: 5cm
Material	Aluminium
Color	Black Matt / **Code S057**
Color	White Matt / **Code S056**




Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1000Lm
Cri	90
Dimensions	Ø: 6cm H: 17cm
Cylinder	Ø: 6cm H: 13cm
Base	Ø: 6cm
Beam Angle	15° / 24° / 40°
Non Dimmable	☒
Cutting Hole	Ø: 5cm
Material	Aluminium
Driver On-Off	Included (250mA)
Suggested DALI Driver	FLS12D for 1 Fixture (pass from the hole)
Color	Black Matt / **Code S057-15**
Color	Black Matt / **Code S057-24**
Color	Black Matt / **Code S057-40**
Color	White Matt / **Code S056-15**
Color	White Matt / **Code S056-24**
Color	White Matt / **Code S056-40**










Power	1x 7W
Input	20V / 350mA
Color Temperature	3000K
Lumen	660Lm
Cri	90
IP	20
UGR	<15
Dimensions	Ø: 4cm H: 10cm
Beam Angle	36°
Cutting Hole	Ø: 4.5cm
Base	Ø: 6cm
Material	Aluminium
Suggested On-Off Driver	KGP7 for 1 Fixture (pass from the hole)
Suggested DALI Driver	4062172151252 for 1 Fixture (pass from the hole)
Color	Sandy White / **Code 180015**
Color	Sandy Black / **Code 180017**








Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	700Lm
Cri	80
IP	20
UGR	<12
Dimensions	Ø: 4.5cm H: 9.8cm
Beam Angle	15-30° Adjustable
Non Dimmable	⊗
Cutting Hole	Ø: 5cm
Base	Ø: 5.5cm
Material	Aluminium
Driver On-Off	Included (350mA) (pass from the hole)
Suggested DALI Driver	4062172151252 for 1 Fixture (pass from the hole)
Special Feature	Zoomable Spot
Color	Sandy White - Black / **Code 1928**
Color	Sandy Black / **Code 1928-B**








Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	580Lm
Cri	90
IP	20
UGR	<15
Dimensions	Ø: 4.5cm H: 12cm
Base	Ø: 5.5cm
Beam Angle	36°
Non Dimmable	⊗
Cutting Hole	Ø: 4cm
Material	Aluminium
Driver On-Off	Included (200mA)
Color	Brushed Brass / **Code S117**
Color	White Matt / **Code S118**
Color	Black Matt / **Code S119**








Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	580Lm
Cri	90
IP	20
UGR	<15
Dimensions	Ø: 4.5cm H: 15cm
Base	Ø: 4.5cm H: 3cm
Beam Angle	36°
Non Dimmable	⊗
Material	Aluminium
Driver On-Off	Included (200mA)
Color	Brushed Brass / **Code S120**
Color	White Matt / **Code S121**
Color	Black Matt / **Code S122**








Power	4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	328Lm
Cri	80
IP	20
UGR	<15
Dimensions	L: 23cm W: 6cm H: 29-37cm
Base	Ø: 6cm H: 12cm
Spot Dimensions	Ø: 4cm L: 23cm
Beam Angle	40°
Non Dimmable	⊗
Material	Metal - Aluminium
Special Feature	Tilt Up Down
Color	Sandy Black-Gold / **Code 22028**








Bulb	1x GU10
Power	40W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 5.2cm H: 12.8cm
Spot	Ø: 5.2cm H: 9.3cm
Base	Ø: 5.2cm H: 3cm
Material	Aluminium
Special Feature	Tilt Up Down
Color	White Sandy / **Code S123**
Color	Black Sandy / **Code S124**






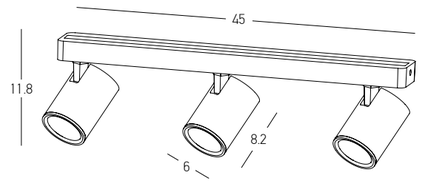

Bulb	3x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
Dimensions	L: 45cm W: 6cm H: 11.8cm
Base	L: 45cm W: 6cm H: 3cm
Material	Metal - Aluminium
Special Feature	Cylinder Ø: 6cm L: 8.2cm
Special Feature	Tilt Up Down
Color	Black Matt-Brushed Brass / **Code S107**
Color	Black Matt / **Code S106**








Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 6cm H: 11.8cm
Base	Ø: 6cm H: 2.8cm
Material	Metal - Aluminium
Special Feature	Cylinder Ø: 6cm L: 8.2cm
Special Feature	Tilt Up Down
Color	Black Matt / **Code S104**





Bulb	1x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
Dimensions	Ø: 5.3cm H: 30cm
Base	Ø: 6.4cm H: 3cm
Material	Aluminium
Special Feature	150cm Cable Adjustable GU10 Lampholder Included
Color	Sandy White / **Code S156**
Color	Sandy Black / **Code S157**
Color	Brushed Gold-Black Ring / **Code S158**



Sandy Black Ring
Material Aluminium
Code RFL B 158






19. ALUMINIUM PROFILES & LED STRIPS

REFERENCE


INSTALLATION


Surface | Pendant | Trimless | Recessed




Dimming
DALI, BLUE TOOTH, PHASE CUT, 1-10,
PUSH BUTTON, DMX
CCT 2700K-6500K, RGB, RGBW
IP Rating 20-67

TOP & SIDE BEND TRIMLESS ALUMINIUM PROFILE

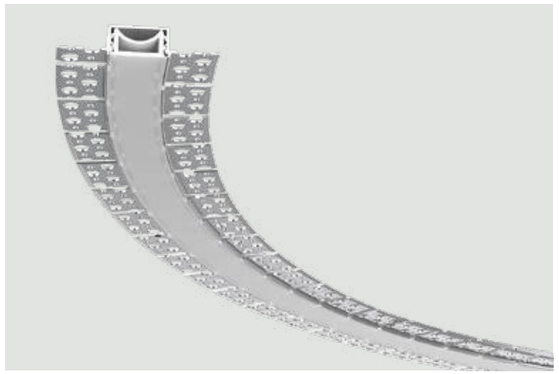


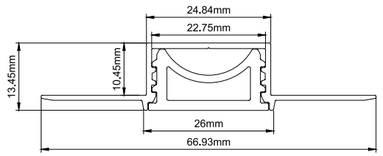

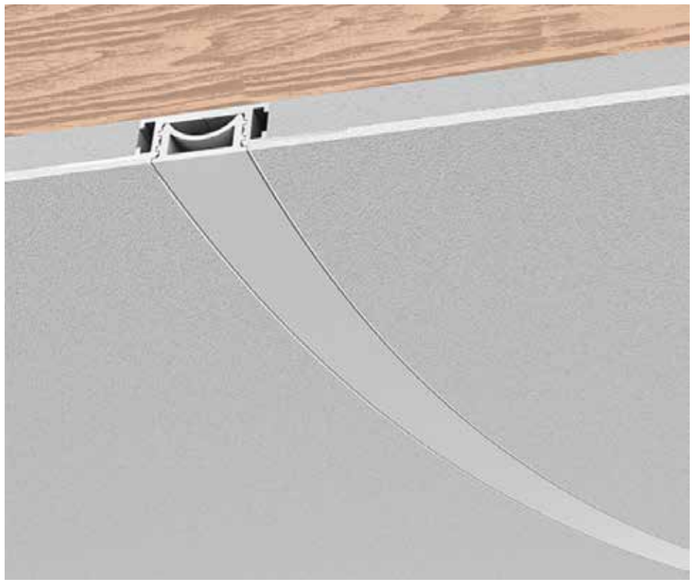


Profile Set


20329	2m Aluminium Profile + 2m Silicone Tube Diffuser
20329-E	2pcs End Caps

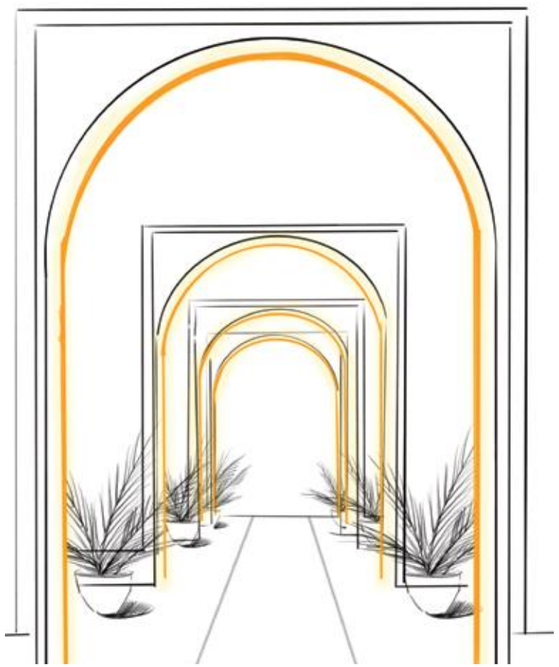

Correct Bending Way

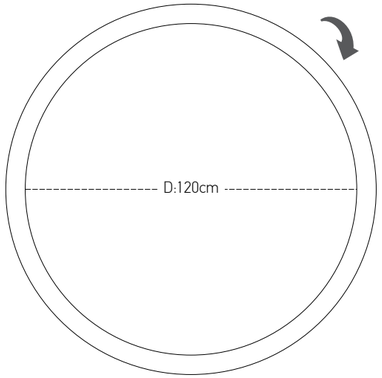


End Caps






*Dimensions Indicated In Millimeters


TRIMLESS ALUMINIUM PROFILE

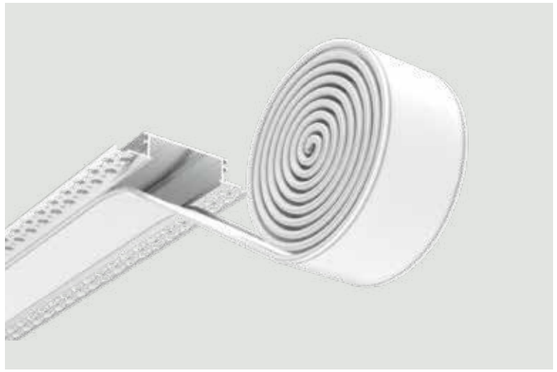

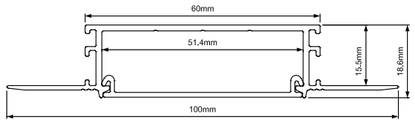

Profile Set	
20328	2m Aluminium Profile + 2m Opal PC Diffuser + 2pcs End Caps
20328-HC	1pc 90° Horizontal Connector
20328-VC	1pc 90° Vertical Connector
20328-OP1	10m Opal Pc Diffuser
20328-OP2	20m Opal Pc Diffuser

Opal PC Diffuser



End Caps



90° Vertical Connector





90° Horizontal Connector





TRIMLESS ALUMINIUM PROFILES






End Caps



Profile Set	
20205	2m Aluminium Profile + 2m Opal PC Diffuser
20205-E	2pcs End Caps with Hole, 2pcs End Caps without Hole







End Caps



Profile Set	
20203	2m Aluminium Profile + 2m Opal PC Diffuser
20203-E	2pcs End Caps with Hole, 2pcs End Caps without Hole





End Caps





Profile Set	
20204	2m Aluminium Profile + 2m Opal PC Diffuser
20204-E	2pcs End Caps with Hole, 2pcs End Caps without Hole


*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

RECESSED CORNER ALUMINIUM PROFILE

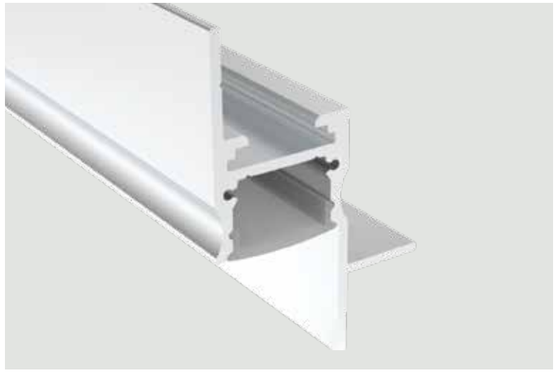


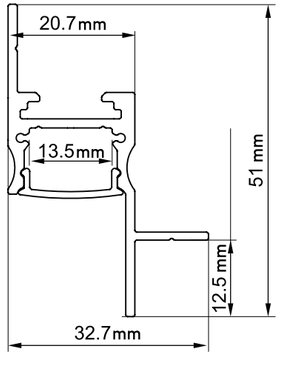




Profile Set

20326	2m Aluminium Profile + 2m Opal PC Diffuser + 2pcs End Caps
20326-CC	1pc 90° Corner Connector
20326-SC	1pc Straight Connector

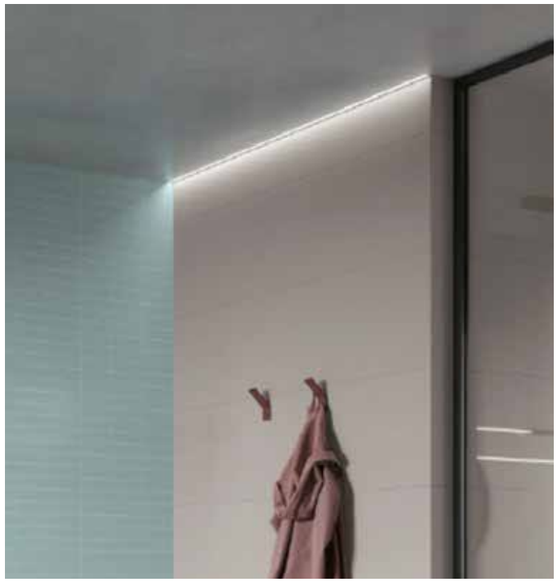

End Caps



90° Corner Connector





Straight Connector



DUAL-LIGHT CORNER ALUMINIUM PROFILE







Profile Set

20327	2m Aluminium Profile + 4m Opal PC Diffuser + 2pcs End Caps
20327-W	2m White Aluminum Profile + 4m Opal PC Diffuser + 2pcs End Caps



End Caps


PC Cover



*Dimensions Indicated In Millimeters

RECESSED ALUMINIUM PROFILE






Metal Clips




End Caps



Profile Set	
20195	2m Aluminium Profile + 2m Opal PC Diffuser
20195-E	2pcs End Caps with Hole, 2pcs End Caps without Hole , 4pcs Metal Clips






Metal Clips




End Caps



Profile Set	
20194	2m Aluminium Profile + 2m Opal PC Diffuser
20194-E	2pcs End Caps with Hole, 2pcs End Caps without Hole , 4pcs Metal Clips







Metal Clips



End Caps



Profile Set	
20206	2m Aluminium Profile + 2m Opal PC Diffuser
20206-E	2pcs End Caps with Hole, 2pcs End Caps without Hole , 4pcs Metal Clips

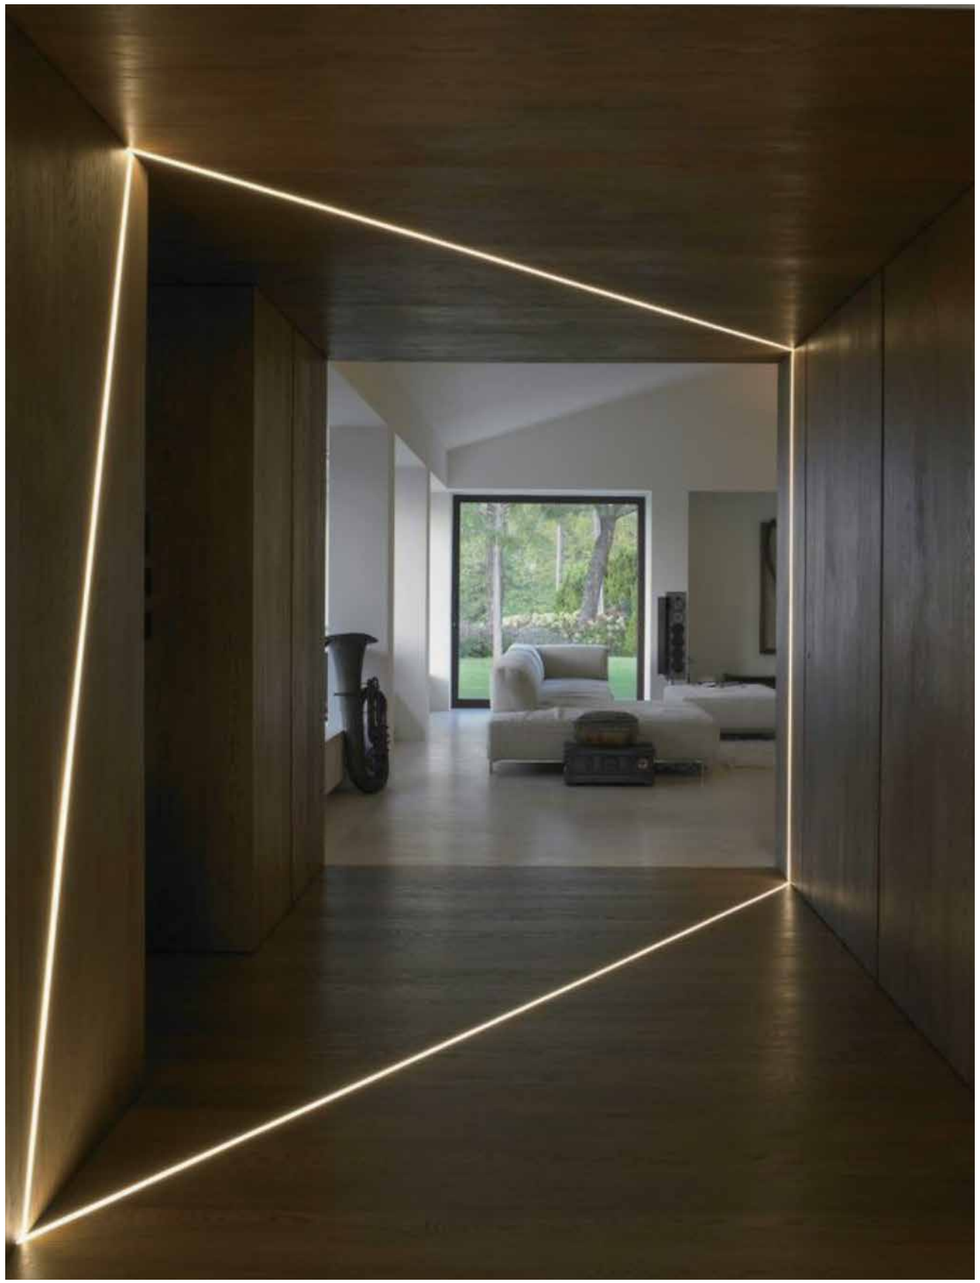


*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

CORNER ALUMINIUM PROFILE








Profile Set


20197	2m Aluminium Profile + 2m Opal PC Diffuser
20197-E	2pcs End Caps with Hole, 2pcs End Caps without Hole , 4pcs Metal Clips



Metal Clips





End Caps



HANGING ALUMINIUM PROFILE







Profile Set

20190	2m Aluminium Profile + 2m Opal PC Diffuser + 2pcs End Caps
20190-H	2pcs Top Hanging Kit
20190-S	2pcs Side Hanging End Caps









End Caps



Side Hanging End Caps



Top Hanging Kit




*Dimensions Indicated In Millimeters

*Dimensions Indicated In Millimeters

SURFACE ALUMINIUM PROFILES






Metal Clips



End Caps



Profile Set	
20193	2m Aluminium Profile + 2m Opal PC Diffuser
20193-E	2pcs End Caps with Hole, 2pcs End Caps without Hole , 4pcs Metal Clips




Plastic Clips




End Caps



Profile Set	
20201	2m Aluminium Profile + 2m Opal PC Diffuser
20201-E	1pcs End Caps with Hole, 1pcs End Caps without Hole, 2pcs Plastic Clips





Metal Clips




End Caps



Profile Set	
20199	2m Aluminum Profile + 2m Opal PC Diffuser
20199-E	2pcs End Cap with Hole , 2pcs End Cap without Hole , 2pcs Metal Clips

SURFACE ALUMINIUM PROFILE






Metal Clips



End Caps



Profile Set	
20198	2m Aluminium Profile + 2m Opal PC Diffuser
20198-E	2pcs End Caps with Hole, 2pcs End Caps without Hole , 4pcs Metal Clips



Profile Set	
20202	2m Aluminium Profile for Heat Dissipation



*Dimensions Indicated In Millimeters



High Efficiency - Up to 100 Lm/w

-5W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS44	20	2700	5W/m	470
LS45	20	3000	5W/m	490
LS46	20	4000	5W/m	500

Lumen Efficiency	100Lm/W
SDCM	<5
Cri	90
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 1.4mm
Unit Cut	50mm
Life Span	30000H


-9.6W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS39	20	2700	9.6W/m	910
LS40	20	3000	9.6W/m	950
LS41	20	4000	9.6W/m	960

Lumen Efficiency	100Lm/W
SDCM	<5
Cri	90
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 1.4mm
Unit Cut	50mm
Life Span	30000H




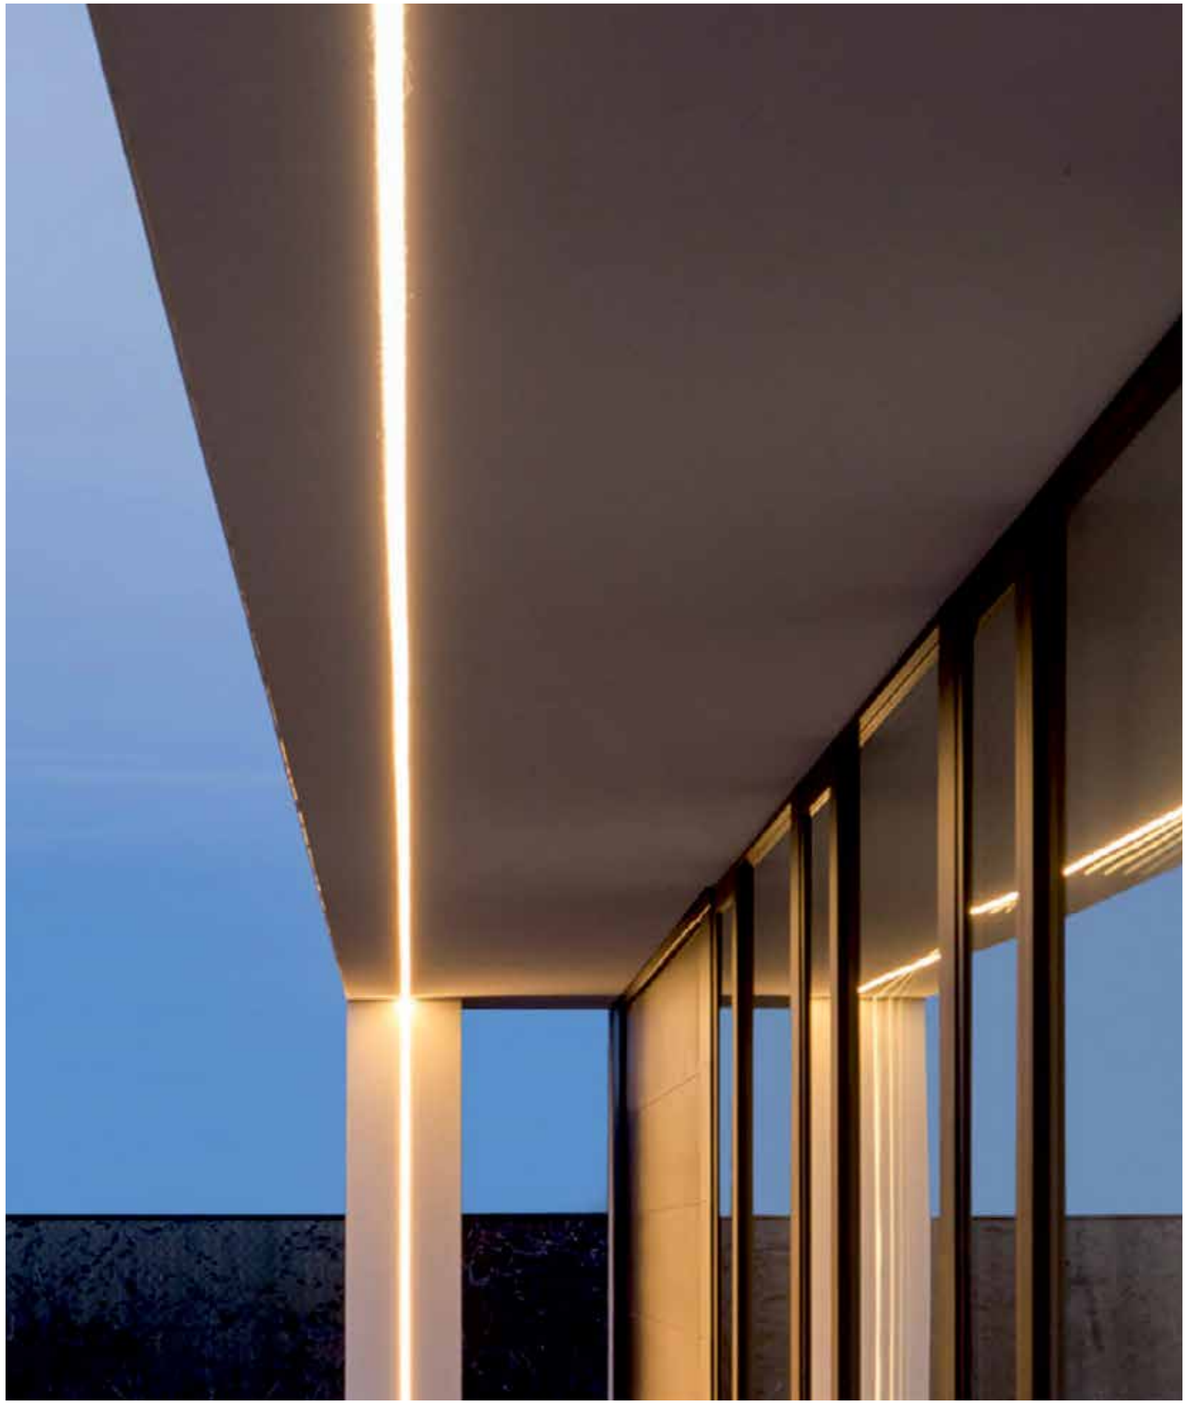



High Efficiency - Up to 100 Lm/W

-5W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS47	65	3000	5W/m	490

Lumen Efficiency	100Lm/W
SDCM	<5
Cri	90
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 4.5mm
Unit Cut	50mm
Life Span	30000H

-9.6W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS42	65	3000	9.6W/m	950
LS43	65	4000	9.6W/m	960

Clips	End Caps	Screws
		

Lumen Efficiency	100Lm/W
SDCM	<5
Cri	90
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 4.5mm
Unit Cut	50mm
Life Span	30000H

*The package includes 10 Clips, 5 End Caps and Screws.



High Lumen - Up to 215 Lm/W

-5W/m 126 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS48	20	2700	5W/m	875
LS49	20	3000	5W/m	955
LS50	20	4000	5W/m	1030

Lumen Efficiency	205Lm/W
SDCM	<3
Cri	80
LEDs/m	126
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 1.4mm
Unit Cut	71.4mm
Life Span	50000H

-7W/m 180 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS51	20	3000	7W/m	1380
LS52	20	4000	7W/m	1505

Lumen Efficiency	215Lm/W
SDCM	<3
Cri	80
LEDs/m	180
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 1.4mm
Unit Cut	50mm
Life Span	50000H







Less Wattage - Better Efficiency

-3.5W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS17	20	2700	3.5W/m	400
LS18	20	3000	3.5W/m	420
LS19	20	4000	3.5W/m	450

Lumen Efficiency	110Lm/W
SDCM	<3
Cri	80
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 1mm
Unit Cut	50mm
Life Span	30000H

-8.6W/m 120 LEDs/m




Code	IP	Kelvin	Watt	Lm/m
LS23	20	2700	8.6W/m	980
LS24	20	3000	8.6W/m	1020
LS25	20	4000	8.6W/m	1050

Lumen Efficiency	110Lm/W
SDCM	<3
Cri	80
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 1mm
Unit Cut	50mm
Life Span	30000H



Less Wattage - Better Efficiency

-3.5W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS20	65	2700	3.5W/m	370
LS21	65	3000	3.5W/m	390
LS22	65	4000	3.5W/m	415


Lumen Efficiency	110Lm/W
SDCM	<3
Cri	80
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 10.3mm H: 4.5mm
Unit Cut	50mm
Life Span	30000H

-8.6W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS26	65	2700	8.6W/m	910
LS27	65	3000	8.6W/m	950
LS28	65	4000	8.6W/m	975


Lumen Efficiency	110Lm/W
SDCM	<3
Cri	80
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 10.3mm H: 4.5mm
Unit Cut	50mm
Life Span	30000H

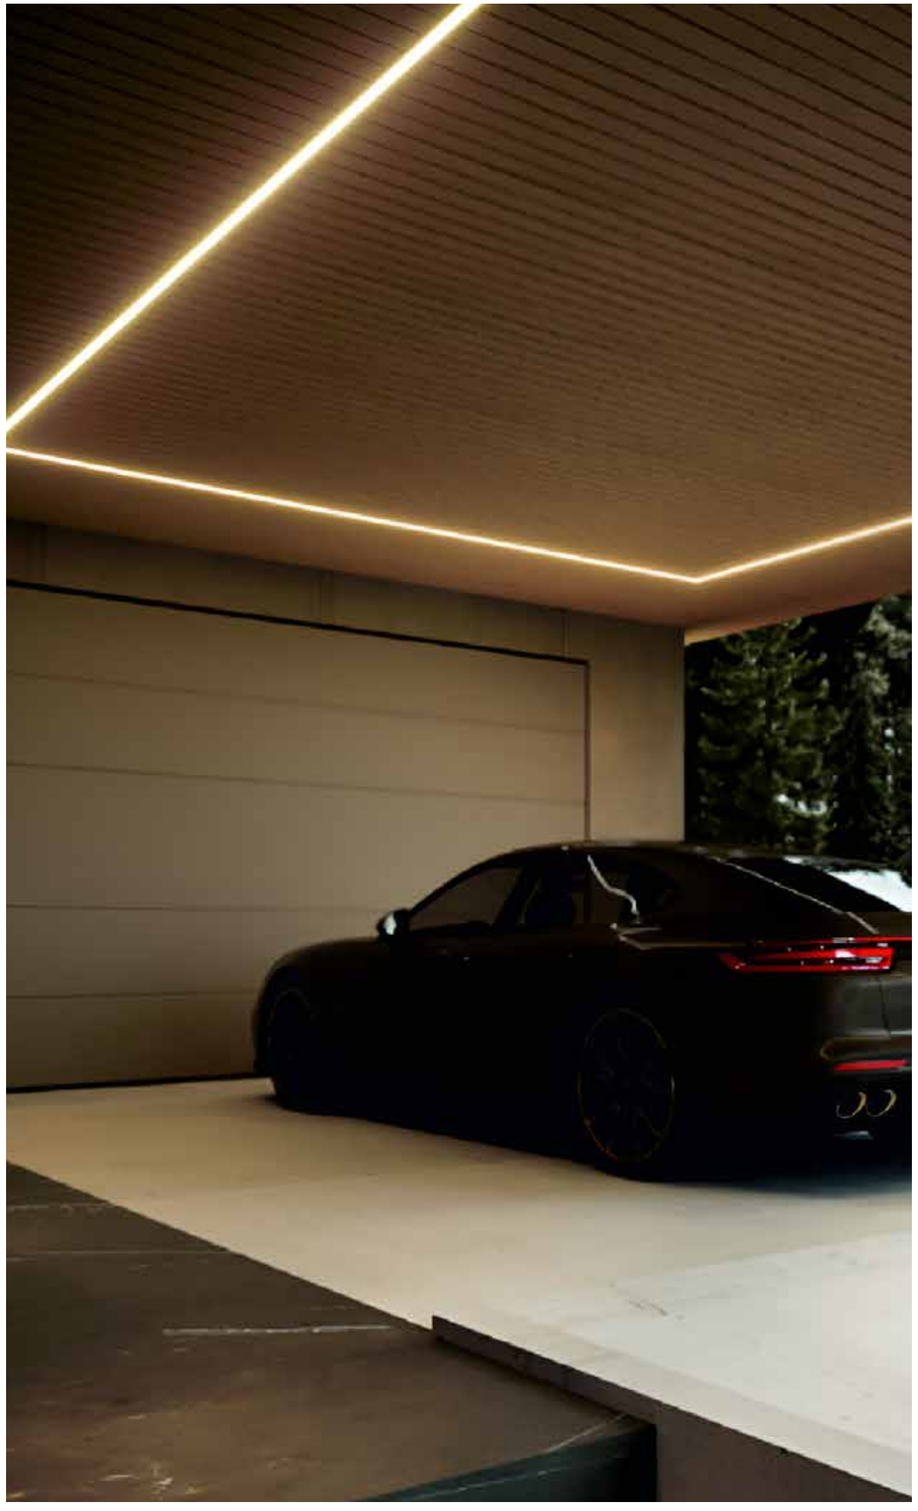



Short Pitch - Up to 105 Lm/W

-9.6W/m 240 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS29	20	3000	9.6W/m	1000
LS33	20	4000	9.6W/m	1020

Lumen Efficiency	105Lm/W
SDCM	<3
Cri	80
LEDs/m	240
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 1mm
Unit Cut	50mm
Life Span	25000H

Dimming Options
1. DALI Dimming : Dali Driver 24V + Switch DALI MCU. Suitable with Drivers to Page : 487 I 488
2. BLUETOOTH Dimming : On-Off Driver 24V+OT Wi DIM (CASAMBI App). Suitable with Drivers to Page : 486 I 488
3. PHASECUT Dimming : Suitable with PhaseCut Drivers to Page : 488
4. 1-10 Dimming : 1-10 Driver 24V. Suitable with 1-10V Drivers to Page : 488
5. PUSH BUTTON Dimming : Dali Driver 24V to Page : 487



High Lumen - Up to 2000 Lm/M

-15.5W/m 140 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS31	20	3000	15.5W/m	2000
LS32	20	4000	15.5W/m	2060

Lumen Efficiency	129Lm/W
SDCM	<3
Cri	80
LEDs/m	140
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 1mm
Unit Cut	50mm
Life Span	50000H

Dimming Options
1. DALI Dimming : Dali Driver 24V + Switch DALI MCU. Suitable with Drivers to Page : 487 I 488
2. BLUETOOTH Dimming : On-Off Driver 24V+OT Wi DIM (CASAMBI App). Suitable with Drivers to Page : 486 I 488
3. PHASECUT Dimming : Suitable with PhaseCut Drivers to Page : 488
4. 1-10 Dimming : 1-10 Driver 24V. Suitable with 1-10V Drivers to Page : 488
5. PUSH BUTTON Dimming : Dali Driver 24V to Page : 487



COB Weldless

-5W/m 320 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS34	20	2700	5W/m	460
LS35	20	3000	5W/m	475

Lumen Efficiency	95Lm/W
SDCM	<5
Cri	90
LEDs/m	320
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 2.2mm
Unit Cut	50mm
Life Span	30000H

-8W/m 320 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS36	20	2700	8W/m	736
LS37	20	3000	8W/m	760


Lumen Efficiency	95Lm/W
SDCM	<5
Cri	90
LEDs/m	320
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 2.2mm
Unit Cut	50mm
Life Span	30000H

COB IP RATING



IP20


Ribbon Series






IP65

Hollow extrusion





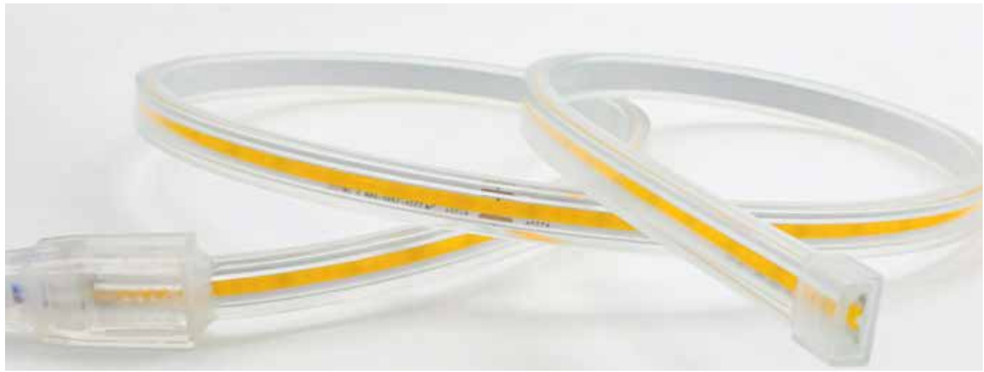

COB Weldless Waterproof

-8W/m 320 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS38	65	3000	8W/m	760

Lumen Efficiency	95Lm/W
SDCM	<5
Cri	90
LEDs/m	320
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 4.5mm
Unit Cut	50mm
Life Span	30000H

Mounting Clips **End Caps** **Screws**



*The package includes 10 Mounting Clips, 5 End Caps and Screws.



High Efficacy COB - Up to 130 Lm/w

-8W/m 320 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS53	20	2700	8W/m	960
LS54	20	3000	8W/m	1040

Lumen Efficiency	130Lm/W
SDCM	<5
Cri	90
LEDs/m	320
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 2.2mm
Unit Cut	50mm
Life Span	50000H




COB LED Strip - Up to 110 Lm/w

-10W/m 480 LEDs/m




Code	IP	Kelvin	Watt	Lm/m
LS02	20	2700	10W/m	950
LS03	20	3000	10W/m	1000
LS04	20	4000	10W/m	1105

Lumen Efficiency	110Lm/W
SDCM	<3
Cri	90
LEDs/m	480
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 2.2mm
Unit Cut	50mm
Life Span	20000H

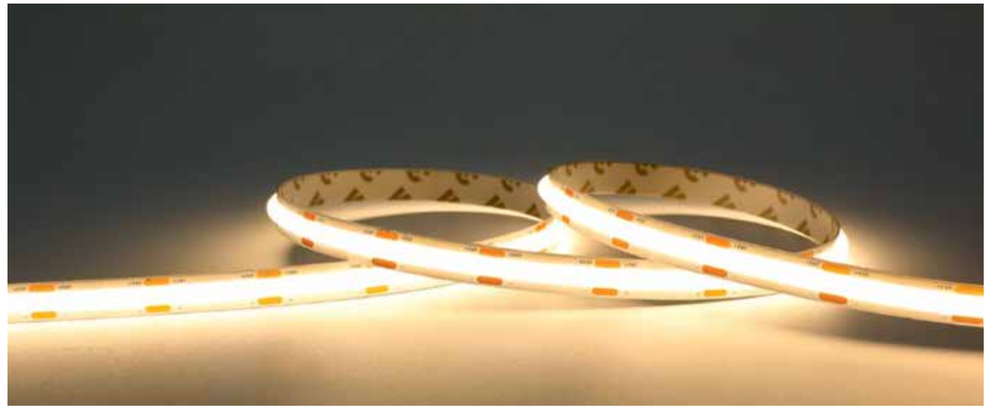

High Efficacy DOB - Up to 147 Lm/W

-15W/m 288 LEDs/m

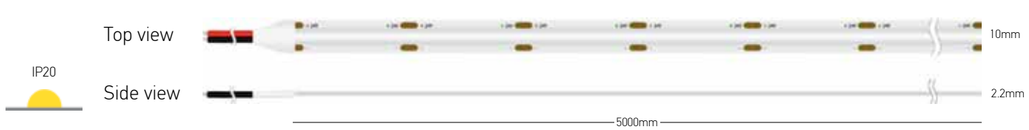


Code	IP	Kelvin	Watt	Lm/m
LS55	20	3000	15W/m	2205

Lumen Efficiency	147Lm/W
SDCM	<5
Cri	90
LEDs/m	288
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 2.2mm
Unit Cut	27.7mm
Life Span	50000H



SMD TECHNOLOGY




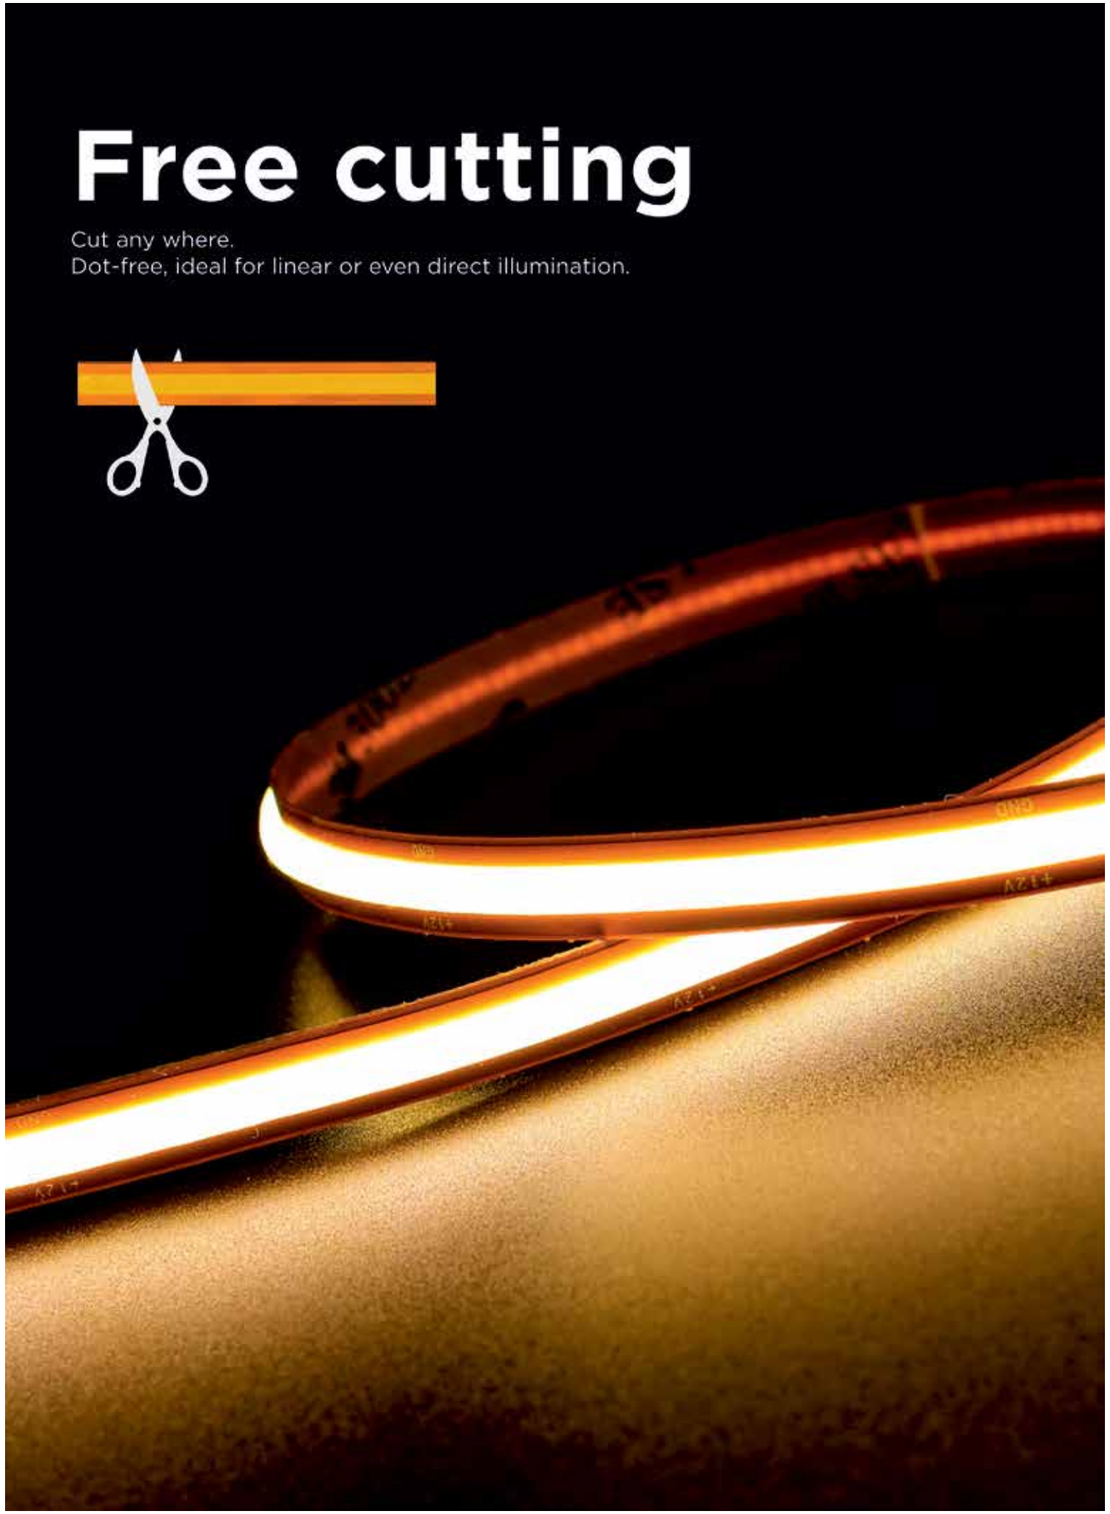



Free Cut COB

-13W/m 528 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS56	20	3000	13W/m	890

Lumen Efficiency	68Lm/W
SDCM	<5
Cri	90
LEDs/m	528
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 2.2mm
Unit Cut	Free Cut
Life Span	30000H



Connectors For IP 20 LED Strips 8mm & 10mm

Connector for LED Strips 8mm & 10mm **- Board to Board**



Code	LED Strip Width
CON08	8mm
CON10	10mm

Corner Connector for LED Strips 8mm & 10mm **- Board to Board**



Code	LED Strip Width
CORN08	8mm
CORN10	10mm

Feeder for LED Strips 8mm & 10mm **- Wire to Board**




Code	LED Strip Width	Cable Length
FED08	8mm	140mm
FED10	10mm	140mm

Flex Connecor for LED Strips 8mm & 10mm **- Board-Wire-Board**




Code	LED Strip Width	Cable Length
FC08	8mm	140mm
FC10	10mm	140mm

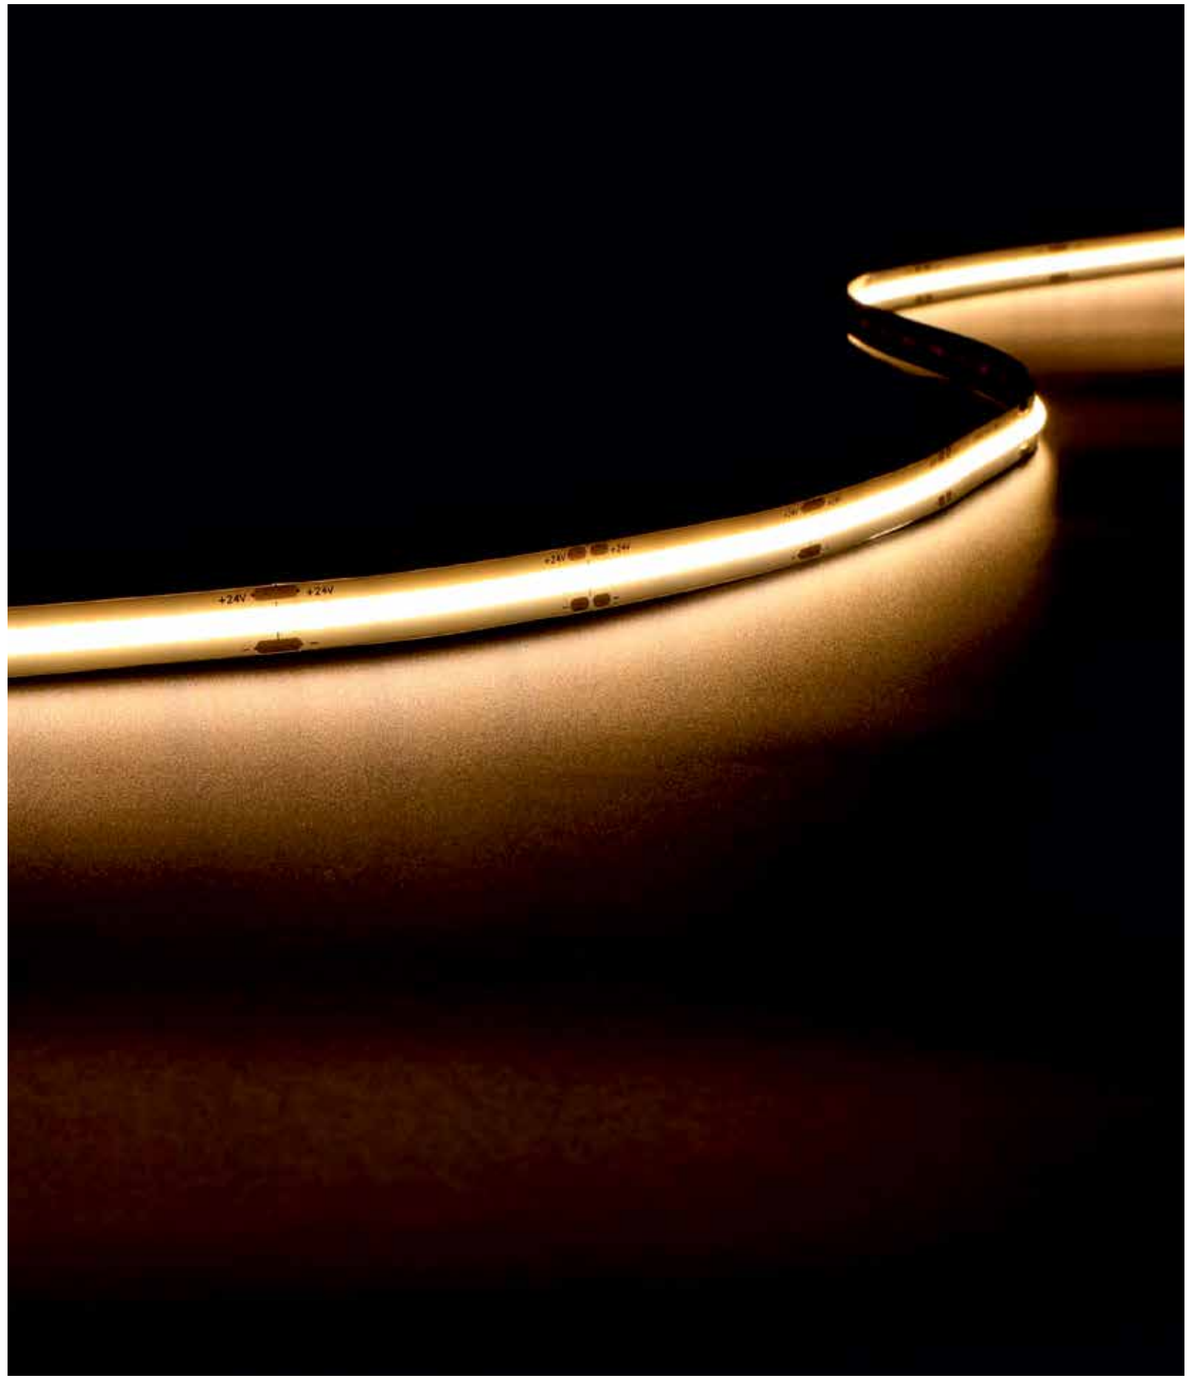



Tunable White Strip - (2700K - 6500K)


-12W/m 120 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS06	20	2700	12W/m	816
LS06	20	6500	12W/m	1050
LS06	20	2700-6500	24W/m	1866

Lumen Efficiency	78Lm/W
SDCM	<3
Cri	90
LEDs/m	120
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 1.1mm
Unit Cut	100mm
Life Span	20000H

Dimming Options
1. DALI Dimming : DALI Driver 24V 4 CHANNEL + Switch DALI MCU. Suitable with Drivers to Page : 487 I 488
2. BLUETOOTH Dimming : On-Off Driver 24V+OT Wi DIM 5 CHANNEL (CASAMBI App). Suitable with Drivers to Page : 486 I 488

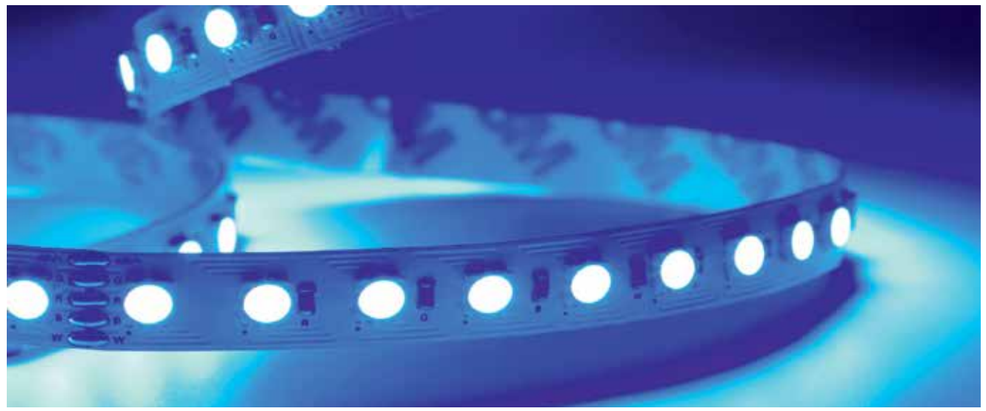

RGBW LED Strip - Up to 52 Lm/w

-16W/m 60 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS12	20	RGB+3000	16W/m	832

Lumen Efficiency	52Lm/W
SDCM	<3
Cri	80
LEDs/m	60
Voltage	DC24V
Dimensions	L: 5000mm W: 12mm H: 2.2mm
Unit Cut	100mm
Life Span	54000H

Dimming Options
1. DALI Dimming : DALI Driver 24V 4 CHANNEL + Switch DALI MCU. Suitable with Drivers to Page : 487 I 488
2. BLUETOOTH Dimming : On-Off Driver 24V+OT Wi DIM 5 CHANNEL (CASAMBI App). Suitable with Drivers to Page : 486 I 488

One size
Two options


Top Bending

or

Side Bending

NEON IP RATING


IP67
NEON Series







*Dimensions Indicated In Millimeters

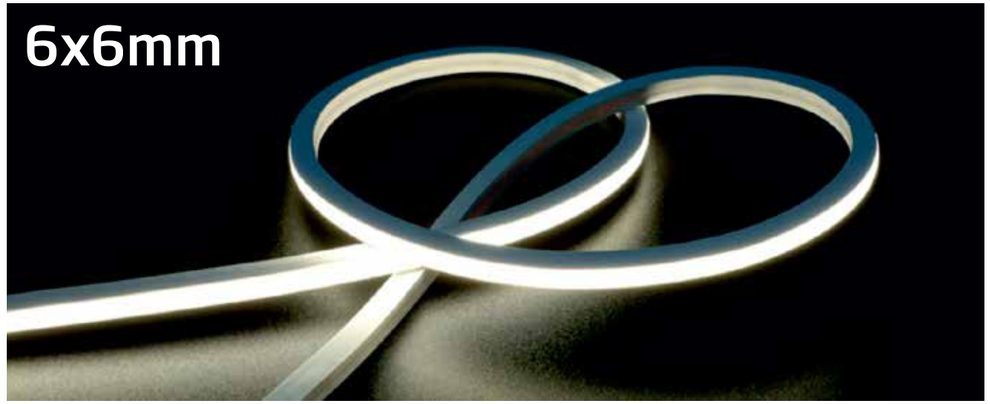


Top bending

IP67 CE 120° UL ZHAGA 5 RoHS LM80 ErP ONE BIN ONLY

6x6mm White NEON Strip - Top Bending

-8W/m 238 LEDs/m

Correct Bending Way



IP67



Top view



Install

Bottom view



Code	IP	Kelvin	Watt	Lm/m
LS57	67	2700	8W/m	480
LS58	67	3000	8W/m	490

Lumen Efficiency	60Lm/W
SDCM	<5
Cri	90
LEDs/m	238
Voltage	DC24V
Dimensions	L: 5000mm W: 6mm H: 6mm
Unit Cut	29.4mm
Life Span	30000H

Mounting Clips	Caps	Screws



*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.

Accessories For LS57 - LS58 - LS59 - LS60




Aluminium Mounting Clips (10pcs)
Dimensions L: 2cm W: 8mm H:8mm
Code CL0606



End Caps (6 pcs)
Straight Feeder Caps (2pcs)
Side Feeder Caps (2pcs)
Code ECLS0606



Aluminium Profile
Dimensions L: 100cm W: 8mm H:8mm
Code ALM0606

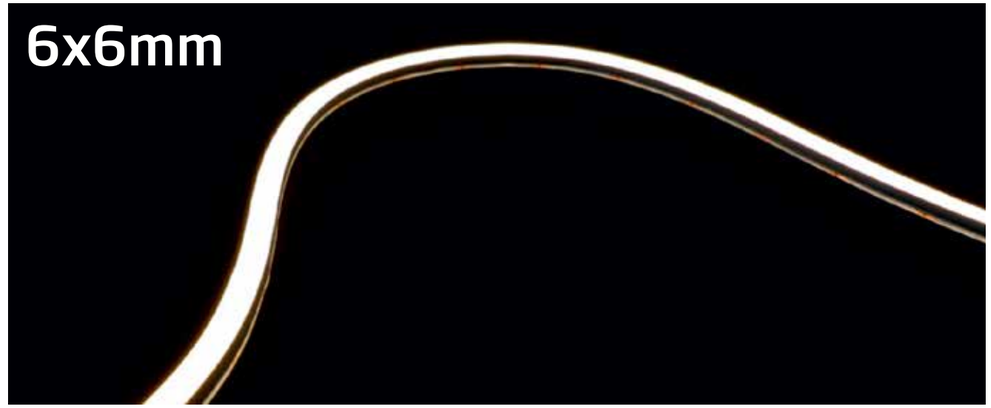


Side bending

IP67 CE 120° UL ZHAGA 3 RoHS LM80 ErP ONE BIN ONLY

6x6mm White NEON Strip - Side Bending

-8W/m 238 LEDs/m

Correct Bending Way



IP67



Top view



Install

Side view



Code	IP	Kelvin	Watt	Lm/m
LS59	67	2700	8W/m	440
LS60	67	3000	8W/m	455

Lumen Efficiency	57Lm/W
SDCM	<5
Cri	90
LEDs/m	238
Voltage	DC24V
Dimensions	L: 5000mm W: 6mm H: 6mm
Unit Cut	29.4mm
Life Span	30000H

Mounting Clips	Caps	Screws



*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.




Top bending

IP67 CE 120° UL 5 RoHS LM80 ErP ONE BIN ONLY

10x10mm White NEON Strip - Top Bending

Correct Bending Way



-14.4W/m 182 LEDs/m

IP67 Top view



Install Bottom view



Code	IP	Kelvin	Watt	Lm/m
LS66	67	2700	14.4W/m	1000
LS67	67	3000	14.4W/m	1030

Lumen Efficiency	71Lm/W
SDCM	<5
Cri	90
LEDs/m	182
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 10mm
Unit Cut	38.5mm
Life Span	30000H

Mounting Clips	Caps	Screws



*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.


Accessories For LS66 - LS67 - LS68 - LS69



End Caps (6 pcs)
Straight Feeder Caps (4pcs)
Side Feeder Caps (2pcs)
Code ECLS66-69



Aluminium Mounting Clips (10pcs)
Dimensions L: 2cm W: 13mm H:8mm
Code CLS66-69

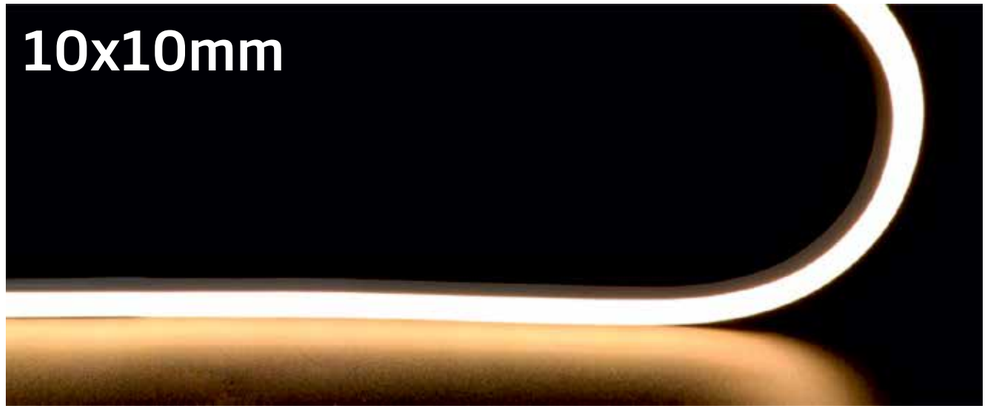


Side bending

IP67 CE 120° UL 5 RoHS LM80 ErP ONE BIN ONLY

10x10mm White NEON Strip - Side Bending

Correct Bending Way




-9.6W/m 144 LEDs/m

IP67 Top view



Install Side view



Code	IP	Kelvin	Watt	Lm/m
LS68	67	2700	9.6W/m	690
LS69	67	3000	9.6W/m	720

Lumen Efficiency	75Lm/W
SDCM	<5
Cri	90
LEDs/m	144
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 10mm
Unit Cut	41.6mm
Life Span	30000H

Mounting Clips	Caps	Screws



*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.

Accessories For LS66 - LS67 - LS68 - LS69



Aluminium Profile
Dimensions L: 200cm W: 13mm H:8mm
Code ALM1010-2M



Bendable INOX Profile
Dimensions L: 100cm W: 11mm H:10mm
Code FPLS66-69




Top bending

IP67 CE 120° UL ZINNABLE 5 RoHS LM80 ErP ONE BIN ONLY

16x16mm White NEON Strip - Top Bending

-16W/m 140 LEDs/m

Correct Bending Way



IP67




Top view




Install

Bottom view



Code	IP	Kelvin	Watt	Lm/m
LS70	67	2700	16W/m	920
LS71	67	3000	16W/m	940
LS72	67	4000	16W/m	960

Lumen Efficiency	60Lm/W
SDCM	<5
Cri	90
LEDs/m	140
Voltage	DC24V
Dimensions	L: 5000mm W: 16mm H: 16mm
Unit Cut	50mm
Life Span	30000H

Mounting Clips	Caps	Screws
		

*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.

Accessories For LS70- LS71 - LS72 - LS73 - LS74 - LS75



End Caps (6 pcs)
Straight Feeder Caps (4pcs)
Side Feeder Caps (2pcs)
Code ECLS1616



Aluminium Mounting Clips (10pcs)
Dimensions L: 2.8cm W: 17mm H:11mm
Code CL1616




Side bending

IP67 CE 120° UL ZINNABLE 5 RoHS LM80 ErP ONE BIN ONLY

16x16mm White NEON Strip - Side Bending

-15W/m 140 LEDs/m

Correct Bending Way



IP67




Top view




Install

Side view



Code	IP	Kelvin	Watt	Lm/m
LS73	67	2700	15W/m	840
LS74	67	3000	15W/m	865

Lumen Efficiency	57Lm/W
SDCM	<5
Cri	90
LEDs/m	140
Voltage	DC24V
Dimensions	L: 5000mm W: 16mm H: 16mm
Unit Cut	50mm
Life Span	30000H

Mounting Clips	Caps	Screws
		

*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.


Accessories For LS70- LS71 - LS72 - LS73 - LS74 - LS75



Aluminium Profile
Dimensions L: 200cm W: 17mm H:11mm
Code ALM1616-2M



Bendable INOX Profile
Dimensions L: 100cm W: 17mm H:16mm
Code FPL1616

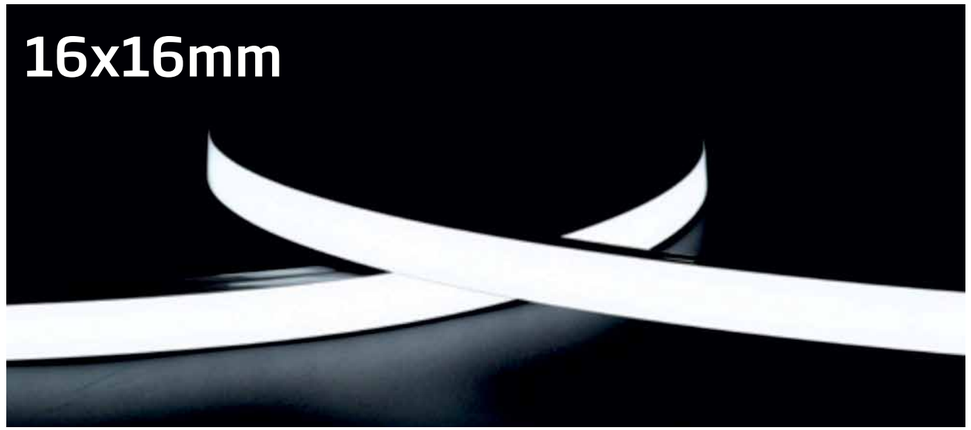

Top bending


IP67 CE 120° UL RoHS LM80 ErP ONE BIN ONLY

16x16mm RGBW NEON Strip - Top Bending

-16W/m 96 LEDs/m

RGBW

Correct Bending Way





Code	IP	Kelvin	Watt	Lm/m
LS75	67	RGB+3000	15W/m	389


Lumen Efficiency	25Lm/W
SDCM	<5
Cri	80
LEDs/m	96
Voltage	DC24V
Dimensions	L: 5000mm W: 16mm H: 16mm
Unit Cut	67mm
Life Span	30000H
Special Feature	UV resistant

Mounting Clips	Caps	Screws
		


*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.

Dimming Options

1. DALI Dimming : DALI Driver 24V 4 CHANNEL + Switch DALI MCU. Suitable with Drivers to Page : 487 I 488
2. BLUETOOTH Dimming : On-Off Driver 24V+OT Wi DIM 5 CHANNEL (CASAMBI App). Suitable with Drivers to Page : 486 I 488

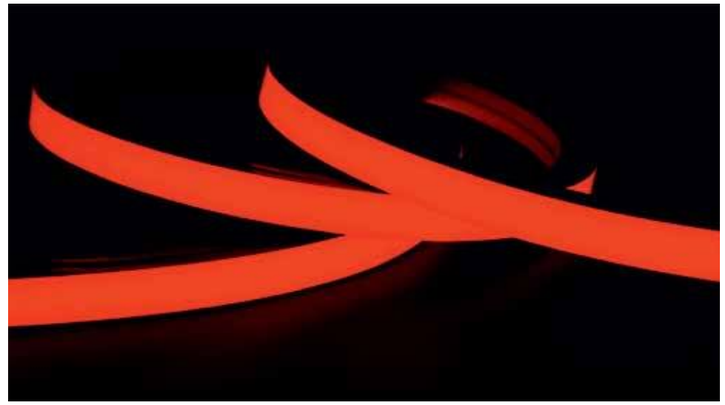


R:58Lm/m

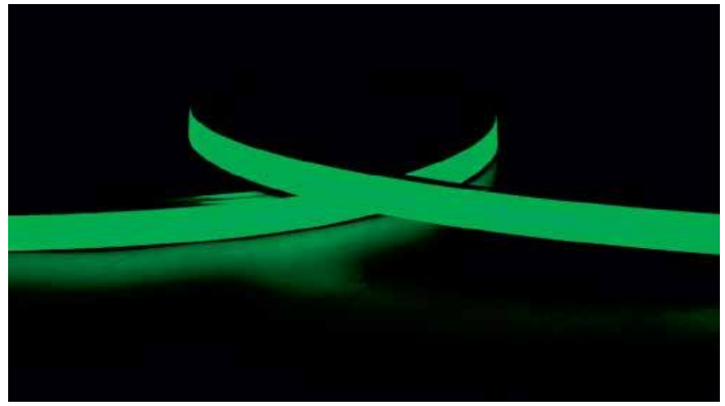

G:150Lm/m



B:37Lm/m

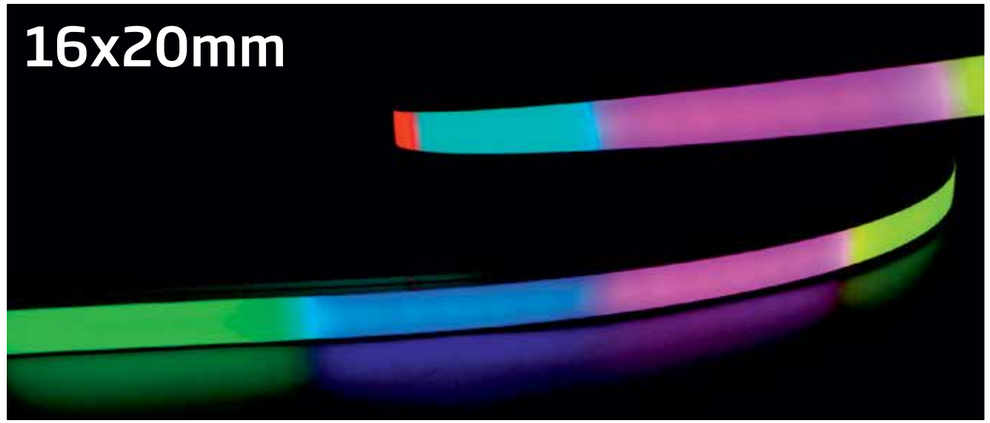

Top bending

IP67 CE 120° UL DIMMABLE 5 RoHS LM80


16x20mm Digital Colorful NEON


DMX Controlled RGBW

-15W/m 70 LEDs/m



Digital DMX



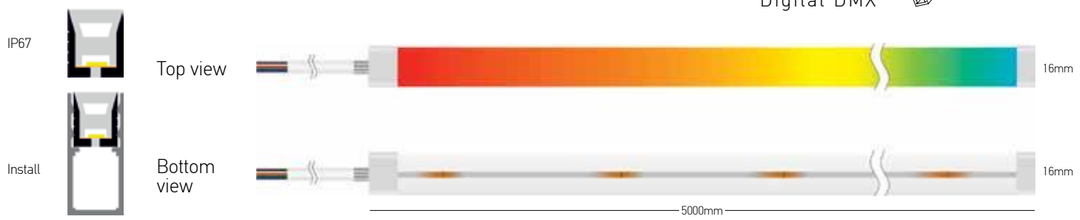



Code	IP	Kelvin	Watt	Lm/m
LS76	67	RGB+3000	15W/m	391

Lumen Efficiency	26Lm/W
SDCM	<5
Cri	90
LEDs/m	70
Voltage	DC24V
Dimensions	L: 5000mm W: 16mm H: 20mm
Unit Cut	100mm
Life Span	30000H
Special Feature	UV resistant
Built-in	IC/SM18522PS DMX512
PPM	10pix/m

Mounting Clips	Caps	Screws
		

*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.

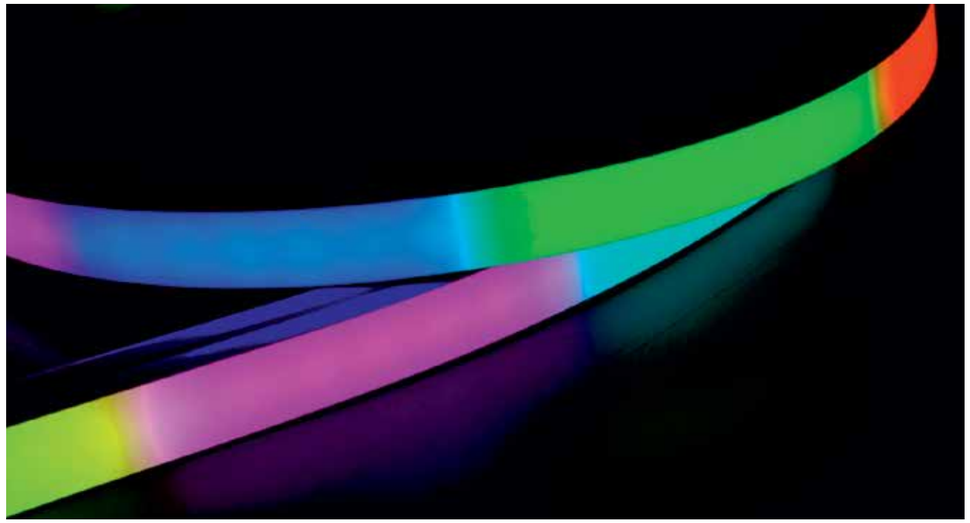

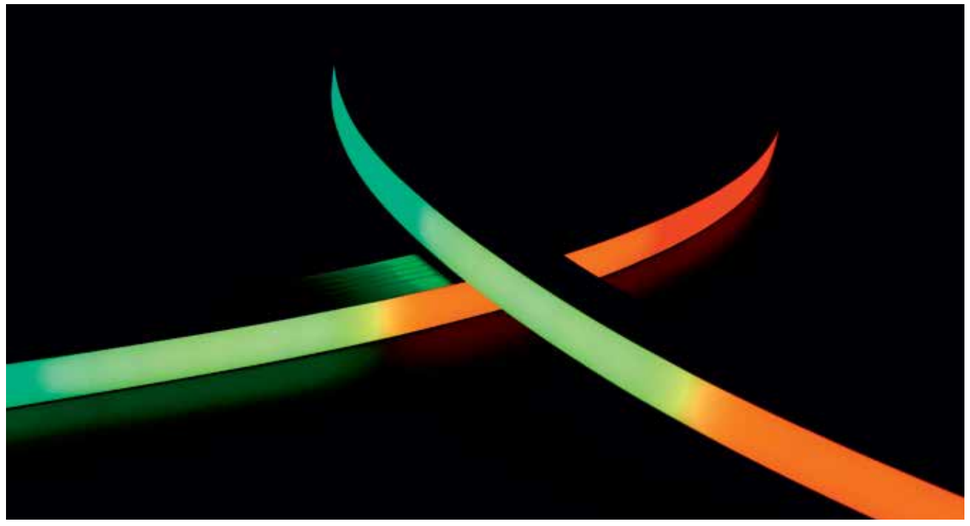


R:50Lm/m **G:130Lm/m** **B:36Lm/m**

Accessories For LS76



Aluminium Mounting Clips (10pcs)
Dimensions L: 2.8cm W: 17mm H:11mm
Code CLS76



End Caps (4 pcs)
Straight Feeder Caps (2pcs)
Vertical Feeder Caps (2pcs)
Horizontal Feeder Caps (2pcs)
Code ECLS76



Aluminium Profile
Dimensions L: 100cm W: 17mm H:45mm
Code ALMLS76




Top bending

IP67 | CE | 120° | UL | 5 years warranty | RoHS | LM80 | ErP | ONE BIN ONLY


10x05mm COB NEON Strip - Top Bending

-10W/m 480 LEDs/m

Correct Bending Way



IP67 Top view

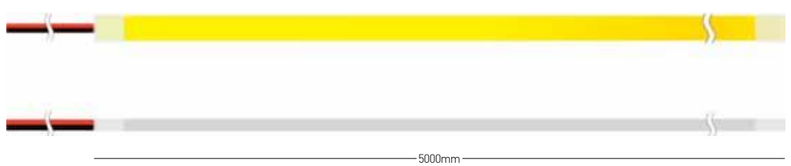

Install Side view

Code	IP	Kelvin	Watt	Lm/m
LS63	67	2700	10W/m	760
LS64	67	3000	10W/m	780
LS65	67	4000	10W/m	810

Lumen Efficiency	81Lm/W
SDCM	<5
Cri	90
LEDs/m	480
Voltage	DC24V
Dimensions	L: 5000mm W: 10mm H: 5mm
Unit Cut	50mm
Life Span	30000H
Special Feature	UV resistant

Mounting Clips	Caps	Screws
		

*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 6 End Caps and Screws.

Accessories For LS63 - LS64 - LS65




Aluminium Mounting Clips (10pcs)
Code CL1010




End Caps (6 pcs)
Straight Feeder Caps (4pcs)
Code ECLS1010



Aluminium Profile
Dimensions L: 100cm W: 12mm H:5mm
Code ALM1010

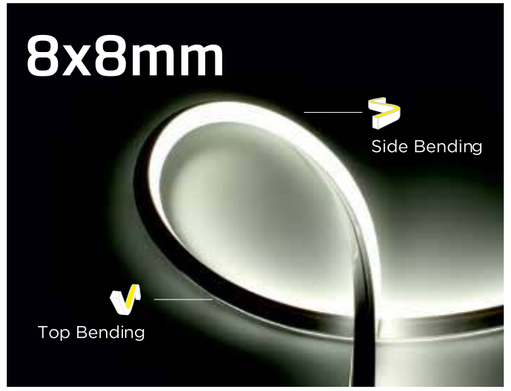

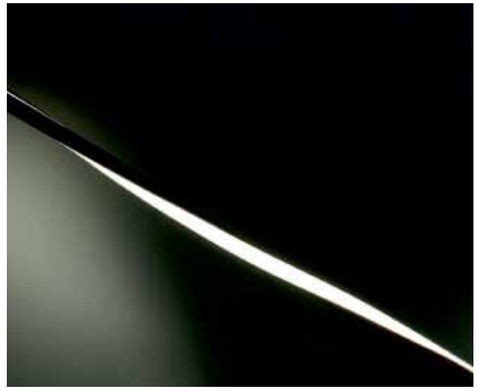

3D bending


IP67 | CE | 120° | UL | 5 years warranty | RoHS | LM80 | ErP | ONE BIN ONLY

8x8mm Mini Cut NEON Strip - 3D Bending

Top & Side Bending intergrated

-6W/m 238 LEDs/m

Correct Bending Way



IP67 Top view



Install Side view

Code	IP	Kelvin	Watt	Lm/m
LS61	67	2700	6W/m	288
LS62	67	3000	6W/m	300

Lumen Efficiency	50Lm/W
SDCM	<5
Cri	90
LEDs/m	238
Voltage	DC24V
Dimensions	L: 5000mm W: 8mm H: 8mm
Unit Cut	29.4mm
Life Span	30000H

Mounting Clips	Caps	Screws
		

*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.

Accessories For LS61 - LS62



Aluminium Mounting Clips (10pcs)
Dimensions L: 2cm W: 9mm H:9mm
Code CL0808




End Caps (6 pcs)
Straight Feeder Caps (4pcs)
Code ECLS0808



Aluminium Profile
Dimensions L: 200cm W: 9mm H:9mm
Code ALS0808



Bendable INOX Profile
Dimensions L: 100cm W: 12mm H:10mm
Code FPL0808

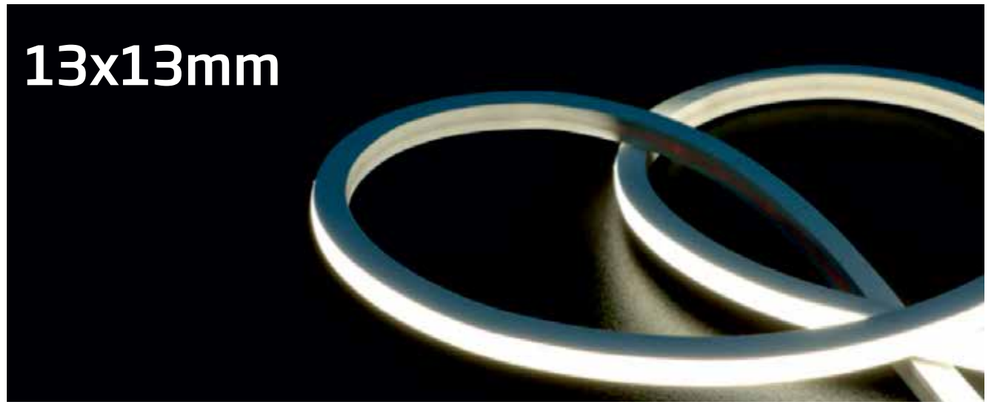


Top bending

IP67 CE 120° UL 5 years warranty RoHS

13x13mm White NEON Strip - Top Bending

-9W/m 112 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS14	67	3000	9W/m	468
LS15	67	4000	9W/m	495

Lumen Efficiency	55Lm/W
SDCM	<3
Cri	90
LEDs/m	112
Voltage	DC24V
Dimensions	L: 5050mm W: 13mm H: 13mm
Unit Cut	55.5mm
Life Span	20000H
Special Feature	UV resistant Chemical resistant

Accessories For LS14 - LS15



End Cap (1pc)
Code ECLS14-15



Straight Connector
Feeder Cap (1pc)
Code SCLS14-15




Feeder Cap (1pc)
Code FCLS14-15



Aluminium Profile
Dimensions L: 100cm W: 14mm H:14mm
Code ALMLS14-15



Bendable INOX Profile
Dimensions L: 100cm W: 15mm H:16mm
Code FPLS14-15

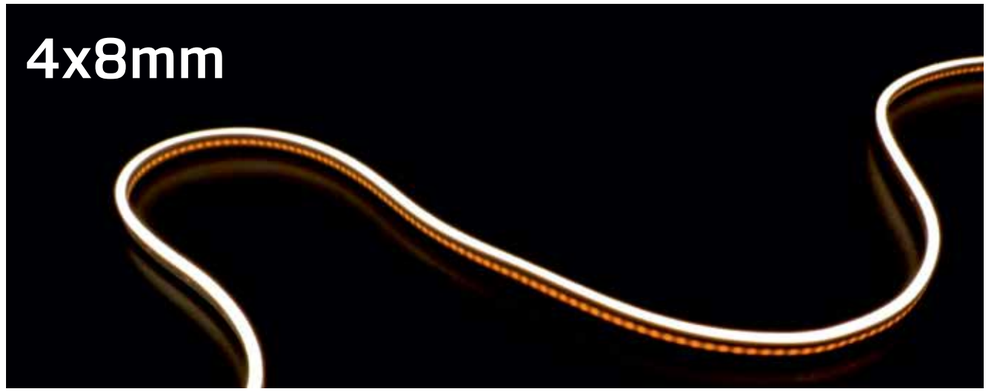


Side bending

IP67 CE 120° UL 5 years warranty RoHS

4x8mm White NEON Strip - Side Bending

-6W/m 480 LEDs/m



Code	IP	Kelvin	Watt	Lm/m
LS08	67	2700	6W/m	240
LS09	67	3000	6W/m	256
LS16	67	4000	6W/m	270

Lumen Efficiency	42Lm/W
SDCM	<3
Cri	90
LEDs/m	480
Voltage	DC24V
Dimensions	L: 5000mm W: 4mm H: 8mm
Unit Cut	25mm
Life Span	20000H
Special Feature	UV resistant Chemical resistant


Accessories For LS08 - LS09 - LS16



End Cap
Code ECLS08-09



Aluminium Profile
Dimensions L: 100cm W: 5mm H:6mm
Code ALM08-09

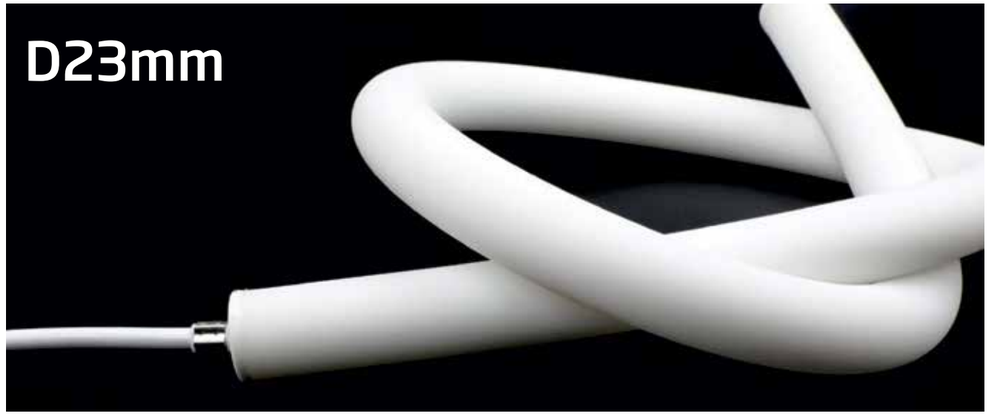

Free Bending


IP65 CE UL DIMMABLE 5 RoHS LM80 ErP ONE BIN ONLY

D23mm Shapeable Bendable 360° Lighting

Free Bending Lighting Tube


-14W/m 280 LEDs/m

Correct Bending Way



IP67

Top & Side view



Code	IP	Kelvin	Watt	Lm/m
LS77	67	3000	14W/m	990

Lumen Efficiency	70Lm/W
SDCM	<5
Cri	90
LEDs/m	280
Voltage	DC24V
Dimensions	L: 5000mm
	Ø: 23mm
Unit Cut	5mm
Life Span	30000H
Special Feature	UV resistant
	Salt resistant
	Flame Retardant

Mounting Clips	Caps	Screws
		

*The package includes 5 Mounting Clips , 2 Input Caps, 2 End Caps and Screws.


Accessories For LS77




End Caps (6 pcs)
Input Caps (4pcs)
Code ECLS77



Plastic Mounting Clips (10pcs)
Code CLS77

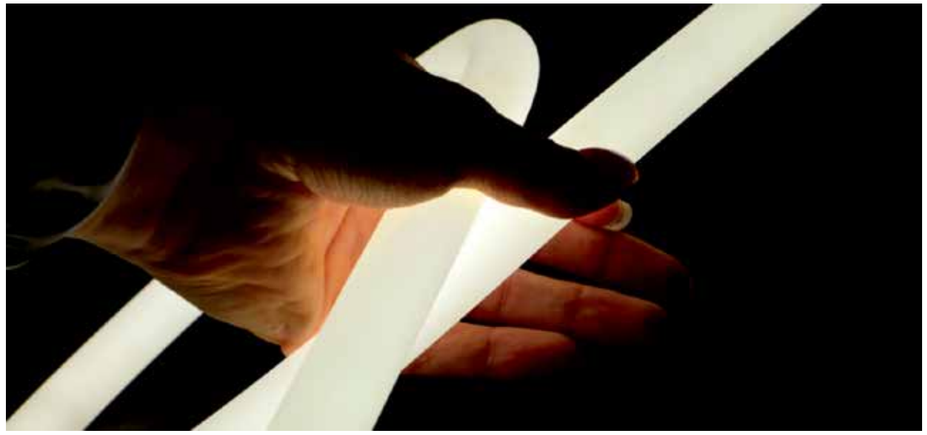



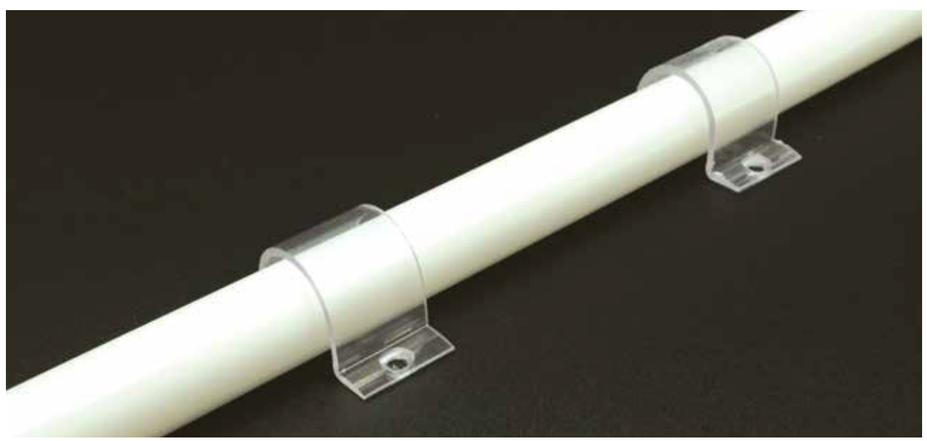


*Dimensions Indicated In Millimeters


Bend it. Mount it. Perfect it.

Free-bending LED lighting tube offers ultimate flexibility,
allowing you to shape it freely and install it as either a pendant fixture or a ceiling-mounted (surface-mounted) solution.
Using a transparent plastic tube for support, combined with either a vertical or horizontal suspension kit with steel wire,
and an aluminium mounting base, the system adapts seamlessly to any design requirement. From linear drops to dynamic curves,
it enables creative, professional-grade lighting installations with ease and precision.










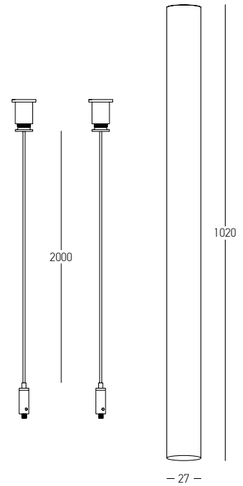

Horizontal Suspension Kit
2m Steel Wire (2pcs)
102cm Plastic Tube D:27mm
Code LKLS77

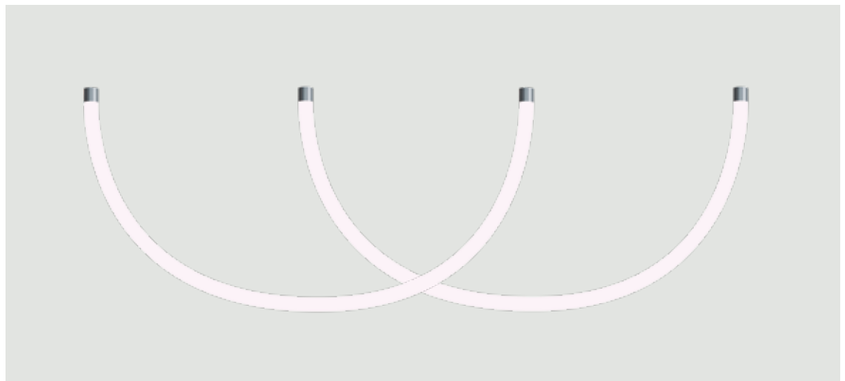







Suspension Kit for Curved Hanging
Aluminium Mounting Base (2pcs)
Code CKLS77

IP67 360° Lighting tube Installations

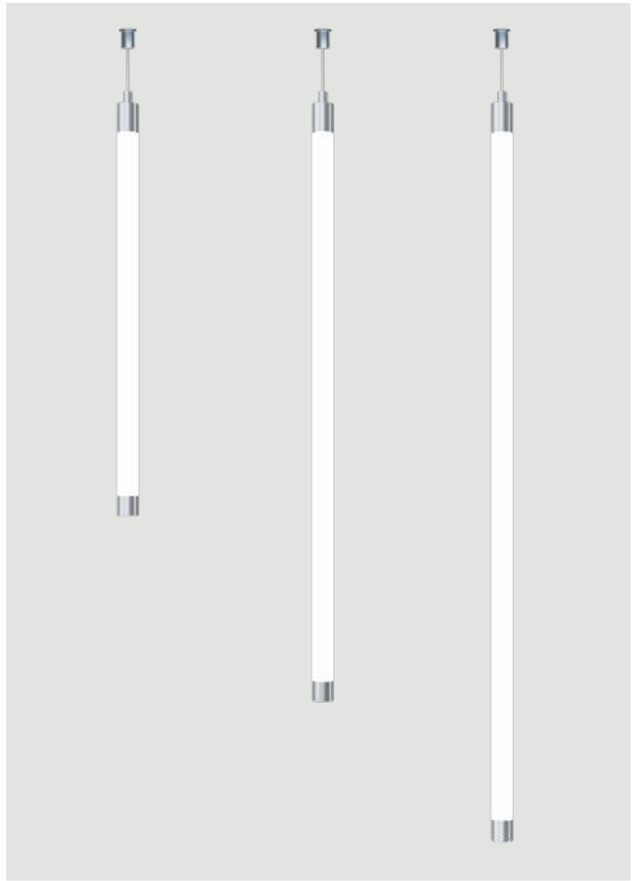




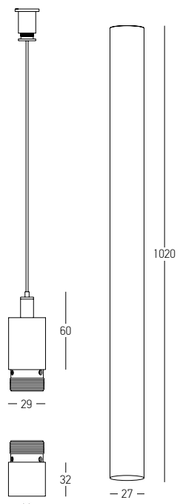


Vertical Suspension Kit
Aluminium Mounting Base with 2m Steel Wire
102cm Plastic Tube D:27mm
Code PKLS77

*Dimensions Indicated In Millimeters

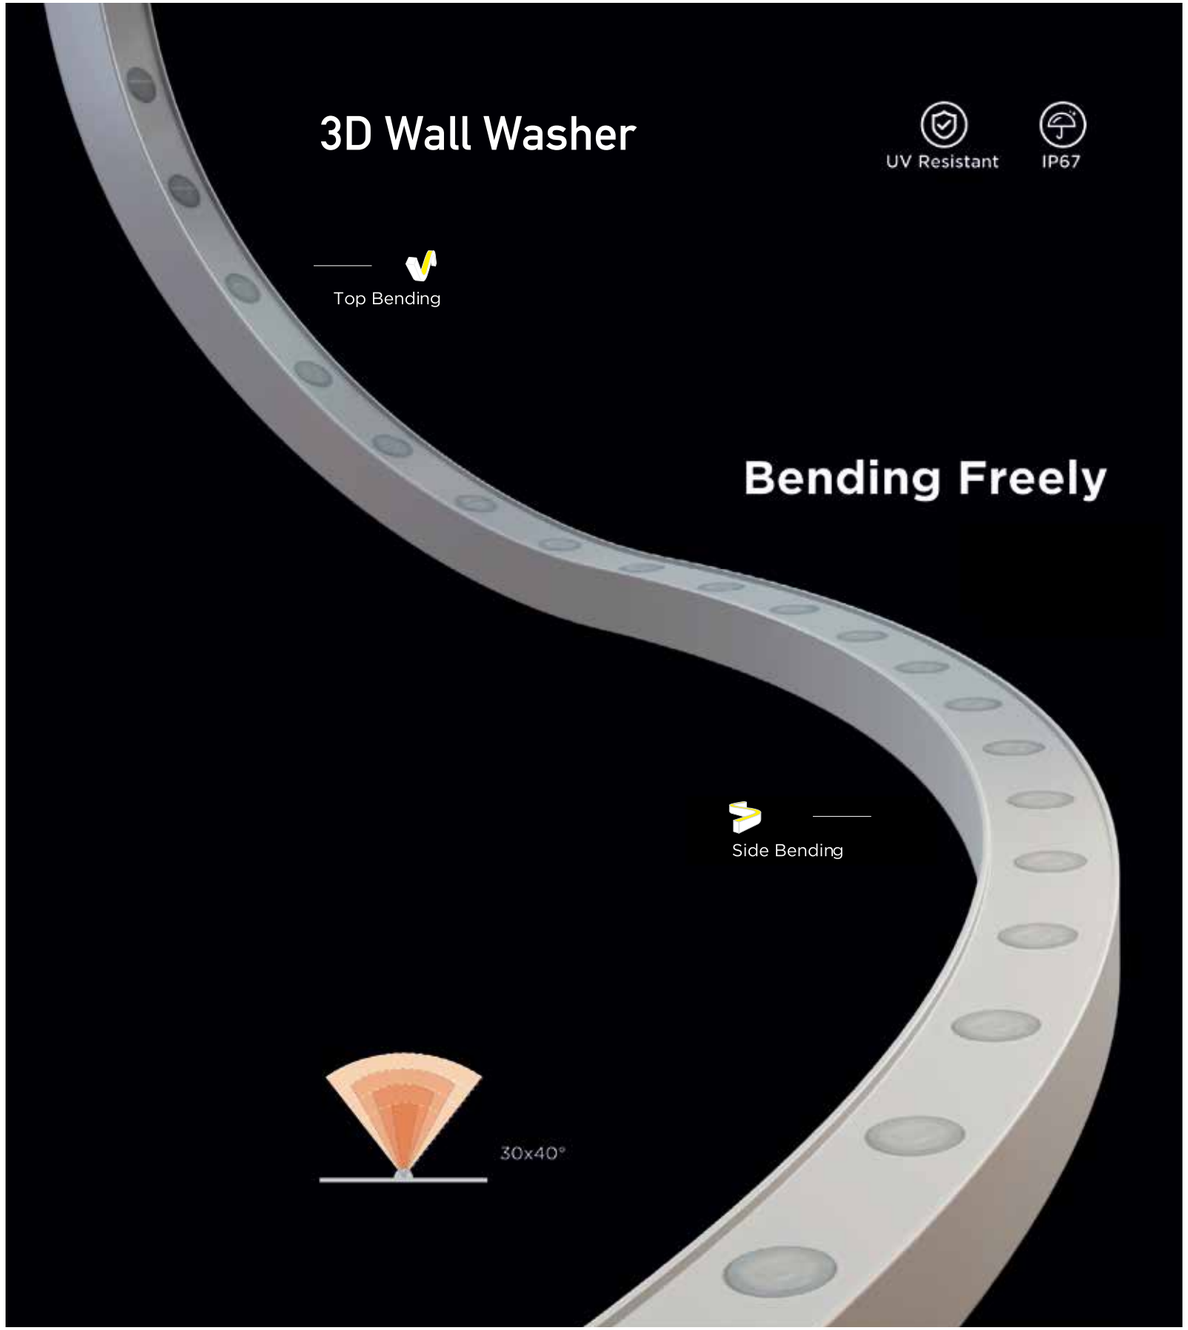
3D Wall Washer
UV Resistant
IP67
Top Bending
Bending Freely
Side Bending
30x40°



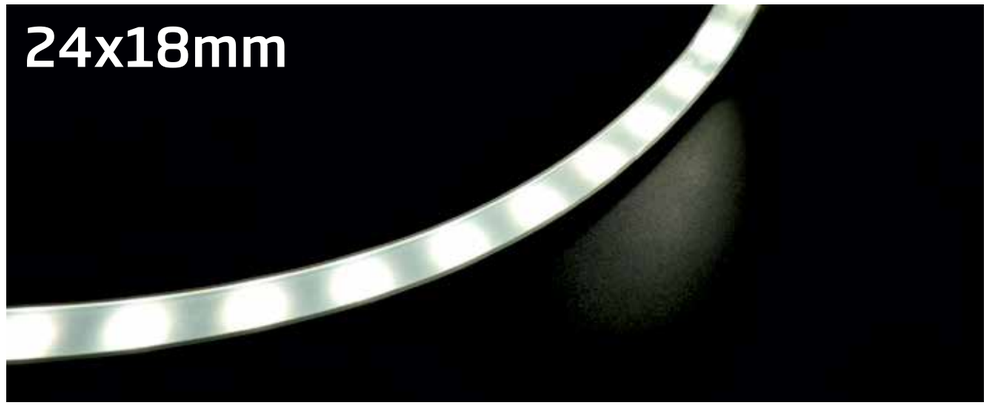


3D bending


IP67 CE UL 5 RoHS ErP 30x40°

24x18mm 30x40° Wall Washer - 3D Bending

Correct Bending Way



-26W/m 24 LEDs/m

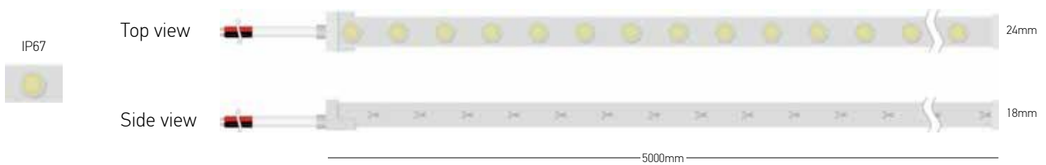

Code	IP	Kelvin	Watt	Lm/m
LS78	67	3000	26W/m	1610

Lumen Efficiency	62Lm/W
SDCM	<5
Cri	90
LEDs/m	24
Voltage	DC24V
Dimensions	L: 5000mm W: 24mm H: 18mm
Unit Cut	41.6mm
Beam Angle	30x40°
Life Span	30000H

Mounting Clips **Caps** **Screws**



*The package includes 10 Mounting Clips, 2 Straight Feeder Caps, 4 End Caps and Screws.

Accessories For LS78



Side-Right Feeder Cap (1pc)
Code FBLS78



Side-Left Feeder Cap (1pc)
Code FKLS78



Straight Feeder Cap (1pc)
Code FSLS78



Bottom Feeder Cap (1pc)
Code FBPLS78



End Cap (1pc)
Code ECLS78



Aluminium Mounting Clips (10pcs)
Dimensions L: 30cm W: 26mm H:20mm
Code CLS78




Bendable Aluminium Profile
Dimensions L: 100cm W: 26mm H:20mm
Code FPLS78




Aluminium Profile
Dimensions L: 100cm W: 27mm H:20mm
Code ALMLS78

IP67 RGBW Module Wall Washer

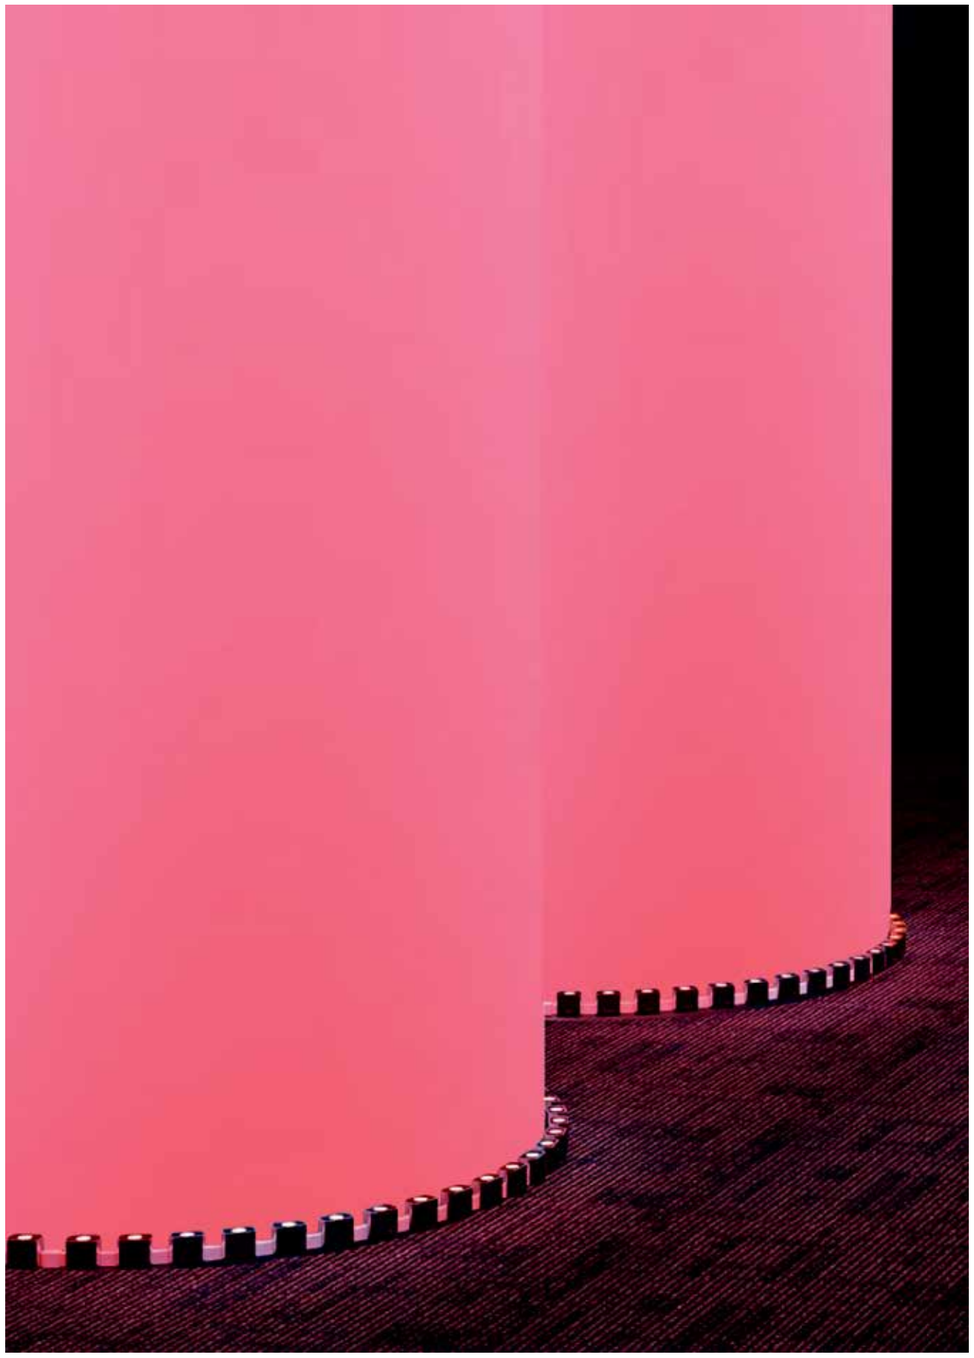

R:120Lm/m G:250Lm/m B:75Lm/m

IP67 Module Wall Washer

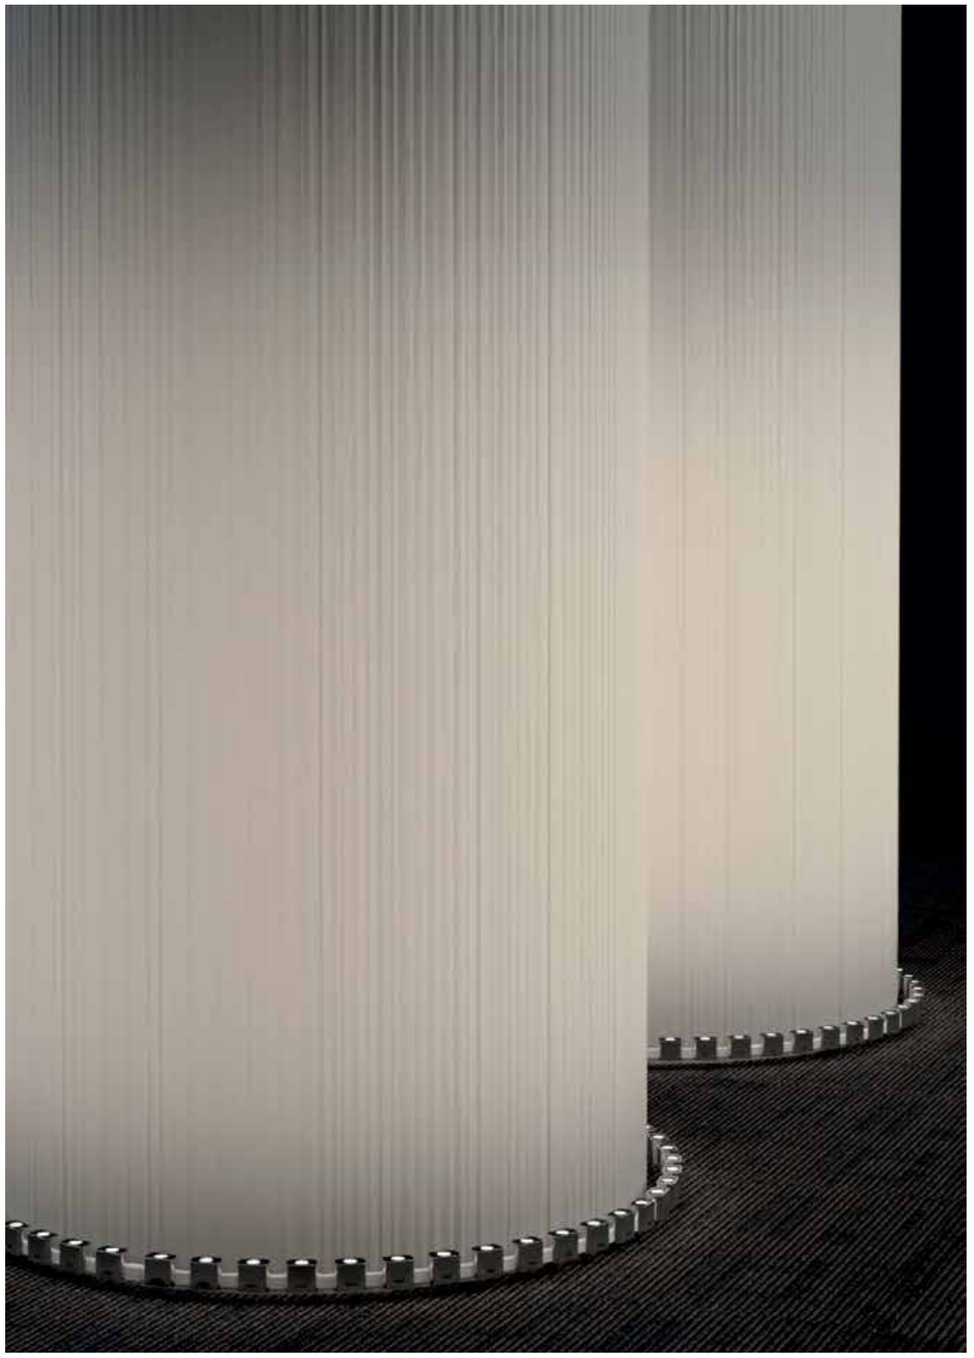



Side bending


IP67 CE UL 5 RoHS 30x40°


21x30mm RGBW Module Wall Washer

-36W/m 20 LEDs/m

RGBW

Correct Bending Way



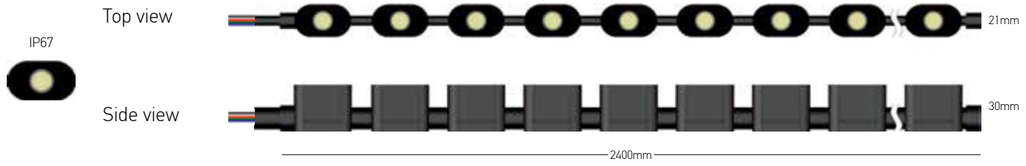

Code	IP	Kelvin	Watt	Lm/m
LS80	67	RGB+3000	36W/m	855

Lumen Efficiency	24Lm/W
SDCM	<3
Cri	80
LEDs/m	20
Voltage	DC24V
Dimensions	L: 2400mm W: 21mm H: 30mm
Unit Cut	1 Module 1 Cut
Beam Angle	30x40°
Life Span	50000H

Dimming Options
1. DALI Dimming : DALI Driver 24V 4 CHANNEL + Switch DALI MCU.
Suitable with Drivers to Page : 487 I 488
2. BLUETOOTH Dimming : On-Off Driver 24V+OT Wi DIM 5 CHANNEL (CASAMBI App).
Suitable with Drivers to Page : 486 I 488

Accessories For LS79-80



Anti-Glare Cover
Code AGLS79-80



Stainless Steel Mounting Clip (1pc)
Code CLS79-80



Bendable Aluminium Profile
Dimensions L: 100cm W: 23mm H:13mm
Code FPLS79-80




Side bending


IP67 CE UL 5 RoHS 30x40°

21x30mm Module Wall Washer

-36W/m 20 LEDs/m

Correct Bending Way



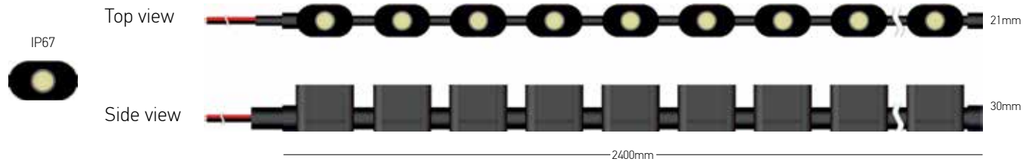

Code	IP	Kelvin	Watt	Lm/m
LS79	67	3000	36W/m	2280

Lumen Efficiency	63Lm/W
SDCM	<3
Cri	90
LEDs/m	20
Voltage	DC24V
Dimensions	L: 2400mm W: 21mm H: 30mm
Unit Cut	1 Module 1 Cut
Beam Angle	30x40°
Life Span	50000H

Accessories For LS79-80



End Cap (1pc)
Code ECLS79-80



Side-Right Feeder Cap (1pc)
Code FBLS79-80



Side-Left Feeder Cap (1pc)
Code FKLS79-80



Straight Feeder Cap (1pc)
Code FSLS79-80

20. COINS-DRIVERS & SENSORS



REFERENCE

5 YEARS* GUARANTEE


INSTALLATION

Trimless | Recessed

Dimming On-Off, Dali
CCT 3000K
IP Rating 54-65

INFRARED RECESSED MOTION SENSOR



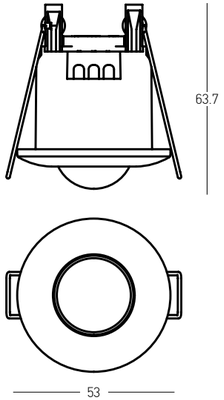


Rated Load	800W
Input	220-240V, 50/60Hz
Ambient light	<5-2000 Lux
Time Delay	5sec - 5min (Adjustable)
Detection Distance	6m MAX - 360°
Installation Height	1.5-3.5m
Dimensions	Ø: 53mm H: 63.7mm
Cuting Hole	Ø: 43mm
IP	20
Material	Plastic
Depth Required	⎍⎍: 55mm
Color	White / **Code 25338**

UNDERSTANDING THE CONTROLS

LUX-LIGHT LEVEL ADJUSTMENT CONTROL
Adjusts the light level at which the Security Sensor operates.
Adjust to ☼ , the unit will operate day and night. Adjust to ❩ , the unit will operate only at night when movement is detected.


TIME "ON" ADJUSTMENT
Adjust the duration the light remains ON from approxomately 10 seconds up to 7 minutes. Turn clockwise to increase ON-time.
Ideal setting is about 10 o'clock position (approximately 2 minutes).
While movement is detected within sensor range, the light will remain ON.
When no further movement is detected, the light will switch OFF after the pre-set time has elapsed.



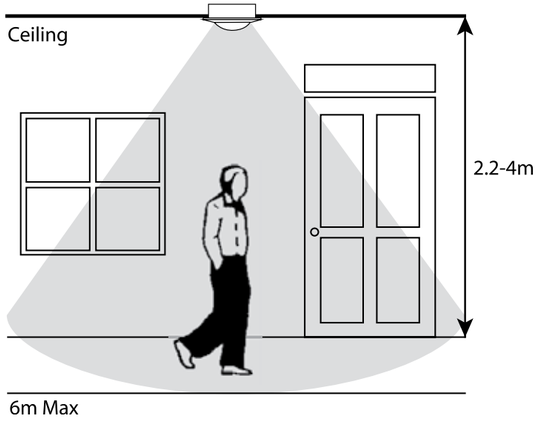

INFRARED CEILING MOTION SENSOR






Rated Load	800W
Input	220-240V, 50/60Hz
Ambient light	<5-2000 Lux
Time Delay	5sec - 5min (Adjustable)
Detection Distance	8m MAX - 360°
Installation Height	1.5-3.5m
Dimensions	Ø: 94.8mm H: 25.3mm
IP	20
Material	Plastic
Color	White / **Code 25339**

UNDERSTANDING THE CONTROLS

LUX-LIGHT LEVEL ADJUSTMENT CONTROL
Turn LUX knob clockwise to the maximum ☼
Turn time knob anti-clockwise to the minimum.

TIME "ON" ADJUSTMENT
Adjust the duration the light remains ON from approxomately 5 seconds up to 5 minutes. Turn clockwise to increase ON-time.
Ideal setting is about 10 o'clock position (approximately 2 minutes).
While movement is detected within sensor range, the light will remain ON.
When no further movement is detected, the light will switch OFF after the pre-set time has elapsed.

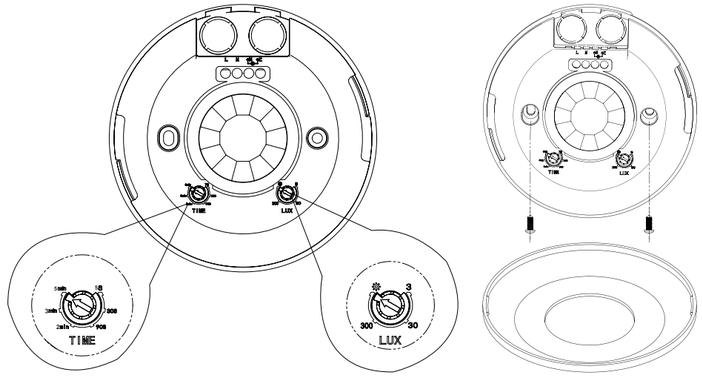

Code	Description	Kelvin	Lm/m
CN5092715	PL-CN50-COB-1400-927-15D-G3	2700	1000
CN5092724	PL-CN50-COB-1400-927-24D-G3	2700	1000
CN5092740	PL-CN50-COB-1400-927-40D-G3	2700	1000
CN5093015	PL-CN50-COB-1400-930-15D-G3	3000	1050
CN5093024	PL-CN50-COB-1400-930-24D-G3	3000	1050
CN5093040	PL-CN50-COB-1400-930-40D-G3	3000	1050
CN5094015	PL-CN50-COB-1400-940-15D-G3	4000	1100
CN5094024	PL-CN50-COB-1400-940-24D-G3	4000	1100
CN5094040	PL-CN50-COB-1400-940-40D-G3	4000	1100

Life Span : 50000H

*7 Years Guarantee when combined with OSRAM drivers

OSRAM


Power	12.6W
Input	36.5V I 350mA
Dimensions	Ø: 50mm H: 55mm
CRi	90
IP	20
Material	Aluminium
Dimming Options	On-Off, Phase-Cut, DALI-Push Button

3rd Generation

Better Efficiency





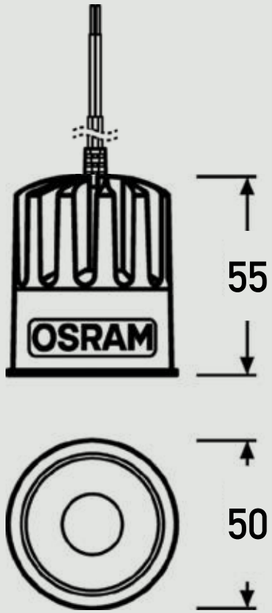

SUGGESTED LAMP-DRIVERS OSRAM



Phase Cut Driver

Code D-OTE-18



DALI Driver

Code 4062172227735



On-Off Driver

Code 6977770430235

Code	Description	Kelvin	Lm/m
CN3592736	PL-CN35-COB-600-927-36D-G3	2700	596
CN3593036	PL-CN35-COB-600-930-36D-G3	3000	627
CN3594036	PL-CN35-COB-600-940-36D-G3	4000	659

Life Span : 50000H

*7 Years Guarantee when combined with OSRAM drivers

OSRAM


Power	5.9W
Input	32.6V I 180mA
Dimensions	Ø: 34mm H: 40mm
CRi	90
IP	20
Material	Aluminium
Dimming Options	On-Off, DALI-Push Button

3rd Generation

Better Efficiency





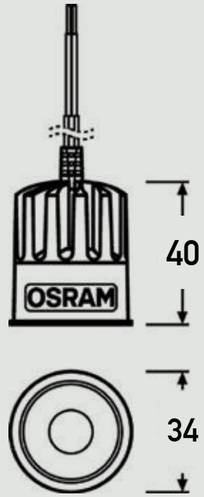

SUGGESTED LAMP-DRIVERS OSRAM



DALI Driver

Code 4062172151252



On-Off Driver

Code D-OT FIT8

ON-OFF DRIVERS

DALI DRIVERS

Power	10W / 14W
Input	220-240V, 50/60Hz
Irated	250mA / 350mA
Urated	50V MAX
Dimensions	W: 4.25cm H: 2cm L: 4.75cm
Non Dimmable	⊠
Material	Plastic
Special Feature	IP 20
Color	White / **Code 28003210**

TRIDONIC



Power	42W
Input	220-240V, 50/60Hz
Irated	300-1050mA
Urated	9-52V
Dimensions	W: 4.3cm H: 3cm L: 9.7cm
Non Dimmable	⊠
Material	Plastic
Special Feature	IP 20
Color	White / **Code FLS42**

EAGLERISE



Power	42W
Input	220-240V, 50/60Hz
Irated	150-1050mA
Urated	2.5-52V
Dimensions	W: 4.3cm H: 3cm L: 9.7cm
DALI Dimming	◯ Push Button - DALI2
Material	Plastic
Special Feature	IP 20
Color	White / **Code FLS42D**

EAGLERISE



Power	10W
Input	220-240V, 50/60Hz
Irated	150-500mA NFC
Urated	2.5-45V
Dimensions	W: 6cm H: 2.4cm L: 6cm
DALI Dimming	◯ Push Button - DALI2
Material	Plastic
Special Feature	IP 20
Color	White / **Code KGP-10D**

KGP



Power	15W
Input	220-240V, 50/60Hz
Irated	350 mA
Urated	24-42V
Dimensions	W: 4.3cm H: 2.2cm L: 9cm
Non Dimmable	⊠
	On-Off ELEMENT 15/220-240/350
Material	Plastic
Special Feature	IP 20
Color	White / **Code 6977770430235**

OSRAM



Power	21W
Input	220-240V, 50/60Hz
Irated	150-500mA
Urated	10-42V
Dimensions	W: 4.3cm H: 3cm L: 13.1cm
Non Dimmable	⊠
Material	Plastic
Special Feature	IP 20
Color	White / **Code FLS21**

EAGLERISE



Power	12W
Input	220-240V, 50/60Hz
Irated	120-350mA
Urated	9-42V
Dimensions	W: 4cm H: 2.2cm L: 11.9cm
DALI Dimming	◯ Push Button - DALI2
Material	Plastic
Special Feature	IP 20
Color	White / **Code FLS12D**

EAGLERISE



Power	18W
Input	220-240V, 50/60Hz
Irated	150-1050mA
Urated	7.5-54V
Dimensions	W: 5.3cm H: 3cm L: 9.5cm
DALI Dimming	◯ Push Button - DALI2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172227735**

OSRAM



Power	8W
Input	220-240V, 50/60Hz
Irated	90/120/150/180 mA
Urated	30-42V
Dimensions	W: 3cm H: 2.6cm L: 10.4cm
Non Dimmable	⊠
Material	Plastic
Special Feature	IP 20
Color	White / **Code D-OT FIT8**

OSRAM



Power	7W
Input	220-240V, 50/60Hz
Irated	100-700mA NFC
Urated	2.5-20V
Dimensions	W: 2.7cm H: 1.7cm L: 5.6cm
Non Dimmable	⊠
Material	Plastic
Special Feature	IP 20
Color	White / **Code KGP7**

KGP



Power	10W
Input	220-240V, 50/60Hz
Irated	150-700mA NFC
Urated	2.5-45V
Dimensions	W: 3cm H: 2.2cm L: 16.6cm
DALI Dimming	◯ Push Button - DALI2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172151252**

OSRAM



24V ON-OFF DRIVERS

Power	30W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 2.7cm L: 14.5cm
Non Dimmable	On-Off
	ELEMENT 30/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605503**

OSRAM



Power	120W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 3.1cm L: 26cm
Non Dimmable	On-Off
	ELEMENT 120/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605541**

OSRAM



Power	250W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3.5cm H: 5cm L: 37.5cm
Non Dimmable	On-Off
	ELEMENT 250/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172333467**

OSRAM



Power	60W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 3.1cm L: 20.1cm
Non Dimmable	On-Off
	ELEMENT 60/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605527**

OSRAM



Power	180W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4cm H: 3.1cm L: 30cm
Non Dimmable	On-Off
	ELEMENT 180/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605565**

OSRAM



Power	200W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 6.3cm H: 3.6cm L: 20cm
Non Dimmable	On-Off
Material	Metal
Special Feature	IP 67
Color	White / **Code XLG-200**

MW MEAN WELL



24V DALI DRIVERS

Power	60W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3cm H: 1.8cm L: 35cm
DALI Dimming	Push Button - DALI2
	1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code Xi24-60D**

PHILIPS



Power	200W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4cm H: 2.2cm L: 40cm
DALI Dimming	Push Button - DALI2
	1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code Xi24-200D**

PHILIPS



Power	80W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3.2cm H: 2.2cm L: 34.6cm
DALI Dimming	Push Button - DALI2
	4 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172274302**

OSRAM



Power	100W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3cm H: 1.8cm L: 35cm
DALI Dimming	Push Button - DALI2
	1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code Xi24-100D**

PHILIPS



Power	150W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 5cm H: 3.1cm L: 26.2cm
DALI Dimming	Push Button - DALI2
	1 CHANNEL
Material	Metal
Special Feature	IP 67
Color	White / **Code AC-MS-150**

EAGLERISE



PHASECUT I 1-10V I BLUETOOTH DRIVERS

Power	100W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 5cm H: 3cm L: 23cm
Dimmable Triac , 1-10	◯
Material	Metal
Special Feature	IP 20
Color	Metal / **Code Z89100VND**



Power	200W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 5cm H: 3cm L: 28.7cm
Dimmable Triac , 1-10	◯
Material	Metal
Special Feature	IP 20
Color	Metal / **Code Z89200VND**



Power	288W @ 24V
Input	220-240V, 50/60Hz
Dimensions	W: 2.9cm H: 2.2cm L: 18.6cm
Bluetooth Dimming	◯ OT Wi DIM 5 CHANNEL CA RGB, RGBW and RGBTW
Material	Plastic
Special Feature	IP 20
Color	White / **Code 6937186115232**

CV dimmers with Bluetooth

OSRAM



Power	288W @ 24V
Input	220-240V, 50/60Hz
Dimensions	W: 4.2cm H: 2cm L: 17.2cm
DMX Dimming	◯ OT DMX DIM 5 CHANNEL RGB, RGBW and RGBTW
Material	Plastic
Special Feature	IP 20
Color	White / **Code 6977078993838**

OSRAM



Input	220-240V, 50/60Hz
Dimensions	W: 5cm H: 8cm L: 8cm
DALI Dimming	◯ DALI MCU Tunable White Switch
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899465916**

OSRAM



PHASECUT I 1-10V DRIVERS

Power	10W
Input	220-240V, 50/60Hz
Output	350mA
Forward Voltage	10-20V
Dimensions	W: 3cm H: 2.1cm L: 13.9cm
Dimmable	PhaseCut , 1-10V
Material	Plastic
Special Feature	IP 20
Color	White / **Code 87500283**

TRIDONIC



Power	10W
Input	220-240V, 50/60Hz
Output	500mA
Forward Voltage	14-28V
Dimensions	W: 3cm H: 2.1cm L: 13.9cm
Dimmable	PhaseCut , 1-10V
Material	Plastic
Special Feature	IP 20
Color	White / **Code 87500284**

TRIDONIC



Power	18W
Input	220-240V, 50/60Hz
Output	350mA
Forward Voltage	27-54V
Dimensions	W: 5.3cm H: 3cm L: 9.5cm
PhaseCut Dimming	◯ OTe 18/220-240/350 PC
Material	Plastic
Special Feature	IP 20
Color	White / **Code D-OTE-18**

OSRAM



Power	15W
Input	220-240V, 50/60Hz
Output	350mA
Forward Voltage	21-46V
Dimensions	W: 3cm H: 2.1cm L: 13.9cm
Dimmable	PhaseCut
Material	Plastic
Special Feature	IP 20
Color	White / **Code 89800255**

TRIDONIC



Power	15W
Input	220-240V, 50/60Hz
Output	500mA
Forward Voltage	13.5-30V
Dimensions	W: 3cm H: 2.1cm L: 13.9cm
Dimmable	PhaseCut
Material	Plastic
Special Feature	IP 20
Color	White / **Code 89800256**

TRIDONIC



Power	15W
Input	220-240V, 50/60Hz
Output	700mA
Forward Voltage	10-21.5V
Dimensions	W: 3cm H: 2.1cm L: 13.9cm
PhaseCut Dimming	◯
Material	Plastic
Special Feature	IP 20
Color	White / **Code 89800257**

TRIDONIC



INDEX

180015 404
180016 316
180017 404
180025 367
180026 366
180027 366
180028 367
1928 404
1928-B 404
19151 204
19152 204
19153 207
19154 207
19155 207
19156 207
19158 204
19160 204
19162 204
19164 204
19166 204
19167 208
19168 208
19170 204
19172 204
19400 250
19400-1M 250
19400-2M 250
19400-4M 250
19401 250
19401-1M 250
19401-2M 250
19401-4M 250
19402-L 250
19402-R 250
19403-L 250
19403-R 250
19404-L 251
19404-R 251
19405-L 251
19405-R 251
19406 250
19407 250
19408 251
19409 251
19410 251
19411 251
19412 251
19413 251
19414 251
19415 251
19416 251
19430 251
19431 251
2081 134
2081-D 134
2081-W 134
2081-WD 134
2082B-1 117
2082B-2 117
2082B-3 117
2082B-C1 117
2082B-C2 117
2082B-CROSS 117
2082B-T 117
2082G-1 113
2082G-2 113
2082G-3 113
2082G-C1 113
2082G-C2 113
2082NCK-1 113
2082NCK-2 113
2082NCK-3 113
2082NCK-C1 113
2082NCK-C2 113
2082SP 113
2082W-1 117
2082W-2 117
2082W-3 117
2082W-C1 117
2082W-C2 117
2083B-1 116
2083B-2 116
2083B-3 116
2083B-C1 116
2083B-C2 116
2083B-CROSS 116
2083B-T 116
2083W-1 116
2083W-2 116
2083W-3 116
2083W-C1 116
2083W-C2 116
2084B-1 118
2084B-2 118
2084B-3 118
2084B-C1 118
2084B-C2 118
2084G-1 112
2084G-2 112
2084G-3 112
2084G-C1 112
2084G-C2 112
2084NCK-1 112
2084NCK-2 112
2084NCK-3 112
2084NCK-C1 112
2084NCK-C2 112
2084W-1 118
2084W-2 118
2084W-3 118
2084W-C1 118
2084W-C2 118
2085B-1 119
2085B-2 119
2085B-3 119
2085B-C1 119
2085B-C2 119
2085W-1 119
2085W-2 119
2085W-3 119
2085W-C1 119
2085W-C2 119
2086 126
2087 126
2088 126
2089 126
2089-27B 126
2089-3W 138
2089-4B 126
2089-4W 138
2090 129
2091 129
2091-27B 129
2091-3W 137
2091-4B 129
2092 130
2092-D 130
2093 130
2094 130
2095 134
2095-D 134
2096 140
2096-2M 140
2096-W 140
2096-W2M 140
2097 119
2097-B 113
2098-B 117
2098-G 113
2098-NCK 113
2098-W 117
2099-B 116
2099-W 116
20101-B 119
20101-W 119
20102 119
20102-B 113
20103 140
20103-W 140
20104 140
20104-W 140
20105 140
20105-W 140
20106 112
20107 116
20107-W 116
20108-1B 118
20108-1W 118
20108-B 118
20108-G 112
20108-NCK 112
20108-W 118
20112 140
20113 140
20140 207
20177 132
20178 132
20179 132
20180 132
20190 421
20190-H 421
20190-S 421
20193 422
20193-E 422
20194 418
20194-E 418
20195 418
20195-E 418
20197 420
20197-E 420
20198 423
20198-E 423
20199 422
20199-E 422
20201 422
20201-E 422
20202 423
20203 415
20203-E 415
20204 415
20204-E 415
20205 415
20205-E 415
20206 418
20206-E 418
20271 360
20272 360
20290 129
20291 129
20291-W 137
20293 140
20295 39
20296 39
20297 39
20298 141
20299 141
20300 141
20301 141
20302 141
20303 141
20304 141
20305 141
20306-B 142
20306-W 142
20307-B 142
20307-W 142
20308-B 142
20308-W 142
20309-B 142
20309-W 142
20310-B 142
20310-W 142
20311-B 142
20311-W 142
20312-B 142
20312-W 142
20313-B 142
20313-W 142
20314-B 143
20314-W 143
20315-B 143
20315-W 143
20316-B 143
20316-W 143
20317-B 143
20317-W 143
20318-B 143
20318-W 143
20319-B 143
20319-W 143
20320-B 143
20320-W 143
20321-B 143
20321-W 143
20322 141
20323 141
20324 141
20326 416
20326-CC 416
20326-SC 416
20327 417
20327-W 417
20328 414
20328-HC 414
20328-OP1 414
20328-OP2 414
20328-VC 414
20329 412
20329-E 412
20400-BD 133
20401-WD 139
20402-B 133
20403-W 139
20404 139
20405 139
20406 133
20407-BD 133
20410 133
20411 133
20412 139
20413 133
20414 139
20415 133
22028 406
22090 166
22091 168
22092 153
22093 153
22094 153
22095 174
22096 174
22097 166
22097-C 150
22097-E 160
22098 168
22099 152
22100 152
22101 152
22102 166
22103 168
22104 171
22105 171
22106 171
22107 171
22120 174
22121 148
22133 390
22134 390
22251 105
22252 105
22253 105
22254 107
22255 107
22256 107
22257 102
22258 102
22259 102
22260 103
22260-E 102
22260-I 103
22261 102
22262 102
22263 103
22264 102
22265 102
22269 141
22269-W 141
22270 176
22271 176
22272 176
22273B-1 148
22273B-2 148
22273B-3 148
22274B-1 150
22274B-2 150
22274B-3 150
22275 148
22276 150
22277 148
22278 150
22279 178
22280 178
22281 178
22282 178
22283 176
22284 178
22285 178
22286 178
22287 178
22290 141
22291 141
22292 141
22293 141
22294 141
22294-W 141
23110 90
23111 90
23112 90
23113 90
23114 92
23115 92
23116 93
23117 93
23118 85
23119 85
23120 85
23121 84
23122 84
23123 84
23124 88
23125 84
23126 96
23127 96
23128 96
23129 96
23130 84
23131 85
23132 85
23133 84
23134 39
23139 189
23140 189
23141 189
23142 189
23143 189
23144 189
23145 188
23146 188
23147 188
23148 187
23149 187
23150 187
23151 187
23152 186
23153 188
23154 187
23155 186
23156 187
23157 187
23159 97
23177 196
23178 196
23179 196
23180 196
23181 201
23182 198
23183 198
23184 199
23185 199
23186 200
23187 200
23188 200
23189 200
23220 399
23221 399
23222 399
23223 399
23224 399
23225 399
23226 399
23262 84
23263 84
23264 88
23265 88
23280 39
23295 189
23296 189
23297 189
23300 88
23350 88
2501 22
2501-W 22
2502 22
2502-W 22
2503 22
2503-W 22
2504 18
2504-W 18
2505 18
2505-W 18
2506 18
2506-W 18
2507 18
2507-W 18
2508 38
2508-2M 38
2508-W 38
2509 38
2509-3D 39
2509-W 38
2510 38
2510-W 38
2511 22
2511-W 22
2512 22
2512-W 22
2513 23
2514 23
2515 23
2516 22
2516-W 22
2517 18
2517-W 18
2518 18

2518-W 18
2519 19
2520 19
2521 19
2522 26
2523 26
2523-W 26
2524 29
2524-W 29
2525 30
2525-W 30
2526 30
2527 34
2528 37
2529 33
2529-W 33
2530 36
2531 34
25115 51
25116 51
25117 51
25118 48
25119 52
25120 52
25121 52
25122 55
25123 55
25124 56
25125 56
25126 56
25127 48
25128 44
25128-W 44
25129 44
25129-W 44
25130 44
25130-W 44
25131 45
25132 45
25133 44
25133-W 44
25134 44
25134-W 44
25135 44
25162 23
25166 23
25197 212
25198 212
25199 214
25200 214
25201 216
25202 216
25203 213
25204 213
25205 215
25206 215
25207 218
25208 218
25209 220
25210 220
25211 222
25212 222
25213 223
25214 223
25215 374
25216 374
25220 62
25221 62
25222 62
25223 62
25224 62
25225 62
25226 62
25227 62
25228 63
25229 63
25230 63
25231 63
25232 63
25233 63
25234 63
25235 63
25240 74
25241 74
25242 74
25243 74
25246 66
25249 77
25250 77
25251 72
25252 72
25253 72
25254 72
25255 69
25256 69
25257 77
25258 77
25259 78
25260 78
25261 62
25262 79
25263 79
25264 79
25264 79
25285 281
25286 281
25287 281
25288 281
25289 281
25290 281
25291 283
25292 283
25293 283
25294 283
25295 384
25296 384
25297 384
25298 384
25299 306
25300 306
25301 306
25304 380
25305 380
25306 371
25307 371
25308 371
25309 377
25310 377
25311 377
25312 379
25313 379
25314 379
25338 480
25339 481
25352 124
25353 124
25354 122
25355 122
25356 122
25357 122
25361 320
25362 320
25363 321
25364 321
25379 365
25380 364
25381 363
25382 362
25383 362
25399 285
25400 285
25401 285
25402 285
25403 285
25404 287
25405 287
25406 287
25407 287
25430 66
25431 66
25432 66
25433 66
25458 62
25458-G 62
25460 45
25460-W 45
25461 79
25462 79
25463 79
25464 79
25465 79
25466 79
25467 79
25468 79
25469 79
25470 79
25471 79
25472 79
25473 124
25474 124
25475 125
25476 125
25477 320
25478 320
25479 45
25480 45
25481 141
25482 141
E332 332
E333 332
E333-4-BOX 332
S001 389
S002 389
S007 351
S008 351
S009 350
S010 350
S011 350
S012 350
S013 351
S014 351
S019 349
S020 349
S025 357
S027 357
S029 354
S030 357
S037 267
S038 267
S039 394
S040 394
S045 343
S046 343
S047 358
S048 358
S054 402
S054-15 402
S054-24 402
S054-40 402
S055 402
S055-15 402
S055-24 402
S055-40 402
S056 402
S056-15 402
S056-24 402
S056-40 402
S057 402
S057-15 402
S057-24 402
S057-40 402
S058 264
S058-15 264
S058-24 264
S058-40 264
S059 264
S059-15 264
S059-24 264
S059-40 264
S060 349
S061 349
S065- 260
S066- 260
S068 393
S069 393
S073 312
S074 312
S075 312
S076 312
S077 318
S078 318
S084 331
S085 330
S085-B 330
S086 330
S086-B 330
S095 308
S096 309
S097 309
S104 407
S106 407
S107 407
S110 316
S111 316
S112 390
S113 390
S114 263
S115 263
S116 263
S117 405
S118 405
S119 405
S120 405
S121 405
S122 405
S123 406
S124 406
S125 338
S126 339
S127 338
S128 339
S129 338
S130 339
S131 392
S131-4K 392
S132 392
S132-4K 392
S133 392
S134 392
S135 302
S136 302
S137 304
S138 304
S139 303
S140 303
S141 305
S142 305
S143 319
S144 319
S145 319
S146 319
S148 347
S149 347
S150 348
S151 394
S152 394
S153 396
S154 396
S155 396
S156 408
S157 408
S158 408
S159 400
S160 400
S161 400
S162 340
S162-W 340
S163 348
S164 348
S165 342
S166 342
S167 342
S168 342
S169 314
S170 314
S171 314
S172 314
S173 323
S174 323
S175 322
S176 322
S177 323
S178 323
S179 389
S180 389
S181 310
S182 310
S183 310
S184 310
S185 311
S186 311
S187 311
S188 311
S189 329
S190 329
S191 327
S192 327
S193 328
S194 328
S195 326
S196 326
S197 259
S198 259
S199 259
S200 259
S201 259
S202 259
S203 259
S204 297
S205 297
S206 297
S207 297
S208 297
S209 299
S210 299
S211 299
S212 299
S213 299
S214 372
S215 372
S216 383
S217 383
S218 383
S219 383
S220 267
S221 267
S222 344
S223 344
S224 340
S225 340
S226 346
S227 346
S228 346
S229 346
S230 354
S231 354
S232 256
S233 256
S234 257
S235 257
S236 256
S237 256
S238 253
S239 252
S240 252
S241 252
S242 252
S243 253
S244 254
S335 324
S336 324
S337 279
S338 271
S339 271
S340 272
S341 272
S342 289
S343 289
S344 293
S345 293
S346 276
S347 276
S348 277
S349 277
S350 275
S351 275
DAB342 291
DAB344 295
DAW342 291
DAW344 295
DFB342 291
DFB344 295
DFBR342 291
DFG342 291
DFG344 295
DFN342 291
DFW342 291
DFW344 295
HNCMB 338
LNS 20 183 310
LNS197 259
LNS202 259
OPTC-S342-15D 289
OPTC-S342-24D 289
OPTC-S344-15D 293
OPTC-S344-24D 293
RFL B 158 408
RFL B 181 310
RFL B 185 310
RFL G 154 396
RFL G 181 310
RFL G 185 310
RFL125-BL 338
RFL125-G 338
RFL125-WH 338
RFL126-BL 339
RFL126-G 339
RFL126-WH 339
RFLG204 297
RFLG209 299
RFLNB204 297
RFLNB209 299
RFLBS342 289
RFLBS344 293
RFLGS342 289
RFLGS344 293
RFLNS342 289
RFLNS344 293
RFLWS342 289
RFLWS344 293
RING G 267
RRB342 291
RRB344 295
RRW342 291

INDEX

RRW344 295
TRML342 291
TRML344 295
TRMLS204 297
TRMLS209 299
Z050106-B 386
Z050106-BR 386
Z10105 TR-B 347
Z10105 TR-W 347
Z12107K-B 386
Z12107K-W 386
LS02 441
LS03 441
LS04 441
LS06 448
LS08 465
LS09 465
LS12 449
LS14 464
LS15 464
LS16 465
LS17 431
LS18 431
LS19 431
LS20 432
LS21 432
LS22 432
LS23 431
LS24 431
LS25 431
LS26 432
LS27 432
LS28 432
LS29 434
LS31 435
LS32 435
LS33 434
LS34 436
LS35 436
LS36 436
LS37 436
LS38 439
LS39 424
LS40 424
LS41 424
LS42 427
LS43 427
LS44 424
LS45 424
LS46 424
LS47 427
LS48 428
LS49 428
LS50 428
LS51 428
LS52 428
LS53 440
LS54 440
LS55 442
LS56 445
LS57 452
LS58 452
LS59 453
LS60 453
LS61 463
LS62 463
LS63 462
LS64 462
LS65 462
LS66 454
LS67 454
LS68 455
LS69 455
LS70 456
LS71 456
LS72 456
LS73 457
LS74 457
LS75 458
LS76 460
LS77 466
LS78 472
LS79 477
LS80 476
AGLS79-80 476
ALM0606 452
ALM08-09 465
ALM1010 462
ALM1010-2M 455
ALM1616-2M 457
ALMLS14-15 464
ALMLS76 461
ALMLS78 473
ALS0808 463
CKLS77 468
CL0606 452
CL0808 463
CL1010 462
CL1616 456
CLS66-69 454
CLS76 461
CLS77 466
CLS78 473
CLS79-80 476
CON08 446
CON10 446
CORN08 446
CORN10 446
ECLS0606 452
ECLS0808 463
ECLS08-09 465
ECLS1010 462
ECLS14-15 464
ECLS1616 456
ECLS66-69 454
ECLS76 461
ECLS77 466
ECLS78 473
ECLS79-80 477
FBLS78 473
FBLS79-80 477
FBPLS78 473
FC08 446
FC10 446
FCLS14-15 464
SCLS14-15 464
FED08 446
FED10 446
FKLS78 473
FKLS79-80 477
FPL0808 463
FPL1616 457
FPLS14-15 464
FPLS66-69 455
FPLS78 473
FPLS79-80 476
FSLS78 473
FSLS79-80 477
LKLS77 468
PKLS77 469
AC-MS-150 487
CN5092715 482
CN5092724 482
CN5092740 482
CN5093015 482
CN5093024 482
CN5093040 482
CN5094015 482
CN5094024 482
CN5094040 482
CN3592736 483
CN3593036 483
CN3594036 483
D-EG-5 297
D-EG-9 299
D-EG-10 372
D-iT FIT7 316
D-KE-9 299
D-KE-10 372
D-OTE-18 489
D-OT FIT8 484
EG-5-D 383
FLS12D 485
FLS21 484
FLS42 484
FLS42D 485
KEDH012 326
KGP7 484
KGP-10D 485
LS-3-700 310
LS-6-150 302
Xi24-60D 487
Xi24-100D 487
Xi24-200D 487
XLG-200 486
Z89100VND 488
Z89200VND 488
28003210 484
4052899465916 488
4062172151252 485
4062172274302 487
4062172227735 485
4052899605503 486
4052899605527 486
4052899605541 486
4052899605565 486
4062172333467 486
6937186115232 488
6977078993838 488
6977770430235 484
87500283 489
87500284 489
89800255 489
89800256 489
89800257 489
31- 240
32- 243
33- 244
34- 247
51- 232
52- 235
53- 236
54- 239
81- 226
82- 226

ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri
Postal: 19001 , P.O. box: 4791
Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521
info@zambelislights.gr | zambelislights.gr

LED Zona®
ОСВЕТИТЕЛНИ РЕШЕНИЯ

Харесахте ли нещо от каталога?

Разгледайте и поръчайте продукти на Zambelis
онлайн на led-zona.bg – с актуални цени и наличности.

Продуктите на Zambelis

Сканирайте или кликнете

Разгледайте продуктите →

Каталози на Zambelis

Сканирайте или кликнете

Още каталози →

www.led-zona.bg

T: 0888 065 970 | E: sales@led-zona.bg

Сфера Лайт ООД · гр. София, ж.к. Банишора, ул. Опълченска, бл. 54 (до 7-ма поликлиника)