
OUTDOOR LIGHTING

Zambelis
LIGHTS

Connect to our B2B platform through our website and access everything you need, anytime - 24/7

- B2B Online Order/Open Orders
- Product Availability & Arrival Dates
- Extensive Range of Products
- HD Photos
- Product Data Sheets
- Installation Manuals
- Flexibility & Customized Products
- Manufacturing Products
- Photometric Files
- CE Certificates
- COC Certificates
- 3D Models / 3D Viewer on Website

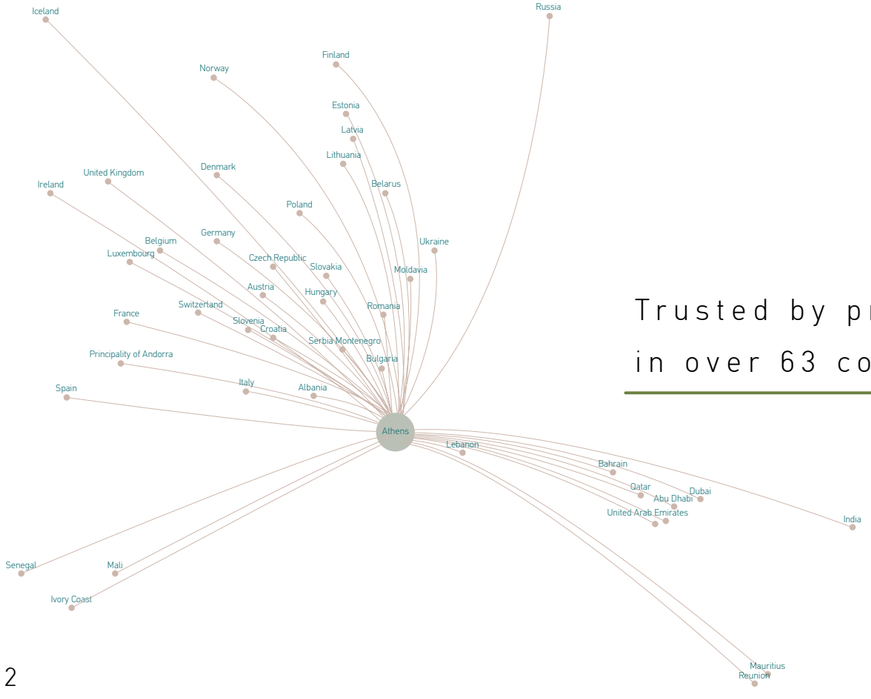

Trusted by professionals
in over 63 countries globally.

SUSTAINABILITY

Lighting the Future Responsibly.

We design lighting solutions that combine efficiency, durability and innovation - with minimal footprint and maximum purpose.
For us, green isn't just a color.
It's a mindset shaping everything we create.

Scan to learn how we go green.



TABLE OF CONTENTS

01. PORTABLE I p.012-035

02. CONCRETE I p.036-059

03. FLOOR & WALL I p.060-153

04. WALL I p.154-245

05. SPIKES I p.246-293

06. STEP I p.294-325

07. CEILING I p.326-341


08. INGROUND I p.342-365

09. WALL WASHER I p.366-379

10. IP65 SURFACE LIGHTING SYSTEM I p.380-389

WE MAKE IT EASY

Virtual Light - ZambelisLights App

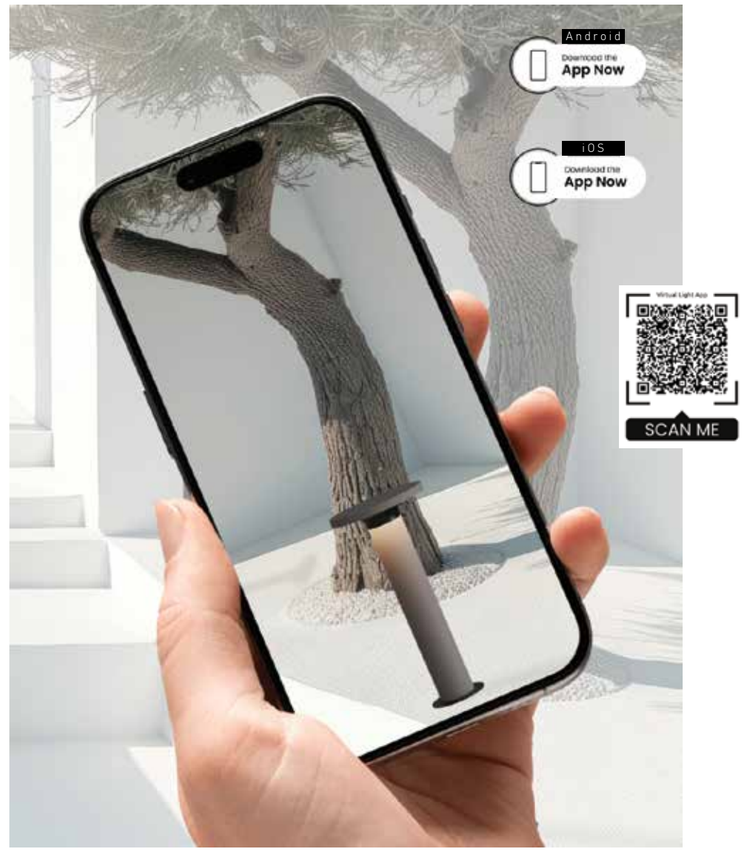

4 simple steps to light up your place

Download the Virtual Light App Scan QR

Find the ideal light by browsing our categories

View in your space through your mobile camera

Enjoy your new atmosphere!


NEW
E485 p.16


NEW
E489 p.20


NEW
E484 p.22


E370 p.24


E314 p.26


E290 p.29


E400 p.30


E402 p.32


E193 p.34


NEW
E478 p.40


NEW
E474 p.41


NEW
E475 p.44


NEW
E476 p.46


E253 p.48


E384 p.51


NEW
E480 p.53


NEW
E411 p.54


E192 p.56


NEW
E479 p.58


NEW
E406 p.65


NEW
E405 p.66


NEW
E445 p.68


NEW
E448 p.72


E339 p.74

E348 p.76


NEW
E463 p.78


NEW
E407 p.80


NEW
E408 p.83


NEW
E466 p.87


NEW
E423 p.88


NEW
E425 p.91


NEW
E424 p.92


NEW
E426 p.94


NEW
E467 p.98


NEW
E418 p.100


NEW
E518 p.102


E297 p.104


NEW
E446 p.106


E368 p.108


E335 p.114

E336 p.113

NEW
E443 p.115

NEW
E444 p.116

E204 p.118

E302 p.121

E277 p.122

E345 p.125

E354 p.126

E357 p.128

E358 p.130

E132 p.132

E325 p.134

E237 p.138

E249 p.138

E298 p.140

E352 p.142

E351 p.143

E356 p.144

E367 p.147

E355 p.147

E208 p.148

E337 p.150

E235-12D p.152

NEW
E419 p.156

NEW
E420 p.156

NEW
E421 p.158

NEW
E422 p.158

NEW
E428 p.160

NEW
E433 p.162

E240-W p.164

NEW
E440 p.168

NEW
E135 p.170

NEW
E159 p.171

E316 p.172

NEW
E413 p.174

NEW
E414 p.177

NEW
E415 p.178

NEW
E412 p.181

NEW
E430 p.182

NEW
E431 p.185

E287 p.186

E343 p.188

NEW
E434 p.191

E202 p.192


E201 p.192


E296 p.192


NEW
E437 p.194


NEW
E438 p.194


E341 p.197


E275 p.197


E342 p.298


E268 p.200


E271 p.200


E267 p.202


NEW
E464 p.204


NEW
E416 p.206


NEW
E417 p.206


NEW
E500 p.209


E149 p.210


E243 p.212


E195 p.214


E315 p.215


E197 p.216


E199 p.217


E274 p.218


E273 p.219


E278 p.220


E272 p.221


NEW
E436 p.223


NEW
E435 p.223


E318 p.224

E227 p.224


E261 p.228


E262 p.228


E146 p.229


E266 p.230


E124 p.232


E123 p.232


E122 p.232


E121 p.232


E151 p.234


E150 p.234


E307 p.237


E306 p.237

E186 p.238

E168 p.240

E216 p.240

E305 p.243

NEW
E457 p.248

NEW
E459 p.249

NEW
E494 p.253

NEW
E456 p.254

NEW
E465 p.256

E329 p.258

NEW
E449 p.261

NEW
E472 p.264

NEW
E470 p.266

E350 p.268

E349 p.268

E404 p.270

E286 p.272

E285 p.272

E284 p.275

E152 p.276

E153 p.277

E177-B p.278

E281 p.281

E283 p.282

E279 p.284

E280 p.286

E312 p.288

E310 p.288

E217 p.288

NEW
E442 p.294

NEW
E441 p.294

NEW
E450 p.294

NEW
E451 p.294

NEW
E455 p.299

NEW
E453 p.299

E347 p.300

E346 p.300

E320 p.302

E322 p.303

E321 p.304

E319 p.305

E301 p.306

E300 p.306

E324 p.308



E294 p.310



E242-W p.312



E241-G p.313



E241-W p.313



E247-G p.316



E246-W p.317



E229 p.318



E230 p.319

E184 p.320



E181 p.320

E187 p.322



E333 p.326



S131 p.330



S113 p.332



E340 p.332



E220 p.334



E309 p.334



E270 p.336



E327 p.338

NEW



E502 p.342

NEW



E504 p.344

NEW



E508 p.348

NEW



E180 p.350



E178 p.351



E365 p.352



E366 p.355

NEW



E461 p.356



E364 p.357



E363 p.358



E362 p.358



E361 p.360



E359 p.363



E189 p.363

NEW



E496 p.366

NEW



E495 p.368

NEW



E499 p.370



E382 p.372



E380 p.375



E377 p.376



E375 p.376

NEW

E385 p.380

NEW

E390 p.380

NEW

E392 p.380

NEW

E389 p.381

NEW

E393 p.381

NEW

E391 p.381

NEW

E386 p.382

NEW

E387 p.382

NEW

E388 p.382

NEW

E501 p.384

NEW

E397 p.386

NEW

SIL-385 p.386

Tap. Dim. Light Up.
Prepare warm ambience with portable lights.



01. PORTABLE














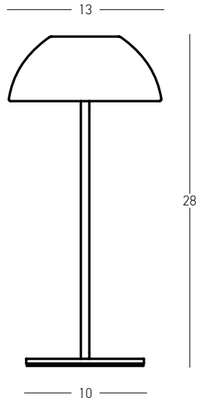

Power	2W
Input	5V DC
Battery	1200 MAH
Color Temperature	2700K
Lumen	104Lm
Cri	80
IP	44
Dimensions	Ø: 13cm H: 28cm
Shade	Ø: 13cm H: 5.5cm
Touch Dimming	
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 5.5H 50% of Light - 10H 10% of Light - 135H
Charging Time	3.5H
Color	Sandy Black / **Code E485**
Color	Sand / **Code E486**
Color	Sandy Milk Tea / **Code E487**

IP 44 LED


White AC-DC Adaptor for Portable Light




Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / **Code E099**






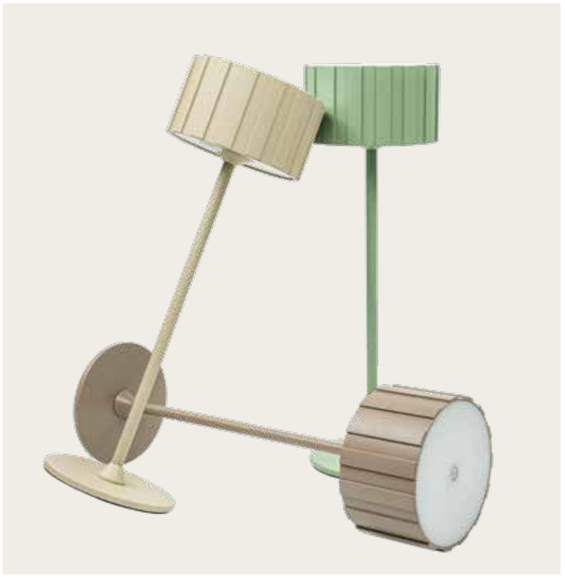

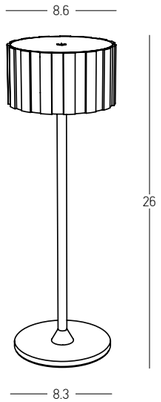

Power	2W
Input	5V DC
Battery	1800 MAH
Color Temperature	2700K, 4000K, 6500K
Lumen	124Lm
Cri	80
IP	44
Dimensions	Ø: 8.6cm H: 26cm
Shade	Ø: 8.6cm H: 4.7cm
Touch Dimming	
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off & Brightness Memory Function
Working Time	100% of Light - 6H 50% of Light - 11.5H 10% of Light - 60H
Charging Time	4H
Color	Sand / **Code E488**
Color	Sandy Milk Tea / **Code E489**
Color	Sandy Green / **Code E490**



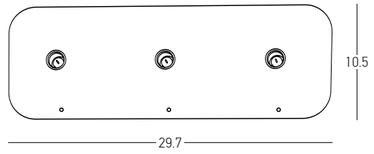

Input	220-240V, 50/60Hz
Output	5V, 2A
IP	20
Dimensions	L: 29.7cm W: 10.5cm H: 2cm
Material	Aluminium
Special Feature	Portable Charging Base for 3pcs 100cm Cable Included
Color	Black / **Code 25280**

White AC-DC Adaptor for Portable Light



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / **Code E099**













Power	2W
Input	5V DC
Battery	2000 MAH
Color Temperature	2700K
Lumen	103Lm
Cri	80
IP	44
Dimensions	L: 8.3cm W: 6cm H: 16cm
Touch Dimming	
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp Charging Base with USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 6H 50% of Light - 11H 10% of Light - 95H
Charging Time	3.5H
Color	Black Matt / **Code E482**
Color	White Matt / **Code E483**
Color	Brushed Gold / **Code E484**






White AC-DC Adaptor for Portable Light




Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / **Code E099**

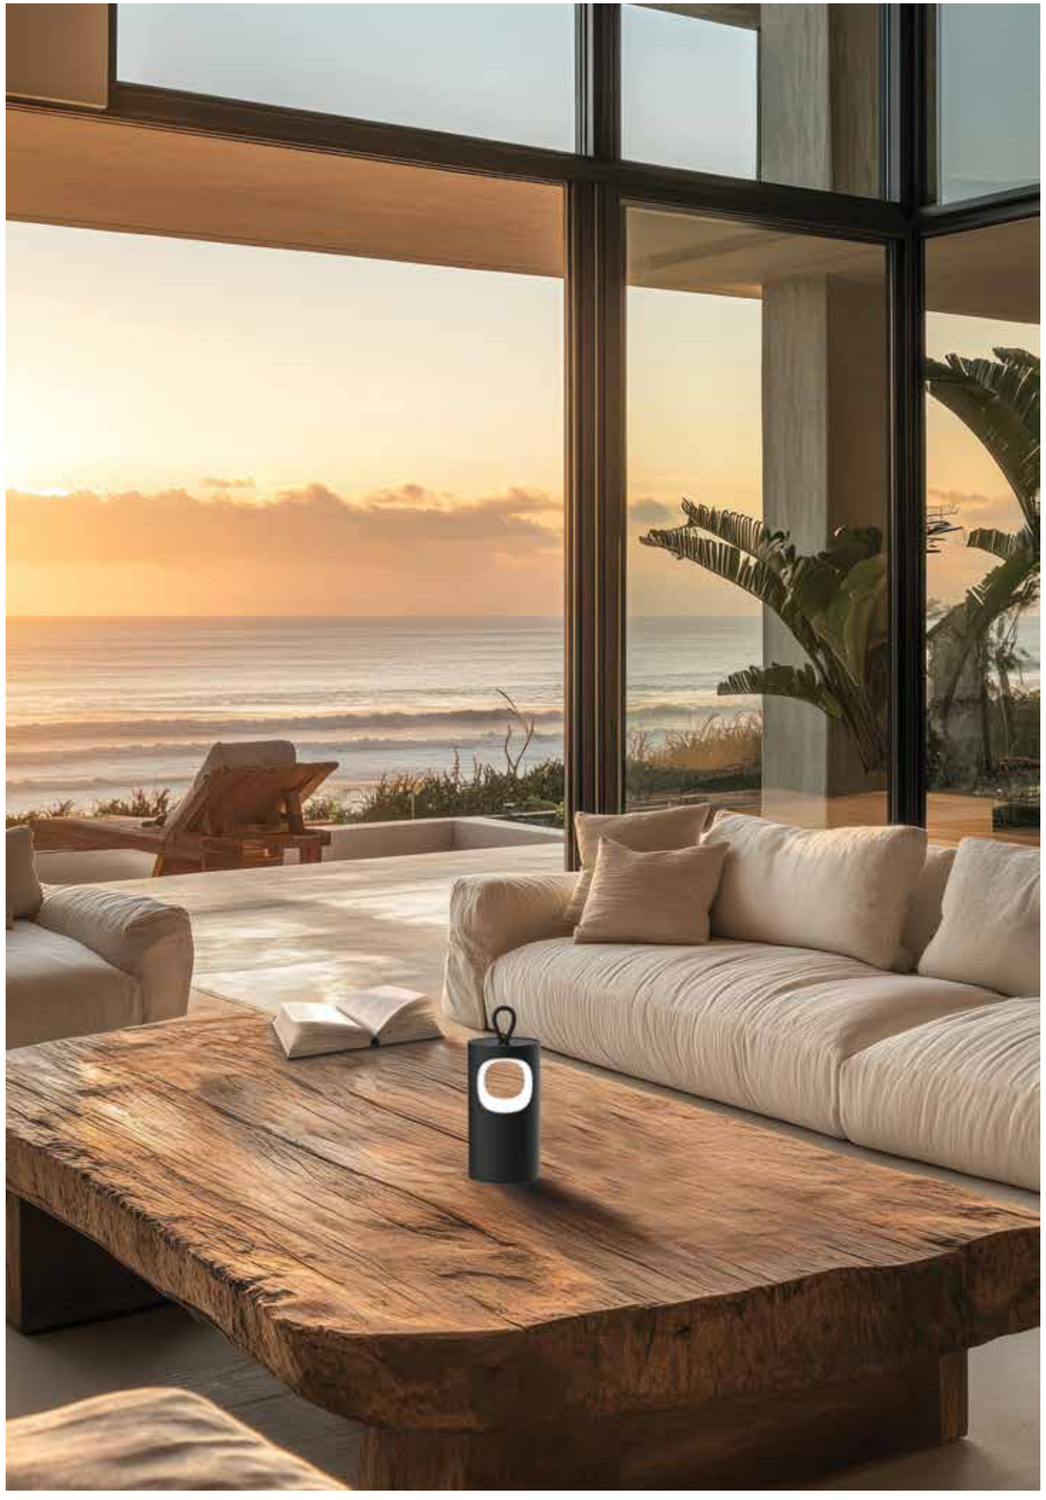







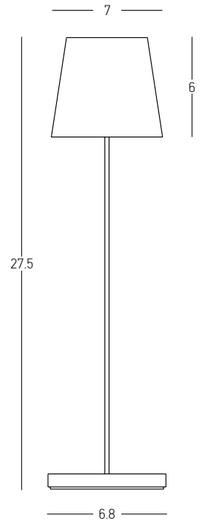

Power	1.5W
Input	5V DC
Battery	1900 MAH
Color Temperature	3000K
Lumen	181Lm
Cri	80
IP	54
Dimensions	Ø: 7cm H: 27.5cm
Shade	Ø: 7cm H: 6cm
Touch Dimming	◠
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp Charging Base with USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 10H 50% of Light - 20H 10% of Light - 100H
Charging Time	4H
Color	Black / **Code E369**
Color	Brick / **Code E370**
Color	Sand / **Code E371**

IP 54 LED

White AC-DC Adaptor for Portable Light



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / **Code E099**















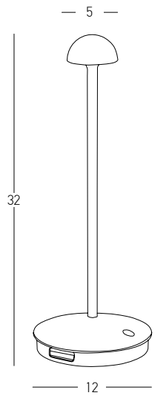

Power	2W
Input	3.7V DC
Battery	1800 MAH
Color Temperature	3000K
Lumen	124Lm
Cri	80
IP	54
Dimensions	Ø: 12cm H: 32cm
Shade	Ø: 5cm H: 2.6cm
Touch Dimming	
Material	Metal - Aluminium - PC Frosted
Special Feature	Portable Table Lamp USB Cable & Adaptor Included Power-Off Memory Function
Working Time	100% of Light - 7H 50% of Light - 14H 10% of Light - 70H
Charging Time	4.5H
Color	Sandy Black / **Code E314**
Color	Sandy White / **Code E313**

















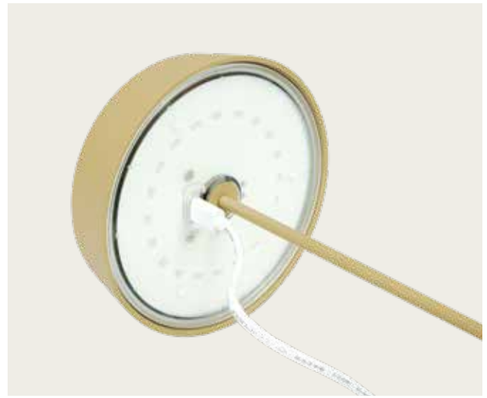

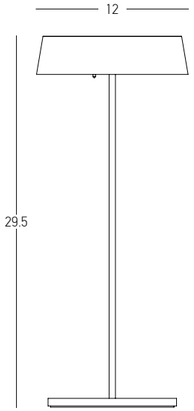


Power	2W
Input	3.7V DC
Battery	2200 MAH
Color Temperature	3000K
Lumen	210Lm
Cri	80
IP	54
Dimensions	Ø: 12cm H: 29.5cm
Shade	Ø: 12cm H: 3.2cm
Touch Dimming	
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 10H 50% of Light - 20H 10% of Light - 110H
Charging Time	5H
Color	Sandy Black / **Code E289**
Color	Sandy White / **Code E290**
Color	Gold Matt / **Code E291**

IP 54 LED

White AC-DC Adaptor for Portable Light




Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / **Code E099**

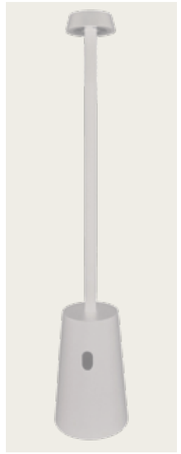





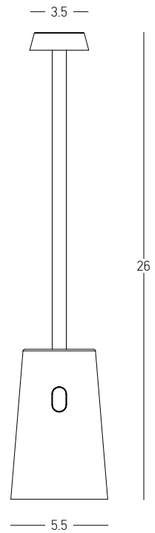

Power	2W
Input	3.7V DC
Battery	2000 MAH
Color Temperature	3000K
Lumen	168Lm
Cri	80
IP	44
Dimensions	Ø: 5.5cm H: 26cm
Shade	Ø: 3.5cm H: 1cm
Touch Dimming	
Material	Metal - Aluminium - Glass
Special Feature	Portable Table Lamp Charging Base with USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 8H 50% of Light - 16H 10% of Light - 80H
Charging Time	4.5H
Color	White / **Code E398**
Color	Black / **Code E399**
Color	Green / **Code E400**





White AC-DC Adaptor for Portable Light




Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / **Code E099**









Power	1W
Input	5V DC
Battery	1200 MAH
Color Temperature	3000K
Lumen	80Lm
Cri	80
IP	44
Dimensions	Ø: 11.2cm H: 10cm
Shade	Ø: 11.2cm H: 2.4cm
Touch Dimming	
Material	Plastic
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 6H 50% of Light - 12H 10% of Light - 70H
Charging Time	3.5H
Color	White / **Code E401**
Color	Black / **Code E402**



White AC-DC Adaptor for Portable Light




Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / **Code E099**








Power	2W
Input	3.7V DC
Battery	2200 MAH
Color Temperature	3000K
Lumen	260Lm
Cri	80
IP	54
Dimensions	Ø: 11cm H: 38cm
Shade	Ø: 11cm H: 10.5cm
Touch Dimming	
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable & Adaptor Included Power-Off Memory Function
Working Time	100% of Light - 10H 50% of Light - 20H 10% of Light - 100H
Charging Time	5.5H
Color	Sandy White / **Code E193**
Color	Sandy Black / **Code E194**





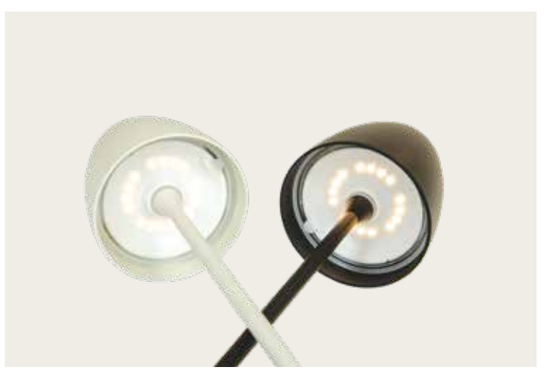



Concrete Glow - Natural Flow
Rugged elegance for unique outdoor space.




02. CONCRETE









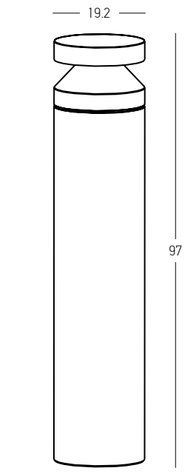


Power	20W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	509Lm
Cri	90
IP	65
Dimensions	Ø: 19.2cm H: 97cm
Base	Ø: 19.2cm H: 0.3cm
Material	Concrete - Metal - Glass
Color	Natural Concrete / **Code E478**

IP 65 LED SeaSide








Power	20W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	509Lm
Cri	90
IP	65
Dimensions	Ø: 19.2cm H: 52cm
Base	Ø: 19.2cm H: 0.3cm
Material	Concrete - Metal - Glass
Color	Natural Concrete / **Code E477**

IP 65 LED SeaSide





Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	414Lm
Cri	90
IP	65
Dimensions	Ø: 19.2cm L: 21.5cm H: 24cm
Base	W: 12cm H: 5cm
Material	Concrete - Metal - Glass
Color	Natural Concrete / **Code E474**

IP 65 LED SeaSide










Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	426Lm
Cri	90
IP	65
Dimensions	L: 15cm W: 15cm H: 75.6cm
Material	Concrete - Metal - Glass
Color	Natural Concrete / **Code E475**

IP 65 LED SeaSide







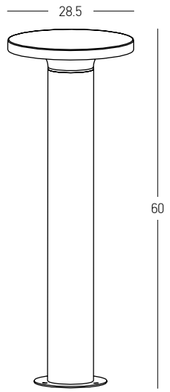


Power	11W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	755Lm
Cri	90
IP	65
Dimensions	Ø: 28.5cm H: 60cm
Base	Ø: 16.5cm H: 0.3cm
Shade	Ø: 28.5cm H: 2.2cm
Material	Concrete - Metal - PC Diffuser
Color	Natural Concrete-Sandy Black / **Code E476**

IP 65 LED SeaSide








Power	4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	340Lm
Cri	80
IP	65
Dimensions	L: 9.7cm W: 9.1cm H: 10.5cm
Beam Angle	36°
Dimmable Triac	
Material	Concrete - Aluminium
Color	Natural Concrete / **Code E253**

IP 65 LED SeaSide





Power	2x 4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	600Lm
Cri	80
IP	65
Dimensions	L: 9.7cm W: 9.1cm H: 20cm
Beam Angle	36°
Dimmable Triac	
Material	Concrete - Aluminium
Special Feature	Up-Down Lighting
Color	Natural Concrete / **Code E254**

IP 65 LED SeaSide











Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	490Lm
Cri	80
IP	65
Dimensions	L: 19cm W: 28cm H: 70.4cm
Base	L: 10cm W: 28cm H: 0.5cm
Material	Concrete - Metal - Glass
Color	Natural Concrete / **Code E383**








Power	2x 8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	780Lm
Cri	80
IP	65
Dimensions	Ø: 28cm H: 70.4cm
Base	L: 10cm W: 28cm H: 0.5cm
Material	Concrete - Metal - Glass
Color	Natural Concrete / **Code E384**










Bulb	1x GU10 LED
Power	9W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	**Ø**: 10cm H: 14cm
Material	Concrete - Metal
Color	Natural Concrete / **Code E480**

IP 54 LED SeaSide





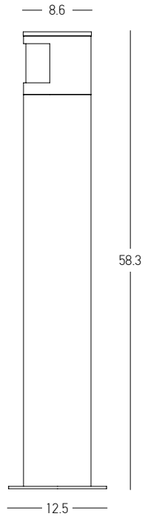


Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	Ø: 8.6cm H: 58.3cm
Base	Ø: 12.5cm H: 0.5cm
Material	Concrete - Metal - PC Diffuser
Color	Natural Concrete-Black / **Code E410**

IP 65 LED





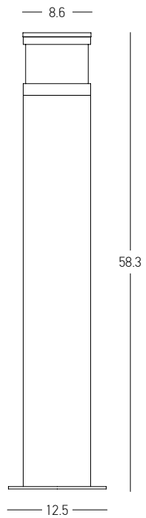


Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	395Lm
Cri	90
IP	65
Dimensions	Ø: 8.6cm H: 58.3cm
Base	Ø: 12.5cm H: 0.5cm
Material	Concrete - Metal - PC Diffuser
Color	Natural Concrete-Black / **Code E411**

IP 65 LED









Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	490Lm
Cri	90
IP	54
Dimensions	L: 15cm W: 16cm H: 30cm
Base	L: 21cm W: 23cm
Material	Concrete
Color	Natural Concrete / **Code E191**


IP 54 LED

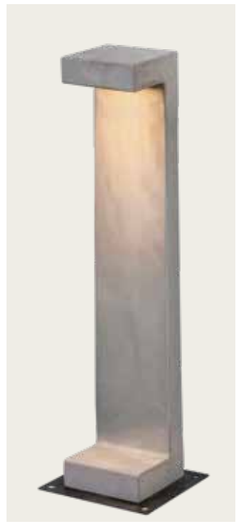


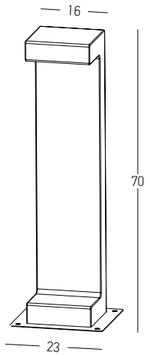

Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	490Lm
Cri	90
IP	54
Dimensions	L: 15cm W: 16cm H: 70cm
Base	L: 21cm W: 23cm
Material	Concrete
Color	Natural Concrete / **Code E192**

IP 54 LED






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	490Lm
Cri	90
IP	54
Dimensions	L: 10cm W: 28cm H: 35cm
Base	L: 19cm W: 37cm
Material	Concrete
Color	Natural Concrete / **Code E190**

IP 54 LED




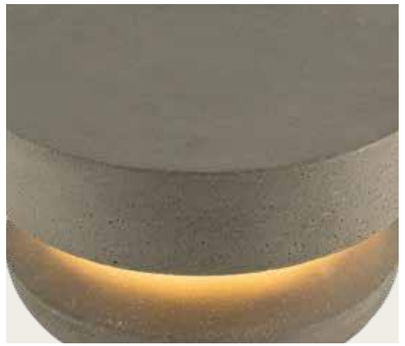





Power	7W
Input	24V
Color Temperature	3000K
Lumen	135Lm
Cri	90
IP	65
Dimensions	Ø: 20cm H: 12cm
Material	Concrete - Glass
Special Feature	Spike & Base Included
Reccomended Driver	LPV-35-24 (Not Included) In Parallel Connection 1-4pcs
Color	Natural Concrete / **Code E479**



IP 65 LED SeaSide




Wall to Floor - One Style
Seamless design connection across surfaces.







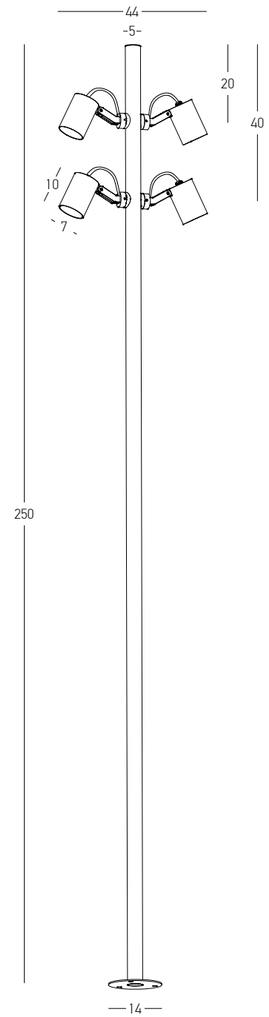


Power	35W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2148Lm
Cri	90
IP	65
Dimensions	L: 44cm W: 7cm H: 250cm
Spots	Ø: 7cm H:10cm
Base	Ø: 14cm H: 0.5cm
Beam Angle	60°
Material	Aluminium
Special Feature	Tilt Up Down Spots
Color	Sandy Black / **Code E406**

IP 65 LED





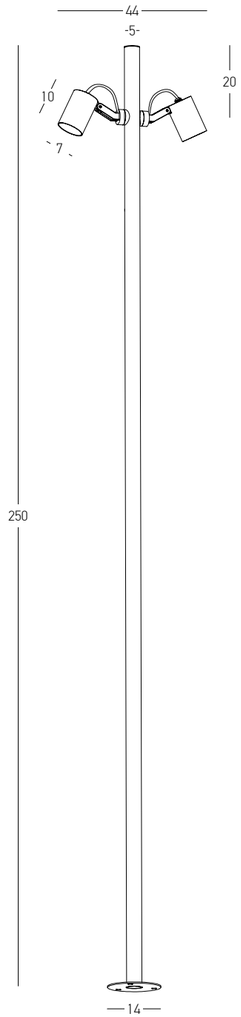


Power	17W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1072Lm
Cri	90
IP	65
Dimensions	L: 44cm W: 7cm H: 250cm
Spots	Ø: 7cm H:10cm
Base	Ø: 14cm H: 0.5cm
Beam Angle	60°
Material	Aluminium
Special Feature	Tilt Up Down Spots
Color	Sandy Black / **Code E405**

IP 65 LED







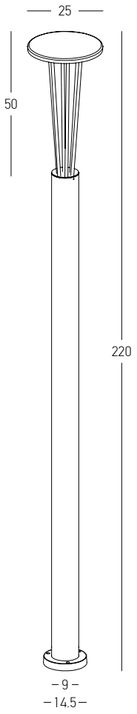



Power	15.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1005Lm
Cri	85
IP	65
Dimensions	Ø: 25cm H: 220cm
Base	Ø: 14.5cm H: 2.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E445**

IP 65 LED






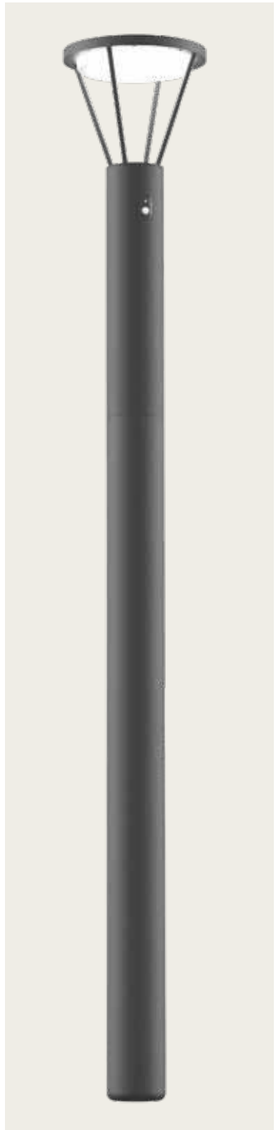

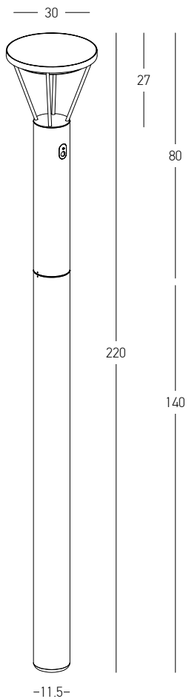





Power	5W
Input	3.7V DC
Battery	2x2200 MAH
Color Temperature	3000K
Lumen	378Lm
Cri	80
IP	54
Dimensions	**Ø**: 30cm H: 80-220cm
Material	Aluminium - PC Diffuser
Special Feature	Solar Panel 3 Lighting Modes Sense Distance 3-5m
Color	Graphite / **Code E448**

IP 54 LED SENSOR SOLAR






LIGHTING MODES OVERVIEW

Mode 1 • Dim + Motion Sensor
LED operates at 10% brightness when ambient light <20 lux. Upon motion detection, brightness increases to 100% during movement.
After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%.
Lamp switches off when ambient light >20 lux.

Mode 2 • Constant Light
Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours.
Turns off when ambient light >20 lux.

Mode 3 • Motion Only
No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops.
After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.






Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 20.5cm W: 12.5cm H: 30.5cm
Base	L: 3cm W: 7.5cm H: 28.5cm
Shade	Ø: 12.5cm H: 24cm
Material	Aluminium - Clear Diffuser
Color	Sandy Black / **Code E338**

IP 65



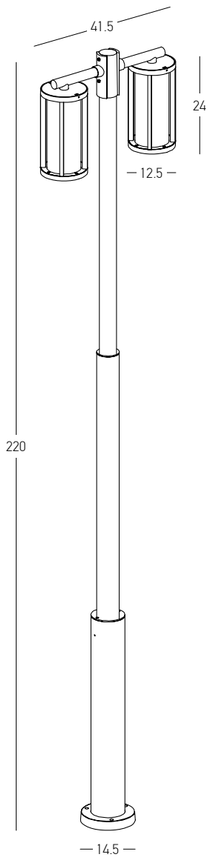


Bulb	2x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 12.5cm W: 41.5cm H: 220cm
Base	Ø: 14.5cm H: 3cm
Shades	Ø: 12.5cm H: 24cm
Material	Aluminium - Clear Diffuser
Color	Sandy Black / **Code E339**

IP 65





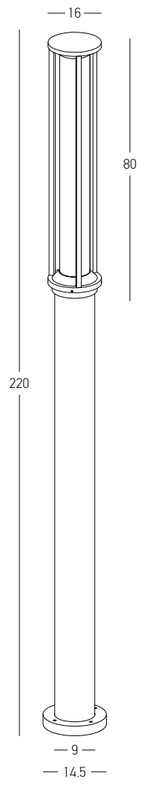


Power	17W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1488Lm
Cri	80
IP	65
Dimensions	Ø: 16cm H: 220cm
Base	Ø: 14.5cm H: 2.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E348**

IP 65 LED










Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	187Lm
Cri	90
IP	65
Dimensions	Ø: 5cm H: 60cm
Base	Ø: 10.5cm
Material	Aluminium - Glass
Color	Sandy Black / **Code E463**

IP 65 LED







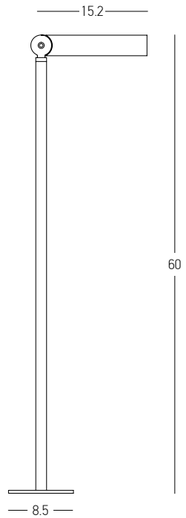



Driver	**LPV-35-24**
Power	35W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14.8cm W: 4cm H: 3cm
IP	67

Power	8W
Input	24V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	L: 15.2cm W: 4cm H: 60cm
Base	Ø: 8.5cm H: 0.5cm
Beam Angle	36°
Material	Aluminium - Tempered Glass
Recommended Driver	LPV-35-24 (Not Included) In Parallel Connection 1-4pcs
Special Feature	Tilt Up-Down Connection Box Included
Color	Sandy Black / **Code E407**


IP 65 LED












Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	Ø: 7cm H: 30cm
Base	Ø: 8.5cm H: 0.5cm
Shade	Ø: 7cm H: 8cm
Material	Aluminium - Tempered Glass
Special Feature	Connection Box Included
Color	Sandy Black / **Code E408**


IP 65 LED



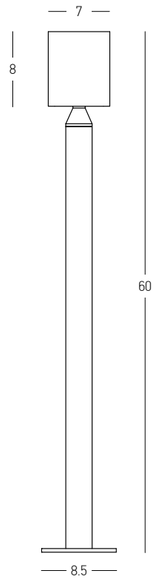

Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	Ø: 7cm H: 60cm
Base	Ø: 8.5cm H: 0.5cm
Shade	Ø: 7cm H: 8cm
Material	Aluminium - Tempered Glass
Special Feature	Connection Box Included
Color	Sandy Black / **Code E409**


IP 65 LED

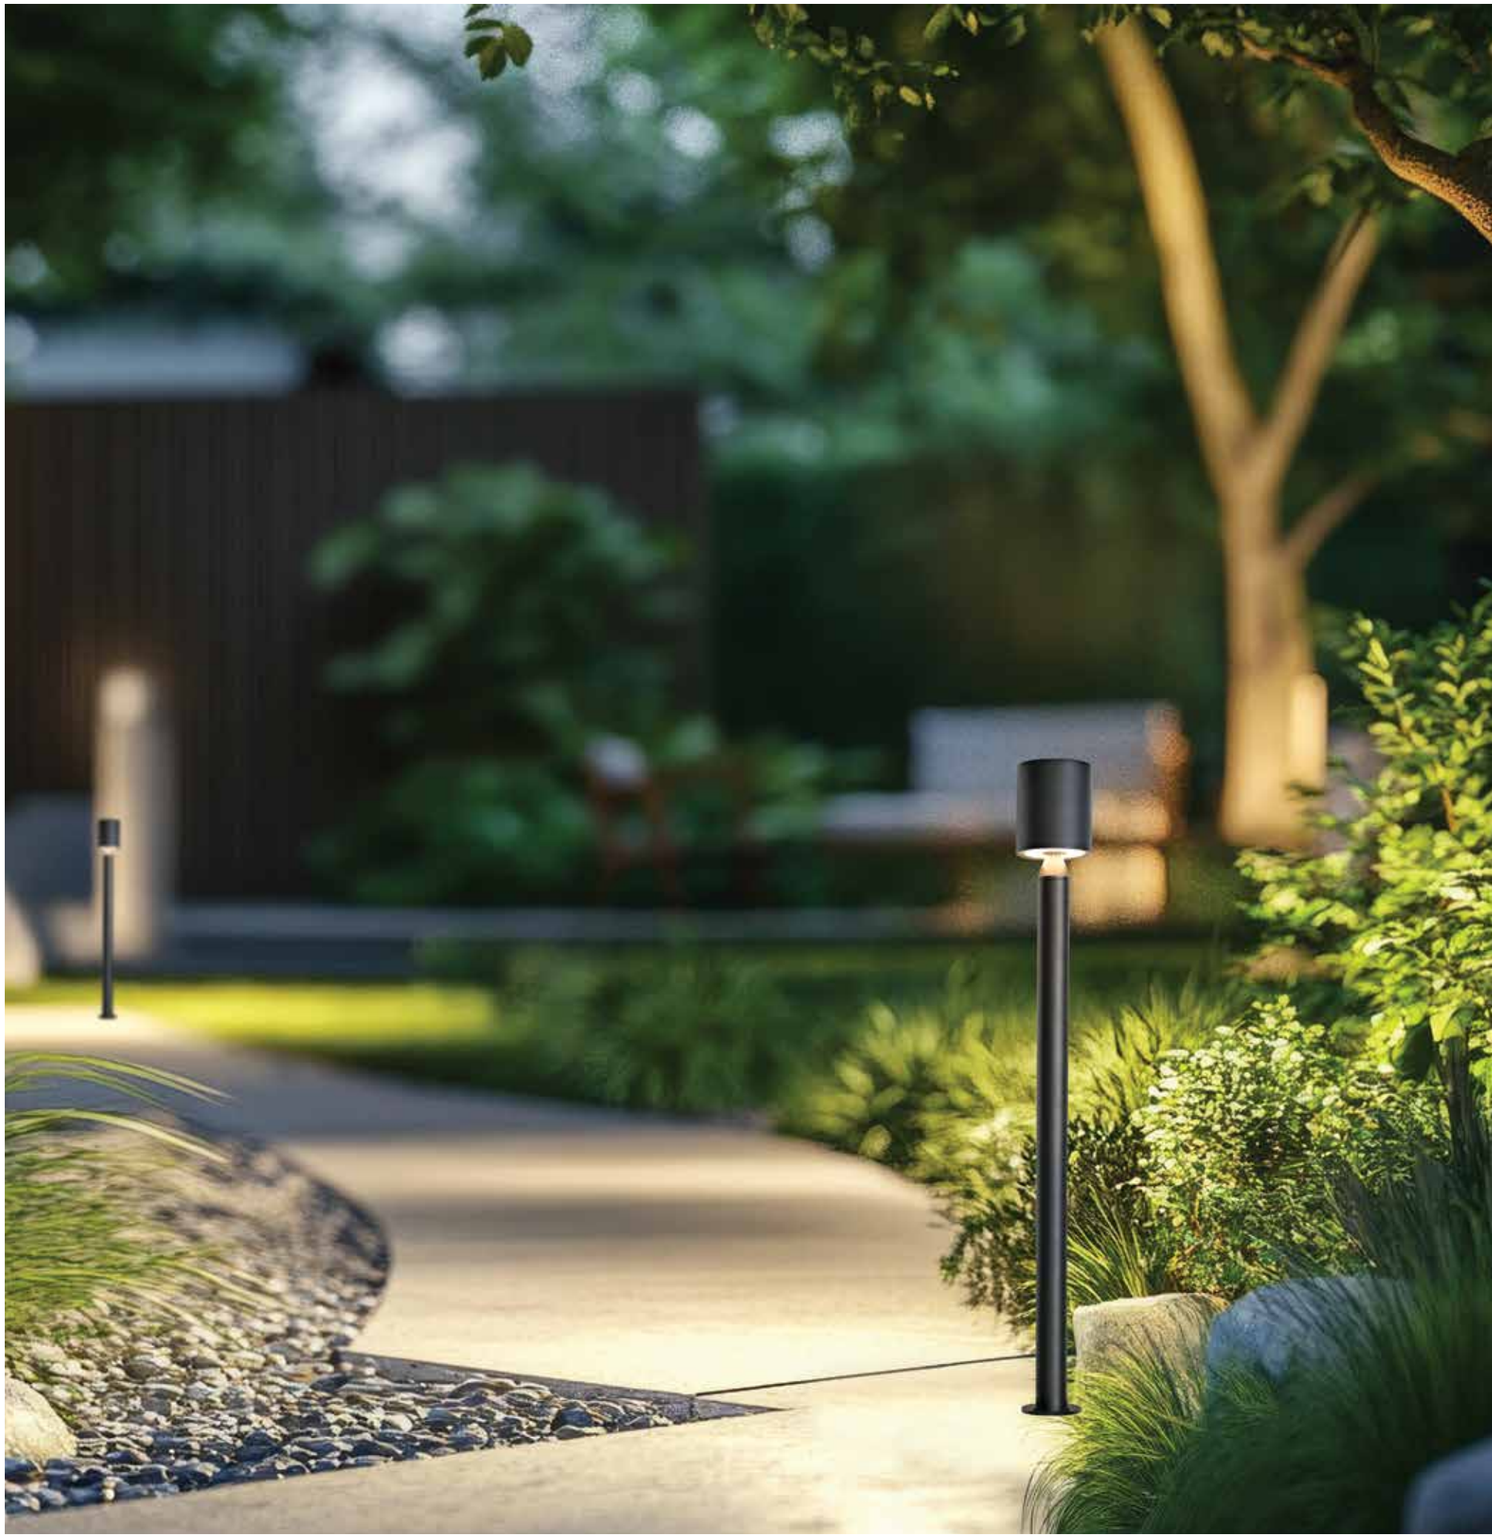









Power	12W
Input	220-240V, 50/60Hz
Color Temperature	2200K, 2700K, 3200K, 4000K
Lumen	566Lm, 610Lm, 658Lm, 712Lm
Cri	80
IP	65
Dimensions	Ø: 16cm H: 80cm
Material	Aluminium - PC Diffuser
Special Feature	CCT Switch
Color	Dark Brown / **Code E466**

IP 65 LED CCT






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	200Lm
Cri	95
IP	65
Dimensions	Ø: 6cm H: 60cm
Material	Aluminium - PC Diffuser
Color	Dark Coffee / **Code E423**

IP 65 LED









Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	438Lm
Cri	95
IP	65
Dimensions	L: 10cm W: 10cm H: 60cm
Material	Aluminium - PC Diffuser
Color	Dark Coffee / **Code E425**

IP 65 LED






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	200Lm
Cri	95
IP	65
Dimensions	Ø: 6cm H: 60cm
Material	Aluminium - PC Diffuser
Color	Graphite-Wood / **Code E424**

IP 65 LED











Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	438Lm
Cri	95
IP	65
Dimensions	L: 10cm W: 10cm H: 60cm
Material	Aluminium - PC Diffuser
Color	Graphite-Wood / **Code E426**

IP 65 LED



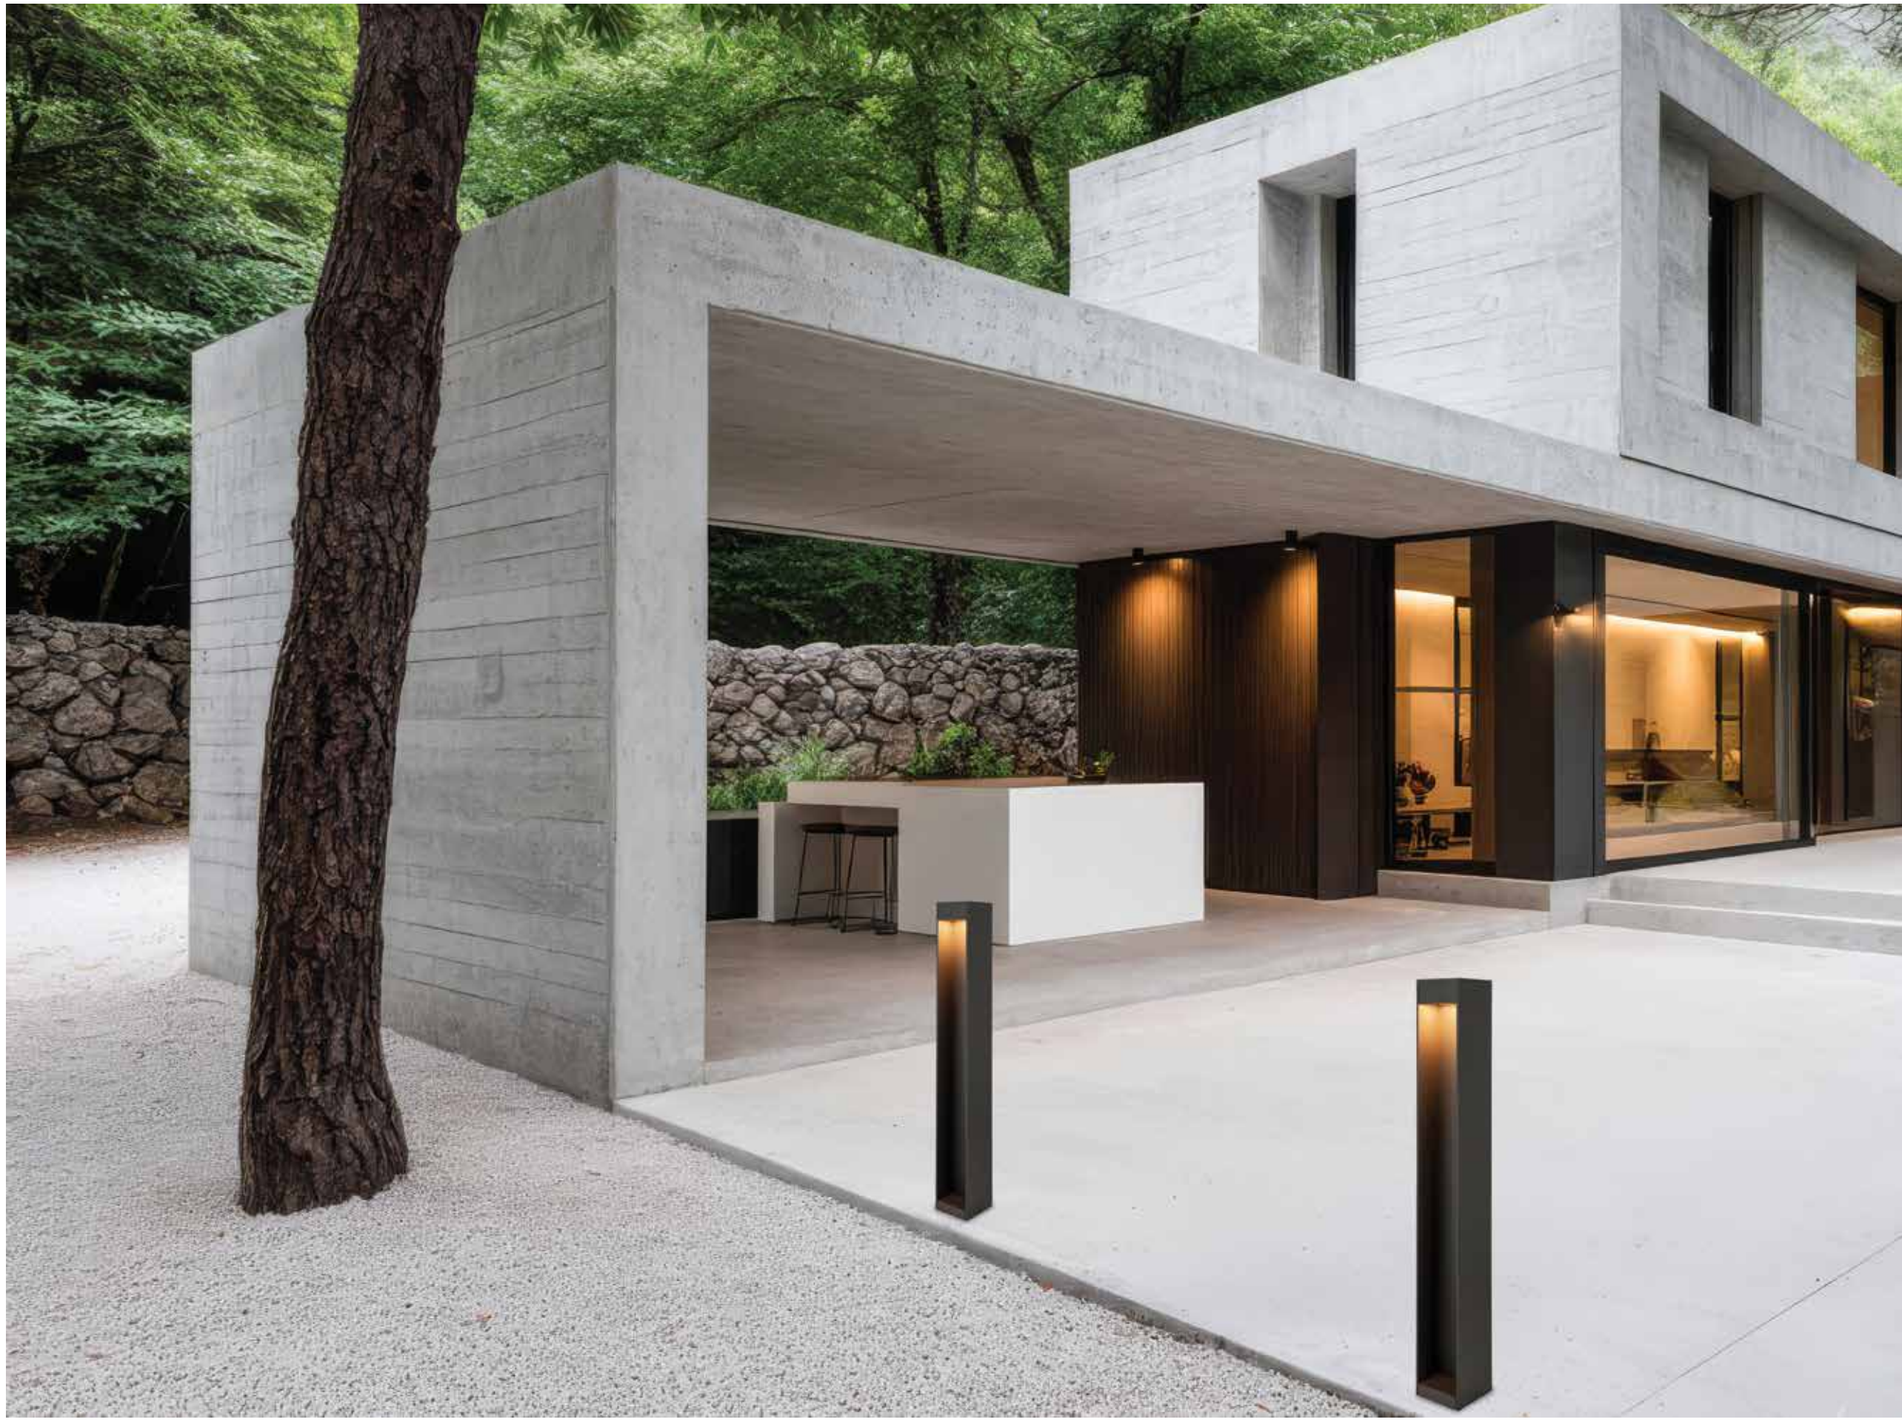



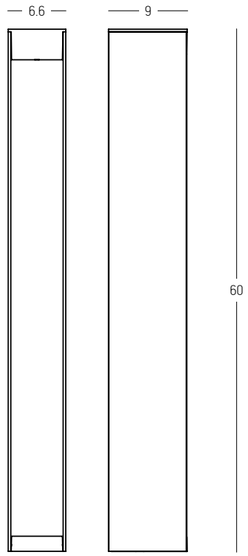

Power	12W
Input	220-240V, 50/60Hz
Color Temperature	2200K, 2700K, 3200K, 4000K
Lumen	320Lm, 341Lm, 358Lm, 375Lm
Cri	80
IP	65
Dimensions	L: 9cm W: 6.6cm H: 60cm
Material	Aluminium - PC Diffuser
Special Feature	CCT Switch
Color	Graphite / **Code E467**

IP 65 LED CCT




















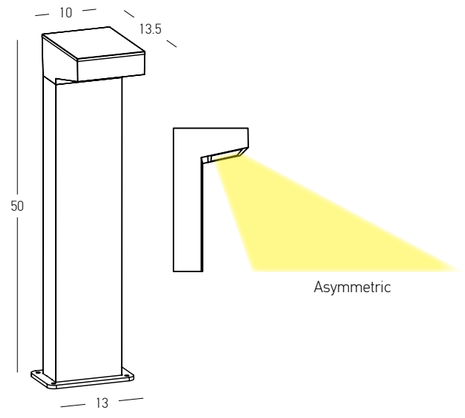

Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	760Lm
Cri	85
IP	65
Dimensions	L: 13.5cm W: 10cm H: 50cm
Base	L: 8cm W: 13cm H: 0.5cm
Material	Aluminium - Tempered Glass
Special Feature	Asymmetric Beam Angle
Color	Graphite / **Code E418**


IP 65 LED

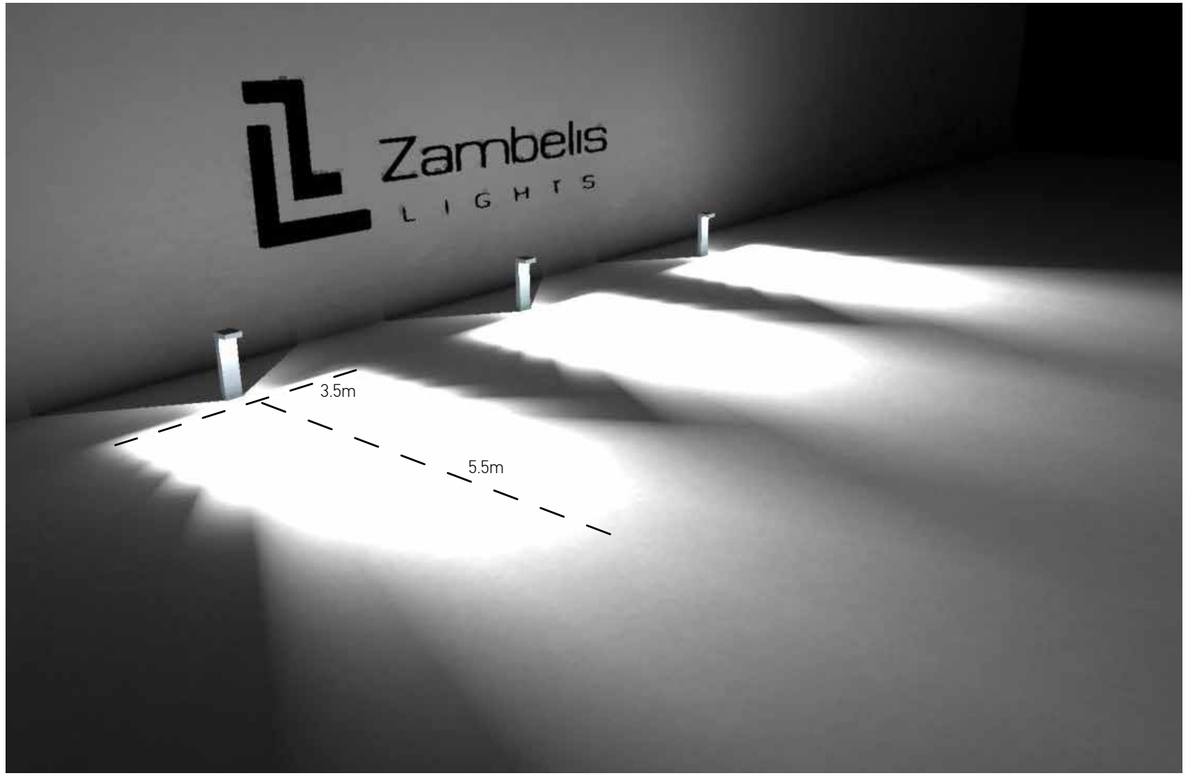


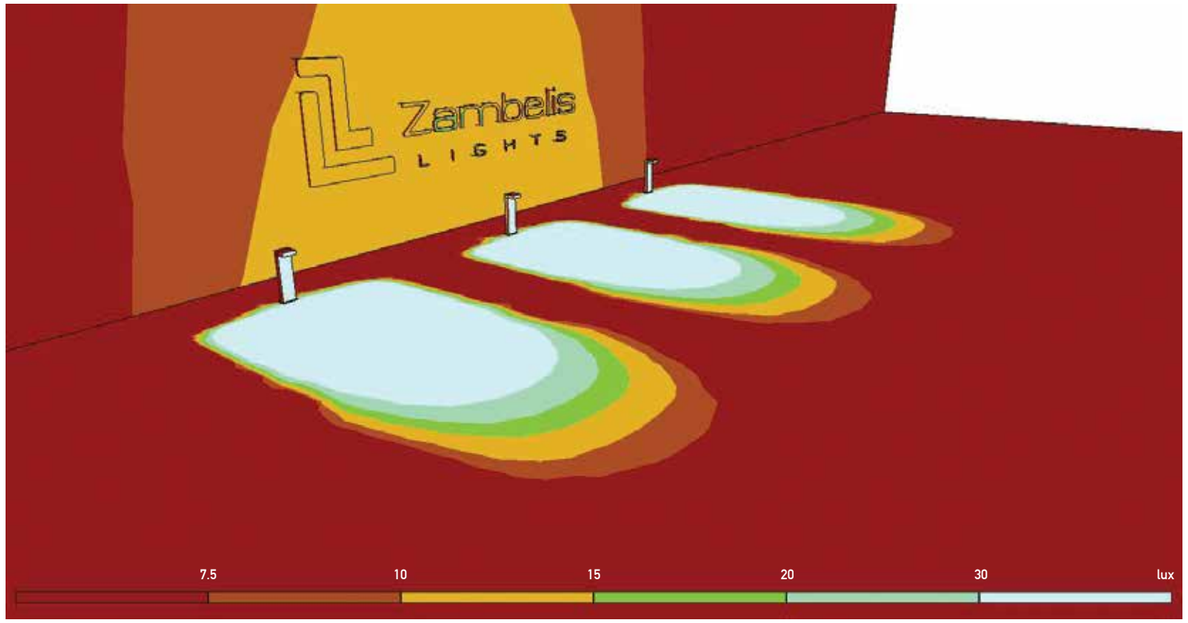





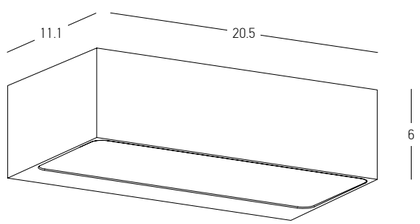




Asymmetric

Power	3x 4.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	968Lm
Cri	85
IP	54
Dimensions	L: 11.1cm W: 20.5cm H: 6cm
Material	Aluminium - Tempered Glass
Special Feature	Asymmetric Beam Angle
Color	Graphite / **Code E518**


IP 54 LED



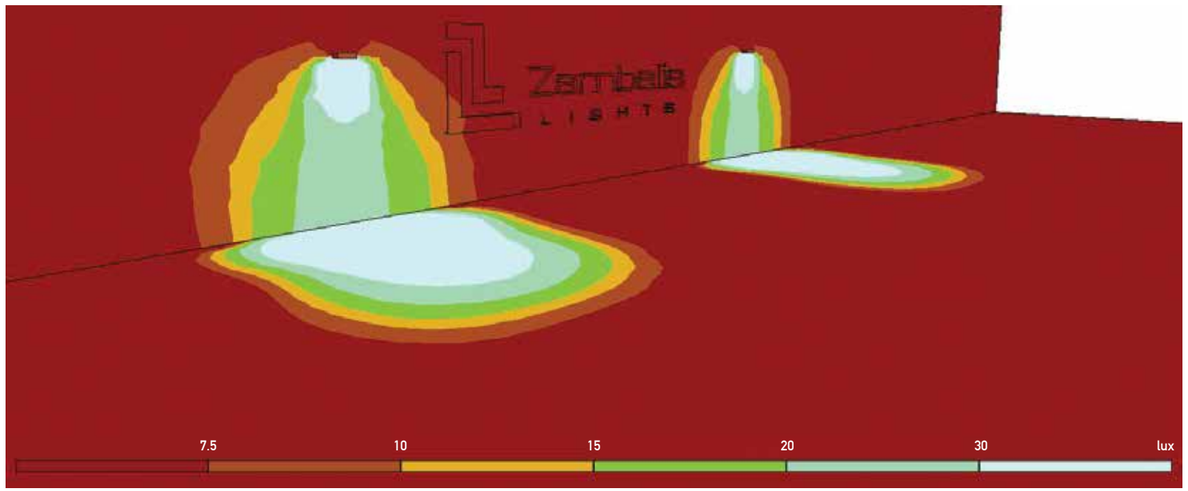





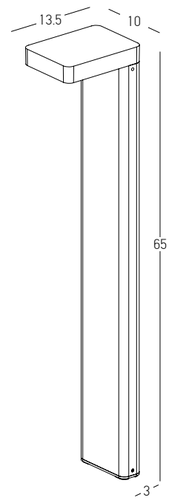


Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	710Lm
Cri	80
IP	54
Dimensions	L: 13.5cm W: 10cm H: 65cm
Beam Angle	120°
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E297**

IP 54 LED








Power	6.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	316Lm
Cri	80
IP	65
Dimensions	L: 4.3m W: 16cm H: 17.2cm
Material	Aluminium - Glass
Color	Graphite / **Code E446**


IP 65 LED



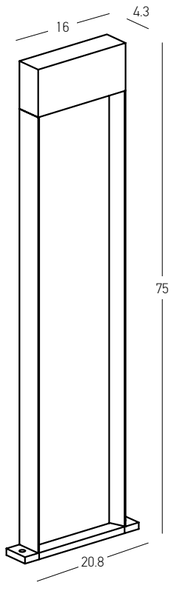



Power	6.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	316Lm
Cri	80
IP	65
Dimensions	L: 4.3m W: 16cm H: 75cm
Base	L: 4.3m W: 20.8cm H: 1cm
Material	Aluminium - Glass
Color	Graphite / **Code E447**

IP 65 LED

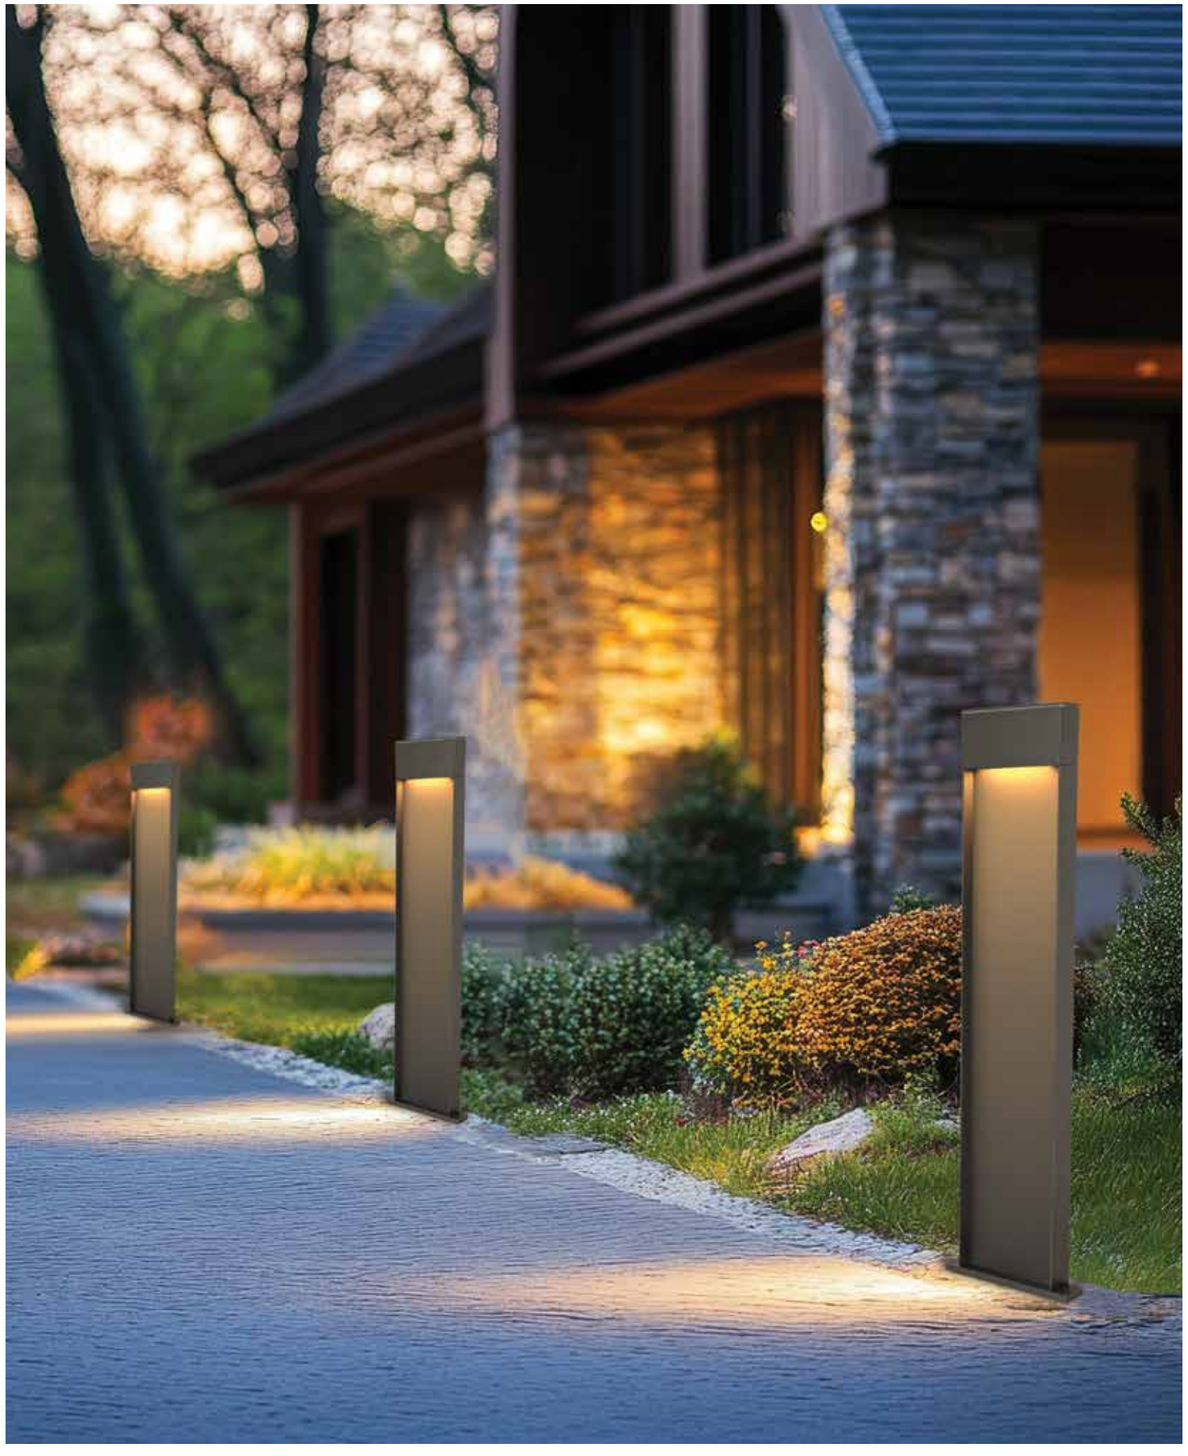




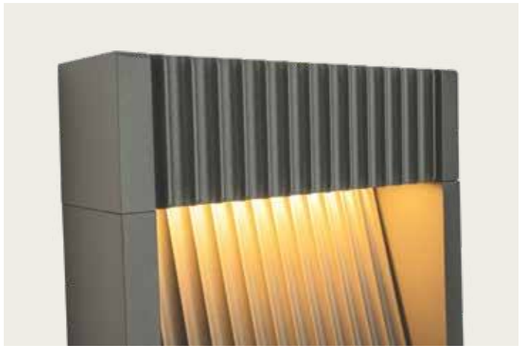




Power	13W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	638Lm
Cri	80
IP	65
Dimensions	L: 4.7cm W: 16.4cm H: 20cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E353**

IP 65 LED

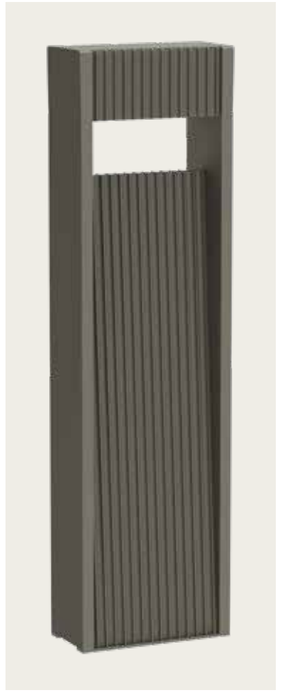



Power	30W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	986Lm
Cri	80
IP	65
Dimensions	L: 8m W: 16.6cm H: 60cm
Material	Aluminium - Tempered Glass
Special Feature	Double Sided Lighting
Color	Graphite / **Code E368**


IP 65 LED










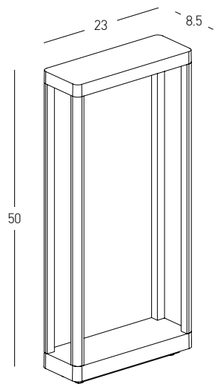

Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	587Lm
Cri	80
IP	65
Dimensions	L: 8.5cm W: 23cm H: 50cm
Material	Aluminium - Clear Glass
Color	Graphite / **Code E335**

IP 65 LED






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	481Lm
Cri	80
IP	65
Dimensions	L: 12cm W: 15cm H: 26cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E336**

IP 65 LED






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	587Lm
Cri	80
IP	65
Dimensions	L: 8.5cm W: 23cm H: 20cm
Material	Aluminium - Clear Glass
Color	Graphite / **Code E334**


IP 65 LED







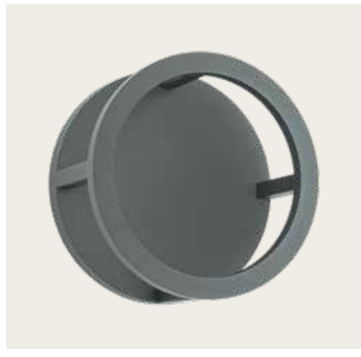




Power	9.2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	368Lm
Cri	85
IP	65
Dimensions	**Ø**: 20.6cm L: 12.3cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E443**

IP 65 LED








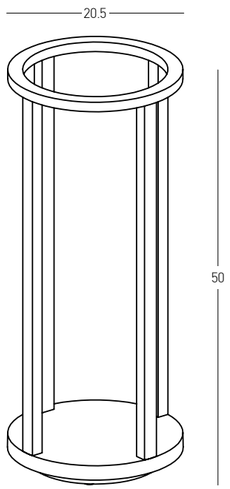

Power	9.2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	450Lm
Cri	85
IP	65
Dimensions	Ø: 20.5cm H: 50cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E444**


IP 65 LED






Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	704Lm
Cri	80
IP	54
Dimensions	L: 18cm W: 18cm H: 23cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E203**

IP 54 LED

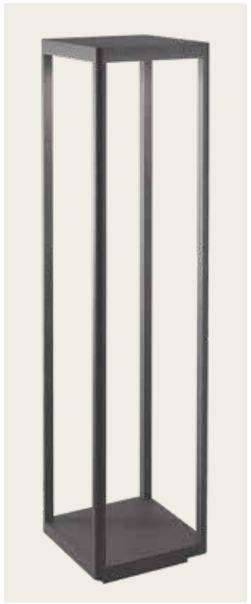


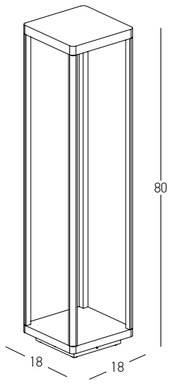

Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	704Lm
Cri	80
IP	54
Dimensions	L: 18cm W: 18cm H: 80cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E204**

IP 54 LED



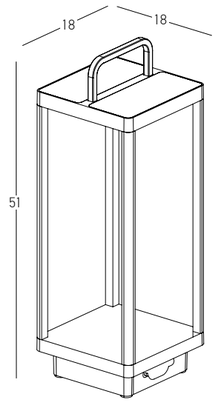



Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	390Lm
Cri	80
IP	54
Dimensions	L: 18cm W: 18cm H: 51
Switch	1 Switch On/Off
Material	Aluminium - Tempered Glass
Special Feature	Solar Panel Portable Lamp USB Cable Included
Color	Graphite / **Code E302**

IP 54 LED SOLAR




LIGHTING MODES OVERVIEW

Charging Instructions:
Before first use, charge the lamp under direct sunlight for 3 full days or use the included USB cable with a 1A adaptor for 4-5 hours. (USB cable included in the package.)

Lighting Modes:
Mode 1: First press • 100% brightness
Mode 2: Second press • 50% brightness
Mode 3: Third press • Light OFF






Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	990Lm
Cri	80
IP	54
Dimensions	L: 12.5cm W: 9cm H: 24cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E276**

IP 54 LED



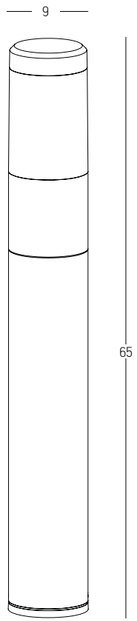


Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	993Lm
Cri	80
IP	54
Dimensions	Ø: 9cm H: 65cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E277**

IP 54 LED










Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	919Lm
Cri	80
IP	65
Dimensions	Ø: 12cm L: 15.5cm H: 21.3cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E344**

IP 65 LED




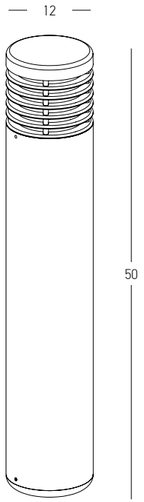

Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	923Lm
Cri	80
IP	65
Dimensions	Ø: 12cm H: 50cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E345**

IP 65 LED



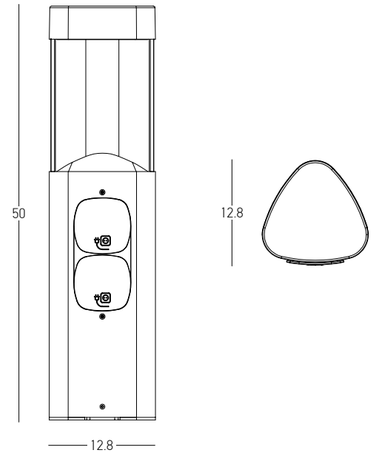

Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	639Lm
Cri	80
IP	54
Dimensions	L: 12.8cm W: 12.8cm H: 50cm
Material	Aluminium - PC Diffuser
Special Feature	2 European Sockets 220-240V
Color	Graphite / **Code E354**

IP 54 LED






*Power sockets operate only when the light is switched on.






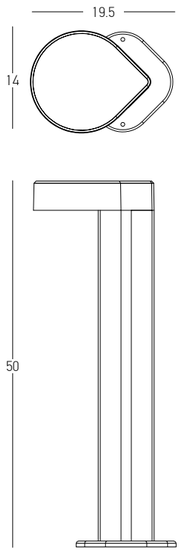


Power	13W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1035Lm
Cri	80
IP	65
Dimensions	L: 19.5cm W: 14cm H: 50cm
Beam Angle	120°
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E357**

IP 65 LED




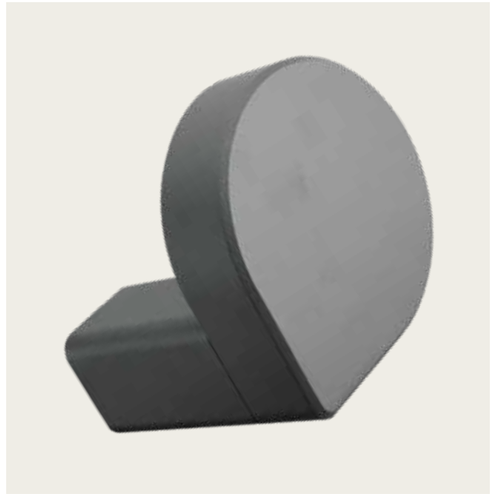




Power	13W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1035Lm
Cri	80
IP	65
Dimensions	L: 16.5cm W: 14cm H: 15cm
Beam Angle	120°
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E358**

IP 65 LED

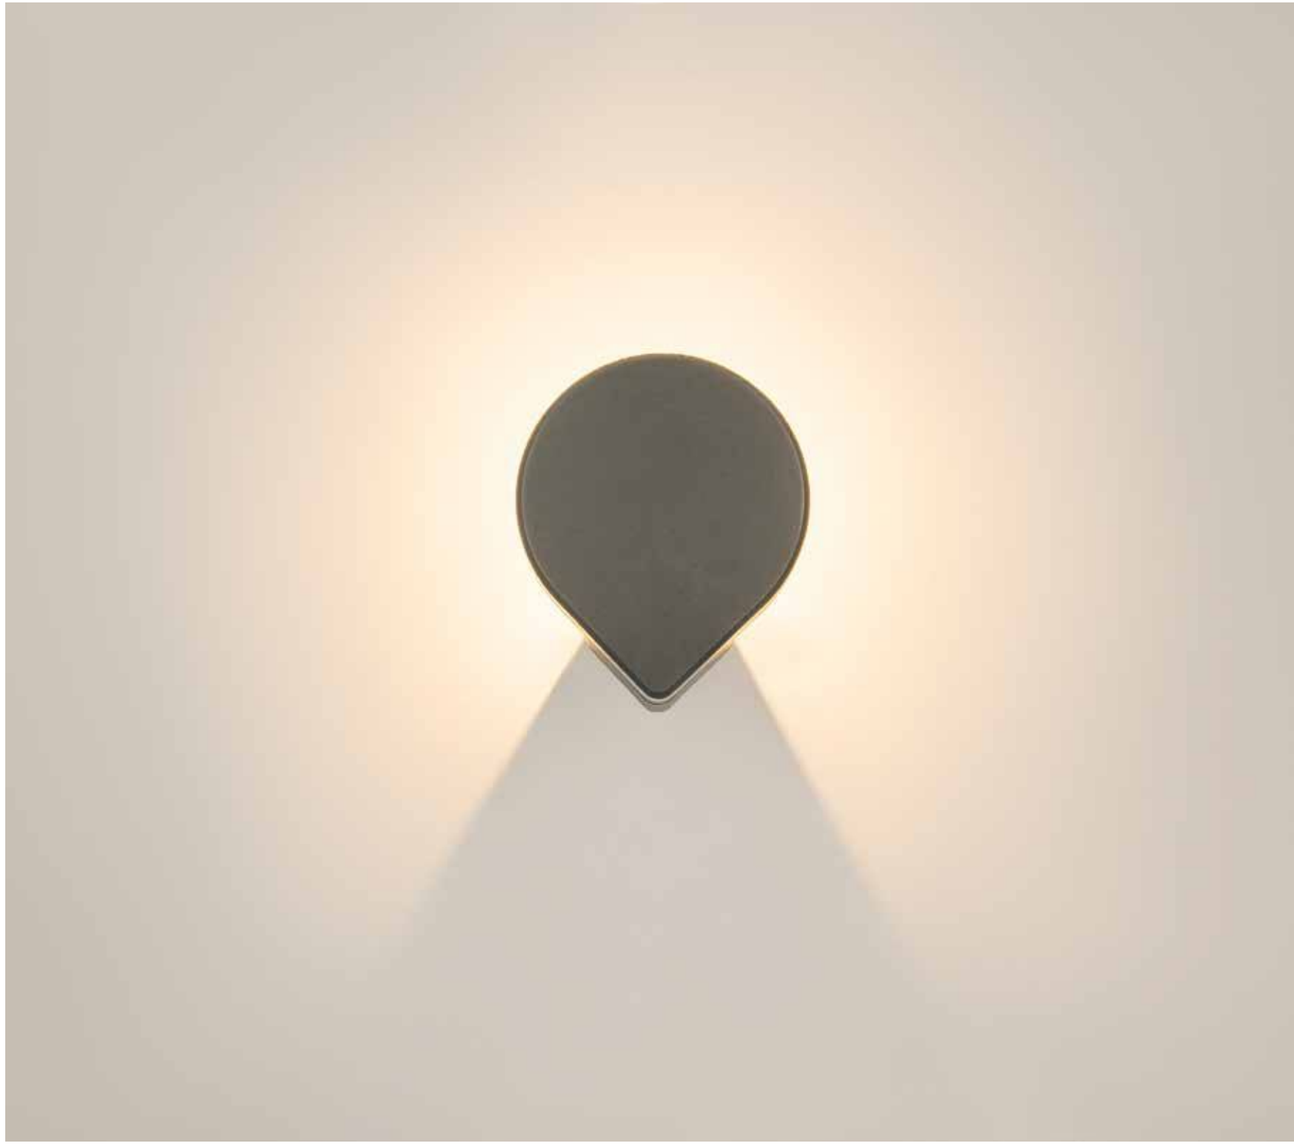






Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	867Lm
Cri	80
IP	54
Dimensions	Ø: 11cm H: 25cm
Material	Aluminium
Color	Graphite / **Code E133**


IP 54 LED






Power	3x 5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1117Lm
Cri	80
IP	54
Dimensions	Ø: 12cm H: 45cm
Material	Aluminium
Color	Graphite / **Code E132**


IP 54 LED

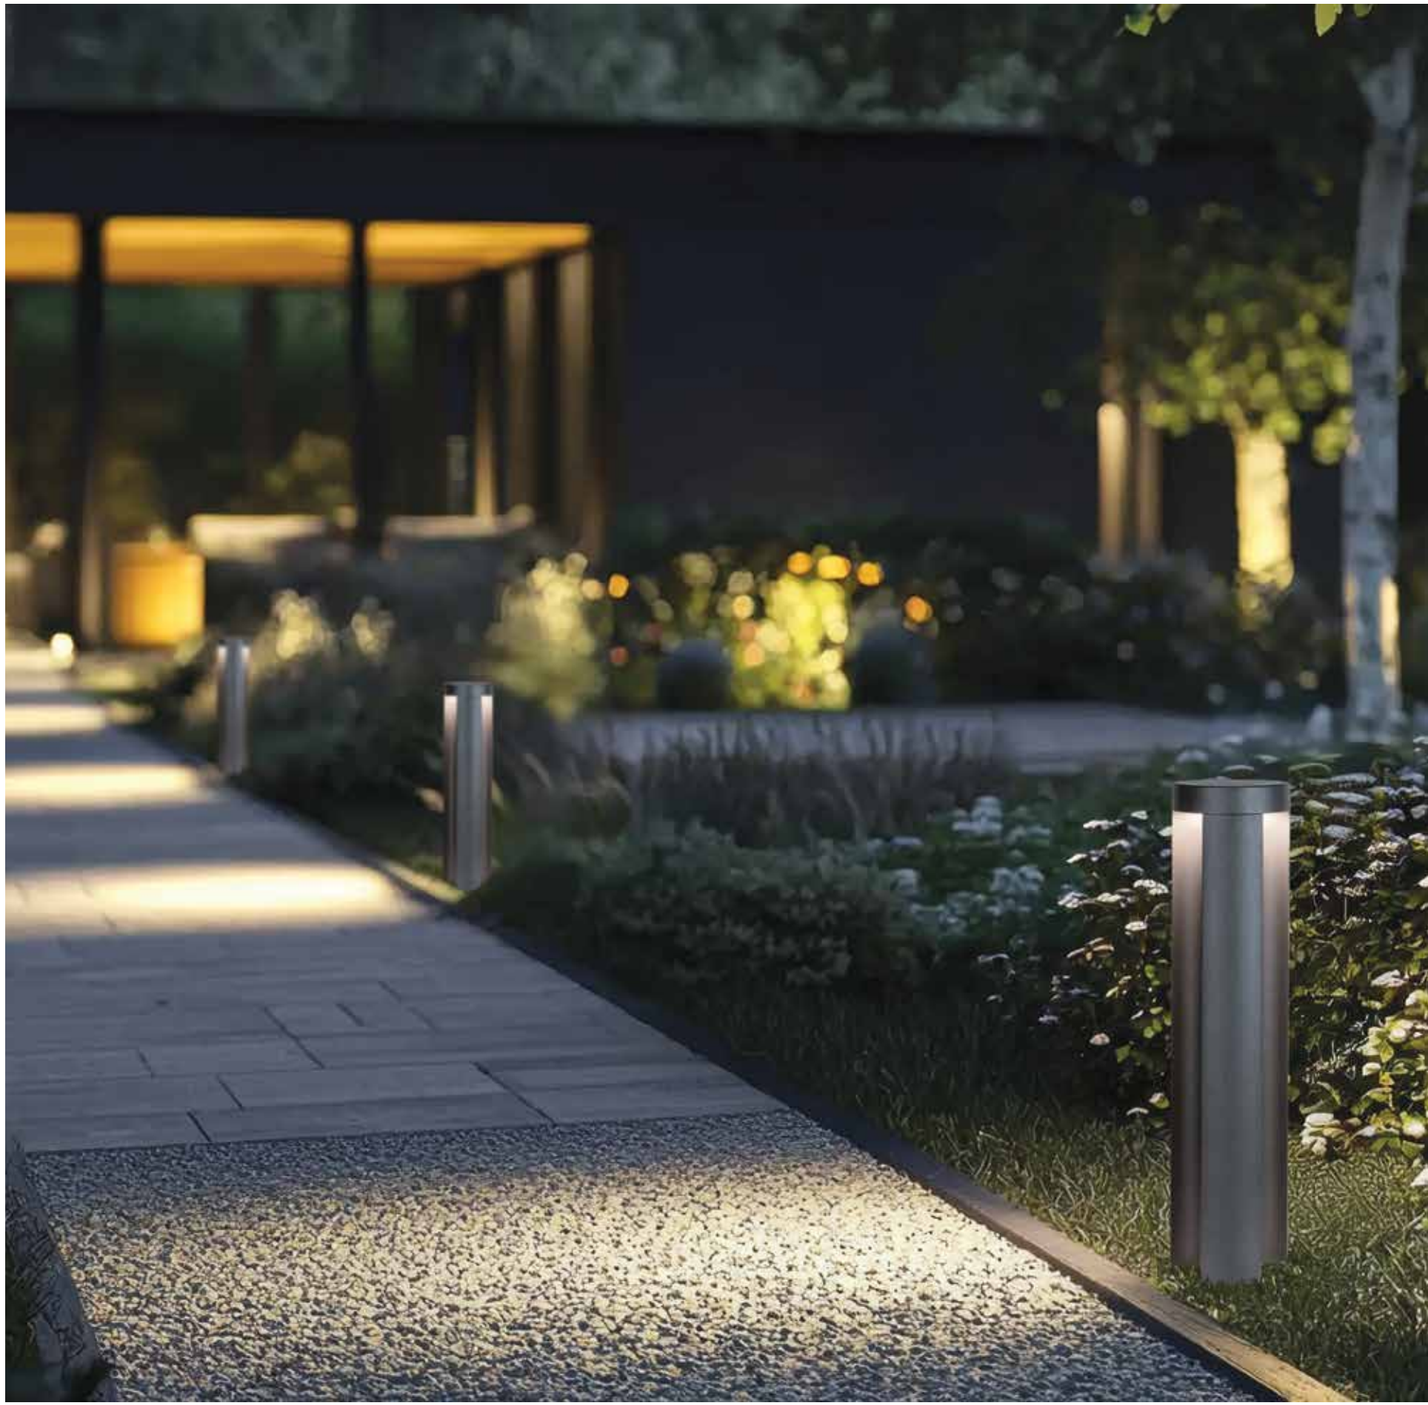





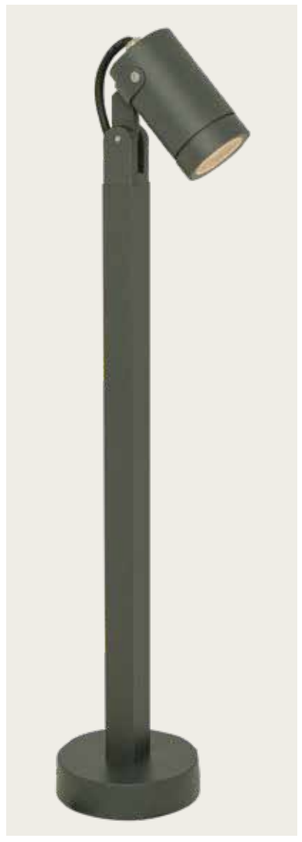

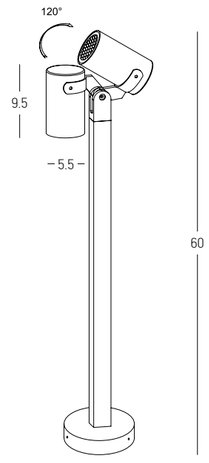


Bulb	1x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 11.5cm W: 5.5cm H: 60cm
Base	Ø: 11.5cm H: 3cm
Spot Dimensions	Ø: 5.5cm L: 9.5cm
Material	Aluminium - Tempered Glass
Special Feature	Tilt Up-Down Honeycomb Included
Color	Graphite / **Code E325**

IP 54










Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	920Lm
Cri	80
IP	54
Dimensions	Ø: 15cm L: 5.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E237**

IP 54 LED










Power	11W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	792Lm
Cri	80
IP	65
Dimensions	Ø: 15cm H: 100cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E249**

IP 65 LED









Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1180Lm
Cri	90
IP	54
Dimensions	Ø: 9cm H: 65cm
Beam Angle	120°
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E298**


IP 54 LED













Power	13W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	767Lm
Cri	80
IP	65
Dimensions	L: 10cm W: 9cm H: 9cm
Material	Aluminium
Special Feature	Up-Down Lighting
Color	Graphite / **Code E352**

IP 65 LED

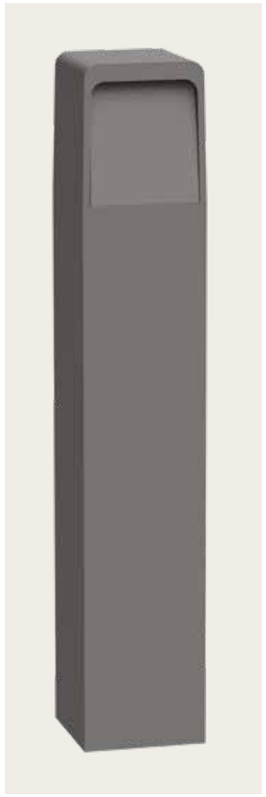



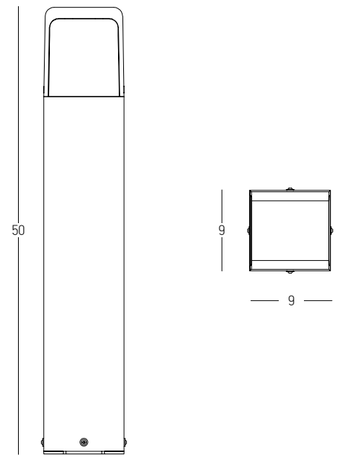


Power	13W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	767Lm
Cri	80
IP	65
Dimensions	L: 9cm W: 9cm H: 50cm
Material	Aluminium
Special Feature	Double Sided Lighting
Color	Graphite / **Code E351**

IP 65 LED





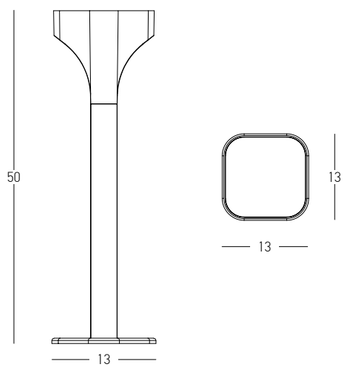


Power	11W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	993Lm
Cri	80
IP	65
Dimensions	L: 13cm W: 13cm H: 50cm
Base	L: 13cm W: 13cm H: 0.5cm
Beam Angle	120°
Material	Aluminium - PC Diffuser
Special Feature	Double Sided Lighting
Color	Graphite / **Code E356**

IP 65 LED







Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	658Lm
Cri	80
IP	67
Dimensions	L: 11cm W: 11cm H: 60cm
Beam Angle	120°
Material	Aluminium - Clear Glass
Color	Graphite / **Code E367**


IP 67 LED










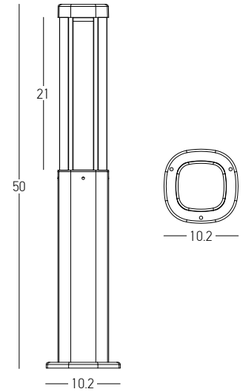


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	533Lm
Cri	80
IP	54
Dimensions	L: 10.2cm W: 10.2cm H: 50cm
Base	Ø: 10.2cm H: 1cm
Beam Angle	120°
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E355**

IP 54 LED

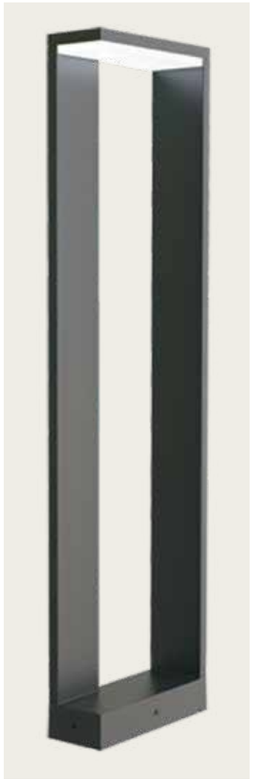



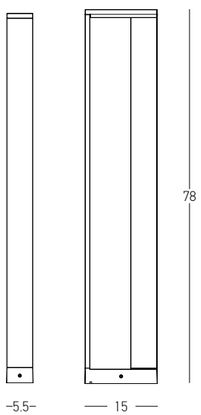


Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	653Lm
Cri	80
IP	54
Dimensions	L: 15cm W: 5.5cm H: 78cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E208**

IP 54 LED








Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	557Lm
Cri	80
IP	65
Dimensions	Ø: 15cm H: 15cm
Material	Aluminium - Clear Diffuser
Color	Graphite / **Code E337**

IP 65 LED






Bulb	1x GU10
Power	11W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 8cm L: 14.3cm
Base	Ø: 7cm
Material	Aluminium - Tempered Glass
Special Feature	Tilt Up-Down
Color	Graphite / **Code E236**

IP 65



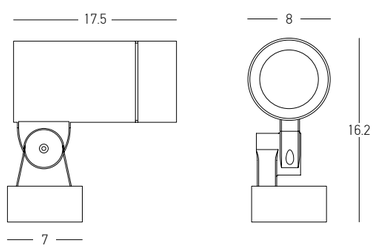

Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1243Lm
Cri	80
IP	65
Dimensions	Ø: 8cm L: 16.2cm
Base	Ø: 7cm
Beam Angle	32°
Material	Aluminium - Tempered Glass
Special Feature	Tilt Up-Down
Color	Graphite / **Code E235**

IP 65 LED

Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1243Lm
Cri	80
IP	65
Dimensions	Ø: 8cm L: 16.2cm
Base	Ø: 7cm
Beam Angle	12°
Material	Aluminium - Tempered Glass
Special Feature	Tilt Up-Down
Color	Graphite / **Code E235-12D**

IP 65 LED




Light That Defines Walls
Captivating outdoor wallscapes with style.



04. WALL








Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	191Lm
Cri	85
IP	54
Dimensions	L: 9cm W: 7.6cm H: 12cm
Material	Aluminium - Glass
Color	Grey Beige / **Code E419**


IP 54 LED






Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	405Lm
Cri	85
IP	54
Dimensions	L: 9cm W: 7.6cm H: 16cm
Material	Aluminium - Glass
Special Feature	Up-Down Lighting
Color	Grey Beige / **Code E420**

IP 54 LED

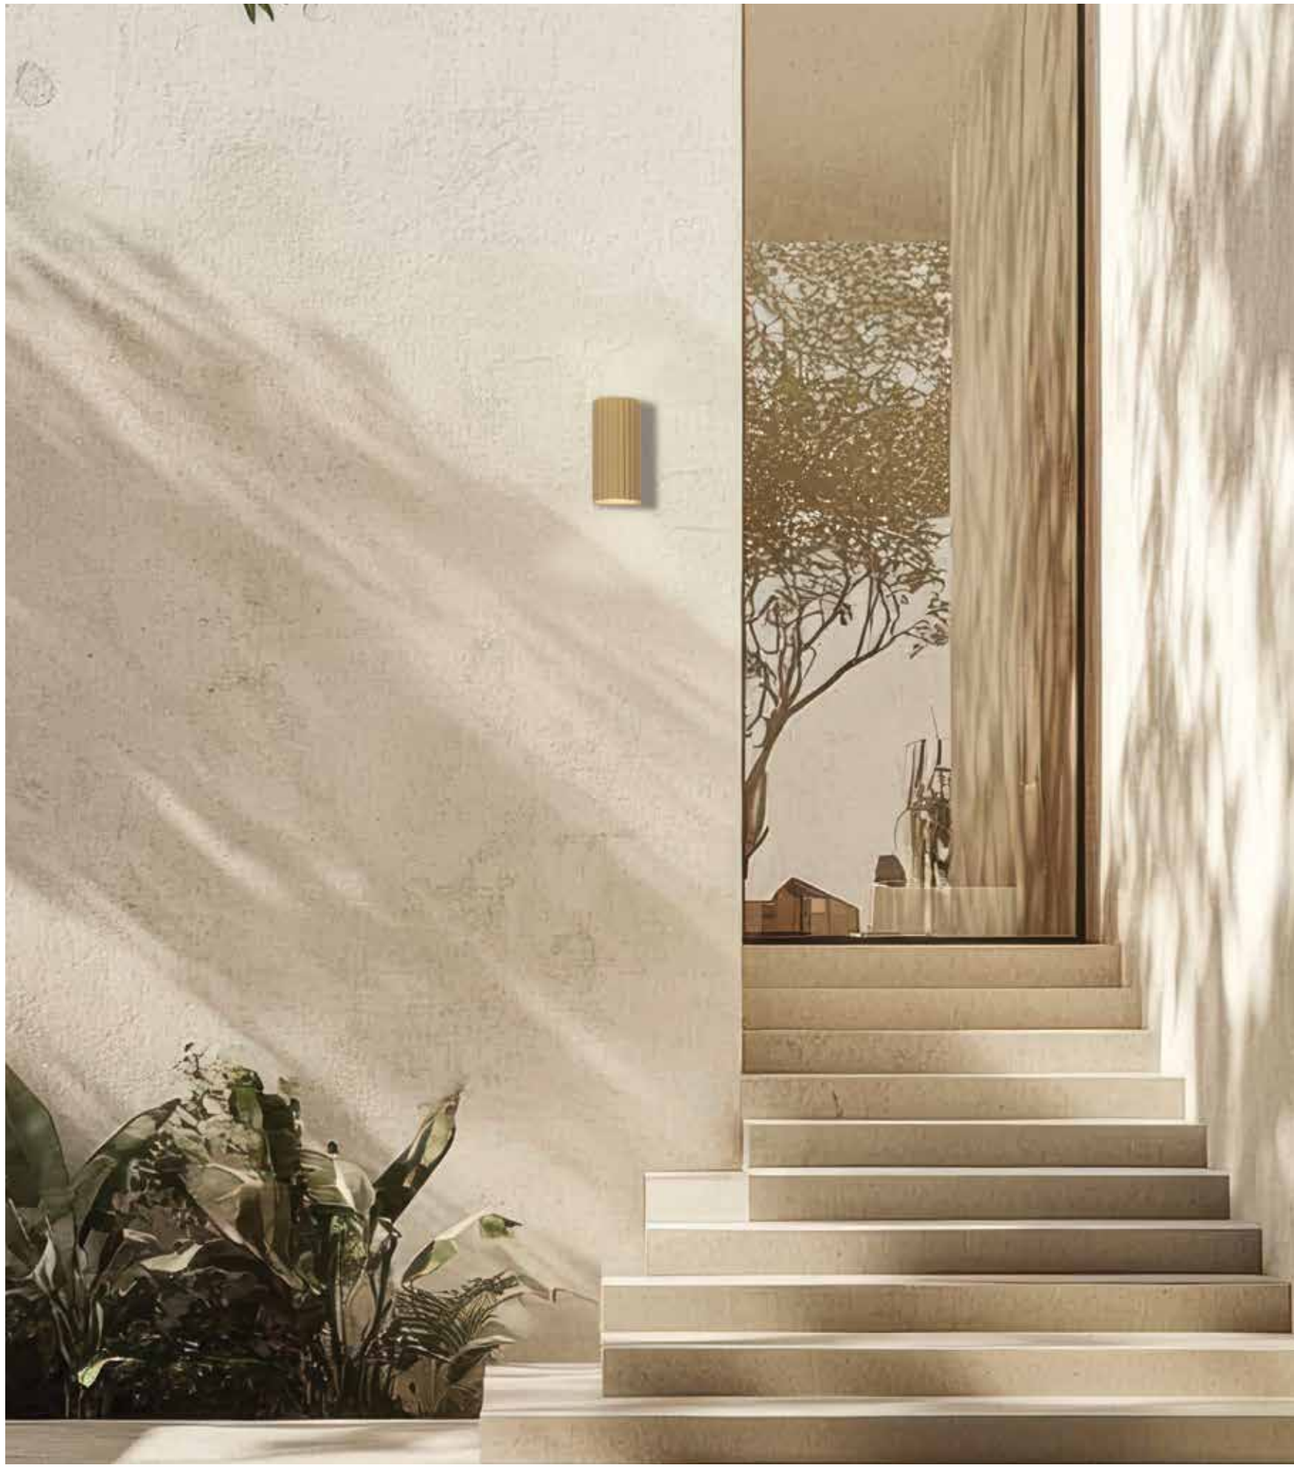








Power	4x 1W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	280Lm
Cri	85
IP	54
Dimensions	L: 9cm W: 7.6cm H: 12cm
Beam Angle	10°
Material	Aluminium - Glass
Color	Graphite / **Code E421**

IP 54 LED






Power	8x 1W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	560Lm
Cri	85
IP	54
Dimensions	L: 9cm W: 7.6cm H: 16cm
Beam Angle	10°
Material	Aluminium - Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E422**

IP 54 LED





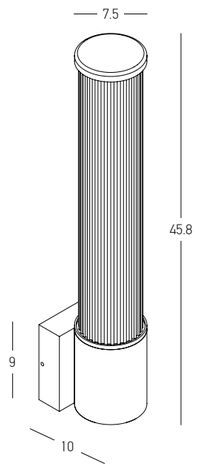


Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	832Lm
Cri	90
IP	54
Dimensions	Ø: 7.5cm L: 10cm H: 45.8cm
Base	L: 3cm W: 9cm H: 9cm
Material	Aluminium - Glass - Acrylic
Color	Graphite / **Code E428**

IP 54 LED







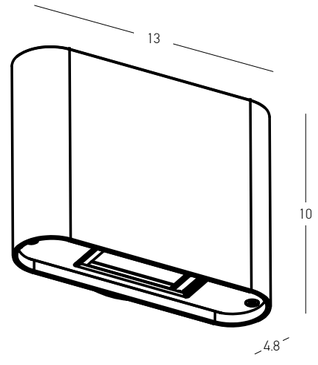

Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K, 4000K
Lumen	508Lm, 542Lm
Cri	80
IP	65
Dimensions	L: 4.8cm W: 13cm H: 10cm
Base	Ø: 8.8cm L: 1cm
Material	Aluminium - Tempered Glass
Special Feature	CCT Switch Adjustable Dual Light Side Cover Up-Down Lighting
Color	Sandy Black / **Code E433**

IP 65 LED CCT















Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	480Lm
Cri	80
IP	65
Dimensions	L: 3.1cm W: 11cm H: 9cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E238**
Color	Sandy White / **Code E238-W**

IP 65 LED








Power	2x 6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	960Lm
Cri	80
IP	65
Dimensions	L: 3.1cm W: 17.5cm H: 9cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E239**
Color	Sandy White / **Code E239-W**

IP 65 LED







Power	2x 10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1600Lm
Cri	80
IP	65
Dimensions	L: 3.1cm W: 30cm H: 9cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E240**
Color	Sandy White / **Code E240-W**

IP 65 LED















Bulb	1x G9
Power	12W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 11cm L: 7.5cm
Material	Aluminium - Clear PC Diffuser
Color	Sandy White / **Code E440**

IP 65








Bulb	1x G9
Power	12W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 11cm L: 7.5cm
Material	Aluminium - Clear PC Diffuser
Color	Sandy White / **Code E439**


IP 65




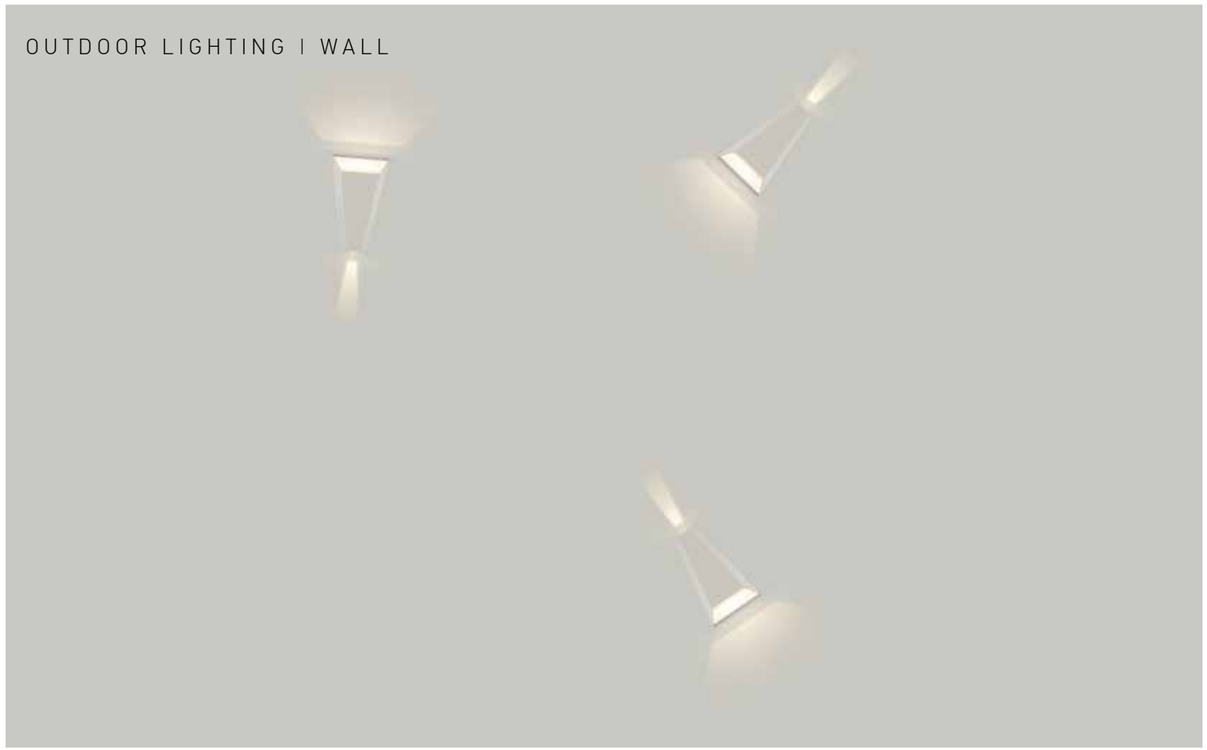










Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	480Lm
Cri	80
IP	54
Dimensions	L: 6.5cm W: 11cm H: 17.5cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E135**
Color	Sandy White / **Code E156**


IP 54 LED








Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	480Lm
Cri	80
IP	54
Dimensions	L: 8.2cm W: 8cm H: 8cm
Material	Aluminium - Tempered Glass
Special Feature	Movable Up-Down Lighting
Color	Graphite / **Code E109**
Color	Sandy White / **Code E159**

IP 54 LED



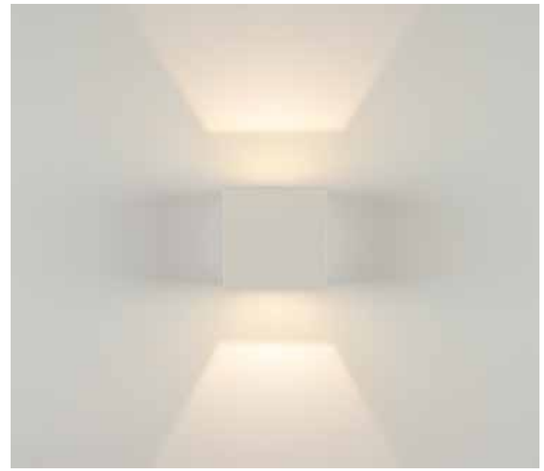


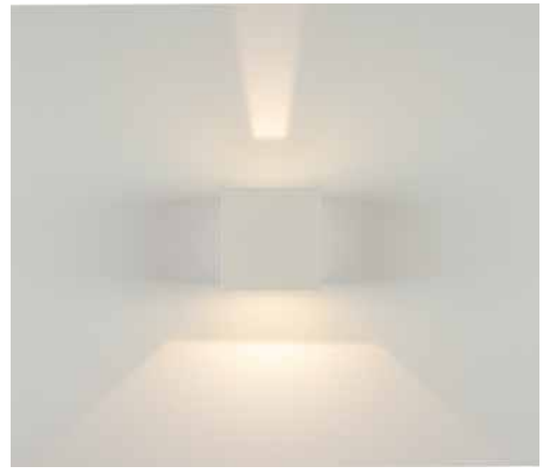

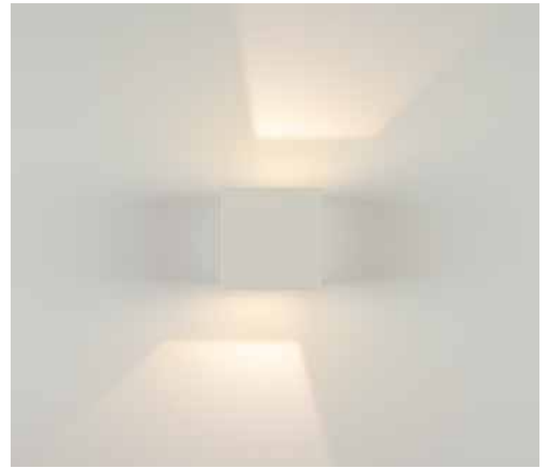








Power	2x 5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	929Lm
Cri	90
IP	54
Dimensions	L: 11cm W: 10cm H: 6.8cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E317**

IP 54 LED




Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	544Lm
Cri	90
IP	54
Dimensions	L: 11cm W: 10cm H: 6.4cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E316**

IP 54 LED







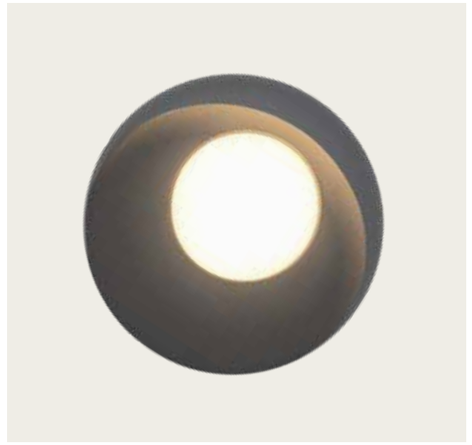



Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	490Lm
Cri	80
IP	54
Dimensions	Ø: 18cm L: 8.5cm
Base	Ø: 12cm L: 5.5cm
Material	Aluminium - PC Diffuser
Special Feature	Diffuser Ø: 8.5cm
Color	Graphite / **Code E413**


IP 54 LED












Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	875Lm
Cri	85
IP	54
Dimensions	Ø: 20cm L: 9cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E414**

IP 54 LED





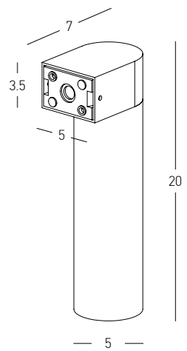

Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	300Lm
Cri	90
IP	65
Dimensions	**Ø**: 5cm L: 7cm H: 20cm
Base	L: 7cm W: 5cm H:3.5cm
Beam Angle	34°
Material	Aluminium - Glass
Color	Graphite / **Code E415**


IP 65 LED










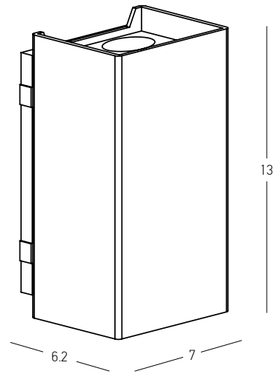

Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	350Lm
Cri	90
IP	65
Dimensions	L: 6.2cm W: 7cm H: 13cm
Base	L: 1.7cm W: 7cm H: 11cm
Beam Angle	6.5°
Material	Aluminium - Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E412**


IP 65 LED

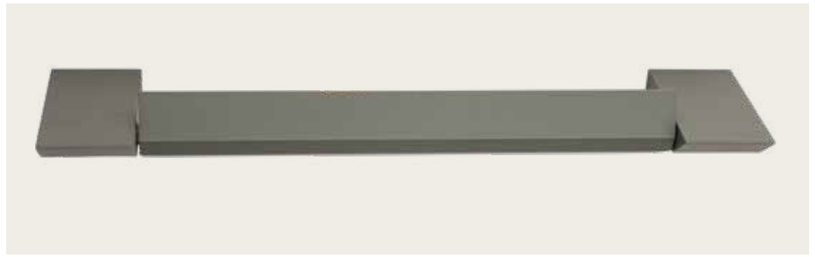











Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	617Lm
Cri	80
IP	54
Dimensions	L: 12.5cm W: 4cm H: 55cm
Base	2x W: 4cm H: 7cm
Material	Aluminium - Acrylic
Special Feature	350° Rotatable Profile 7.2x2.5cm
Color	Graphite / **Code E429**
Color	Dark Brown / **Code E430**

IP 54 LED





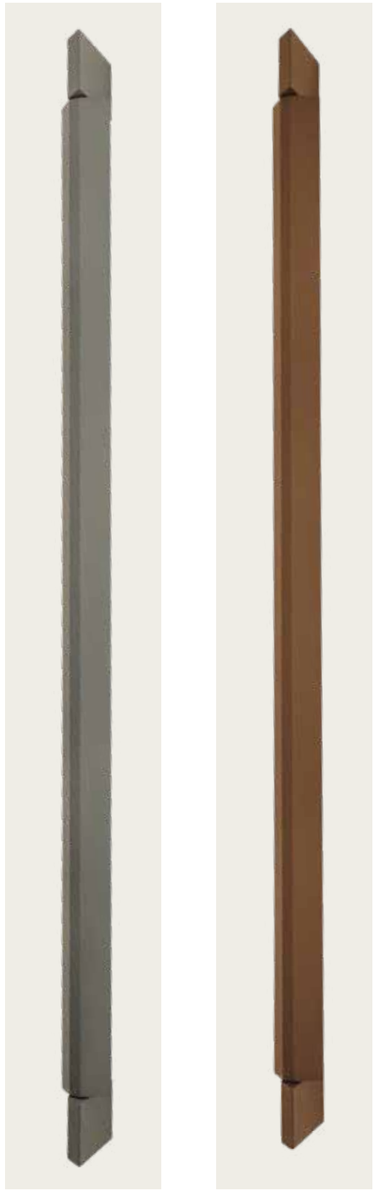




Power	36W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2000Lm
Cri	80
IP	54
Dimensions	L: 12.5cm W: 4cm H: 134cm
Base	2x W: 4cm H: 7cm
Material	Aluminium - Acrylic
Special Feature	350° Rotatable Profile 7.2x2.5cm
Color	Graphite / **Code E431**
Color	Dark Brown / **Code E432**

IP 54 LED






Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1187Lm
Cri	80
IP	65
Dimensions	L: 9.5cm W: 4.5cm H: 80cm
Base	L: 9cm W: 4.5cm H: 12.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E287**

IP 65 LED





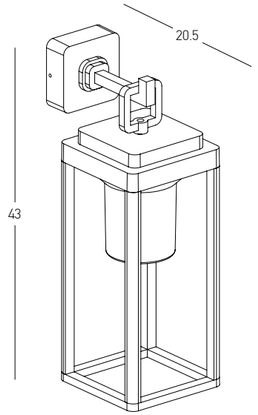


Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 20.5cm W: 14.5cm H: 43cm
Base	L: 3.3cm W: 9cm H: 9cm
Material	Aluminium - Clear Diffuser
Color	Dark Brown / **Code E343**

IP 65








Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 12cm W: 13.5cm H: 26cm
Base	L: 2.5cm W: 9.3cm H: 22cm
Material	Aluminium - PC Diffuser
Color	Graphite-Smoked Diffuser / **Code E434**

IP 54






Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	810Lm
Cri	80
IP	65
Dimensions	L: 9cm W: 9.5cm H: 26.5cm
Material	Aluminium - PC Diffuser
Color	Sandy Black / **Code E202**

IP 65 LED






Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 9cm W: 9.5cm H: 26.5cm
Material	Aluminium - Clear Diffuser
Color	Sandy Black / **Code E201**


IP 65






Bulb	2x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9cm W: 8.6cm H: 34.8cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E296**

IP 54

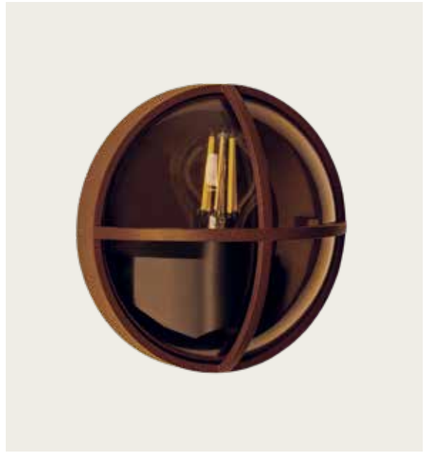




Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 17.7cm L: 9.8cm
Material	Aluminium - PC Diffuser
Color	Dark Brown / **Code E437**

IP 65







Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 9.6cm W: 14cm H: 27cm
Material	Aluminium - PC Diffuser
Color	Dark Brown / **Code E438**

IP 65



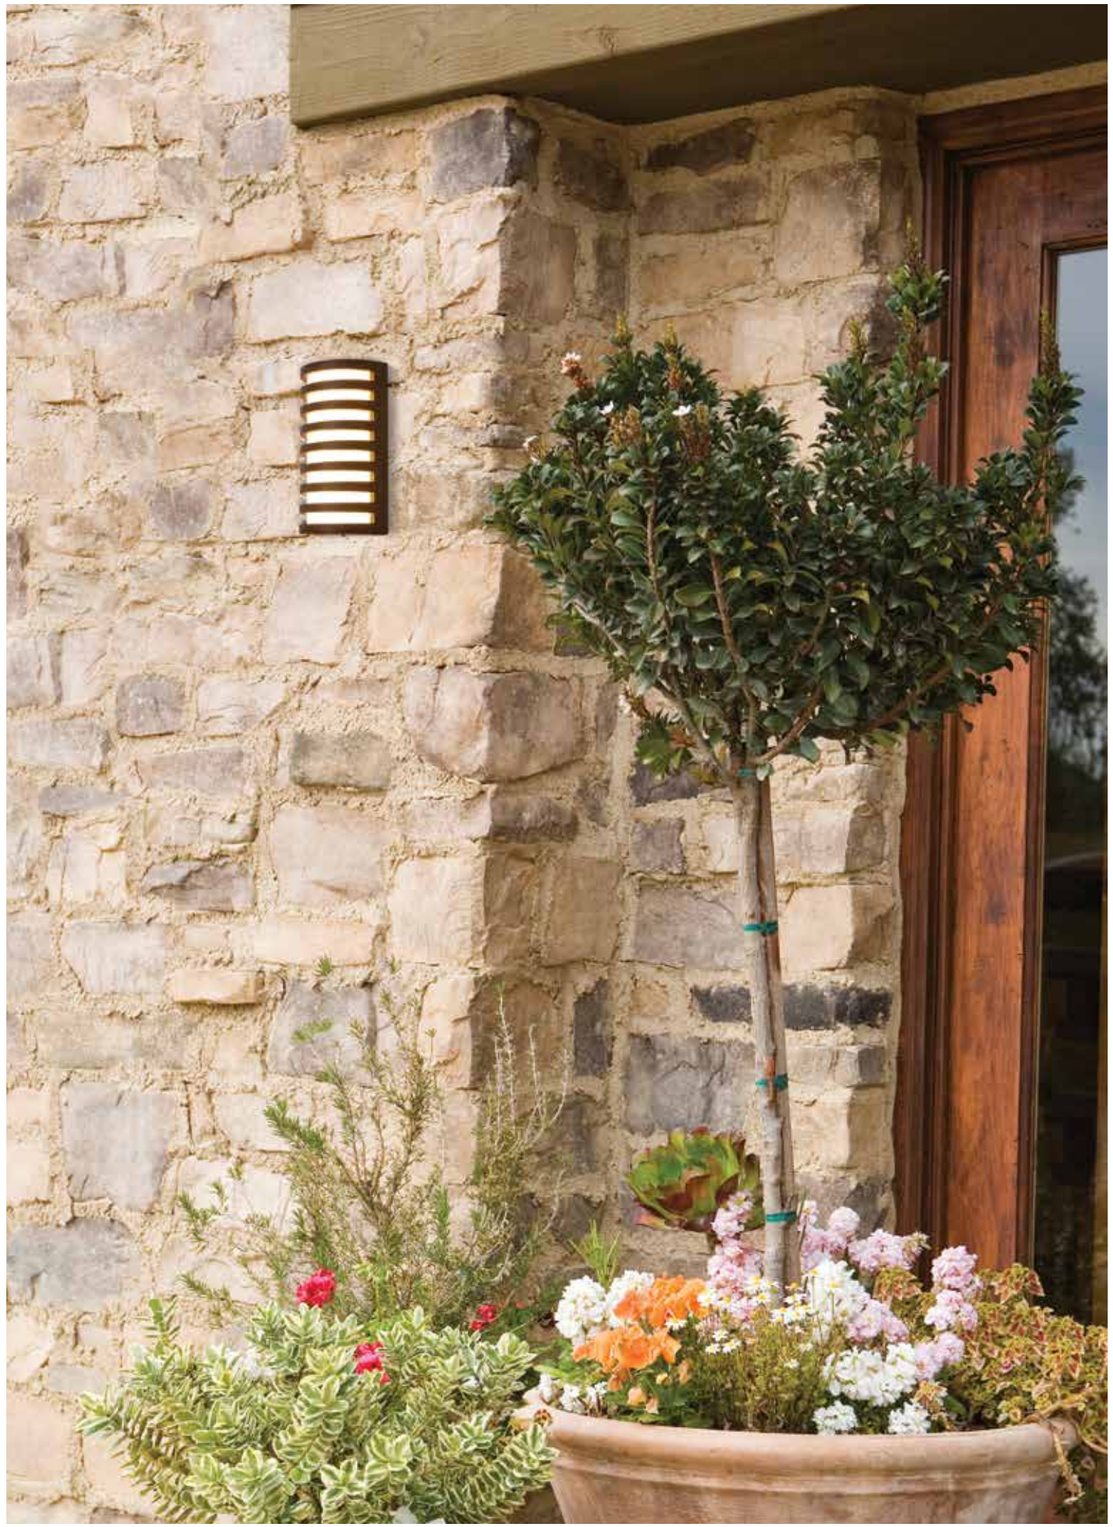






Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	929Lm
Cri	80
IP	65
Dimensions	L: 8cm W: 11.2cm H: 20.5cm
Material	Aluminium - PC Diffuser
Color	Dark Brown / **Code E341**

IP 65 LED






Bulb	1x E27
Power	20W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9cm W: 20cm H: 10cm
Material	Aluminium - PC Diffuser
Color	Dark Brown / **Code E275**

IP 54







Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	880Lm
Cri	80
IP	65
Dimensions	Ø: 18.8cm L: 9.5cm
Material	Aluminium - PC Diffuser
Color	Dark Brown / **Code E342**

IP 65 LED



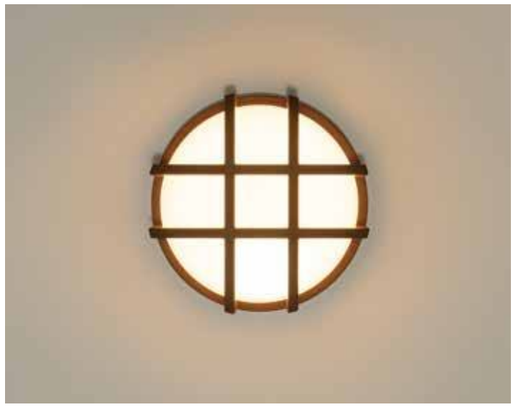




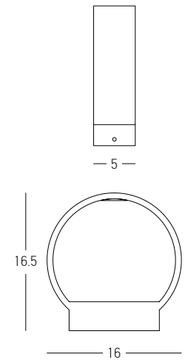

Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	530Lm
Cri	80
IP	65
Dimensions	L: 16.5cm W: 16cm H: 5cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Dark Brown / **Code E268**


IP 65 LED




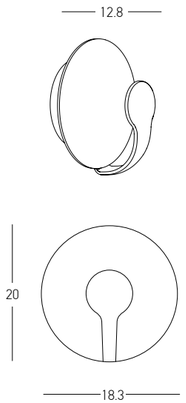

Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	880Lm
Cri	80
IP	65
Dimensions	L: 12.8cm W: 18.3cm H: 20cm
Material	Aluminium
Color	Dark Brown - Sandy White / **Code E271**


IP 65 LED

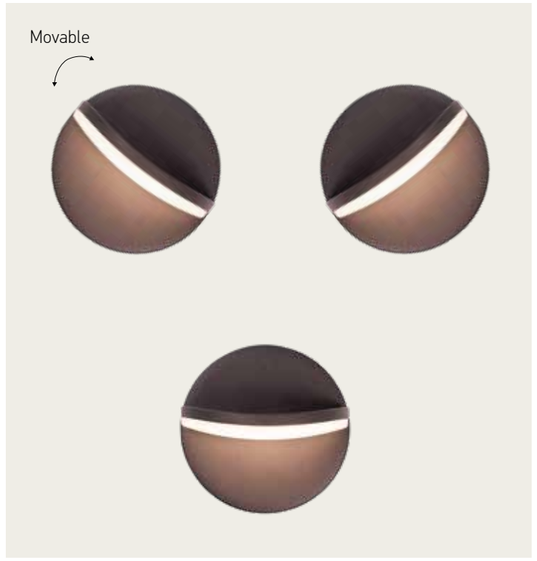



Power	16W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1106Lm
Cri	80
IP	65
Dimensions	Ø: 18.3cm L: 13cm
Material	Aluminium - Opal PC Diffuser
Special Feature	Movable Light
Color	Dark Brown / **Code E267**

IP 65 LED

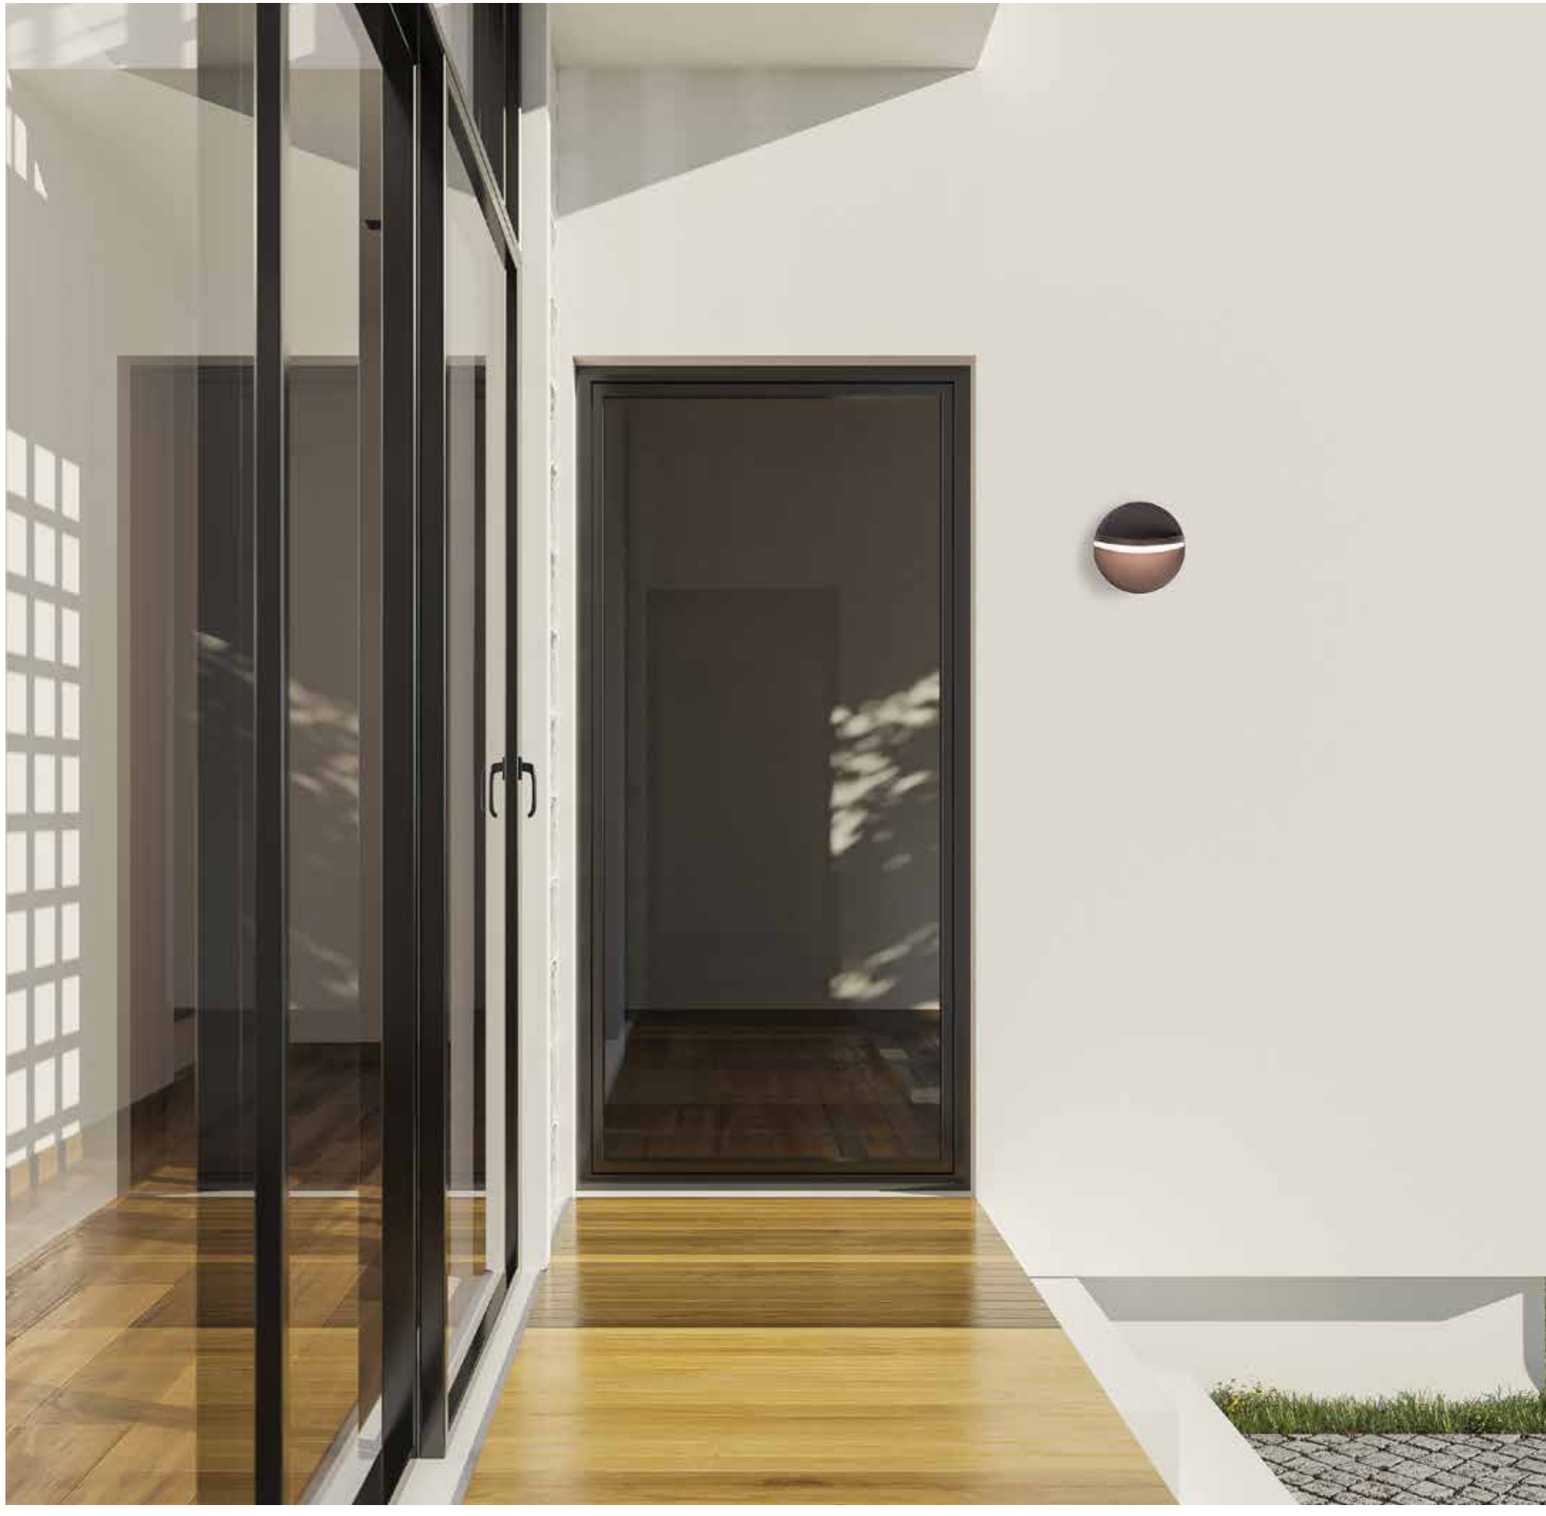






Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1100Lm
Cri	80
IP	54
Dimensions	L: 19.2cm W: 16.2cm H: 6cm
Beam Angle	120°
Material	Aluminium - Clear Glass
Color	Graphite / **Code E464**

IP 54 LED








Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1115Lm
Cri	80
IP	65
Dimensions	L: 7cm W: 9cm H: 18cm
Material	Aluminium - Opal PC Diffuser
Color	Graphite / **Code E416**

IP 65 LED






Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1115Lm
Cri	80
IP	65
Dimensions	L: 9cm W: 18cm H: 9cm
Material	Aluminium - Opal PC Diffuser
Color	Graphite / **Code E417**

IP 65 LED








Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.5cm W: 23cm H: 10cm
Material	Aluminium - PC Diffuser
Special Feature	Up-Down Lighting
Color	Graphite / **Code E500**

IP 54




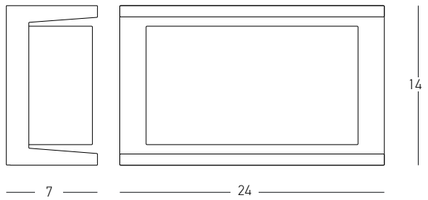

Bulb	1x E27
Power	18W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 7cm W: 24cm H: 14cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E149**

IP 54






Bulb	1x E27
Power	18W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 16.5cm W: 16.5cm H: 17.1cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E127**

IP 54




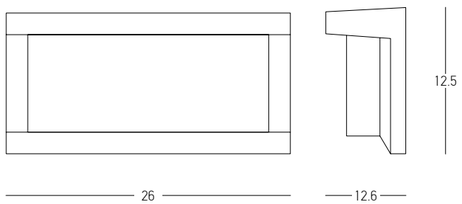

Bulb	1x E27
Power	18W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 12.6cm W: 26cm H: 12.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E128**


IP 54



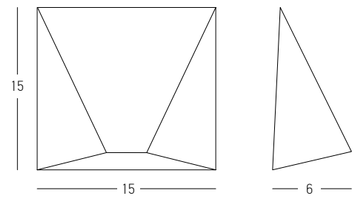

Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	480Lm
Cri	80
IP	54
Dimensions	L: 6cm W: 15cm H: 15cm
Material	Aluminium - Glass
Color	Graphite / **Code E243**


IP 54 LED

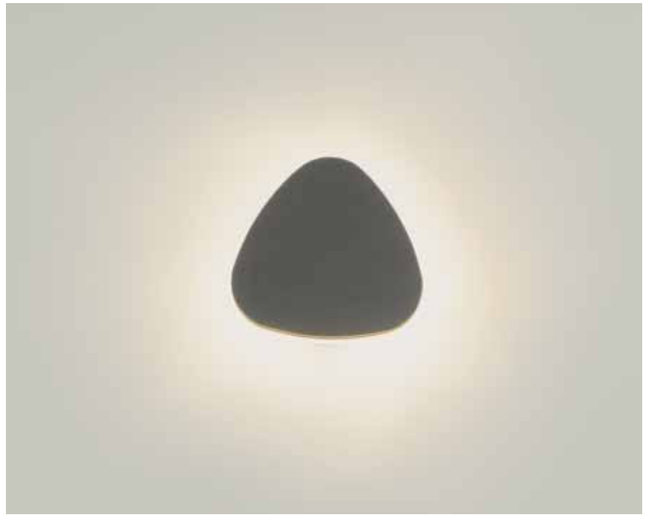











Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	810Lm
Cri	80
IP	65
Dimensions	L: 7.2cm W: 16cm H: 15.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E195**

IP 65 LED

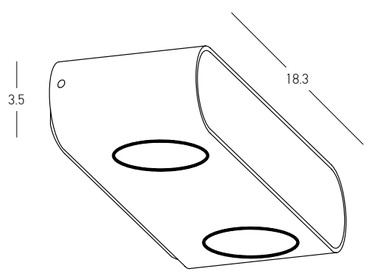

Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	775Lm
Cri	90
IP	54
Dimensions	L: 6.5cm W: 18.3cm H: 3.5cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E315**

IP 54 LED




Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	336Lm
Cri	80
IP	65
Dimensions	L: 6cm W: 11cm H: 11cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E197**

IP 65 LED








Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	810Lm
Cri	80
IP	65
Dimensions	L: 7.8cm W: 16cm H: 10-16cm
Material	Aluminium - PC Diffuser
Special Feature	Movable
Color	Graphite / **Code E199**

IP 65 LED










Power	11W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	900Lm
Cri	80
IP	54
Dimensions	L: 10cm W: 16cm H: 7.7cm
Material	Aluminium - PC Diffuser
Special Feature	Up-Down Lighting
Color	Graphite / **Code E274**

IP 54 LED






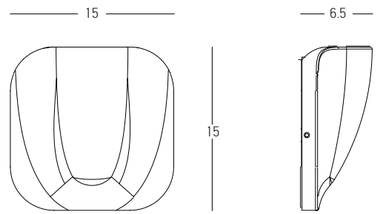

Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	572Lm
Cri	80
IP	54
Dimensions	L: 6.5cm W: 15cm H: 15cm
Beam Angle	45°
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E273**

IP 54 LED






Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	752Lm
Cri	80
IP	54
Dimensions	L: 12cm W: 13cm H: 5.1cm
Beam Angle	120°
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E278**

IP 54 LED





Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	796Lm
Cri	80
IP	54
Dimensions	L: 5cm W: 18cm H: 11cm
Beam Angle	30°
Material	Aluminium - Tempered Glass - PC Diffuser
Special Feature	Up - Down - Front Lighting 12x SMD LED
Color	Graphite / **Code E272**

IP 54 LED















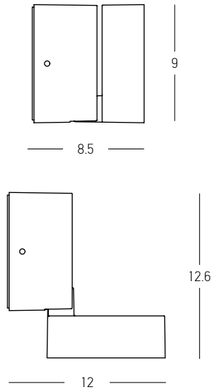


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	518Lm
Cri	80
IP	65
Dimensions	Ø: 12cm L: 8.8cm H: 13cm
Beam Angle	120°
Material	Aluminium - Tempered Glass
Color	Sandy Black / **Code E436**

IP 65 LED

Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	672Lm
Cri	80
IP	65
Dimensions Closed	Ø: 9cm L: 8.5cm
Dimensions Open	L: 12cm W: 9cm H: 12.6cm
Beam Angle	120°
Material	Aluminium - PC Diffuser
Special Feature	90° Movable Head
Color	Sandy Black / **Code E435**

IP 65 LED






Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	498Lm
Cri	80
IP	54
Dimensions	L: 9cm W: 9.5cm H: 24cm
Material	Aluminium - PC Diffuser
Color	Black / **Code E318**


IP 54 LED



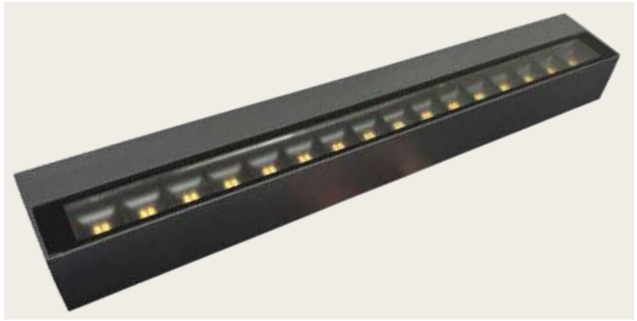









Power	30W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2263Lm
Cri	80
IP	65
Dimensions	L: 7.8cm W: 50cm H: 5.6cm
Material	Aluminium - PC Diffuser
Special Feature	Up-Down Lighting Clear Microprismatic Diffuser
Color	Graphite / **Code E227**

IP 65 LED

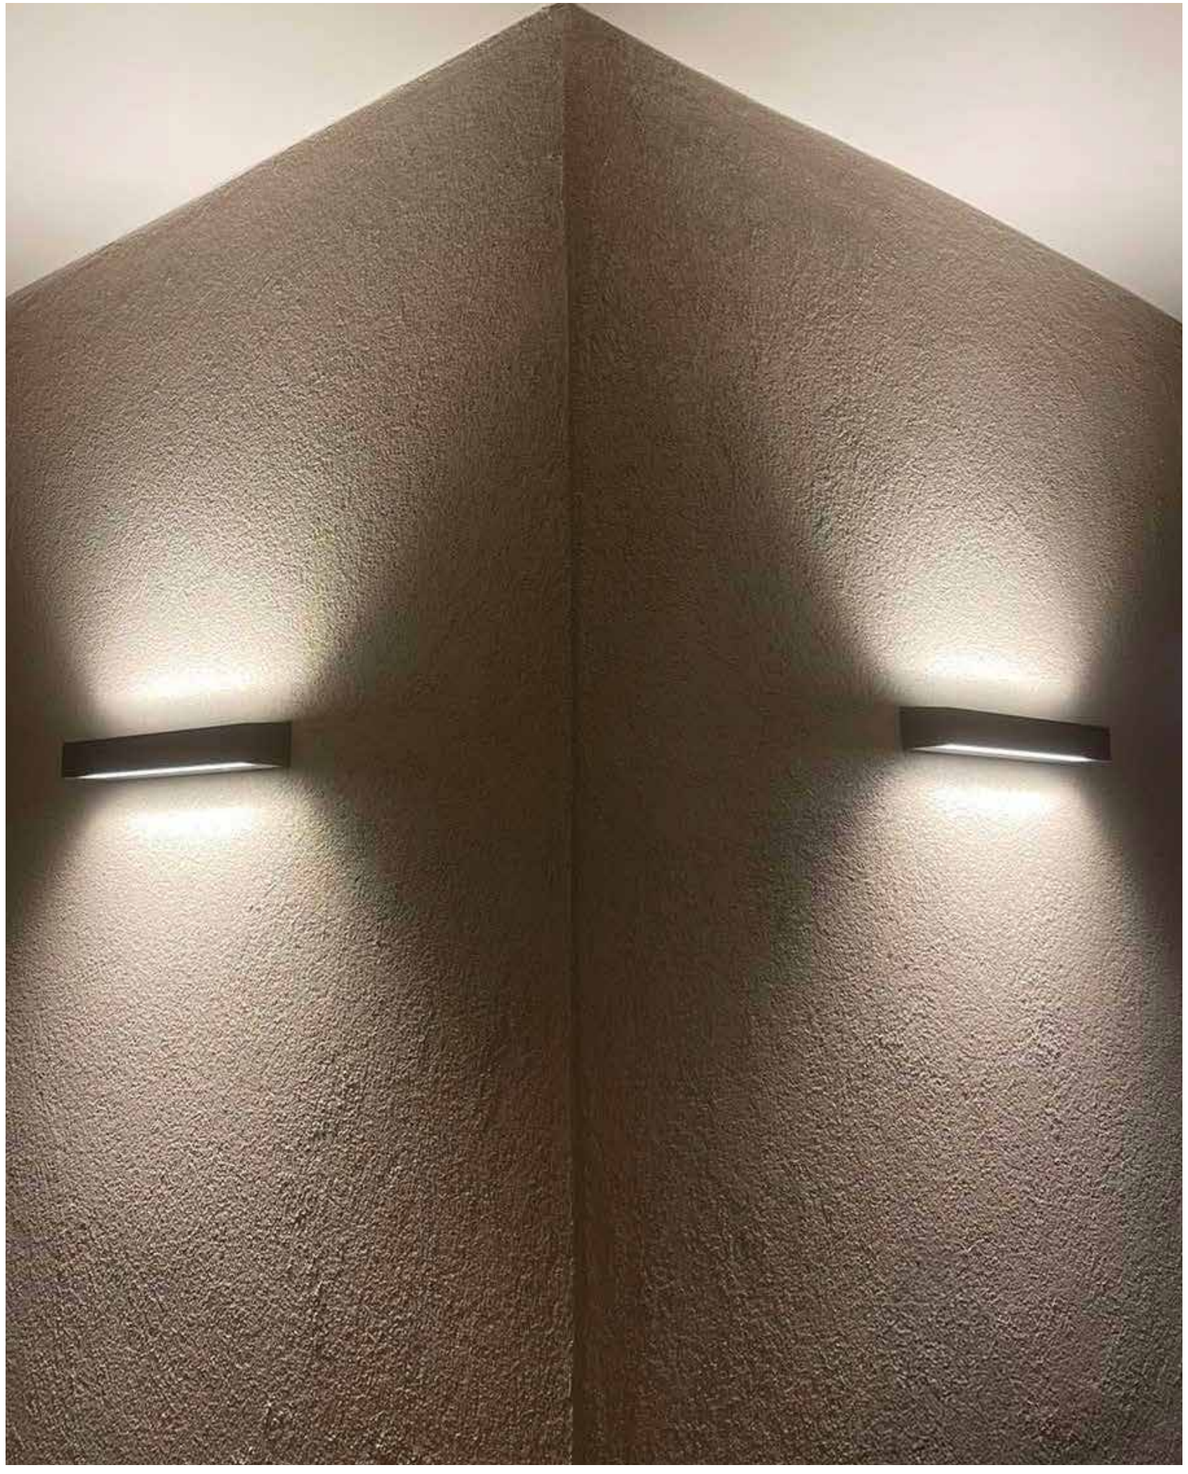








Power	2x 13.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1359Lm
Cri	80
IP	65
Dimensions	L: 10.6cm W: 22cm H: 9cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Dark Grey / **Code E261**
Color	Dark Brown / **Code E262**

IP 65 LED











Bulb	1x E27
Power	18W MAX
Input	220-240V, 50/60Hz
IP	44
Dimensions	L: 12cm W: 22cm H: 9cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E146**

IP 44

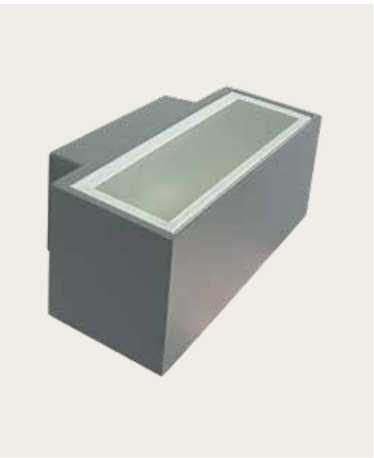






Power	11W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	640Lm
Cri	80
IP	65
Dimensions	L: 9.6cm W: 30cm H: 12cm
Material	Aluminium - Opal PC Diffuser
Special Feature	Up-Down Lighting
Color	Dark Grey / **Code E265**
Color	Dark Brown / **Code E266**

IP 65 LED








Bulb	2x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.5cm H: 15cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E124**

IP 54






Bulb	1x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.5cm H: 9cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E123**

IP 54






Bulb	2x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.5cm H: 15cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Graphite / **Code E122**

IP 54






Bulb	1x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.5cm H: 9cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E121**

IP 54








Bulb	2x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.5cm H: 15cm
Material	Aluminium - Tempered Glass
Special Feature	Up-Down Lighting
Color	Sandy White / **Code E151**


IP 54







Bulb	1x GU10
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.5cm H: 9cm
Material	Aluminium - Tempered Glass
Color	Sandy White / **Code E150**

IP 54

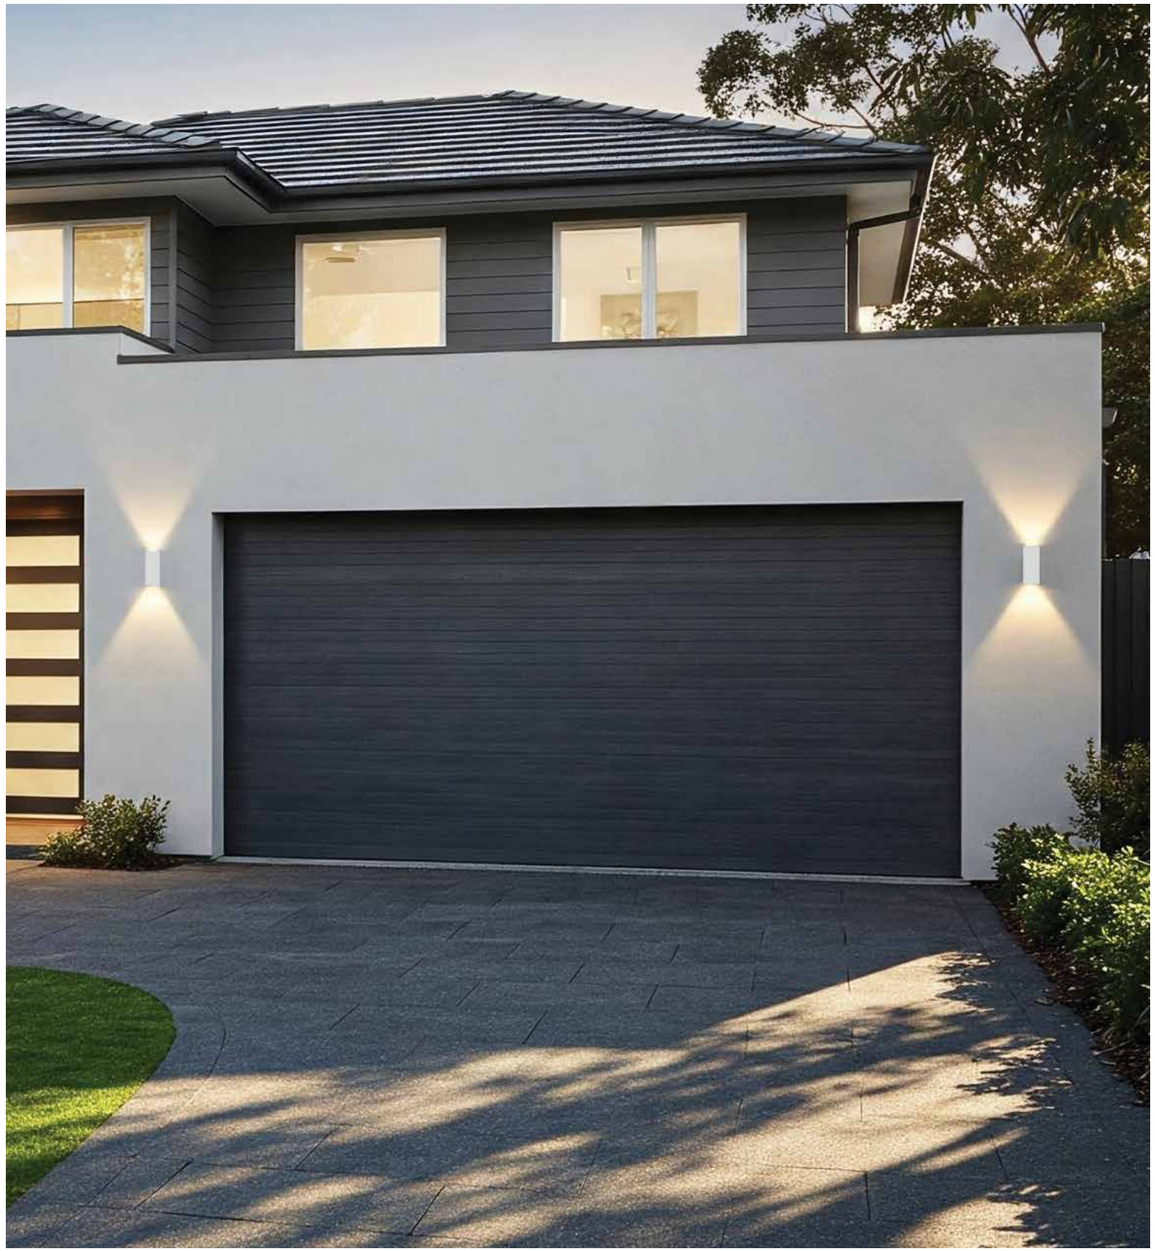

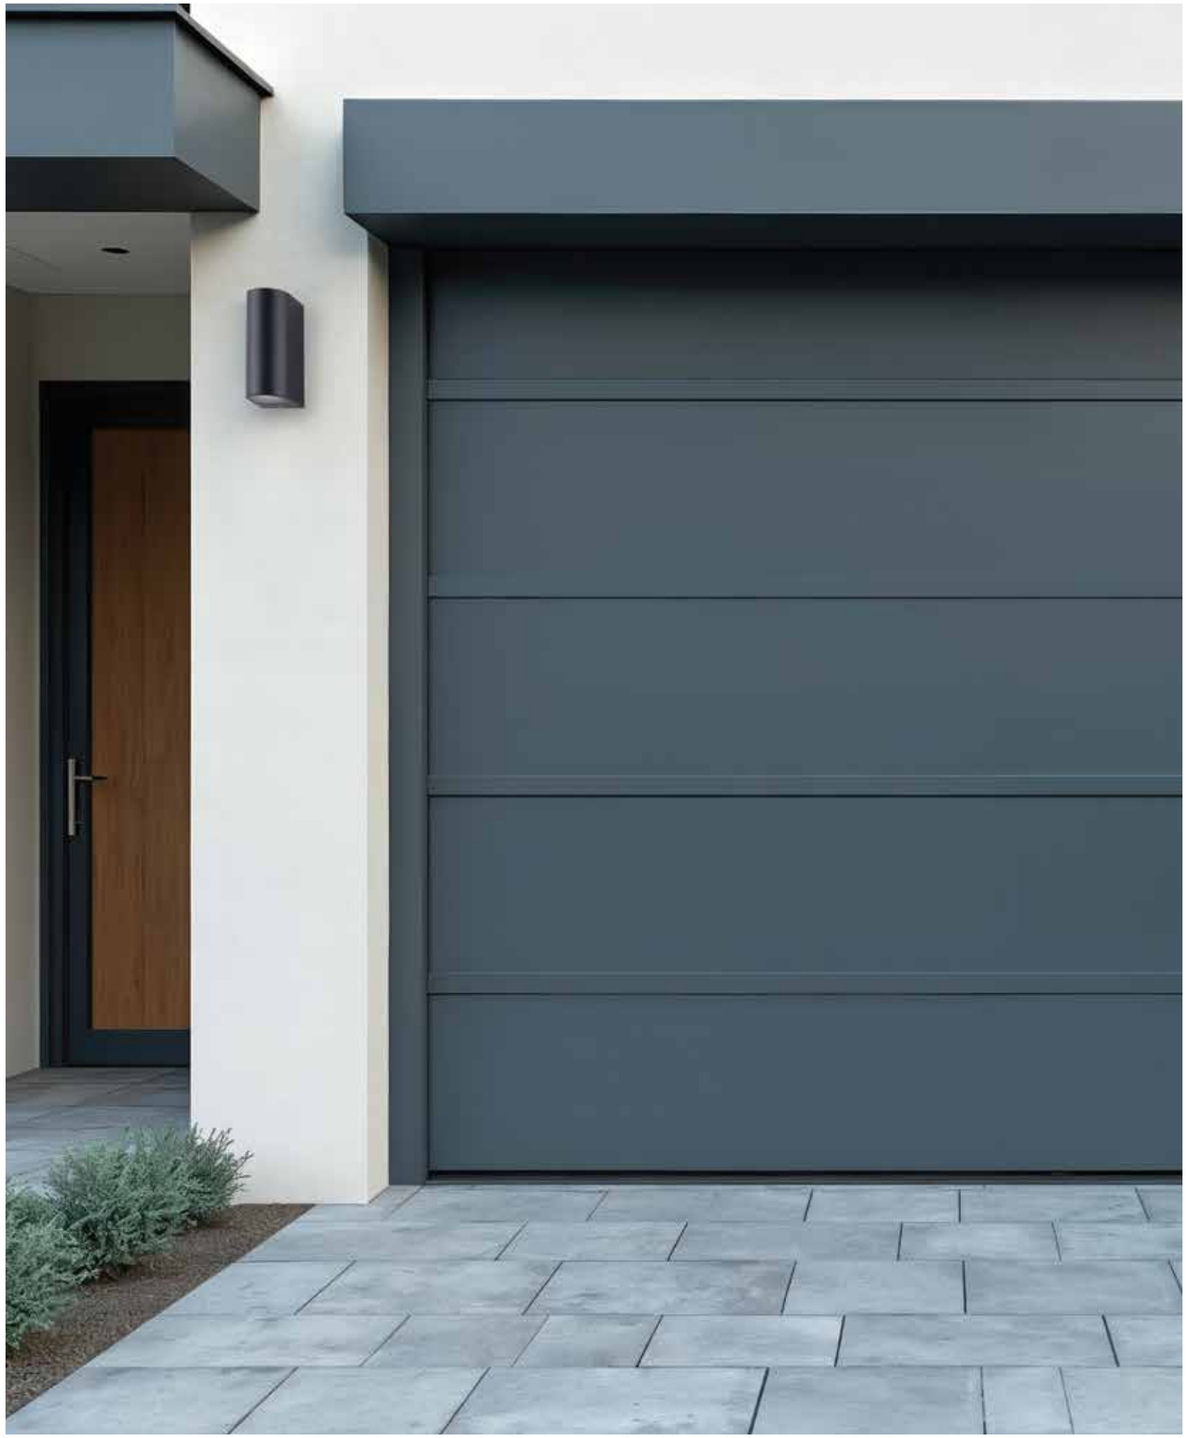






Bulb	2x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.8cm H: 15cm
Material	ABS - Acrylic
Special Feature	Up-Down Lighting
Color	Sandy Black / **Code E307**

IP 54 SeaSide






Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.2cm W: 6.8cm H: 7.5cm
Material	ABS - Acrylic
Color	Sandy Black / **Code E306**

IP 54 SeaSide






Bulb	2x GU10
Power	9W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 7.6cm L: 9.9cm H: 18.6cm
Material	ABS - PC Diffuser
Special Feature	Up-Down Lighting
Color	White / **Code E186**

IP 54 SeaSide






Bulb	1x GU10
Power	9W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø 7.6cm L: 9.9cm H: 14.8cm
Material	ABS - PC Diffuser
Color	White / **Code E185**

IP 54 SeaSide








Power	11W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	653Lm
Cri	80
IP	54
Dimensions	L: 7.5cm W: 22cm H: 3.2cm
Material	Aluminium - Tempered Glass
Color	Sandy White / **Code E168**

IP 54 LED






Power	2x 2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	320Lm
Cri	80
IP	65
Dimensions	L: 3cm W: 8.3cm H: 12.3cm
Material	ABS - PC Diffuser
Special Feature	Up-Down Lighting
Color	White / **Code E216**

IP 65 LED SeaSide







Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	65
Dimensions	Ø: 16.5cm L: 5.8cm
Material	ABS - PC Diffuser
Color	Sandy Black / **Code E305**
Color	Sandy White / **Code E304**

IP 65 LED SeaSide



Precision Light. Grounded Installation
Spike lights for targeted garden illumination.




05. SPIKES










Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	90Lm
Cri	80
IP	65
Dimensions	Ø: 1.8cm H: 60cm
Material	Aluminium - Frosted Acrylic
Special Feature	200cm Cable Available Spike Included Waterproof Connector Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-11 pcs
Color	Brown / **Code E457**

IP 65 LED






Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	90Lm
Cri	80
IP	65
Dimensions	Ø: 1.8cm H: 99cm
Material	Aluminium - Frosted Acrylic
Special Feature	200cm Cable Available Spike Included Waterproof Connector Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-11 pcs
Color	Brown / **Code E458**

IP 65 LED






Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	90Lm
Cri	80
IP	65
Dimensions	Ø: 4.5cm H: 65cm
Material	Aluminium - Frosted Acrylic
Special Feature	200cm Cable Available Spike Included Waterproof Connector Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-11 pcs
Color	Brown / **Code E459**

IP 65 LED





Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	90Lm
Cri	80
IP	65
Dimensions	Ø: 4.5cm H: 90cm
Material	Aluminium - Frosted Acrylic
Special Feature	200cm Cable Available Spike Included Waterproof Connector Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-11 pcs
Color	Brown / **Code E460**

IP 65 LED












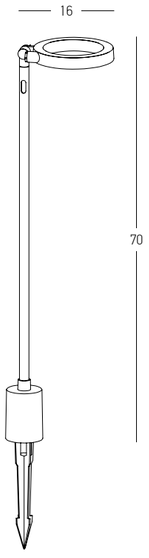


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	245Lm
Cri	80
IP	65
Dimensions	L: 16cm W: 12cm H: 70cm
Ring	Ø: 12cm H: 1.5cm
Material	Aluminium - PC Diffuser
Special Feature	50cm Cable Available Driver Included Spike Included Tilt Up-Down Waterproof Connector Included
Color	Brown / **Code E494**

IP 65 LED







Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	595Lm
Cri	80
IP	65
Dimensions	Ø: 11cm H: 90cm
Material	Aluminium - PC Diffuser
Special Feature	100cm Cable Available Driver Included Spike Included Movable Head Waterproof Connector Included
Color	Green / **Code E456**


IP 65 LED












Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	80Lm
Cri	80
IP	65
Dimensions	Ø: 5cm H: 30cm
Material	Stainless Steel - PC Diffuser
Special Feature	50cm Cable Available Spike Included Waterproof Connector Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-10 pcs
Color	Brown / **Code E465**


IP 65 LED






Power	0.5W
Input	24V
Color Temperature	2700K
Lumen	50Lm
Cri	80
IP	65
Dimensions	Ø: 1cm H: 80cm
Material	Stainless Steel - PC Diffuser
Special Feature	100cm Cable Available Spike Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-17 pcs
Color	Dark Brown / **Code E330**
Color	Dark Green / **Code E331**

IP 65 LED

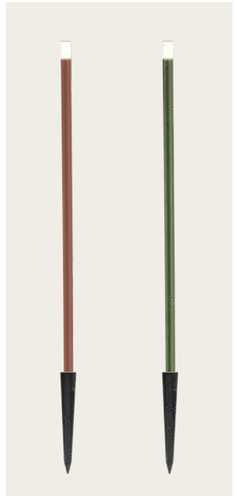



Power	0.5W
Input	24V
Color Temperature	2700K
Lumen	50Lm
Cri	80
IP	65
Dimensions	Ø: 1cm H: 30cm
Material	Stainless Steel - PC Diffuser
Special Feature	100cm Cable Available Spike Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-17 pcs
Color	Dark Brown / **Code E328**
Color	Dark Green / **Code E329**

IP 65 LED






Driver **LPH-18-24**

Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67




Waterproof Connection Box 1in / 1out , 16A , 450V

IP	67
Color	Black / **Code Z0800-BA**

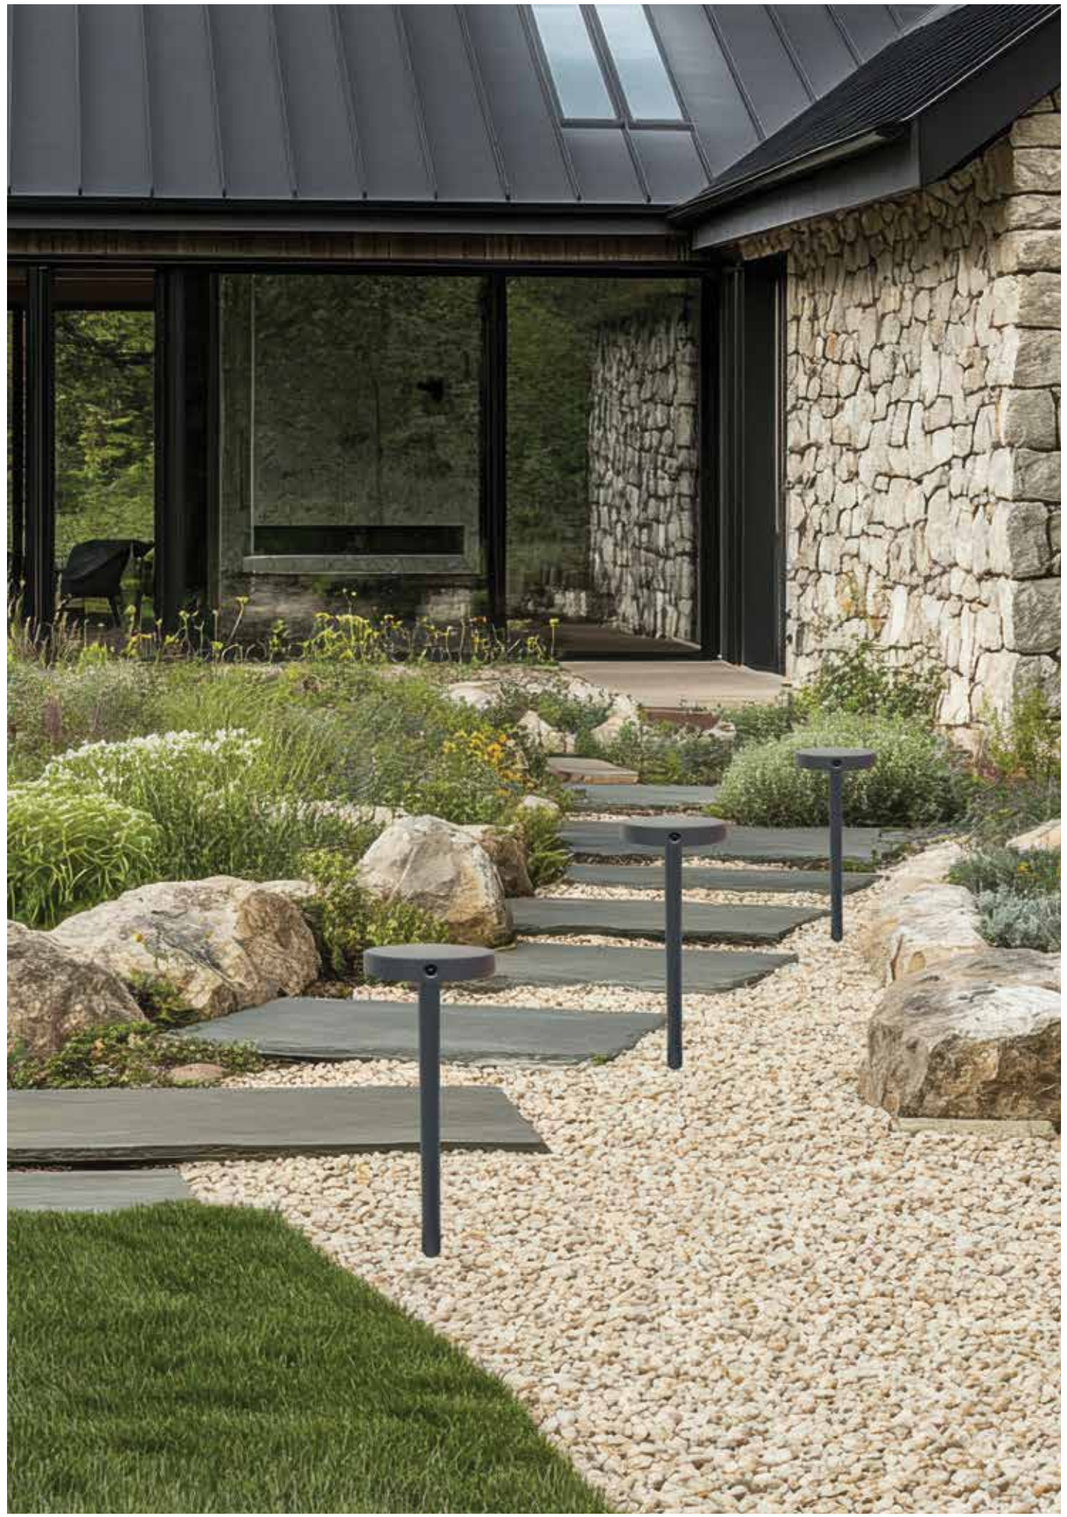



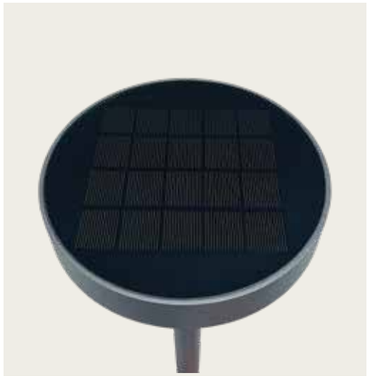





Power	2W
Input	3.7V
Battery	2200 MAH
Color Temperature	3000K
Lumen	85Lm
Cri	80
IP	54
Dimensions	Ø: 16cm H: 49cm
Material	Aluminium - PC Diffuser
Special Feature	Solar Panel 3 Lighting Modes Sense Distance 3 - 5m Base & Spike Included
Color	Graphite / **Code E449**

IP 54 LED SENSOR SOLAR

LIGHTING MODES OVERVIEW

Mode 1 • Dim + Motion Sensor
LED operates at 10% brightness when ambient light <20 lux.
Upon Motion detection, brightness increases to 100% during movement.
After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%.
Turns off when ambient light >20 lux.

Mode 2 • Constant Light
Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours.
Turns off when ambient light >20 lux.

Mode 3 • Motion Only
No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops.
After 5 hours, motion-triggered output reduces to 70%.
Turns off automatically when ambient light >20 lux.















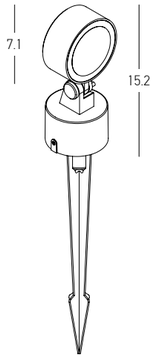

Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	779Lm
Cri	90
IP	65
Dimensions	Ø: 7.1cm H: 15.2cm
Base	Ø: 6.3cm H: 4cm
Beam Angle	36°
Material	Aluminium - Glass
Special Feature	30cm Cable Available Movable Spot Aluminium Spike Included Driver Included
Color	Green / **Code E472**


IP 65 LED



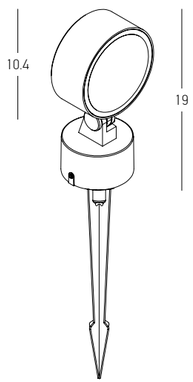


Power	25W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1860Lm
Cri	90
IP	65
Dimensions	Ø: 10.4cm H: 19cm
Base	Ø: 7.5cm H: 4cm
Beam Angle	24°
Material	Aluminium - Glass
Special Feature	30cm Cable Available Movable Spot Aluminium Spike Included Driver Included
Color	Green / **Code E473**

IP 65 LED

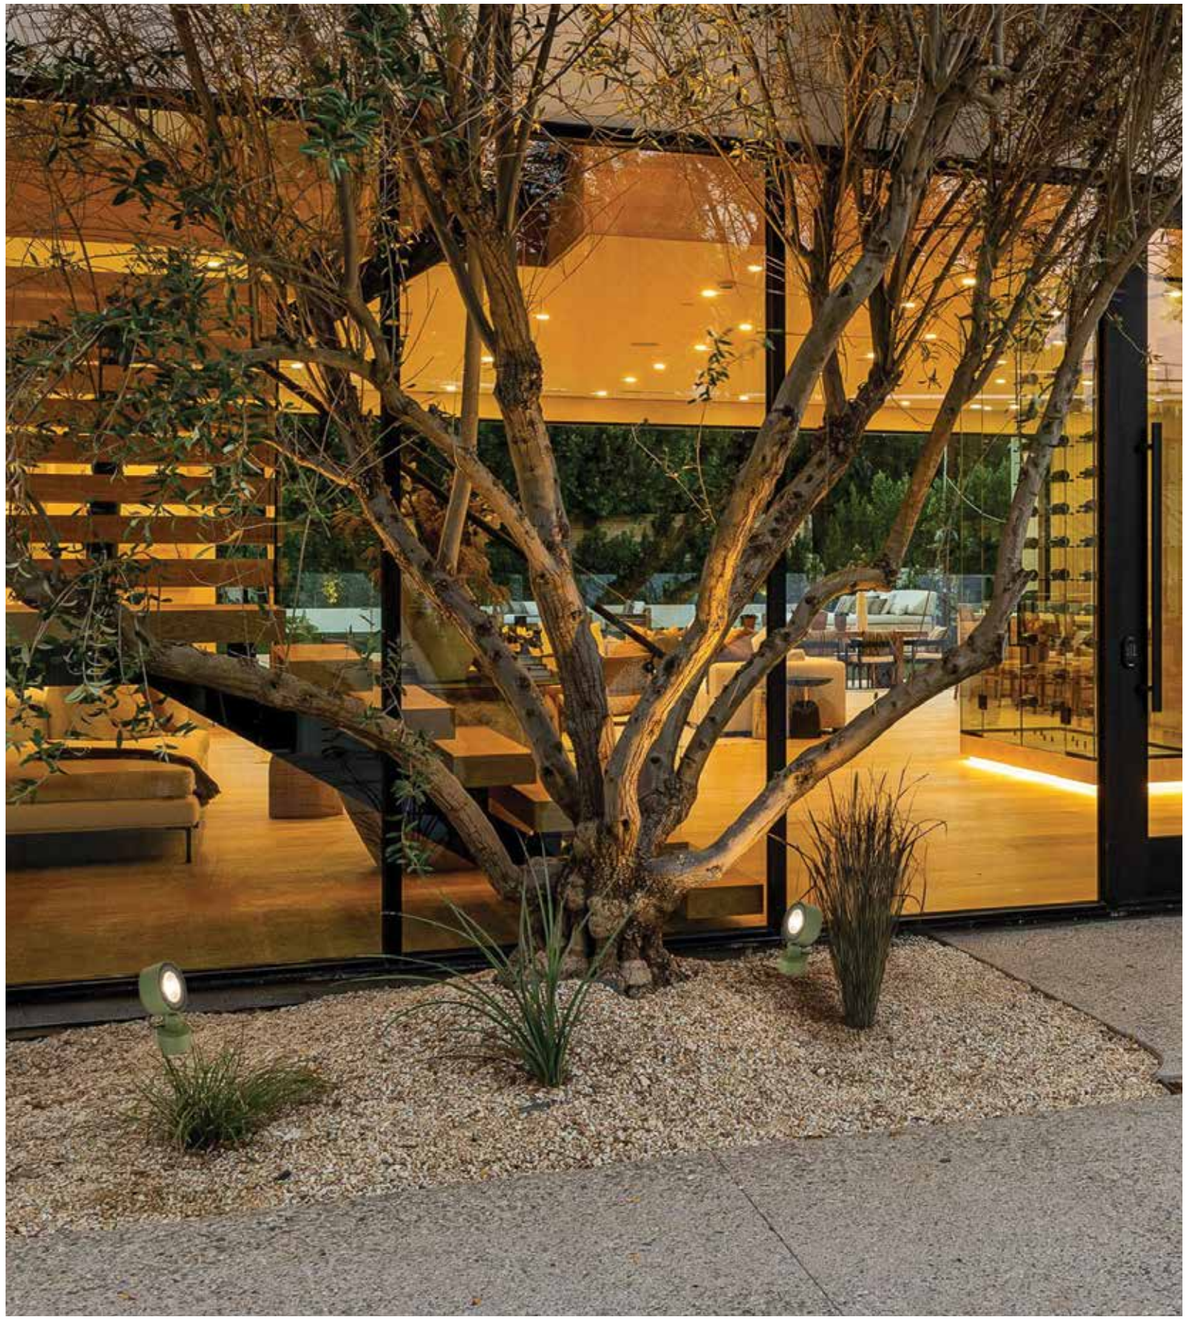



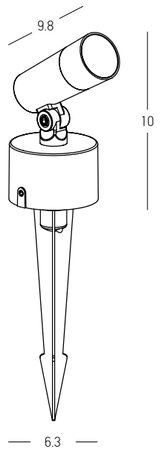


Power	10W
Input	24V
Color Temperature	3000K
Lumen	534Lm
Cri	90
IP	65
Dimensions	Ø: 6.2cm H: 10cm
Spot Dimensions	Ø: 3.5cm L: 9.8cm
Base	Ø: 6.3cm H:4cm
Beam Angle	24°
Material	Aluminium - Glass
Special Feature	30cm Cable Available Movable Spot Aluminium Spike Included
Recommended Driver	LPH-18-24 (Not Included)
Color	Graphite / **Code E468**

IP 65 LED

Lens for 10W Spot / Beam Angle 15° / **Code E469**



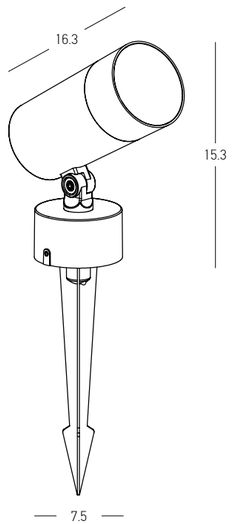

Power	28W
Input	24V
Color Temperature	3000K
Lumen	1615Lm
Cri	90
IP	65
Dimensions	Ø: 7.6cm H: 15.3cm
Spot Dimensions	Ø: 7.8cm L: 16.3cm
Base	Ø: 7.5cm H: 4cm
Beam Angle	24°
Material	Aluminium - Glass
Special Feature	30cm Cable Available Movable Spot Aluminium Spike Included
Recommended Driver	LPV-35-24 (Not Included)
Color	Graphite / **Code E470**

IP 65 LED


Lens for 28W Spot / Beam Angle 15° / **Code E471**




Driver	**LPH-18-24**
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67



Driver	**LPV-35-24**
Power	35W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14.8cm W: 4cm H: 3cm
IP	67

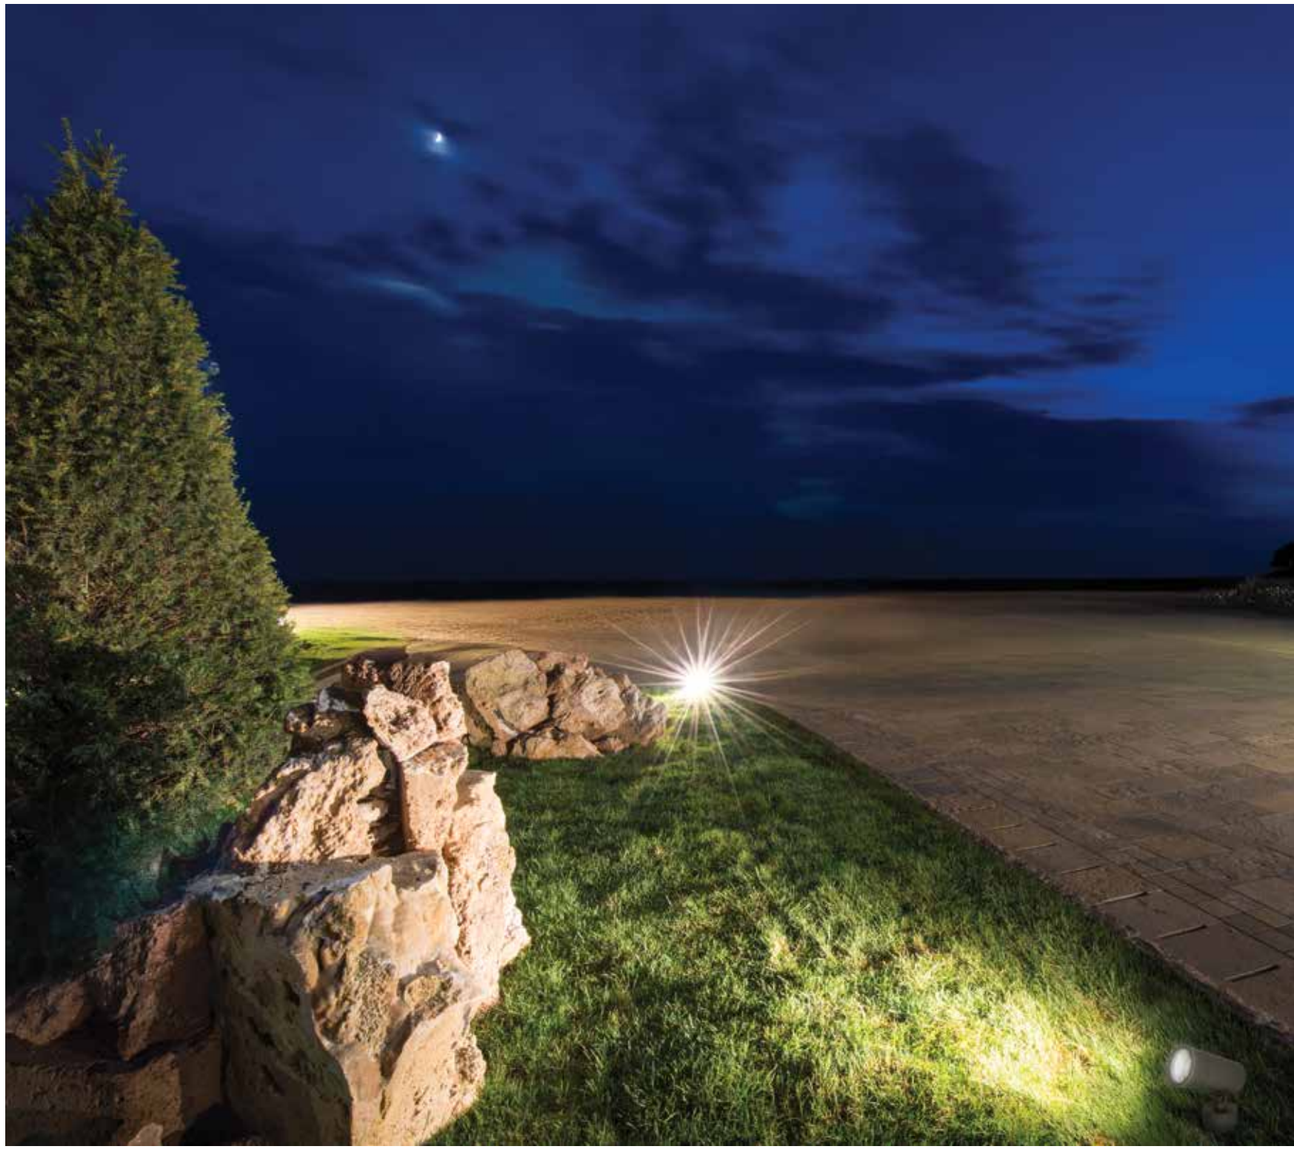




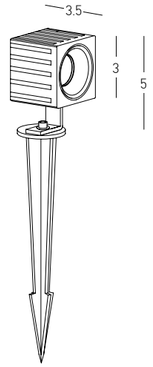

Power	3W
Input	24V
Color Temperature	3000K
Lumen	228Lm
Cri	90
IP	65
Dimensions	L: 3cm W: 3.5cm H: 5cm
Beam Angle	36°
Material	Aluminium - Tempered Glass
Special Feature	30cm Cable Available Movable Spot Spike Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Color	Graphite / **Code E350**

IP 65 LED





Power	3W
Input	24V
Color Temperature	3000K
Lumen	228Lm
Cri	90
IP	65
Dimensions	Ø: 3cm W: 3.5cm H: 5cm
Beam Angle	36°
Material	Aluminium - Tempered Glass
Special Feature	30cm Cable Available Movable Spot Spike Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Color	Graphite / **Code E349**


IP 65 LED




Driver	**LPH-18-24**
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67



Waterproof Connection Box 1in / 1out , 16A , 450V	
IP	67
Color	Black / **Code Z0800-BA**

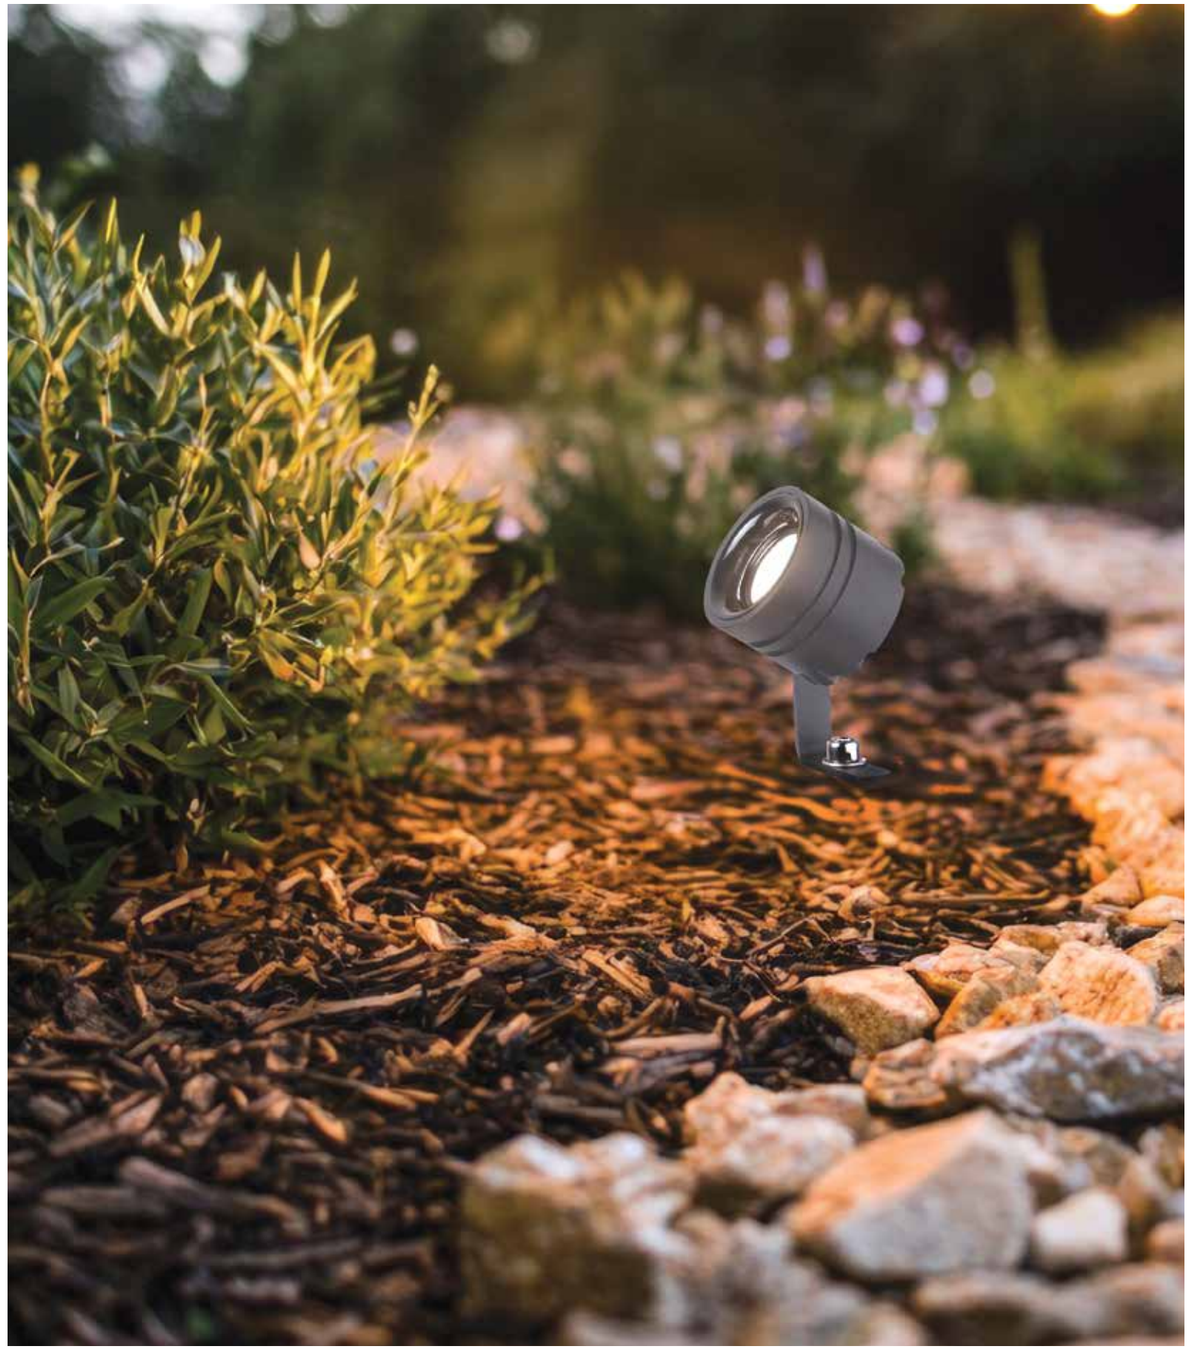




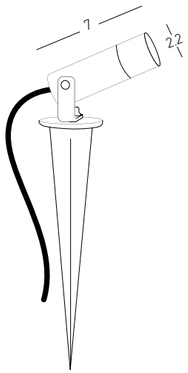

Power	2.3W
Input	3.2V, 700mA
Color Temperature	2700K
Lumen	130Lm
Cri	80
IP	54
Dimensions	Ø: 2.2cm L: 7cm H: 3.2cm
Beam Angle	40°
Material	Brush
Special Feature	60cm Cable Available Movable Spot Spike Included
Recommended Driver	V350-1050 (Not Included) In Series Connection 1-9 pcs
Color	Natural Brush / **Code E403**

IP 54 LED



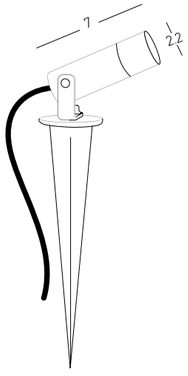

Power	2.3W
Input	3.2V, 700mA
Color Temperature	3000K
Lumen	130Lm
Cri	80
IP	54
Dimensions	Ø: 2.2cm L: 7cm H: 3.2cm
Beam Angle	40°
Material	Brush
Special Feature	60cm Cable Available Movable Spot Spike Included
Recommended Driver	V350-1050 (Not Included) In Series Connection 1-9 pcs
Color	Natural Brush / **Code E404**

IP 54 LED




Driver	**V350-1050**
Power	34W
Input	220-240V, 50/60Hz
Output	2 - 32V
Dimensions	L: 15cm W: 4cm H: 3cm
IP	20










Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	740Lm
Cri	80
IP	65
Dimensions	L: 7cm W: 7cm H: 12.5-25cm
Base	Ø: 6cm H: 0.5cm
Beam Angle	40°
Material	Aluminium - Tempered Glass
Special Feature	40cm Cable Available Movable Spot Spike & Base Included Waterproof Connector Included
Color	Graphite / **Code E286**

IP 65 LED








Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	740Lm
Cri	80
IP	65
Dimensions	Ø: 7.5cm L: 13cm H: 12.5-25cm
Base	Ø: 6cm H: 0.5cm
Beam Angle	40°
Material	Aluminium - Tempered Glass
Special Feature	40cm Cable Available Movable Spot Spike & Base Included Waterproof Connector Included
Color	Graphite / **Code E285**

IP 65 LED










Bulb	1x GU10
Power	20W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 7.5cm L: 13cm H: 25cm
Base	Ø: 6cm H: 0.5cm
Material	Aluminium - Tempered Glass
Special Feature	40cm Cable Available Movable Spot Spike & Base Included Waterproof Connector Included
Color	Brown / **Code E284**

IP 65







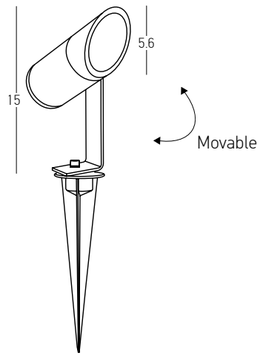

Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	516Lm
Cri	80
IP	65
Dimensions	Ø: 5.6cm H: 15cm
Beam Angle	36°
Material	Aluminium - Tempered Glass
Special Feature	20cm Cable Available Movable Spot Spike Included
Color	Graphite / **Code E152**

IP 65 LED

















Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	380Lm
Cri	80
IP	65
Dimensions	Ø: 6.1cm H: 9cm
Beam Angle	36°
Material	Aluminium - Tempered Glass
Special Feature	20cm Cable Available Movable Spot Spike Included
Color	Graphite / **Code E153**

IP 65 LED






Power	2.1W
Input	220-240V, 50/60Hz
Color Temperature	2700K
Lumen	168Lm
Cri	80
IP	54
Dimensions	L: 8cm H: 8.5cm
Base	Ø: 6.6cm H: 4.2cm
Beam Angle	10°-60°
Material	Aluminium - Stainless Steel
Special Feature	60cm Cable Available Stick Ø: 3.2cm H: 8cm Spike Included
Color	Sandy Black / **Code E177-B**

IP 54 LED





Power	2.1W
Input	3V, 700mA
Color Temperature	2700K
Lumen	168Lm
Cri	80
IP	54
Dimensions	L: 8cm H: 8.5cm
Beam Angle	10-60°
Material	Aluminium - Stainless Steel
Special Feature	60cm Cable Available Stick Ø: 3.2cm H: 8cm Spike Included
Recommended Driver	V350-1050 (Not Included) In Series Connection 1-10 pcs
Color	Sandy Black / **Code E177-A**

IP 54 LED




Driver	**V350-1050**
Power	34W
Input	220-240V, 50/60Hz
Output	2 - 32V
Dimensions	L: 15cm W: 4cm H: 3cm
IP	20










Bulb	1x GU10
Power	20W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 10cm W: 10cm H: 60cm
Material	Aluminium - Tempered Glass
Special Feature	50cm Cable Available Spike Included Recommended Base E282-SP / Not Included
Color	Graphite / **Code E281**

IP 65



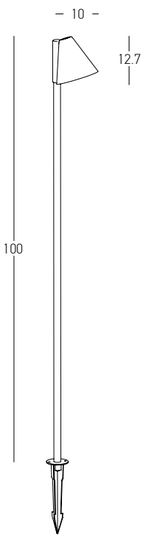

Bulb	1x GU10
Power	20W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 10cm W: 10cm H: 100cm
Material	Aluminium - Tempered Glass
Special Feature	40cm Cable Available Spike Included Recommended Base E282-SP / Not Included
Color	Graphite / **Code E282**


IP 65



Base for E281 - E282

Dimensions	Ø: 9.5cm H: 2cm
Material	Aluminium
Color	Graphite / **Code E282-SP**



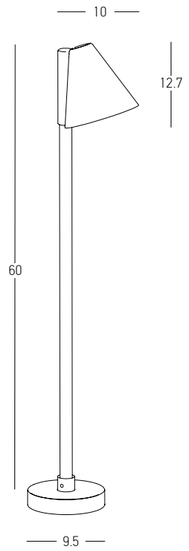


Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	522Lm
Cri	80
IP	65
Dimensions	L: 10cm W: 10cm H: 60cm
Base	Ø: 9.5cm H: 2cm
Beam Angle	40°
Material	Aluminium - Tempered Glass
Special Feature	50cm Cable Available Spike & Base Included
Color	Graphite / **Code E283**

IP 65 LED







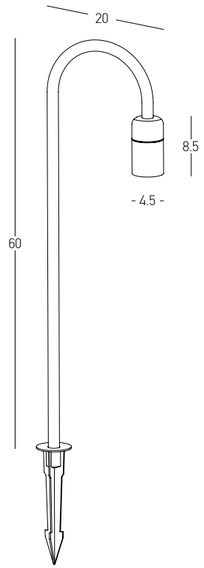


Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	500Lm
Cri	80
IP	65
Dimensions	L: 20cm W: 4.5cm H: 60cm
Beam Angle	40°
Material	Aluminium - Tempered Glass
Special Feature	40cm Cable Available Spike Included
Color	Dark Brown / **Code E279**

IP 65 LED









Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1550Lm
Cri	80
IP	65
Dimensions	L: 2.5cm W: 2.5cm H: 100cm
Base	Ø: 9.5cm H: 2cm
Material	Aluminium - Opal PC Diffuser
Special Feature	40cm Cable Available Spike & Base Included Profile 2.5 x 2.5cm
Color	Dark Brown / **Code E280**


IP 65 LED



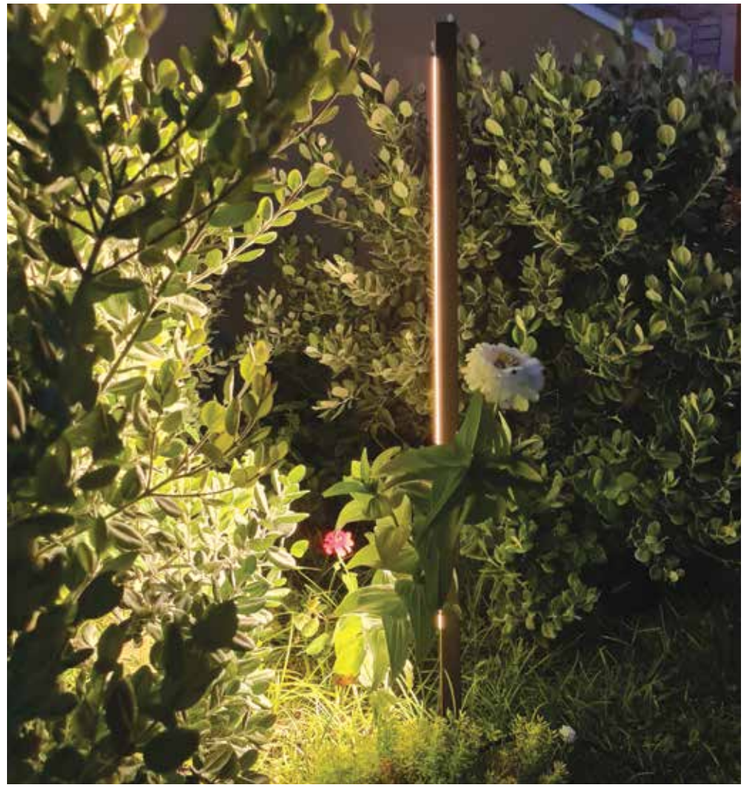

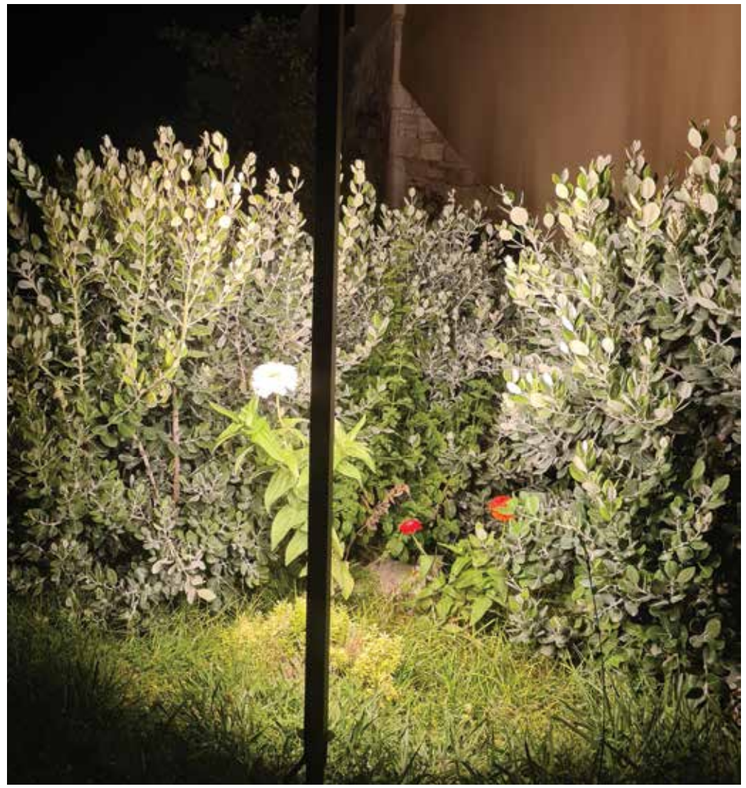






Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 6cm L: 11cm H: 6.2cm
Material	ABS - PC Diffuser
Special Feature	30cm Cable Available Movable Spot Without Spike
Color	Black / **Code E311**

IP 54 SeaSide






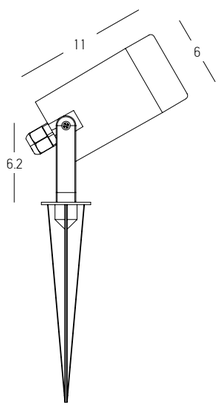


Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 6cm L: 11cm H: 6.2cm
Material	ABS - PC Diffuser
Special Feature	30cm Cable Available Movable Spot Spike Included
Color	Black / **Code E312**

IP 54 SeaSide

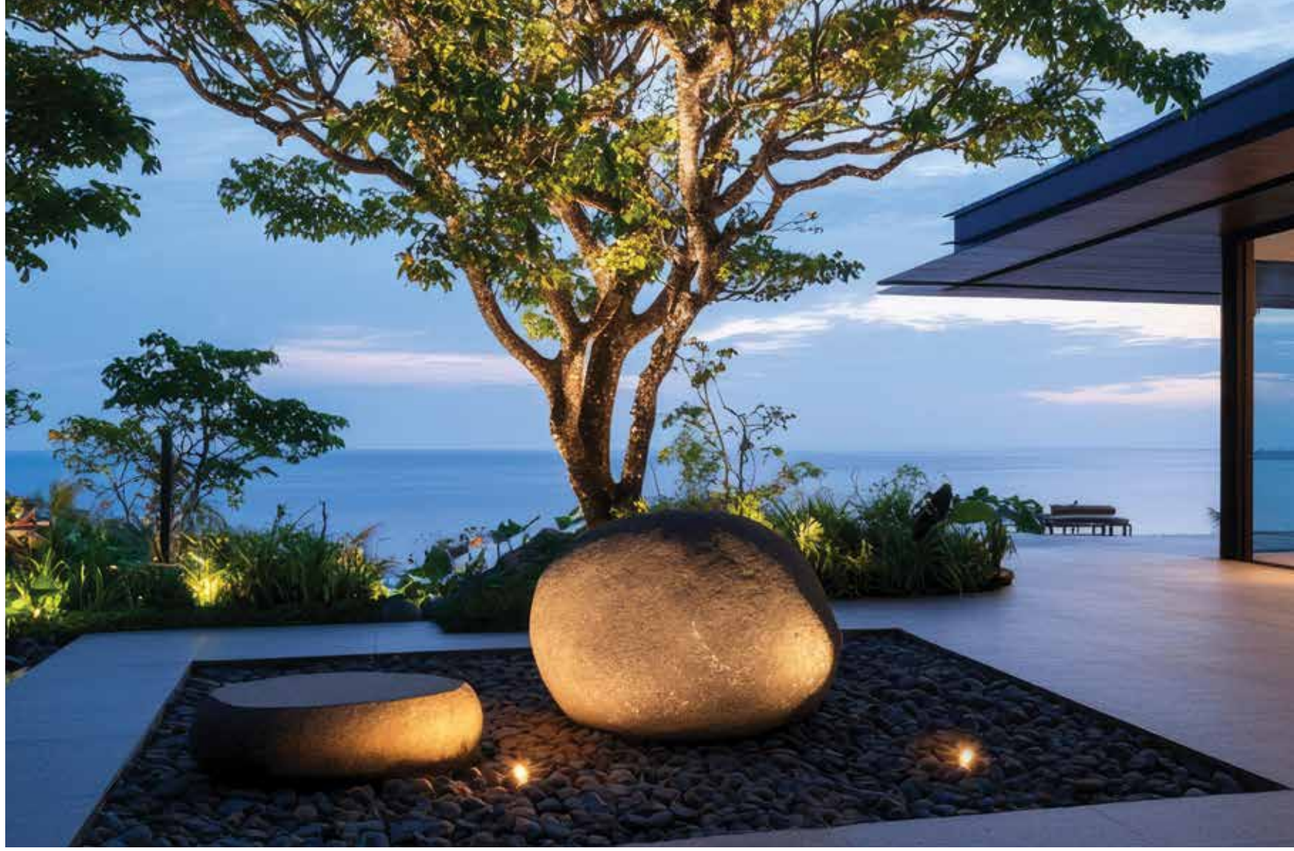






Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 8.6cm L: 15.5cm H: 7.3cm
Material	ABS - Tempered Glass
Special Feature	30cm Cable Available Movable Spot Spike Included
Color	Black / **Code E310**

IP 54 SeaSide





Bulb	1x GU10 LED
Power	5W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	Ø: 6cm H: 16cm
Material	ABS - PC Diffuser
Special Feature	30cm Cable Available Movable Spot Spike Included
Color	Black / **Code E217**

IP 65 SeaSide




Step by Step Safety and Visibility
Guiding your path with confidence.



06. STEP






Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	200Lm
Cri	80
IP	65
Dimensions	L: 3.9cm W: 8cm H: 8cm
Material	Aluminium - Glass
Color	Brown / **Code E442**


IP 65 LED





Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	200Lm
Cri	80
IP	65
Dimensions	L: 3.9cm W: 8cm H: 16cm
Material	Aluminium - Glass
Color	Brown / **Code E441**


IP 65 LED

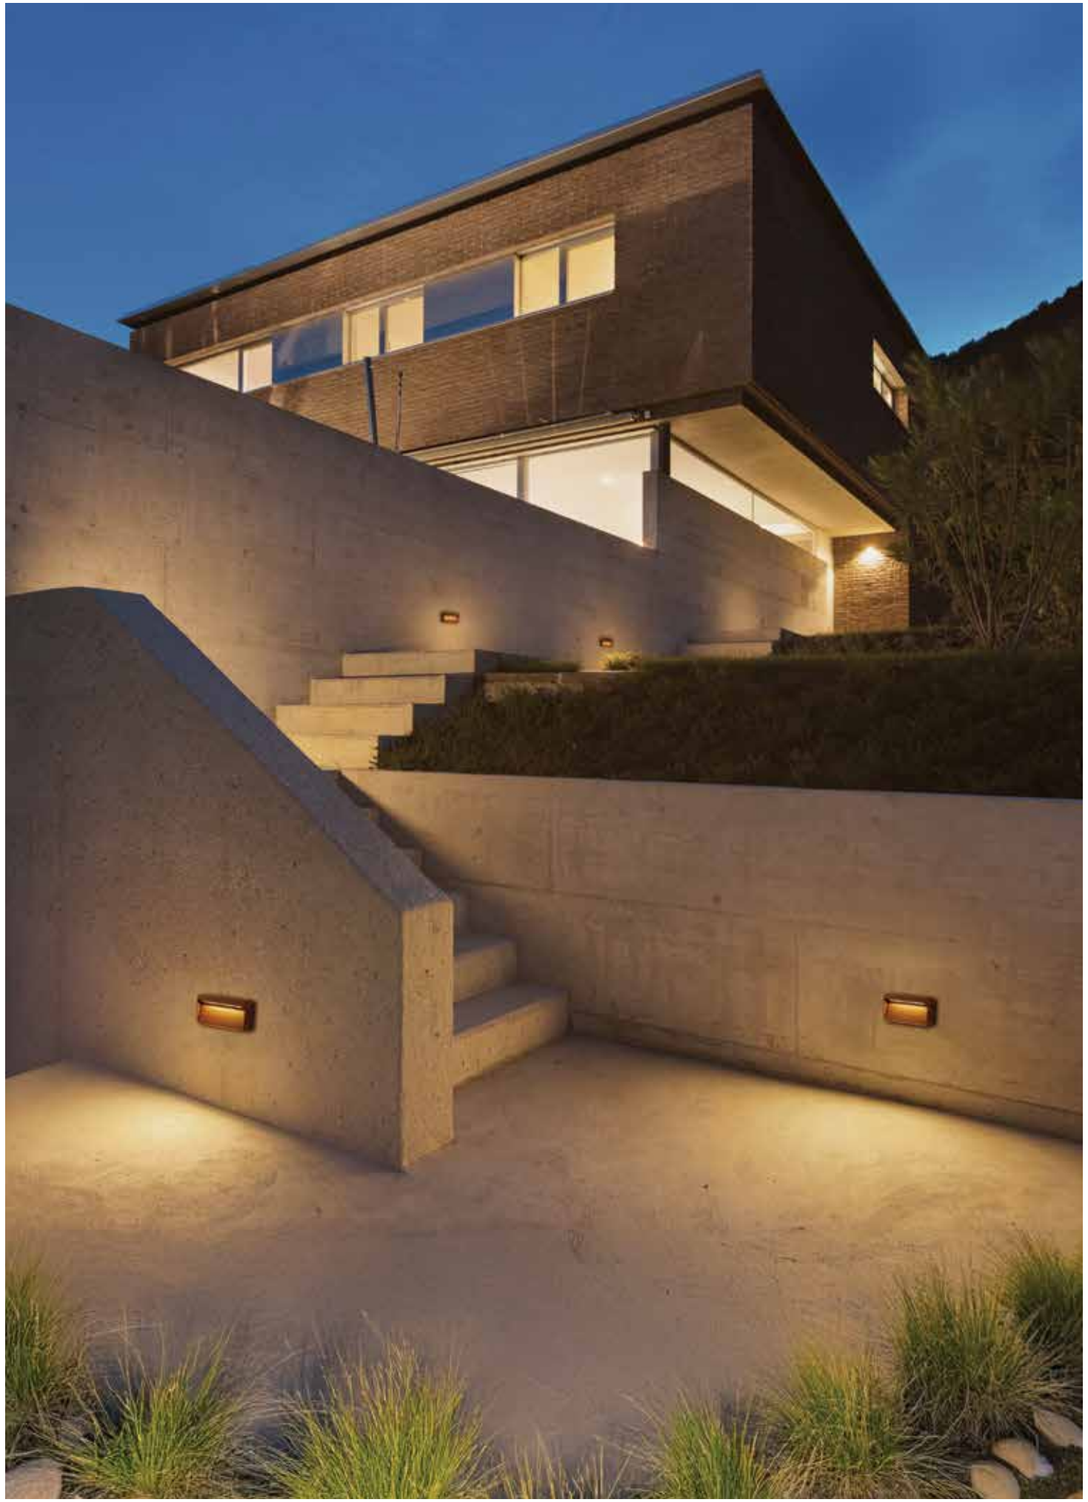












Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	185Lm
Cri	80
IP	65
Dimensions	L: 2.6cm W: 14cm H: 14cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E450**
Color	Sandy White / **Code E451**
Color	Brown / **Code E452**

IP 65 LED

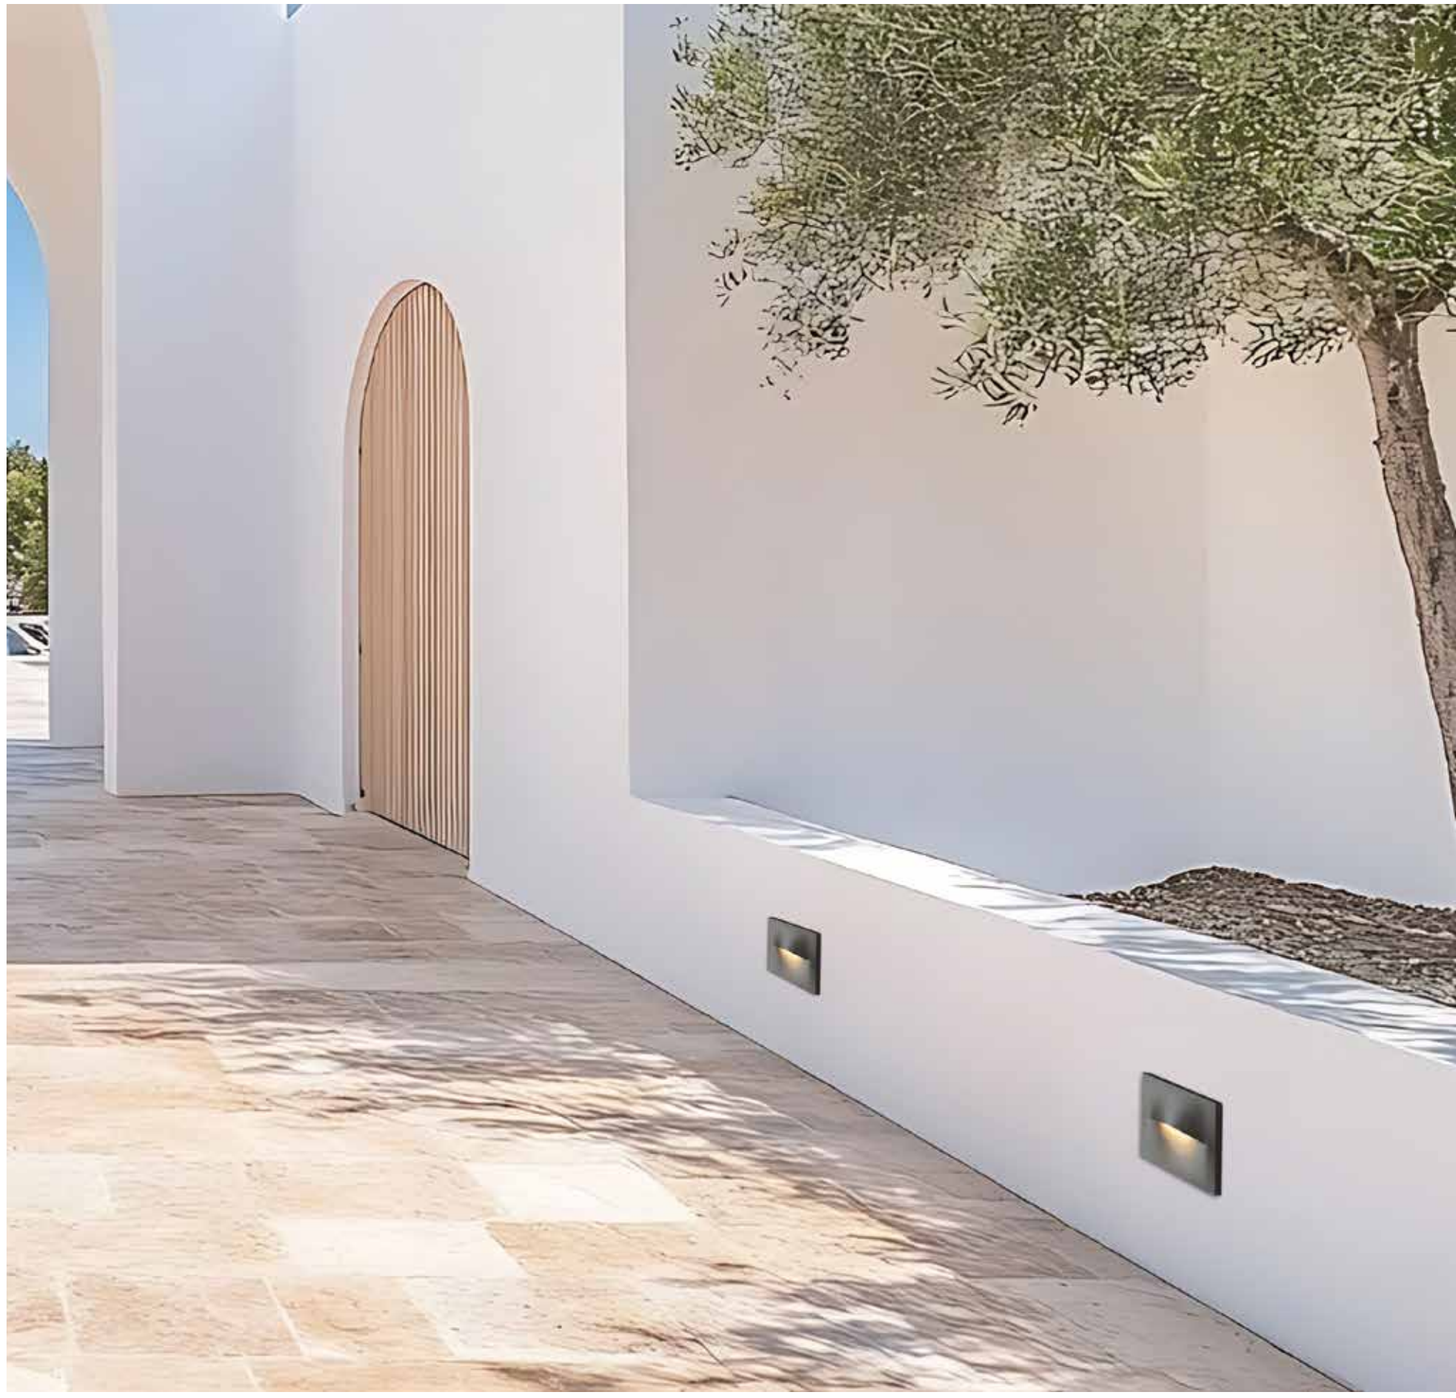















Power	4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	285Lm
Cri	80
IP	65
Dimensions	L: 1.5cm W: 19.5cm H: 9.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E453**
Color	Sandy White / **Code E454**
Color	Brown / **Code E455**

IP 65 LED






Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	420Lm
Cri	80
IP	65
Dimensions	L: 3.5cm W: 22.7cm H: 12.7cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E347**

IP 65 LED



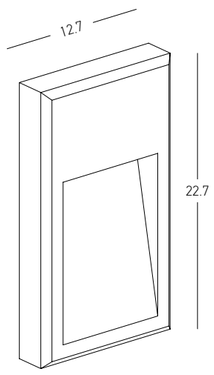


Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	420Lm
Cri	80
IP	65
Dimensions	L: 3.5cm W: 12.7cm H: 22.7cm
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E346**

IP 65 LED









Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	133Lm
Cri	90
IP	65
Dimensions	Ø: 7cm L: 6.5cm
Material	Aluminium - Tempered Glass
Depth Required	: 6cm
Recessed Mounting Box	Ø: 5.5cm L: 6cm (Included)
Color	Sandy White / **Code E320**

IP 65 LED



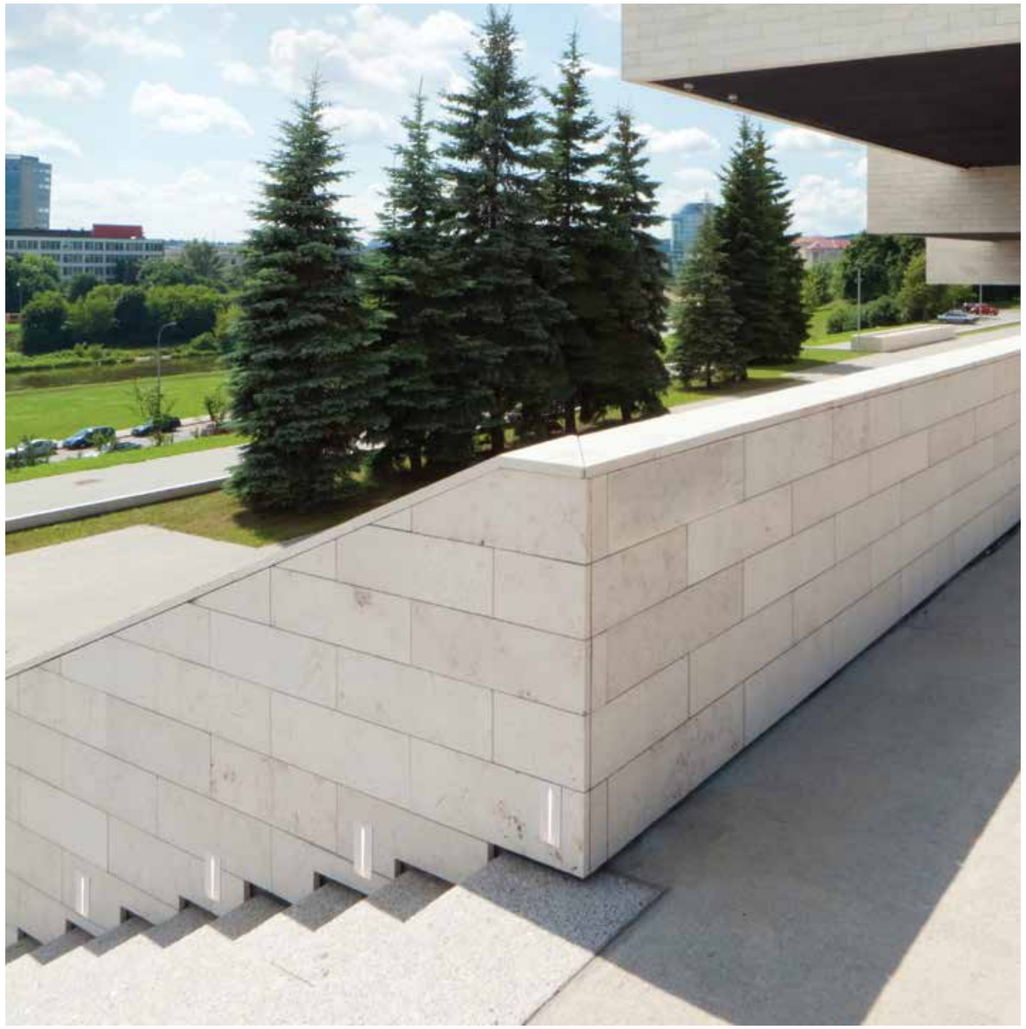






Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	92Lm
Cri	90
IP	65
Dimensions	L: 6.5cm W: 5cm H: 13.5cm
Material	Aluminium - Tempered Glass
Depth Required	: 6cm
Recessed Mounting Box	L: 6cm W: 4.3cm H: 12.6cm (Included)
Color	Sandy White / **Code E322**

IP 65 LED







Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	92Lm
Cri	90
IP	65
Dimensions	Ø: 7cm L: 6.5cm
Material	Aluminium - Tempered Glass
Depth Required	⊓ : 6cm
Recessed Mounting Box	Ø: 5.5cm L: 6cm (Included)
Color	Sandy White / **Code E321**

IP 65 LED



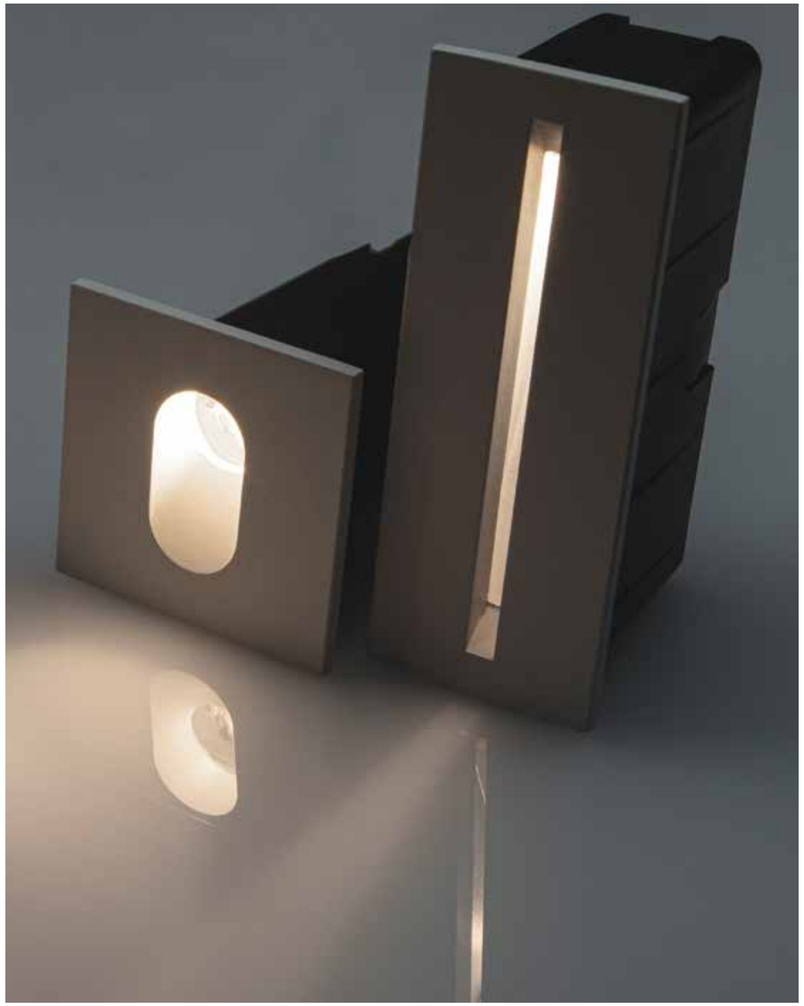






Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	133Lm
Cri	90
IP	65
Dimensions	L: 7.5cm W: 7cm H: 7cm
Material	Aluminium - Tempered Glass
Depth Required	⊓ : 7cm
Recessed Mounting Box	Ø: 5.5cm L: 7cm (Included)
Color	Sandy White / **Code E319**

IP 65 LED






Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	230Lm
Cri	90
IP	65
Dimensions	Ø: 6.5cm L: 6cm
Material	Aluminium - PC Diffuser
Depth Required	⟷ : 6cm
Recessed Mounting Box	Ø: 5.5cm L: 6cm (Included)
Color	Sandy Black / **Code E300**


IP 65 LED






Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	290Lm
Cri	90
IP	65
Dimensions	Ø: 6.5cm L: 6cm
Material	Aluminium - PC Diffuser
Depth Required	⟷ : 6cm
Recessed Mounting Box	Ø: 5.5cm L: 6cm (Included)
Color	Sandy Black / **Code E301**

IP 65 LED

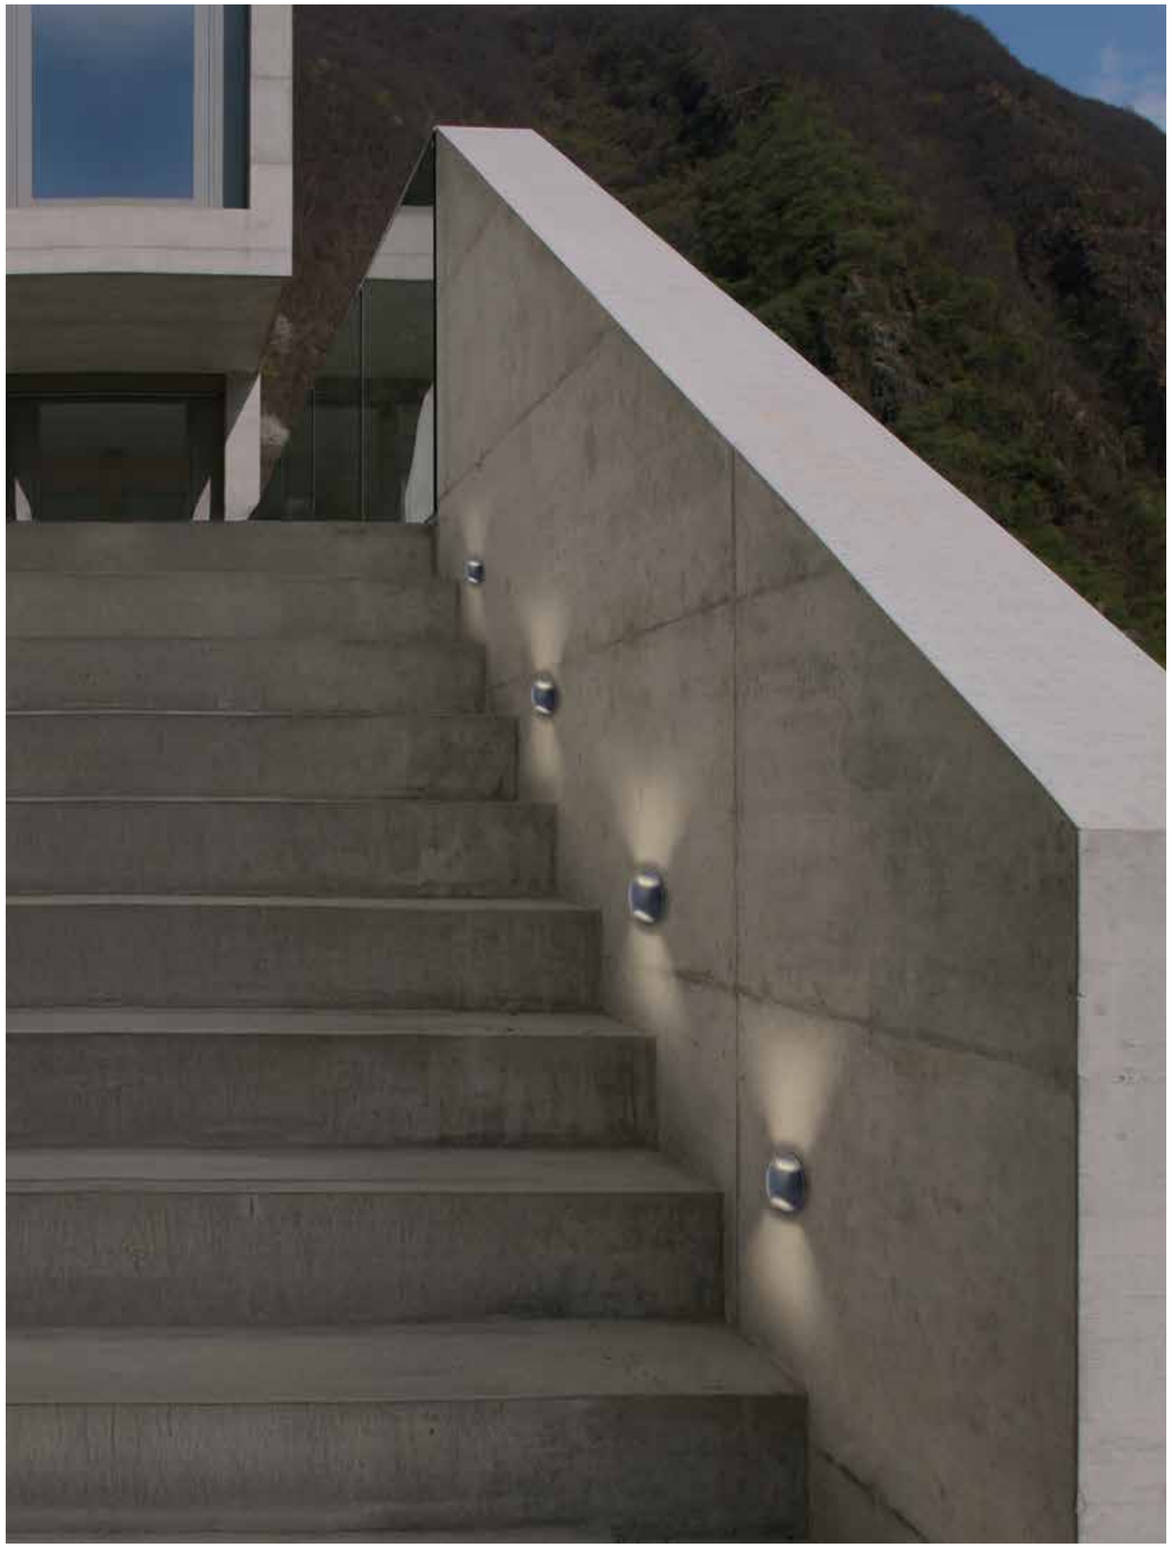








Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	302Lm
Cri	80
IP	65
Dimensions	L: 6.5cm W: 13.8cm H: 5.5cm
Material	Aluminium - Tempered Glass
Depth Required	: 6cm
Recessed Mounting Box	L: 6cm W: 13cm H: 4cm (Included)
Color	Graphite / **Code E324**

IP 65 LED






Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	195Lm
Cri	80
IP	65
Dimensions	L: 6.5cm W: 8.5cm H: 5.5cm
Material	Aluminium - Tempered Glass
Depth Required	: 6cm
Recessed Mounting Box	L: 6cm W: 8cm H: 4cm (Included)
Color	Graphite / **Code E323**

IP 65 LED








Power	2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	190Lm
Cri	80
IP	65
Dimensions	Ø: 10.5cm L: 3.7cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E294**

IP 65 LED










Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	480Lm
Cri	80
IP	65
Dimensions	Ø: 15cm L: 3.7cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E242-G**
Color	Sandy White / **Code E242-W**

IP 65 LED








Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	480Lm
Cri	80
IP	65
Dimensions	L: 3.7cm W: 15cm H:15cm
Material	Aluminium - PC Diffuser
Color	Graphite / **Code E241-G**
Color	Sandy White / **Code E241-W**

IP 65 LED








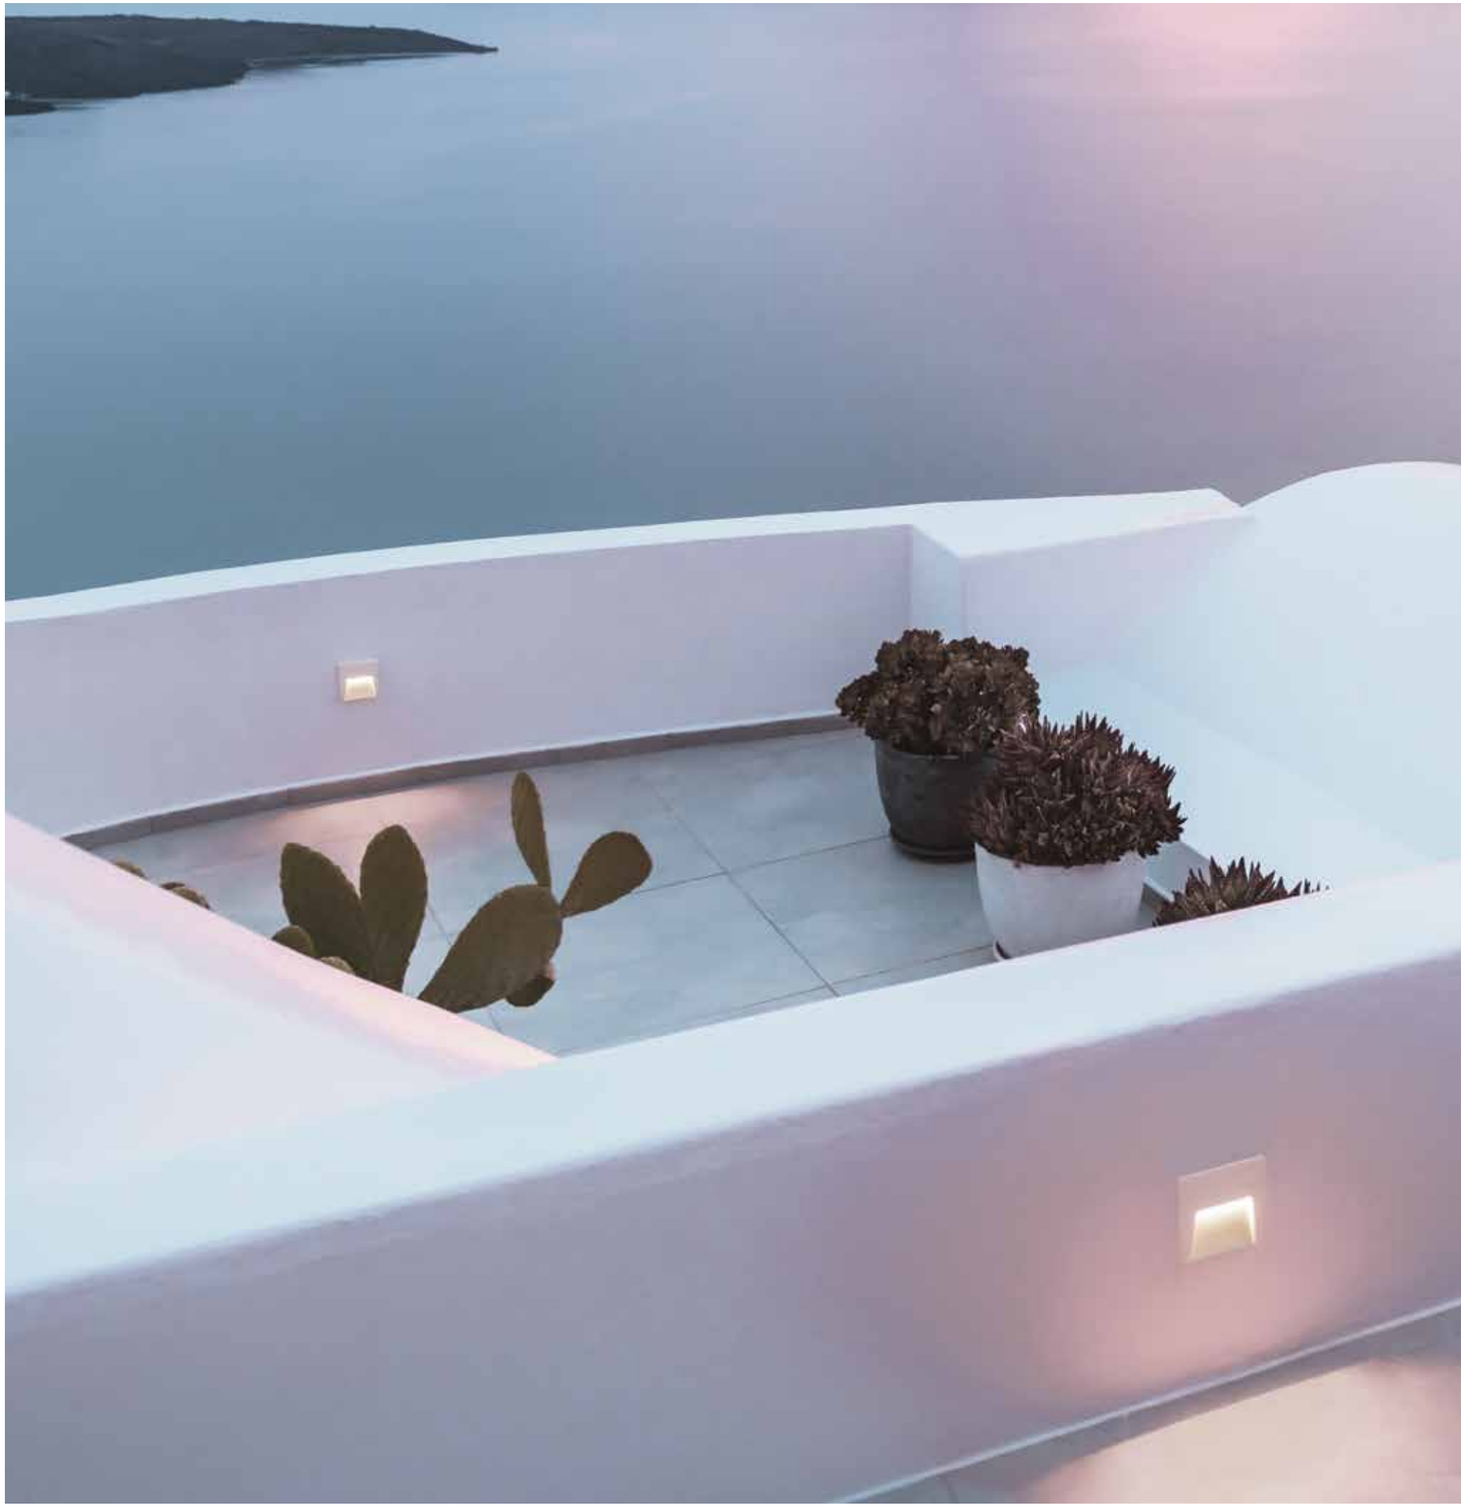








Power	4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	188Lm
Cri	80
IP	65
Dimensions	L: 6cm W: 14cm H: 7cm
Depth Required	⊓: 6cm
Material	Aluminium - PC Diffuser
Recessed Mounting Box	L: 6cm W: 13cm H: 6cm (Included)
Color	Graphite / **Code E247-G**
Color	Sandy White / **Code E247-W**

IP 65 LED







Power	2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	65Lm
Cri	80
IP	65
Dimensions	L: 6cm W: 9cm H: 9cm
Depth Required	⊓: 6cm
Material	Aluminium - PC Diffuser
Recessed Mounting Box	L: 6cm W: 6cm H: 8cm (Included)
Color	Graphite / **Code E246-G**
Color	Sandy White / **Code E246-W**

IP 65 LED



Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	132Lm
Cri	80
IP	65
Dimensions	L: 2.5cm W: 23cm H: 8cm
Material	ABS
Color	Graphite / **Code E229**

IP 65 LED SeaSide






Power	2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	69Lm
Cri	80
IP	65
Dimensions	L: 2.5cm W: 12.5cm H: 12.5cm
Material	ABS
Color	Graphite / **Code E230**

IP 65 LED SeaSide








Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	92Lm
Cri	80
IP	54
Dimensions	Ø: 13.5cm L: 3.2cm
Material	ABS
Color	Graphite / **Code E183**
Color	White / **Code E184**

IP 54 LED SeaSide








Power	2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	88Lm
Cri	80
IP	54
Dimensions	L: 3.3cm W: 10cm H: 6cm
Material	ABS
Color	Graphite / **Code E181**
Color	White / **Code E182**

IP 54 LED SeaSide







Power	1.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	90Lm
Cri	80
IP	65
Dimensions	L: 1.5cm W: 9cm H: 12cm
Material	ABS - PC Diffuser
Color	White / **Code E187**


IP 65 LED SeaSide




IP-Rated Ceiling Lighting


All-weather performance.



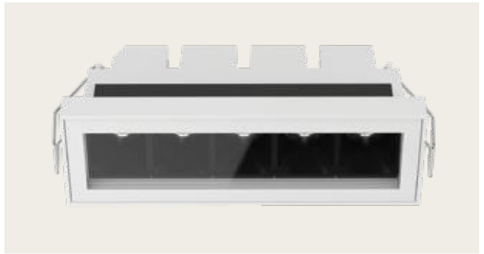







Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	757Lm
Cri	90
IP	65
Dimensions	L: 15.7cm W: 5cm H: 6.8cm
Cutting Hole	14.2 x 3.5cm
Beam Angle	40^0
Non Dimmable	⊠
Material	Stainless Steel - Aluminium - Tempered Glass
Depth Required	⎍⎍: 6cm
Driver	Included
Color	Sandy Black / **Code E332**
Color	Sandy White / **Code E333**

IP 65 LED
























Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	561Lm
Cri	90
IP	54
Dimensions	Ø: 8cm H: 5.5cm
Beam Angle	120°
Material	Aluminium
Color	Sandy Black / **Code S131**
Color	Sandy White / **Code S132**

IP 54 LED



Power	12W
Input	220-240V, 50/60Hz
Color Temperature	4000K
Lumen	593Lm
Cri	90
IP	54
Dimensions	Ø: 8cm H: 5.5cm
Beam Angle	120°
Material	Aluminium
Color	Sandy Black / **Code S131-4K**
Color	Sandy White / **Code S132-4K**


IP 54 LED



Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	454Lm
Cri	80
IP	54
Dimensions	Ø: 6.5cm H: 4.5cm
Beam Angle	120°
Material	Aluminium
Color	Sandy Black / **Code S133**
Color	Sandy White / **Code S134**

IP 54 LED






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	597Lm
Cri	80
IP	65
Dimensions	Ø: 9cm H: 11cm
Beam Angle	120^0
Material	Aluminium - Tempered Glass
Color	Graphite / **Code E340**

IP 65 LED








Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	500Lm
Cri	90
IP	54
Dimensions	Ø: 6.3cm H: 7.5cm
Beam Angle	20^0
Material	Aluminium - Glass
Special Feature	Driver Included
Color	Sandy Black / **Code S112**
Color	Sandy White / **Code S113**

IP 54 LED










Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 6cm H: 10.5cm
Material	Aluminium - Glass Diffuser
Color	Sandy Black / **Code E219**
Color	Sandy White / **Code E220**

IP 54









Bulb	1x GU10 LED
Power	7W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 7.2-7.6cm H: 14cm
Material	ABS - Acrylic
Color	White Matt / **Code E308**
Color	Black Matt / **Code E309**

IP 54 SeaSide

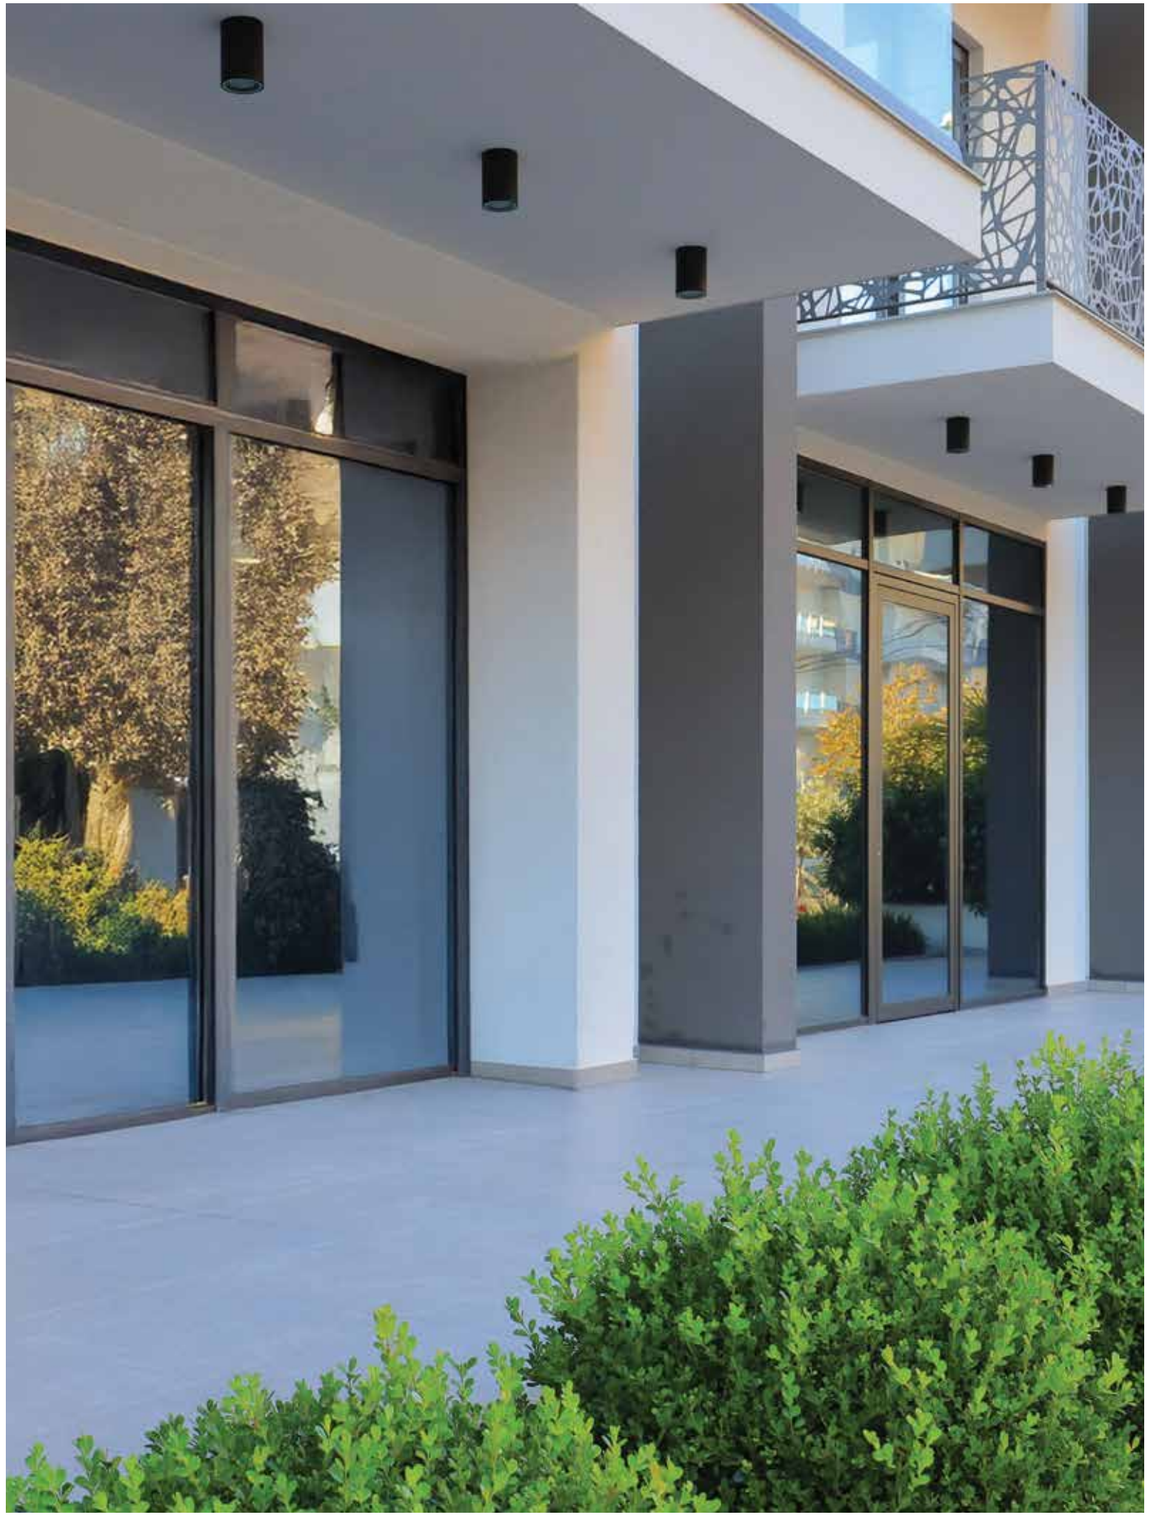





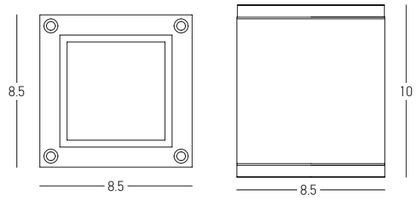


Bulb	1x GU10
Power	35W MAX
Input	220-240V, 50/60Hz
IP	65
Dimensions	L: 8.5cm W: 8.5cm H: 10cm
Material	Aluminium - Glass
Color	Graphite / **Code E269**
Color	Sandy White / **Code E270**

IP 65










Power	20W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2041 Lm
Cri	80
IP	65
Dimensions	Ø: 27cm H: 7.5cm
Material	Aluminium - PC Diffuser
Special Feature	Driver Included
Color	Sandy White / **Code E326**
Color	Graphite / **Code E327**

IP 65 LED

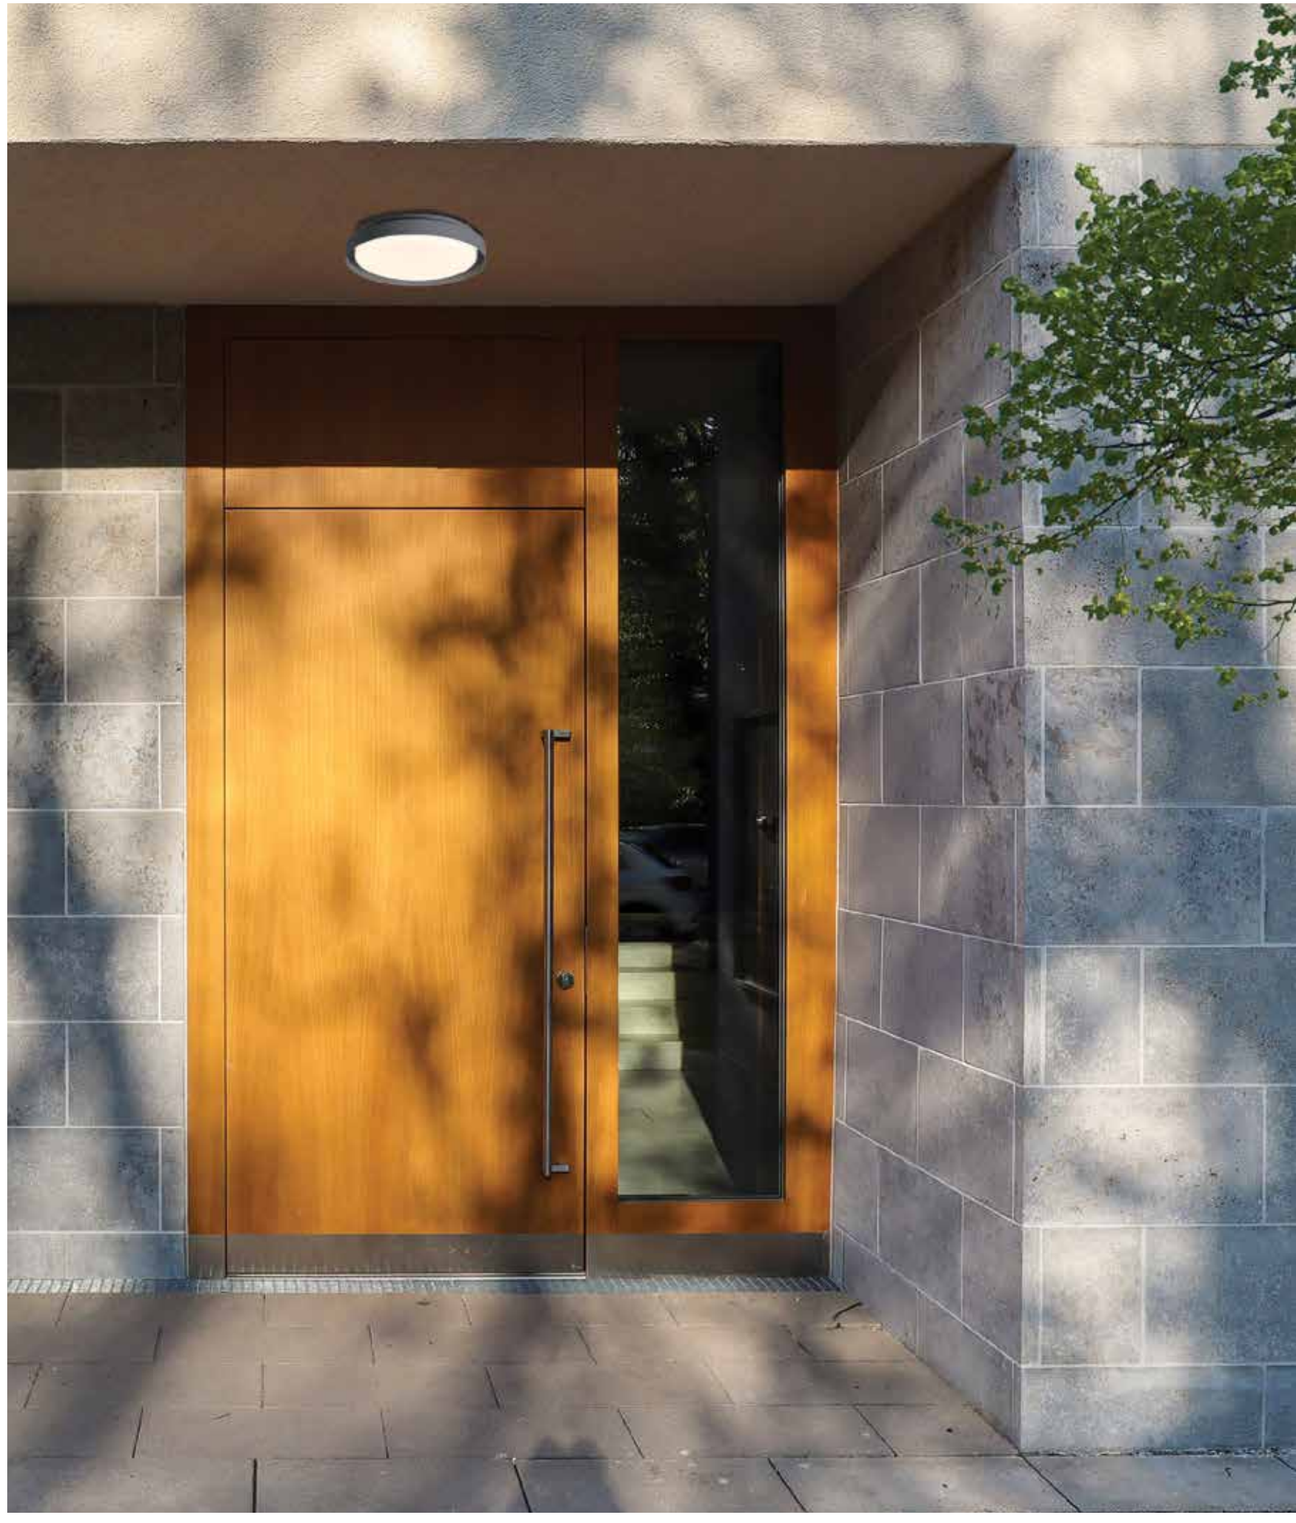

Discreet Integration
Inground lights with focused beam control.




08. INGROUND





Power	1W
Input	24V
Color Temperature	3000K
Lumen	57Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 3.5cm H: 5.2cm
Beam Angle	15°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	: 7cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-17 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E502**



IP 65 LED

Power	1W
Input	24V
Color Temperature	2700K
Lumen	51Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 3.5cm H: 5.2cm
Beam Angle	15°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	: 7cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-17 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E503**

IP 65 LED




Driver	**LPH-18-24**
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67







Power	3W
Input	24V
Color Temperature	3000K
Lumen	230Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.6cm
Beam Angle	24°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇅: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E504**



IP 65 LED

Power	3W
Input	24V
Color Temperature	2700K
Lumen	218Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.6cm
Beam Angle	24°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇅: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E505**




Driver	**LPH-18-24**
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67

IP 65 LED





Power	3W
Input	24V
Color Temperature	3000K
Lumen	230Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.6cm
Beam Angle	10°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇅: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E506**




IP 65 LED

Power	3W
Input	24V
Color Temperature	2700K
Lumen	218Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.6cm
Beam Angle	10°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇅: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E507**



Driver	**LPH-18-24**
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67


IP 65 LED

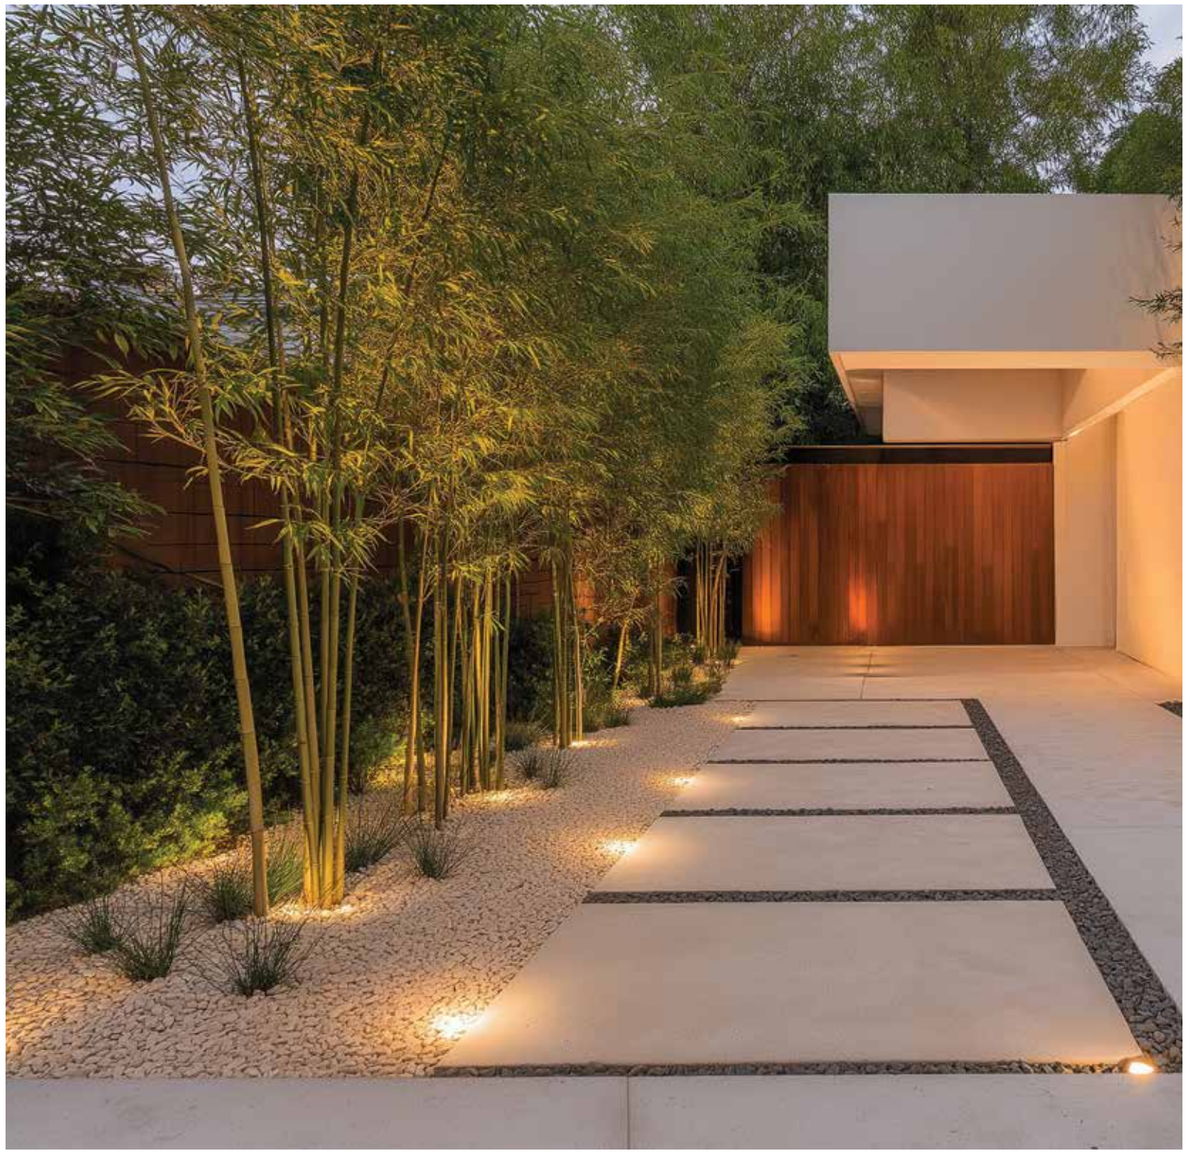





Power	5W
Input	24V
Color Temperature	3000K
Lumen	345Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.6cm
Beam Angle	24°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇅: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-3 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E510**



IP 65 LED

Power	5W
Input	24V
Color Temperature	2700K
Lumen	324Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.2cm
Beam Angle	24°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇅: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-3 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / **Code E511**

IP 65 LED




Driver	**LPH-18-24**
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67





Power	3W
Input	24V
Color Temperature	3000K
Lumen	230Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 6.5cm H: 7.5cm
Beam Angle	10x60°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇂⇃: 8cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Special Feature	Honeycomb Striated Included
Color	Stainless Steel / **Code E508**




IP 65 LED

Power	3W
Input	24V
Color Temperature	2700K
Lumen	218Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 6.5cm H: 7.5cm
Beam Angle	10x60°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⇂⇃: 8cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Special Feature	Honeycomb Striated Included
Color	Stainless Steel / **Code E509**




Driver	**LPH-18-24**
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67

IP 65 LED

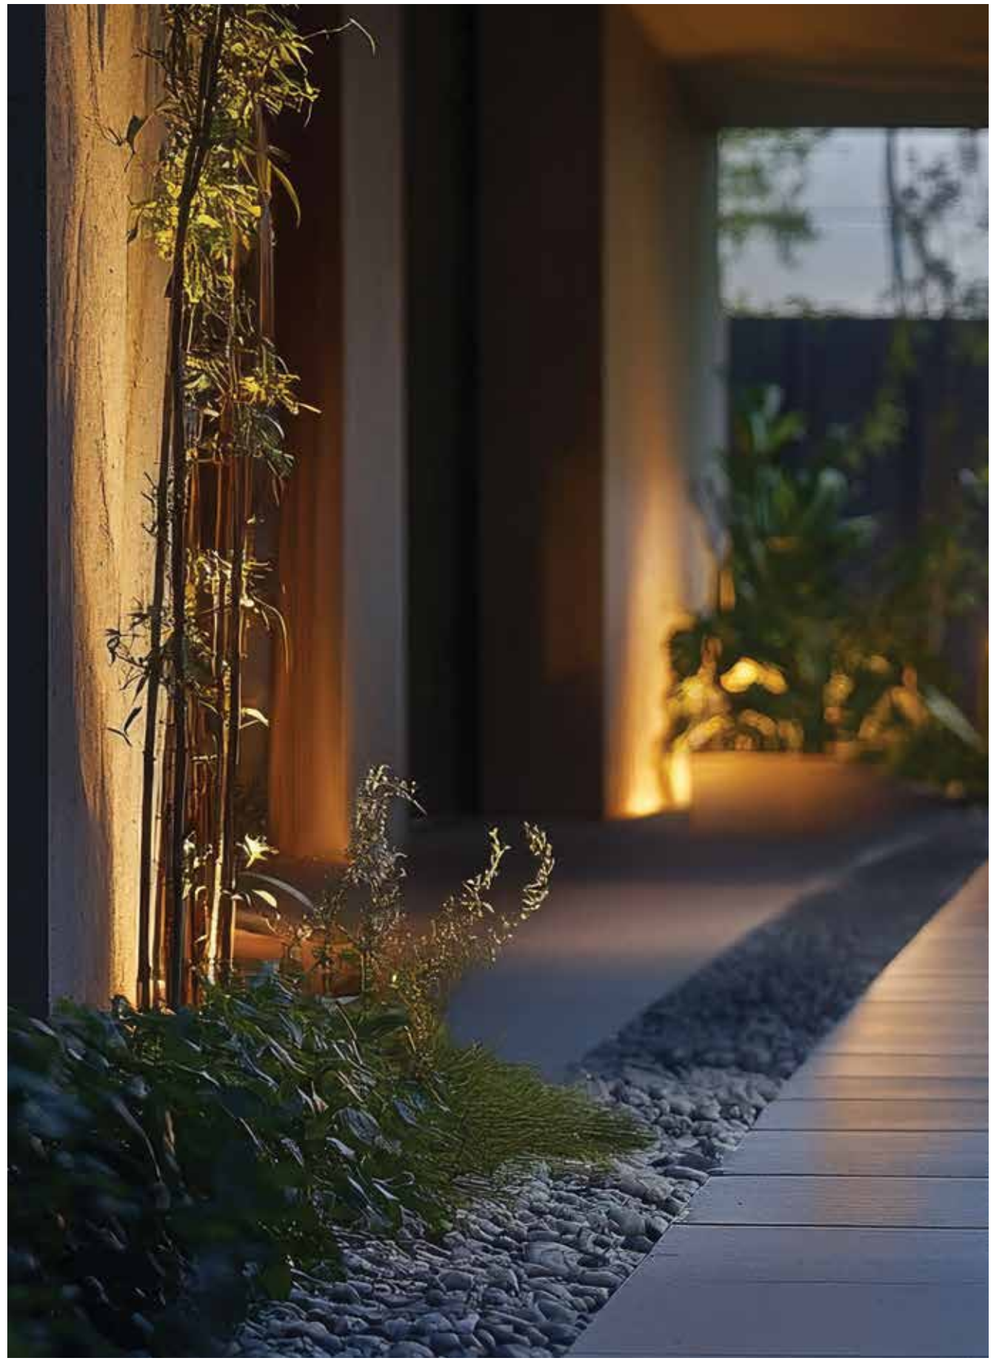






Power	3W
Input	24V
Color Temperature	3000K
Lumen	150Lm
Cri	80
IP	65
IK	10
Dimensions	Ø: 4.8cm H: 10cm
Material	Aluminium - Stainless Steel - PC Diffuser
Depth Required	: 13cm
Recessed Mounting Box	Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Color	Aluminium / **Code E180**

IP 65 LED






Power	3W
Input	24V
Color Temperature	3000K
Lumen	95Lm
Cri	80
IP	65
IK	10
Dimensions	Ø: 4.8cm H: 10cm
Material	Aluminium - Stainless Steel - PC Diffuser
Depth Required	: 13cm
Recessed Mounting Box	Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Color	Aluminium / **Code E179**

IP 65 LED











Power	3W
Input	24V
Color Temperature	3000K
Lumen	232Lm
Cri	80
IP	65
IK	8
Dimensions	Ø: 4.5cm H: 9.3cm
Material	Aluminium - Stainless Steel - PC Diffuser
Depth Required	: 12cm
Recessed Mounting Box	Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-5 pcs
Color	Aluminium / **Code E178**

IP 65 LED





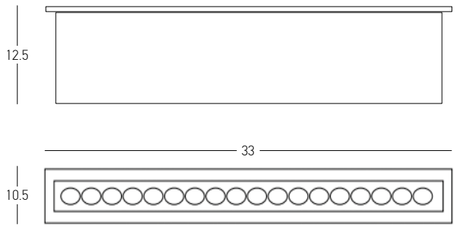




Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 33cm W: 10.5cm H: 12.5cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⎍: 14.5cm
Recessed Mounting Box	Included
Special Feature	Light Angle can be adjusted externally through screw on the frame. 50cm Cable Available Driver Included
Color	Stainless Steel / **Code E365**


IP 67 LED



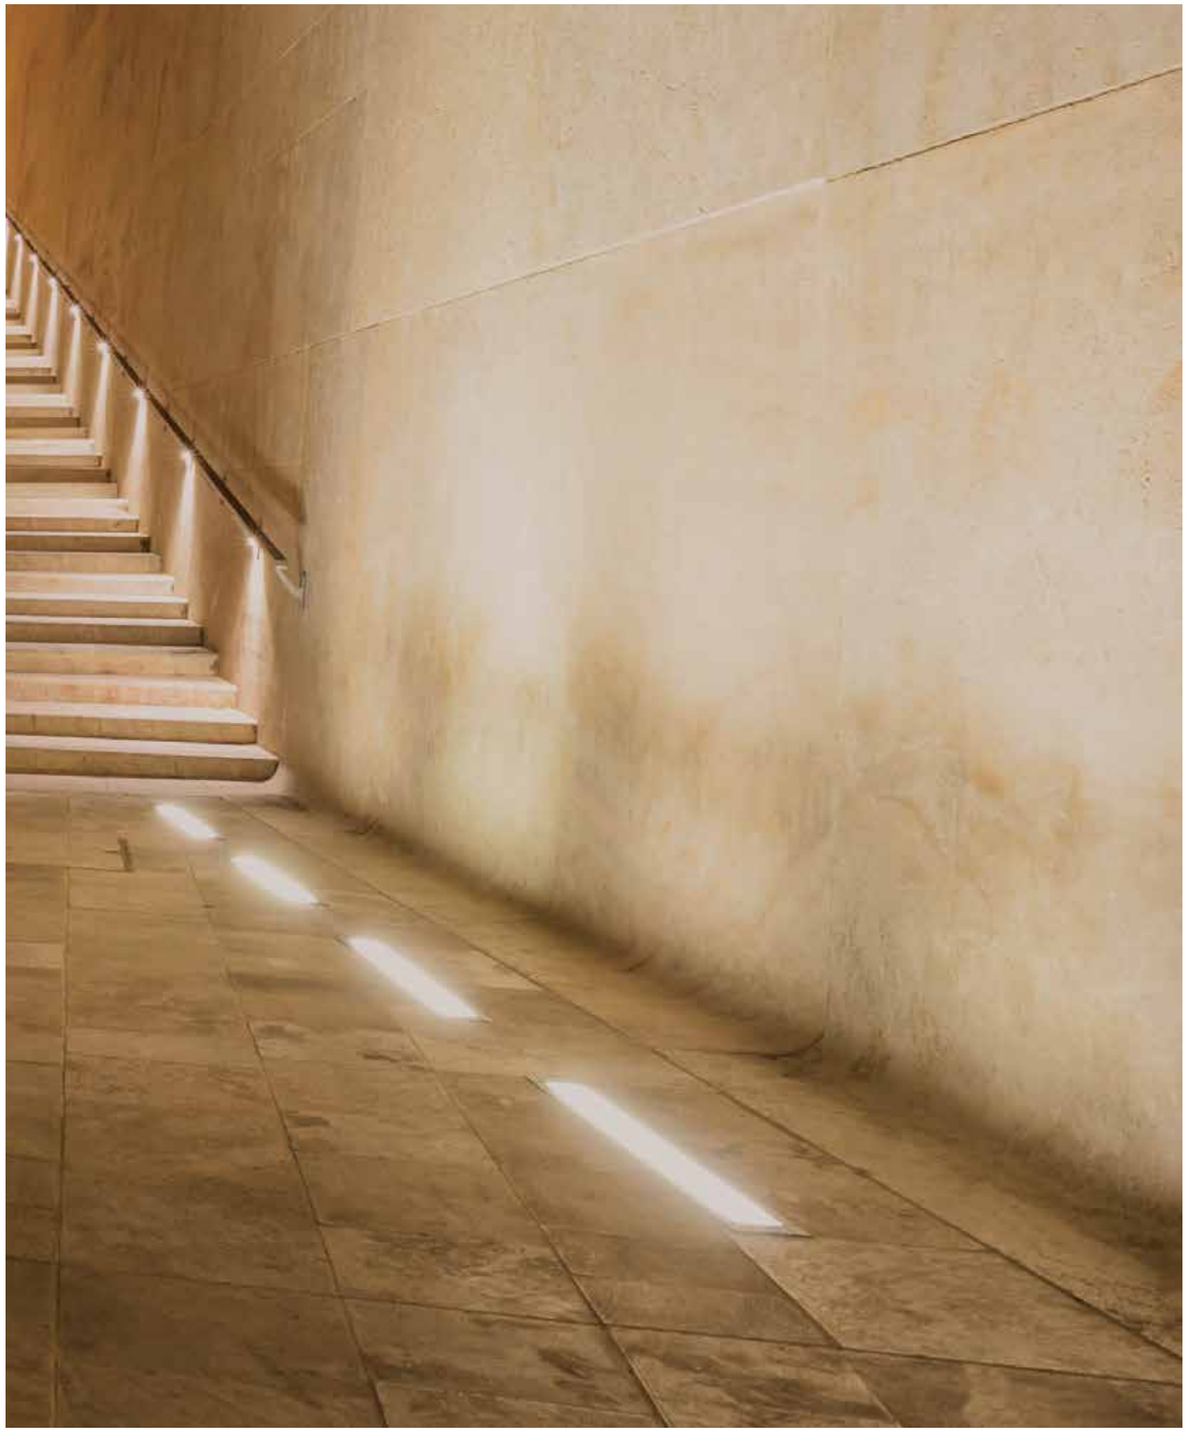








Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 50cm W: 9.2cm H: 9cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	⅂⅃: 11cm
Recessed Mounting Box	Included
Special Feature	50cm Cable Available Driver Included
Color	Stainless Steel / **Code E366**

IP 67 LED






Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	130Lm
Cri	80
IP	67
IK	10
Dimensions	Ø: 21cm H: 5.4cm
Material	Aluminium - Clear PC Diffuser
Special Feature	Surface Ground Driver Included
Color	Grey / **Code E461**

IP 67 LED






Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	228Lm
Cri	80
IP	67
IK	10
Dimensions	Ø: 21cm H: 5.4cm
Material	Aluminium - Clear PC Diffuser
Special Feature	Surface Ground Driver Included
Color	Grey / **Code E462**

IP 67 LED










Power	0.2W
Input	24V
Color Temperature	3000K
Lumen	23Lm
Cri	80
IP	68
IK	10
Dimensions	Ø: 1.5cm H: 3.5cm
Beam Angle	45°
Material	Stainless Steel - Tempered Glass
Depth Required	: 5cm
Special Feature	50cm Cable Available
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-10 pcs
Color	Stainless Steel / **Code E364**

IP 68 LED




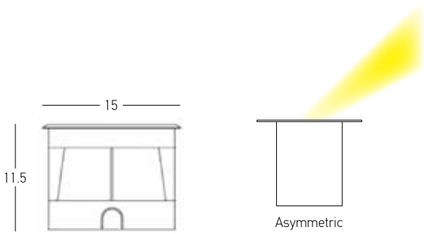

Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	560Lm
Cri	80
IP	66
IK	8
Dimensions	Ø: 15cm H: 11.5cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Glass
Depth Required	⏊: 12.5cm
Recessed Mounting Box	Included
Special Feature	Asymmetric 50cm Cable Available Driver Included
Color	Stainless Steel / **Code E363**


IP 66 LED



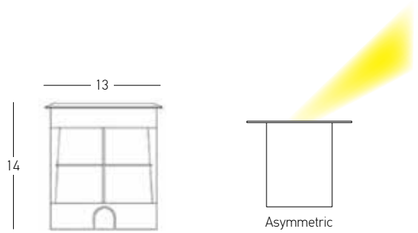


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	560Lm
Cri	80
IP	66
IK	8
Dimensions	Ø: 13cm H: 14cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Glass
Depth Required	⏊: 15cm
Recessed Mounting Box	Included
Special Feature	Asymmetric 50cm Cable Available Driver Included
Color	Stainless Steel / **Code E362**


IP 66 LED

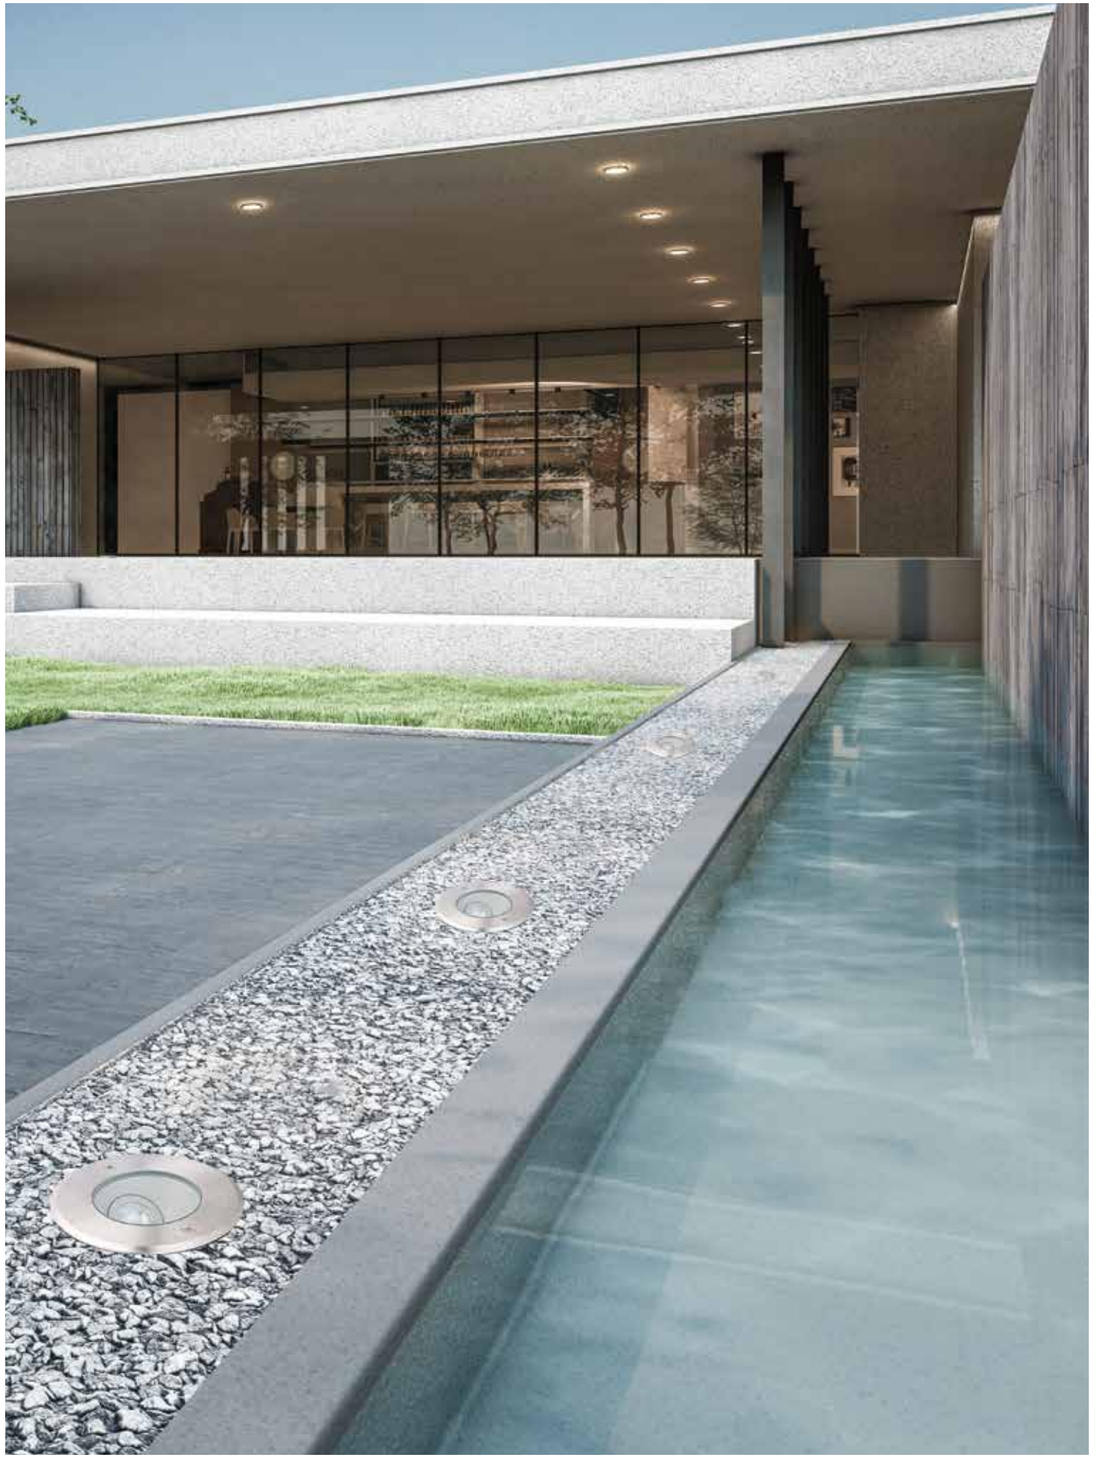











Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1200Lm
Cri	80
IP	66
IK	8
Dimensions	Ø: 18cm H: 16cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Glass
Depth Required	: 17cm
Recessed Mounting Box	Included
Special Feature	Light Angle can be adjusted externally through screw on the frame. 50cm Cable Available Driver Included
Color	Stainless Steel / **Code E361**

IP 66 LED










Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	560Lm
Cri	80
IP	66
IK	8
Dimensions	Ø: 13cm H: 14cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Glass
Depth Required	: 15cm
Recessed Mounting Box	Included
Special Feature	Internal Adjustable Light Angle 50cm Cable Available Driver Included
Color	Stainless Steel / **Code E360**

IP 66 LED










Bulb	1x GU10 LED
Power	10W MAX
Input	220-240V, 50/60Hz
IP	65
IK	8
Dimensions	Ø: 10cm H: 10cm
Material	Stainless Steel - Tempered Glass
Depth Required	⊔: 11cm
Recessed Mounting Box	Included
Special Feature	50cm Cable Available GU10 Lampholder Included
Color	Stainless Steel / **Code E359**

IP 65





Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	618Lm
Cri	80
IP	67
IK	8
Dimensions	Ø: 10cm H: 9.5cm
Beam Angle	36°
Material	Stainless Steel - Tempered Glass
Depth Required	⊔: 12cm
Recessed Mounting Box	Included
Special Feature	Driver Included
Color	Stainless Steel / **Code E189**

IP 67 LED




Power. Precision. Presence.
Wall washers for uniform illumination and architectural impact.



09. WALL WASHER








Power	36W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2200Lm
Cri	80
IP	65
Dimensions	L: 100cm W: 4cm H: 12.3cm
Beam Angle	60° x 10°
Material	Aluminium - Glass
Special Feature	Half Cilcular Anti-Glare Driver Included Connect 8pcs MAX
Color	Graphite / **Code E496**

IP 65 LED




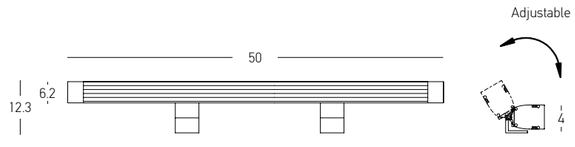

Power	18W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1160Lm
Cri	80
IP	65
Dimensions	L: 50cm W: 4cm H: 12.3cm
Beam Angle	60° x 10°
Material	Aluminium - Glass
Special Feature	Half Cilcular Anti-Glare Driver Included Connect 8pcs MAX
Color	Graphite / **Code E497**

IP 65 LED



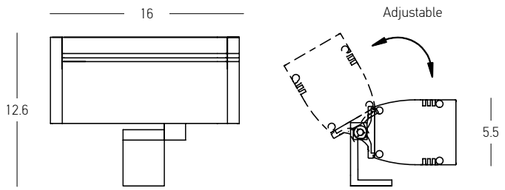

Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	420Lm
Cri	80
IP	65
Dimensions	L: 16cm W: 5.5cm H: 12.6cm
Beam Angle	15°
Material	Aluminium - Glass
Special Feature	Honeycomb Included Driver Included 120° Adjustable Angle Connect 8pcs MAX
Color	Graphite / **Code E495**

IP 65 LED




Connectors Male & Female for E495, E496 & E497

Cable	25cm
Input	220-240V
IP	66
Color	Black / **Code CNCTR 6**










Power	36W
Input	24V
Color Temperature	2700K
Lumen	1530Lm
Cri	80
IP	65
Dimensions	L: 100cm W: 4cm H: 8.9cm
Beam Angle	60° x 10°
Material	Aluminium - Glass
Special Feature	Anti-Glare Driver Not Included Connect 5pcs MAX
Color	Dark Brown / **Code E498**

Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1(Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)

IP 65 LED





Power	18W
Input	24V
Color Temperature	2700K
Lumen	775Lm
Cri	80
IP	65
Dimensions	L: 50cm W: 4cm H: 8.9cm
Beam Angle	60° x 10°
Material	Aluminium - Glass
Special Feature	Anti-Glare Driver Not Included Connect 5pcs MAX
Color	Dark Brown / **Code E499**

IP 65 LED




Connectors Male & Female for E498 & E499


Cable	25cm
Input	24V
IP	66
Color	Black / **Code CNCTR 7**



WALL WASHER TUNABLE WHITE





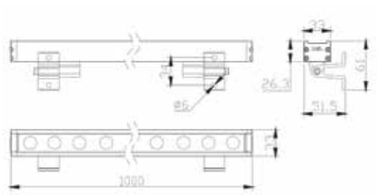

Power	24W
Input	24V
Color Temperature	2700K-6500K
Lumen	1580-1770Lm
Cri	80
IP	66
Dimensions	L: 100cm W: 3.3cm H: 2.6cm
Beam Angle	60° x 10°
Material	Aluminium
Special Feature	Honeycomb Included Driver Not Included Connect 6pcs MAX
Color	Grey / **Code E382**

IP 66 LED

Dimming Options

1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)




Connectors Male & Female for E382

Cable	25cm
Input	24V
IP	66
Color	Black / **Code CNCTR 3**



Power	288W @ 24V
Input	220-240V, 50/60Hz
Dimensions	W: 2.9cm H: 2.2cm L: 18.6cm
Bluetooth Dimming	OT Wi DIM 5CH CA , RGB, RGBW and RGBTW
Material	Plastic
Special Feature	IP 20
Color	White / **Code 6937186115232**


CV dimmers with Bluetooth

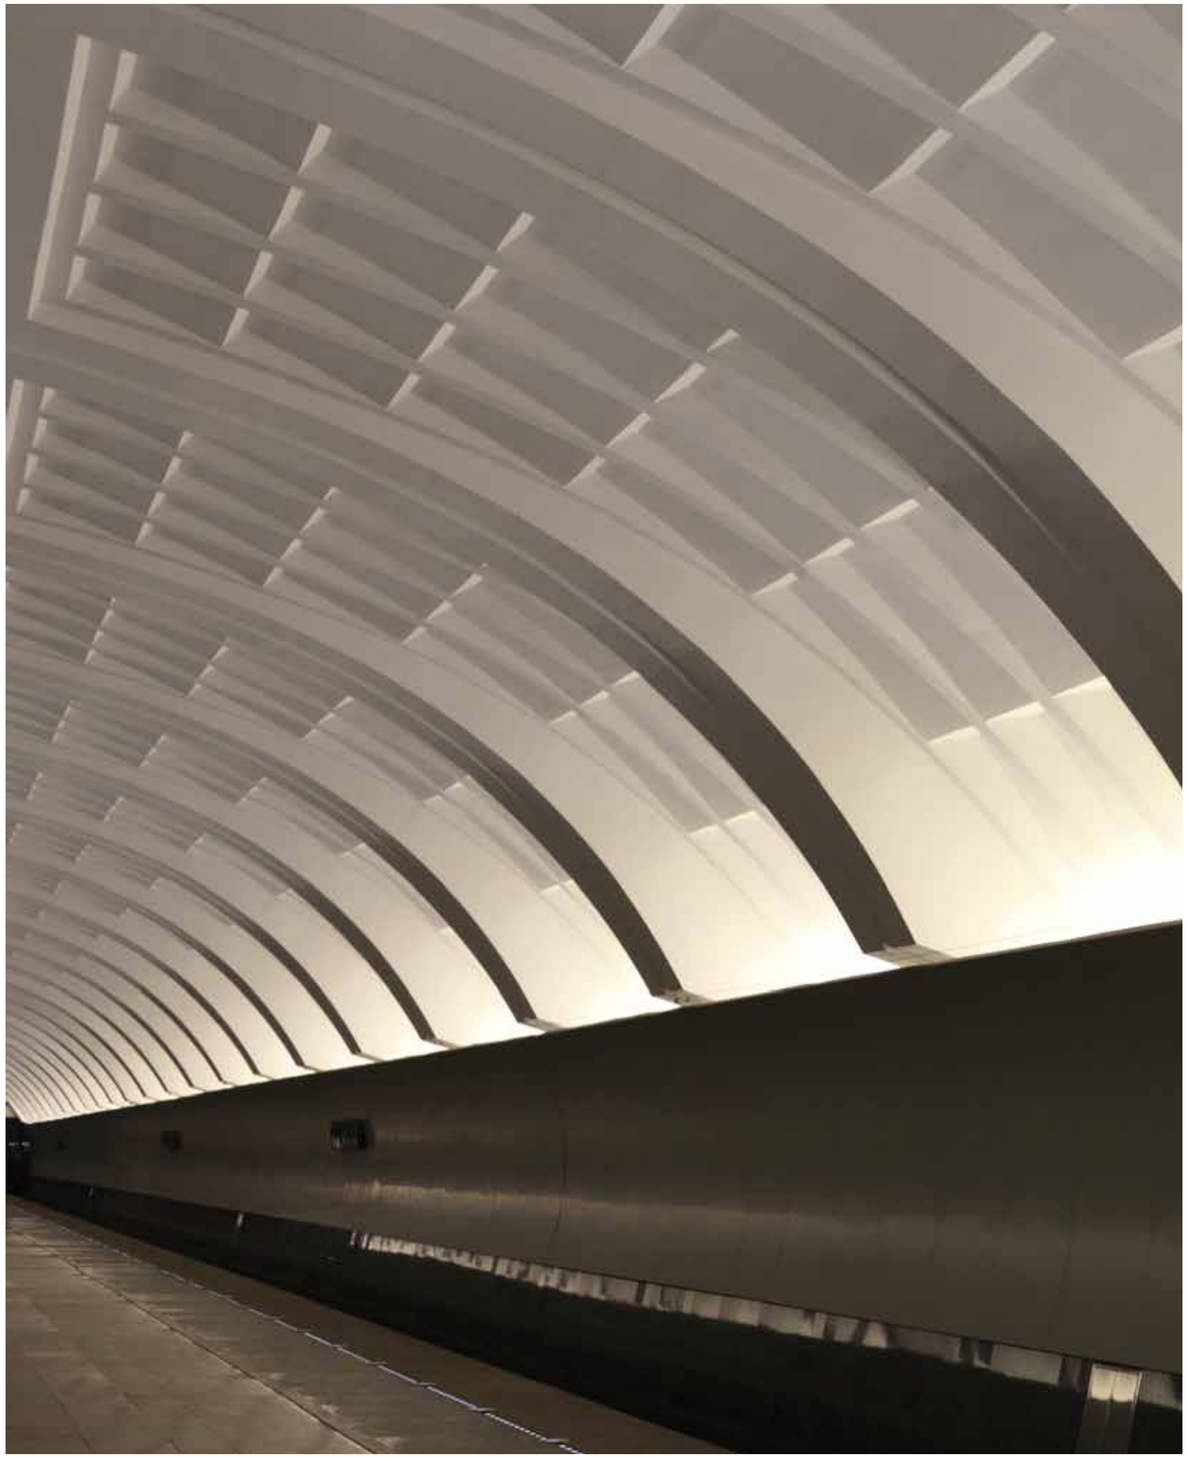




WALL WASHERS RGB & RGBW





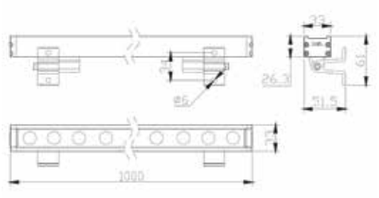

Code	Kelvin	Watt	Lumen
E380	RGB	12W	MAX 280
E381	RGBW 4000	12W	MAX 480

Power	12W
Input	24V
Cri	80
IP	66
Dimensions	L: 100cm W: 3.3cm H: 2.6cm
Beam Angle	60° x 10°
Material	Aluminium
Special Feature	Honeycomb Included Driver Not Included Connect 6pcs MAX
Color	Grey


IP 66 LED


Dimming Options

1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)

2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)





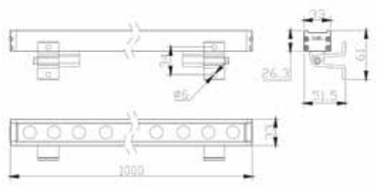

Code	Kelvin	Watt	Lumen
E378	RGB	24W	MAX 560
E379	RGBW 4000	24W	MAX 960

Power	24W
Input	24V
Cri	80
IP	66
Dimensions	L: 100cm W: 3.3cm H: 2.6cm
Beam Angle	60° x 10°
Material	Aluminium
Special Feature	Honeycomb Included Driver Not Included Connect 6pcs MAX
Color	Grey

IP 66 LED

Dimming Options

1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)

2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)



Connectors Male & Female for E381 & E379


Cable	25cm
Input	24V
IP	66
Color	Black / **Code CNCTR 2**




Connectors Male & Female for E380 & E378

Cable	25cm
Input	24V
IP	66
Color	Black / **Code CNCTR 4**





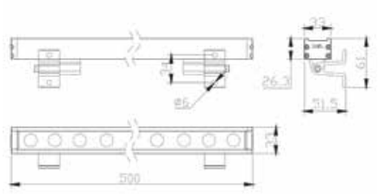

Code	Kelvin	Watt	Lumen
E376	3000	12W	MAX 850
E377	4000	12W	MAX 870


Power	12W
Input	24V
Cri	80
IP	66
Dimensions	L: 50cm W: 3.3cm H: 2.6cm
Beam Angle	60° x 10°
Material	Aluminium
Special Feature	Honeycomb Included Driver Not Included Connect 12pcs MAX
Color	Grey


IP 66 LED

Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1(Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)





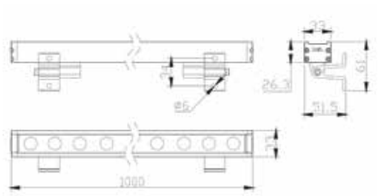

Code	Kelvin	Watt	Lumen
E374	3000	24W	MAX 1700
E375	4000	24W	MAX 1720

Power	24W
Input	24V
Cri	80
IP	66
Dimensions	L: 100cm W: 3.3cm H: 2.6cm
Beam Angle	60° x 10°
Material	Aluminium
Special Feature	Honeycomb Included Driver Not Included Connect 6pcs MAX
Color	Grey

IP 66 LED

Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1(Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)



Connectors Male & Female for E376, E377, E374 & E375

Cable	25cm
Input	24V
IP	66
Color	Black / **Code CNCTR 1**



Track The Light, Magnify The Possibilities.
IP-protected outdoor lighting for modern spaces.




10. IP65 SURFACE LIGHTING SYSTEM



IP65 SURFACE OUTDOOR TRACK


Dimensions L: 300cm W: 2.6cm H: 2.5cm
Material Aluminium
Color Sandy Black / **Code E385**





HORIZONTAL MECHANICAL CORNER


Dimensions L: 7cm W: 7cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E390**





VERTICAL MECHANICAL CORNER


Dimensions L: 7cm W: 3cm H: 7cm
Material Aluminium
Color Sandy Black / **Code E392**





STRAIGHT MECHANICAL CONNECTOR

Dimensions L: 10cm W: 3cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E389**






T MECHANICAL CONNECTOR

Dimensions L: 10cm W: 6.5cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E393**




END CAP


Dimensions L: 6.2cm W: 3cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E391**




IP65 WATERPROOF RUBBER

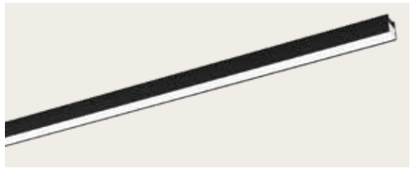




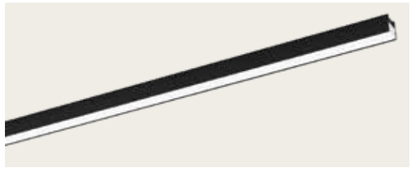





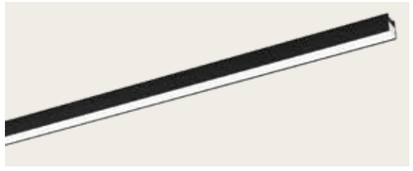



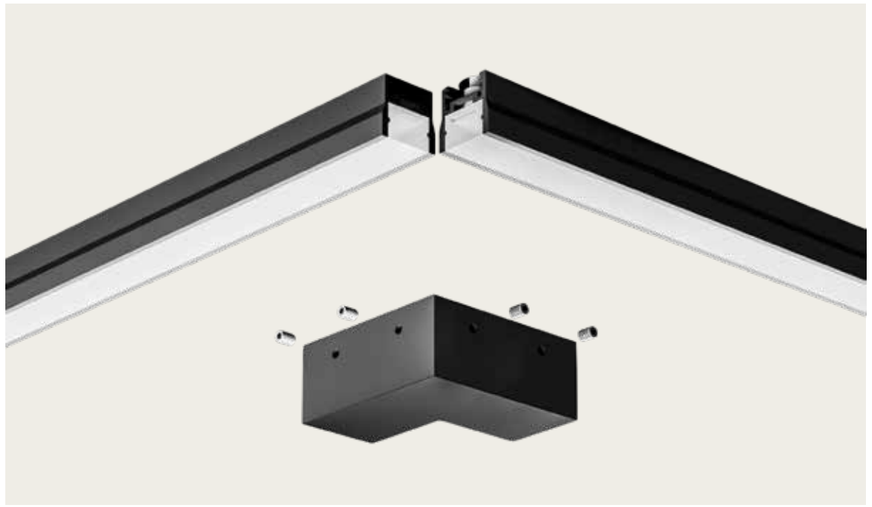

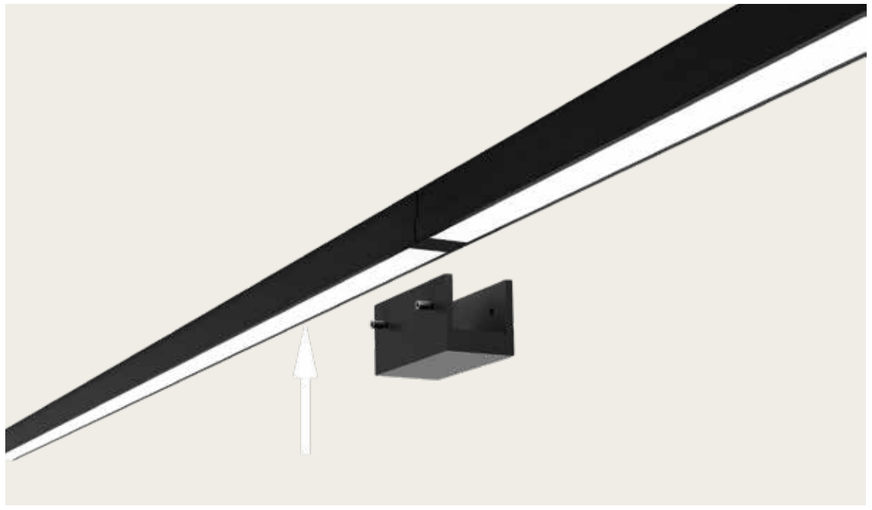

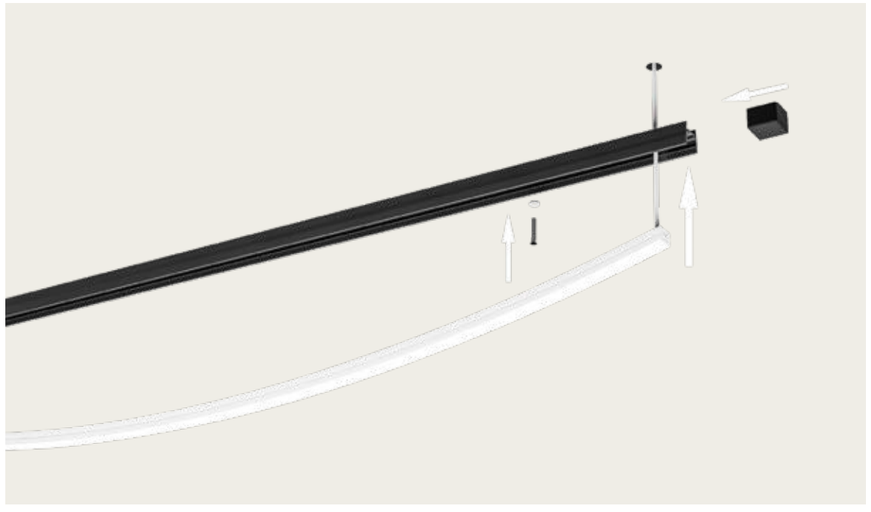

100

Power	10W
Input	48V
Color Temperature	3200K
Lumen	700Lm
Cri	90
IP	65
Beam Angle	100°
Dimmable DALI	
Dimensions	L: 100cm W: 2cm H: 1.4cm
Material	Silicone Rubber
Special Feature	1m Can Load 144W MAX
Color	White / **Code E386**

IP 65 LED

200


Power	20W
Input	48V
Color Temperature	3200K
Lumen	1400Lm
Cri	90
IP	65
Beam Angle	100°
Dimmable DALI	
Dimensions	L: 200cm W: 2cm H: 1.4cm
Material	Silicone Rubber
Special Feature	2m Can Load 288W MAX
Color	White / **Code E387**

IP 65 LED


300

Power	30W
Input	48V
Color Temperature	3200K
Lumen	2100Lm
Cri	90
IP	65
Beam Angle	100°
Dimmable DALI	
Dimensions	L: 300cm W: 2cm H: 1.4cm
Material	Silicone Rubber
Special Feature	3m Can Load 432W MAX
Color	White / **Code E388**

IP 65 LED

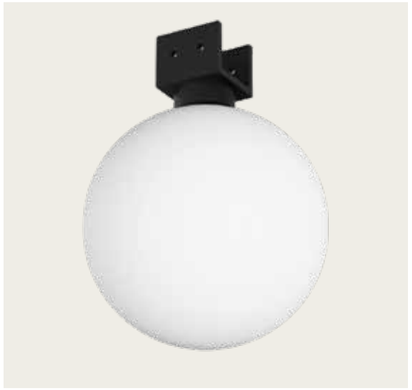






Power	9W
Input	48V
Color Temperature	3200K
Lumen	438Lm
Cri	80
IP	65
Dimmable DALI	◠
Dimensions	Ø: 12cm H: 16cm
Material	Aluminium - Opal Diffuser
Special Feature	Does Not Operate Independently, Must Be Mounted On E386, E387 & E388
Color	Opal-Sandy Black Adaptor / **Code E501**

IP 65 LED

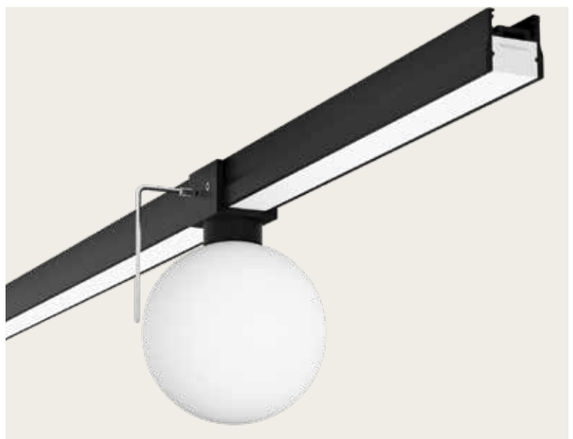






SURFACE MOUNT BOX FOR 48V IP65 LIGHTING SYSTEM



Dimensions	L: 39cm W: 14cm H: 5.5cm
Material	Metal
Special Feature	Driver Not Included
Color	Black / **E397**






Power	160W
Input	220-240V, 50/60Hz
Output	48V
IP	67
Dimensions	L: 33.5 W: 3cm H: 2.1cm
Dimmable DALI	
Material	Metal
Special Feature	Fits Into E397

Code XSV160W48



Power	240W
Input	220-240V, 50/60Hz
Output	48V
IP	67
Dimensions	L: 38.5 W: 3cm H: 2.1cm
Dimmable DALI	
Material	Metal
Special Feature	External Application

Code XSV240W48

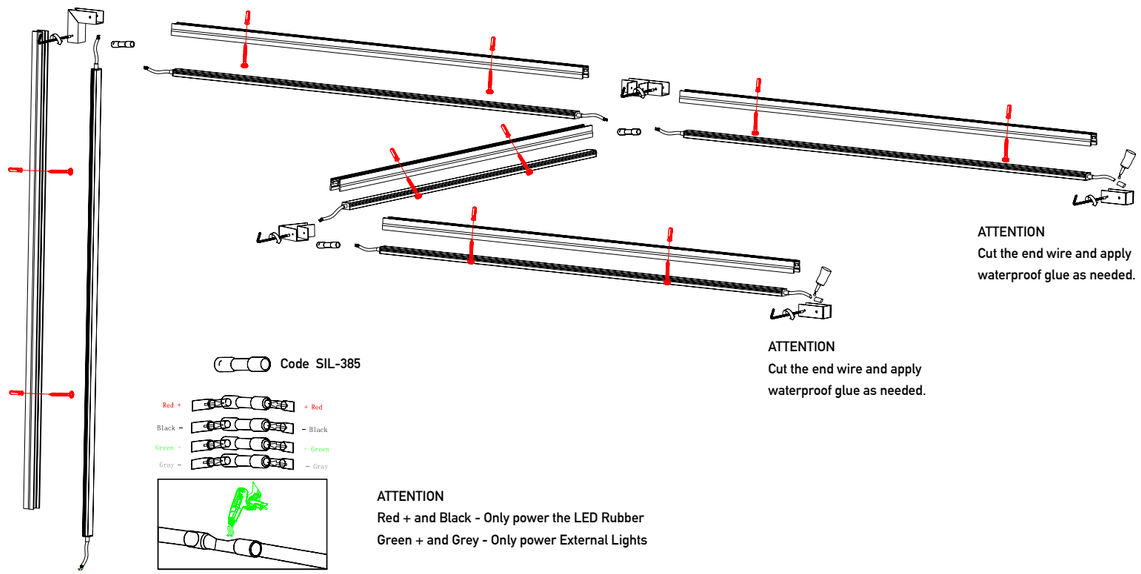


ATTENTION
Cut the end wire and apply waterproof glue as needed.

ATTENTION
Cut the end wire and apply waterproof glue as needed.

Code SIL-385

ATTENTION
Red + and Black - Only power the LED Rubber
Green + and Grey - Only power External Lights

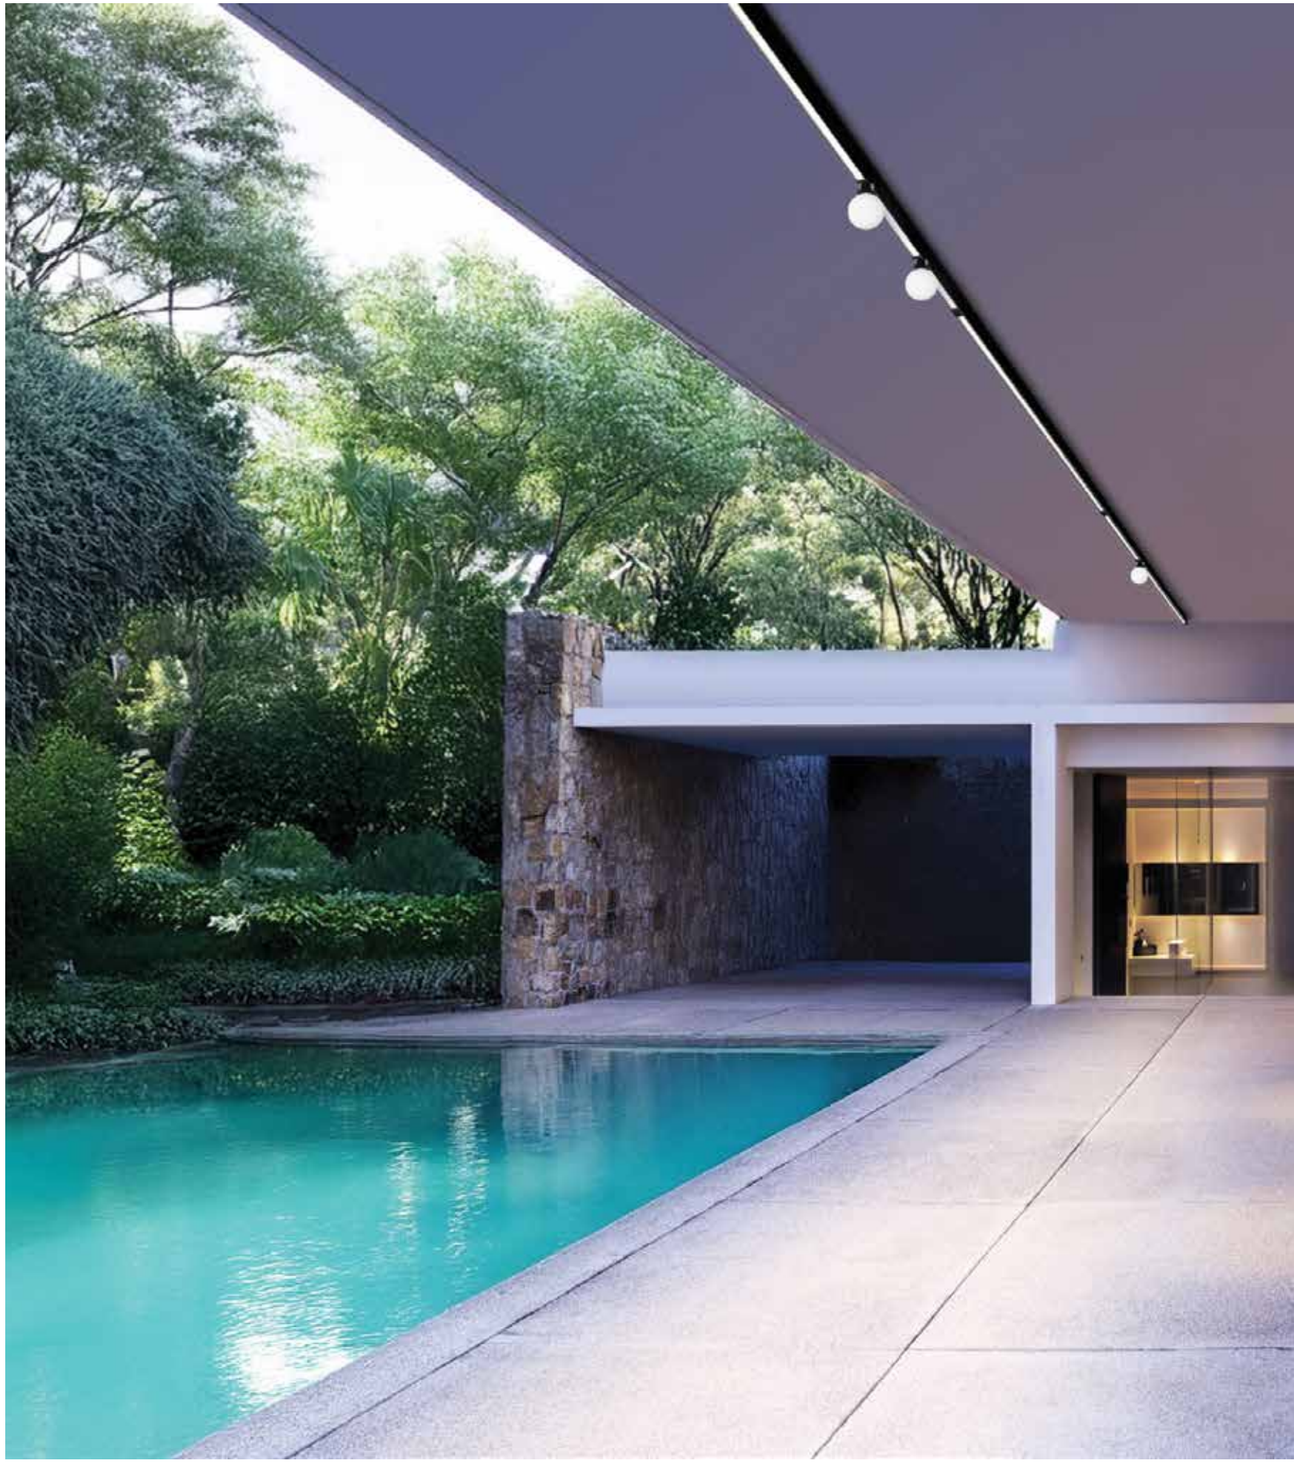

Power	30W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 2.7cm L: 14.5cm
Non Dimmable	On-Off ELEMENT 30/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605503**



Power	60W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4.1cm H: 3.1cm L: 20.1cm
Non Dimmable	On-Off ELEMENT 60/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605527**



Power	180W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 4cm H: 3.1cm L: 30cm
Non Dimmable	On-Off ELEMENT 180/220-240/24 G2
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899605565**



Power	30W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 6.7cm H: 3cm L: 10.3cm
DALI Dimming	Push Button - DALI2 1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172329767**



Power	50W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3.2cm H: 2.2cm L: 34.6cm
DALI Dimming	Push Button - DALI2 1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172274340**



Power	80W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3.2cm H: 2.2cm L: 34.6cm
DALI Dimming	Push Button - DALI2 1 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172274364**



Power	200W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 6.3cm H: 3.6cm L: 20cm
Non Dimmable	On-Off
Material	Metal
Special Feature	IP 67
Color	White / **Code XLG-200**



Power	80W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 3.2cm H: 2.2cm L: 34.6cm
DALI Dimming	Push Button - DALI2 4 CHANNEL
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4062172274302**



Power	100W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 5cm H: 3cm L: 23cm
Dimmable Triac , 1-10	
Material	Metal
Special Feature	IP 20
Color	Metal / **Code Z89100VND**



Power	288W @ 24V
Input	220-240V, 50/60Hz
Dimensions	W: 2.9cm H: 2.2cm L: 18.6cm
Bluetooth Dimming	 OT Wi DIM 5 CHANNEL CA RGB, RGBW and RGBTW
Material	Plastic
Special Feature	IP 20
Color	White / **Code 6937186115232**

CV dimmers with Bluetooth



Power	150W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 5cm H: 3.1cm L: 26.2cm
DALI Dimming	Push Button - DALI2 1 CHANNEL
Material	Metal
Special Feature	IP 67
Color	White / **Code AC-MS-150**



Input	220-240V, 50/60Hz
Dimensions	W: 5cm H: 8cm L: 8cm
DALI Dimming	 DALI MCU Tunable White Switch
Material	Plastic
Special Feature	IP 20
Color	White / **Code 4052899465916**



Power	200W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	W: 5cm H: 3cm L: 28.7cm
Dimmable Triac , 1-10	
Material	Metal
Special Feature	IP 20
Color	Metal / **Code Z89200VND**



Power	288W @ 24V
Input	220-240V, 50/60Hz
Dimensions	W: 4.2cm H: 2cm L: 17.2cm
DMX Dimming	 OT DMX DIM 5 CHANNEL RGB, RGBW and RGBTW
Material	Plastic
Special Feature	IP 20
Color	White / **Code 6977078993838**



INDEX

E099 16
E109 171
E121 232
E122 232
E123 232
E124 232
E127 210
E128 210
E132 132
E133 132
E135 170
E146 229
E149 210
E150 234
E151 234
E152 276
E153 277
E156 170
E159 171
E168 240
E177-A 278
E177-B 278
E178 351
E179 351
E180 351
E181 320
E182 320
E183 320
E184 320
E185 238
E186 238
E187 322
E189 363
E190 56
E191 56
E192 56
E193 34
E194 34
E195 214
E197 216
E199 217
E201 192
E202 192
E203 118
E204 118
E208 148
E216 240
E217 290
E219 334
E220 334
E227 226
E229 318
E230 319
E235 152
E235-12D 152
E236 152
E237 138
E238 164
E238-W 164
E239 164
E239-W 164
E240 164
E240-W 164
E241-G 313
E241-W 313
E242-G 312
E242-W 314
E243 214
E246-G 317
E246-W 317
E247-G 316
E247-W 316
E249 138
E253 48
E254 48
E261 228
E262 228
E265 230
E266 230
E267 202
E268 200
E269 336
E270 336
E271 200
E272 221
E273 219
E274 218
E275 197
E276 122
E277 122
E278 220
E279 284
E280 286
E281 281
E282 281
E282-SP 281
E283 282
E284 275
E285 272
E286 272
E287 186
E289 29
E290 29
E291 29
E294 310
E296 292
E297 104
E298 140
E300 306
E301 306
E302 121
E304 243
E305 243
E306 237
E307 237
E308 334
E309 334
E310 290
E311 288
E312 288
E313 26
E314 26
E315 215
E316 172
E317 172
E318 224
E319 305
E320 302
E321 304
E322 303
E323 308
E324 308
E325 134
E326 338
E327 338
E328 258
E329 258
E330 258
E331 258
E332 326
E333 326
E334 113
E335 112
E336 113
E337 150
E338 74
E339 74
E340 332
E341 201
E342 197
E343 188
E344 125
E345 125
E346 300
E347 300
E348 76
E349 268
E350 268
E351 143
E352 142
E353 108
E354 126
E355 147
E356 144
E357 128
E358 130
E359 363
E360 360
E361 360
E362 358
E363 358
E364 357
E365 352
E366 355
E367 147
E368 108
E369 24
E370 24
E371 24
E374 376
E375 376
E376 376
E377 376
E378 375
E379 375
E380 375
E381 375
E382 372
E383 51
E384 51
E385 380
E386 382
E387 382
E388 382
E389 381
E390 380
E391 381
E392 380
E393 381
E397 386
E398 30
E399 30
E400 30
E401 32
E402 32
E403 270
E404 270
E405 66
E406 65
E407 80
E408 83
E409 84
E410 54
E411 54
E412 181
E413 174
E414 177
E415 178
E416 206
E417 206
E418 100
E419 156
E420 156
E421 158
E422 158
E423 88
E424 92
E425 91
E426 94
E428 160
E429 182
E430 182
E431 185
E432 185
E433 162
E434 191
E435 222
E436 222
E437 194
E438 194
E439 168
E440 168
E441 294
E442 294
E443 115
E444 116
E445 68
E446 106
E447 106
E448 72
E449 261
E450 296
E451 296
E452 296
E453 299
E454 299
E455 299
E456 254
E457 248
E458 248
E459 249
E460 249
E461 356
E462 356
E463 78
E464 206
E465 256
E466 87
E467 98
E468 266
E469 266
E470 266
E471 266
E472 264
E473 264
E474 41
E475 44
E476 46
E477 41
E478 40
E479 58
E480 53
E482 22
E483 22
E484 22
E485 16
E486 16
E487 16
E488 20
E489 20
E490 20
E494 253
E495 368
E496 366
E497 367
E498 370
E499 370
E500 211
E501 384
E502 342
E503 342
E504 344
E505 344
E506 345
E507 345
E508 348
E509 348
E510 347
E511 347
E518 102
S112 332
S113 332
S131 330
S131-4K 330
S132 330
S132-4K 330
S133 331
S134 331
AC-MS-150 389
SIL-385 386
CNCTR 1 376
CNCTR 2 375
CNCTR 3 376
CNCTR 4 379
CNCTR 6 368
CNCTR 7 370
LPH-18-24 259
LPV-35-24 80
V350-1050 270
XLG-200 389
XSV160W48 386
XSV240W48 386
Z0800-BA 279
Z89100VND 389
Z89200VND 389
25280 20
4052899465916 389
4052899605503 388
4052899605527 388
4052899605565 388
4062172166010 372
4062172274302 389
4062172274340 389
4062172274364 388
4062172329767 388
6937186115232 389
6977078993838 389

ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri
Postal: 19001 , P.O. box: 4791
Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521
info@zambelislights.gr | zambelislights.gr

LED Zona®
ОСВЕТИТЕЛНИ РЕШЕНИЯ

Харесахте ли нещо от каталога?

Разгледайте и поръчайте продукти на Zambelis
онлайн на led-zona.bg – с актуални цени и наличности.

Продуктите на Zambelis

Сканирайте или кликнете

Разгледайте продуктите →

Каталози на Zambelis

Сканирайте или кликнете

Още каталози →

www.led-zona.bg

T: 0888 065 970 | E: sales@led-zona.bg

Сфера Лайт ООД · гр. София, ж.к. Банишора, ул. Опълченска, бл. 54 (до 7-ма поликлиника)